

Frontend Contract Browser Test - Combined Report

Date: 2026-07-01

Target:

- Frontend: `http://127.0.0.1:5173`
- Adapter: `http://127.0.0.1:5178`
- Runtime: managed OpenCode `1.17.12`

Overall Verdict

9 passed, 1 failed, 1 blocked.

- Failed: Loop 09 Reviewer Flow. Backend/provenance receives manual finding, but frontend does not render the findings card.
- Blocked: Loop 11 Permission Cards. Current managed OpenCode run did not provide a deterministic permission prompt for browser testing.


Loop 01 - App Shell And Runtime Connection

Verdict: Pass.

Operation: opened the frontend, waited for initial adapter snapshots and WebSocket connection, then queried /v1/health.

Expected: App Shell and runtime connection visible.

Observed: UI showed product shell, project selector, workspace actions, session filters, and **connected**. Backend health returned **healthy: true**, OpenCode **1.17.12**, managed mode, **connected**.

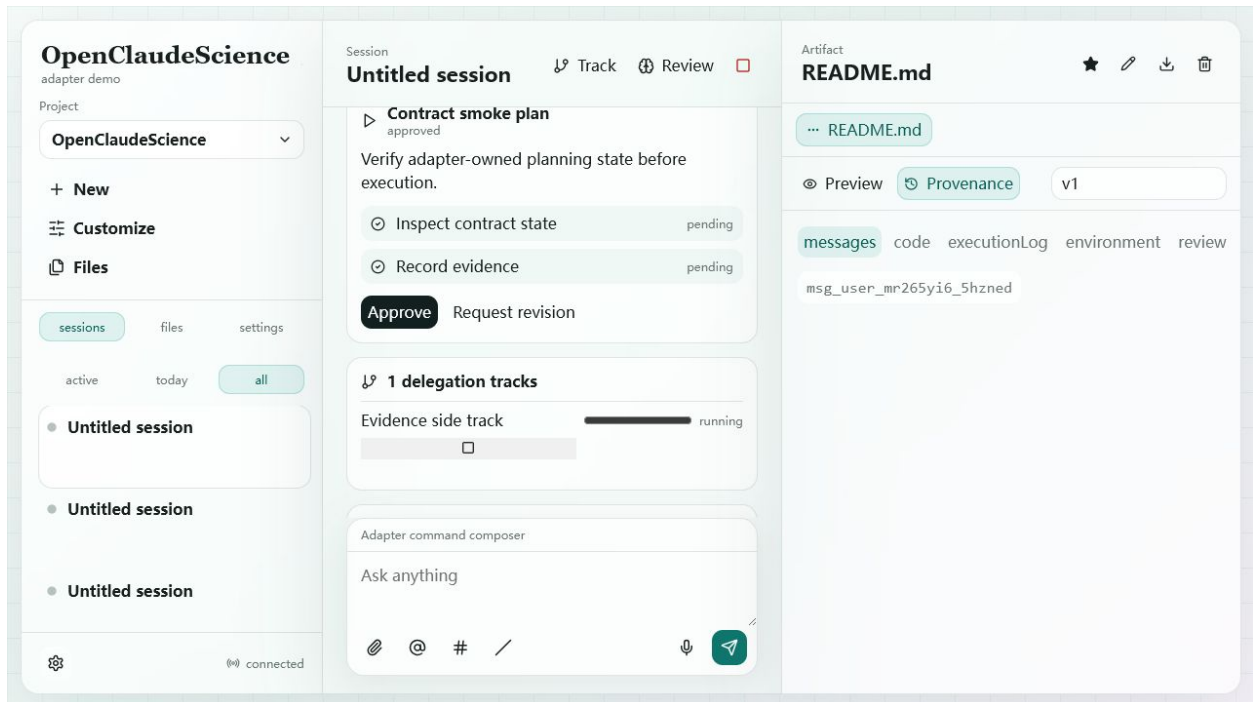

Loop 01 app shell


Loop 02 - No-Session Chat Send

Verdict: Pass.


Operation: from no selected session, sent Reply exactly TEST_OK and nothing else.

Expected: frontend creates a session, sends through OpenCode, keeps user message, and shows assistant reply.

Observed: adapter created session ses_Rmst77P99HgZ; backend messages contained user and assistant; UI showed user prompt and assistant TEST_OK; no NaN.

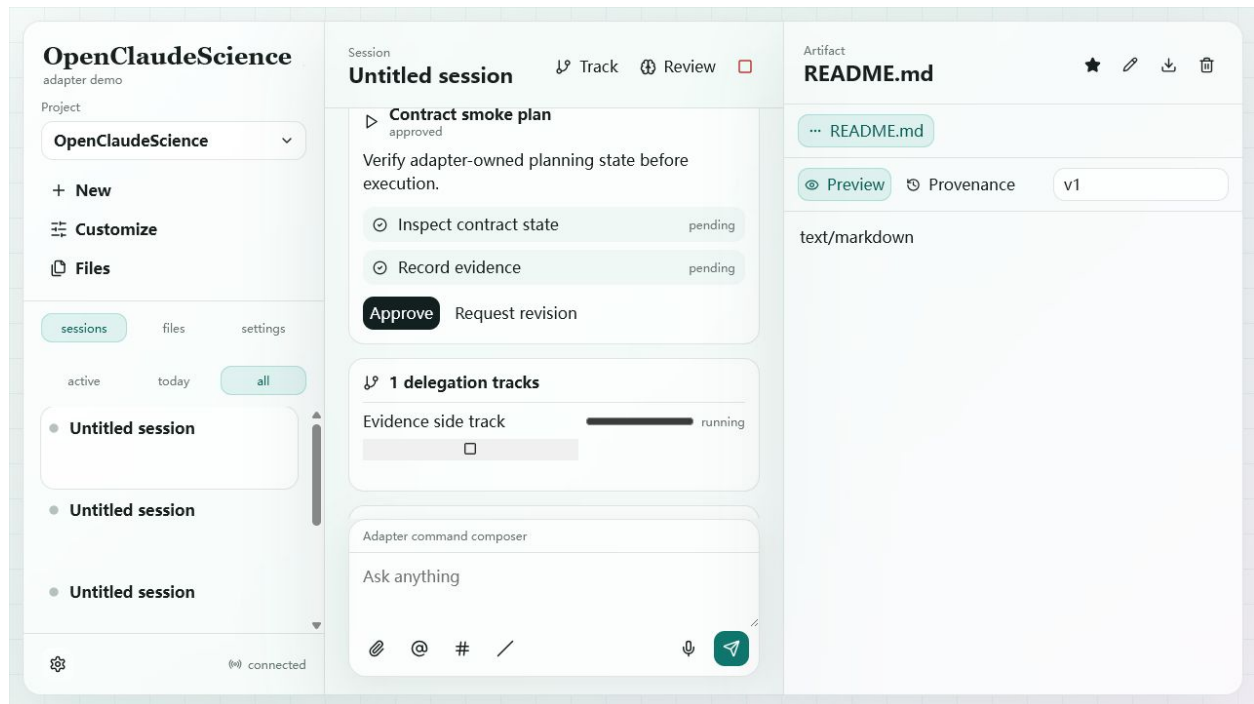

Loop 02 before send

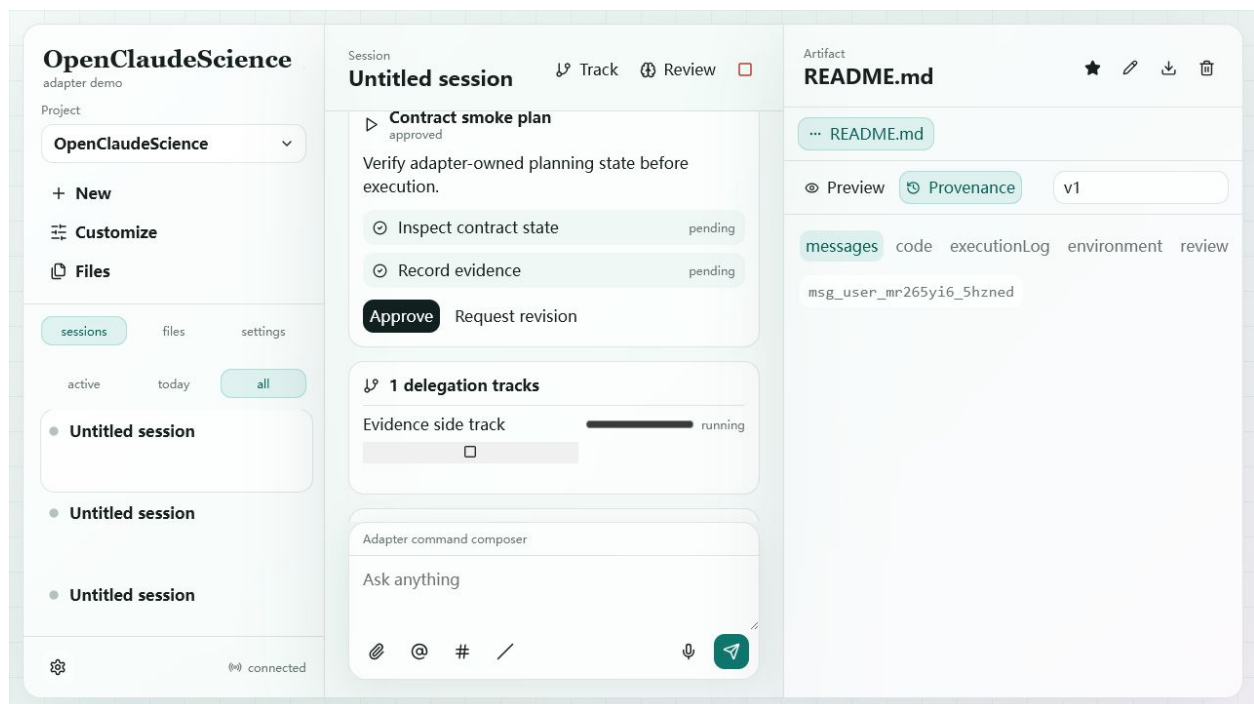

Loop 02 after reply


Loop 03 - Refresh Snapshot And Session Replay

Verdict: Pass with caveat.


Operation: reloaded page, then selected all session filter.

Expected: session state can be recovered from HTTP snapshots.

Observed: reload landed on Active filter with No session selected; selecting all restored the latest idle session and messages.

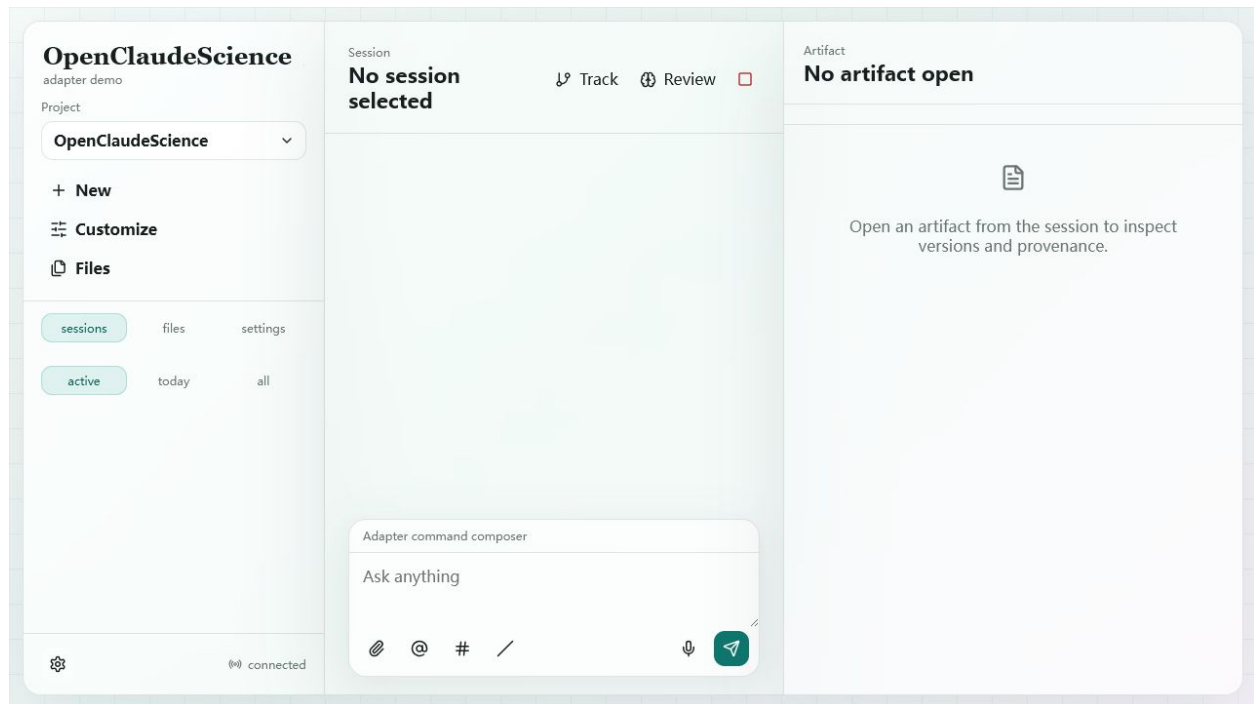

Loop 03 reload snapshot

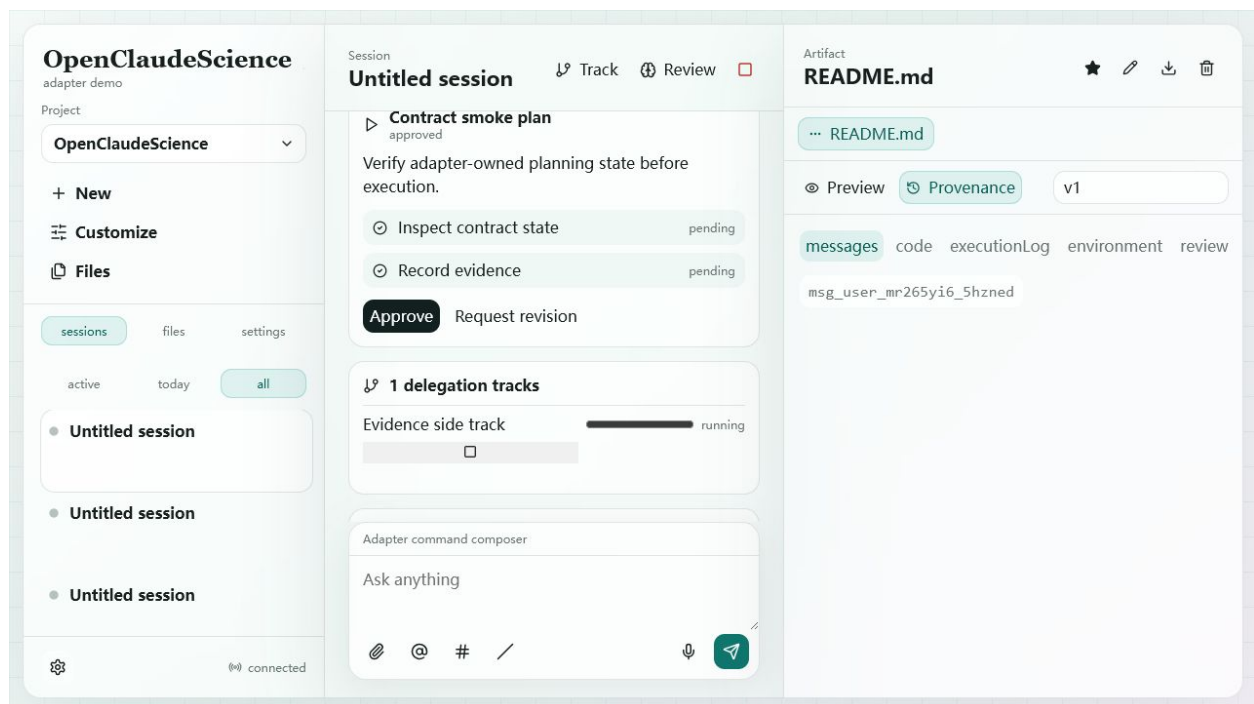

Loop 03 after all filter

Loop 04 - Files And Settings Catalogs


Verdict: Pass with caveat.

Operation: clicked Files, then Customize, and checked adapter catalog endpoints.


Expected: project tree and Settings catalog sections render.

Observed: Files showed project tree. Settings showed General, Permissions, Connectors, Skills, Specialists, and Network allowlist. Skills endpoint returned 29 skills.

Caveat: Files UI displays ignored/sensitive entries such as `.env`, `.git`, `dist`, and `node_modules`.

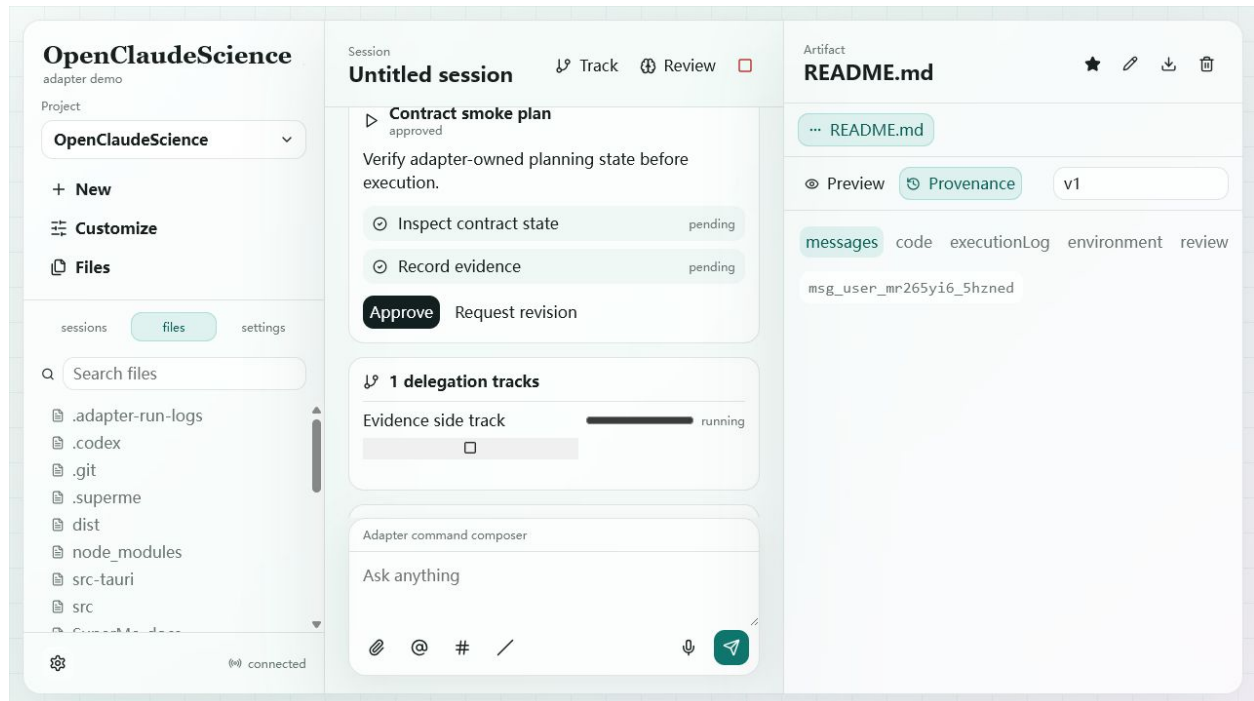

Loop 04 files tree

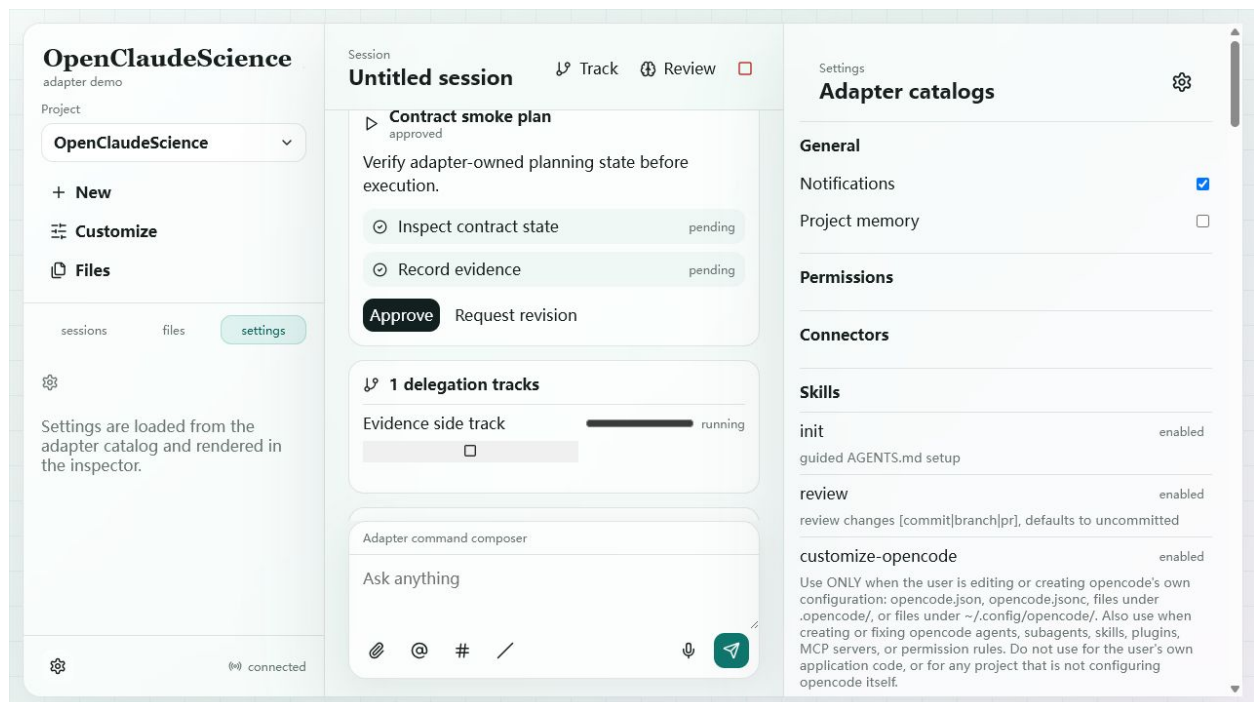

Loop 04 settings

Loop 05 - Artifact Registration, Preview, Version, Provenance


Verdict: Pass with caveat.

Operation: registered README.md as a markdown artifact owned by the tested session, then reopened the session.

Expected: artifact/version IDs are adapter-owned, public version metadata hides local paths, and frontend can open preview/provenance.

Observed: created `art_GNM6FfLmnpF9` and `ver_9pfQ0dLTsxEQ`; provenance returned messages, code, executionLog, environment, and review tabs; frontend showed artifact controls.

Caveat: `artifact.created` did not activate the artifact while the right pane was in Settings mode. Reopening the session made the artifact active.

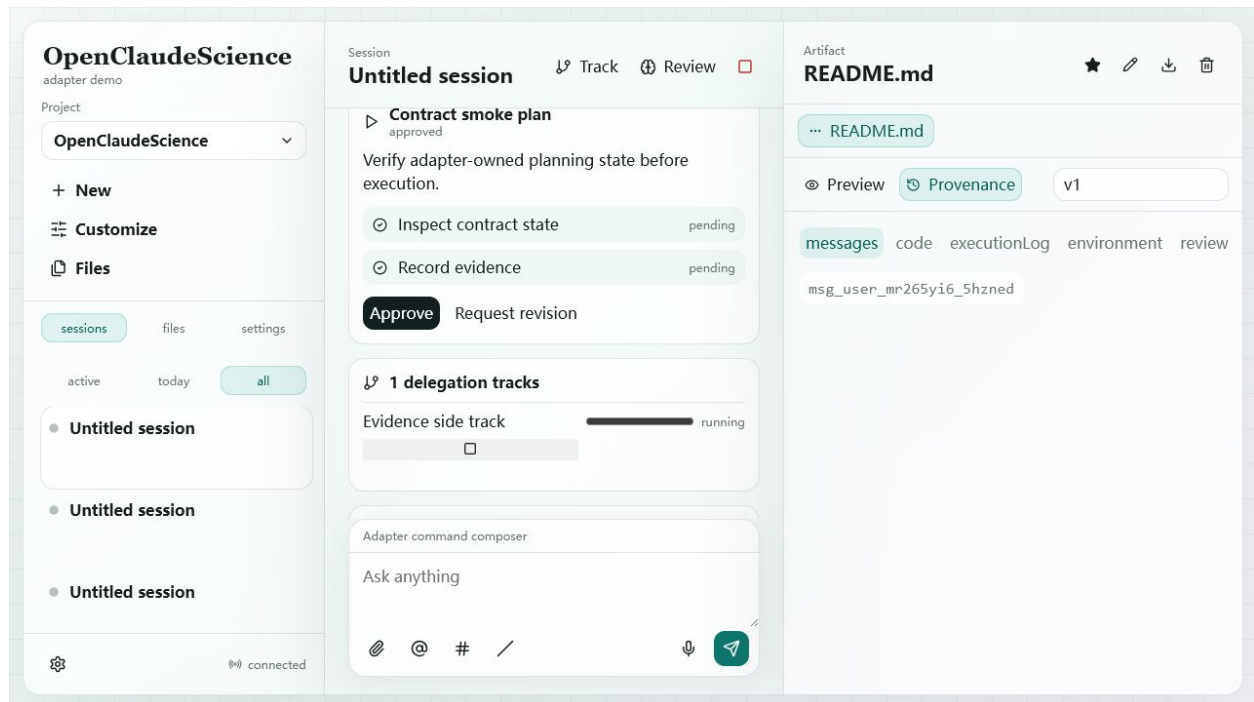

Loop 05 artifact preview


Loop 06 - Artifact Provenance Panel And Star Operation

Verdict: Pass.

Operation: opened Provenance and clicked Star.

Expected: five provenance tabs render and star state syncs.

Observed: UI rendered messages, code, executionLog, environment, and review; backend artifact starred became true.

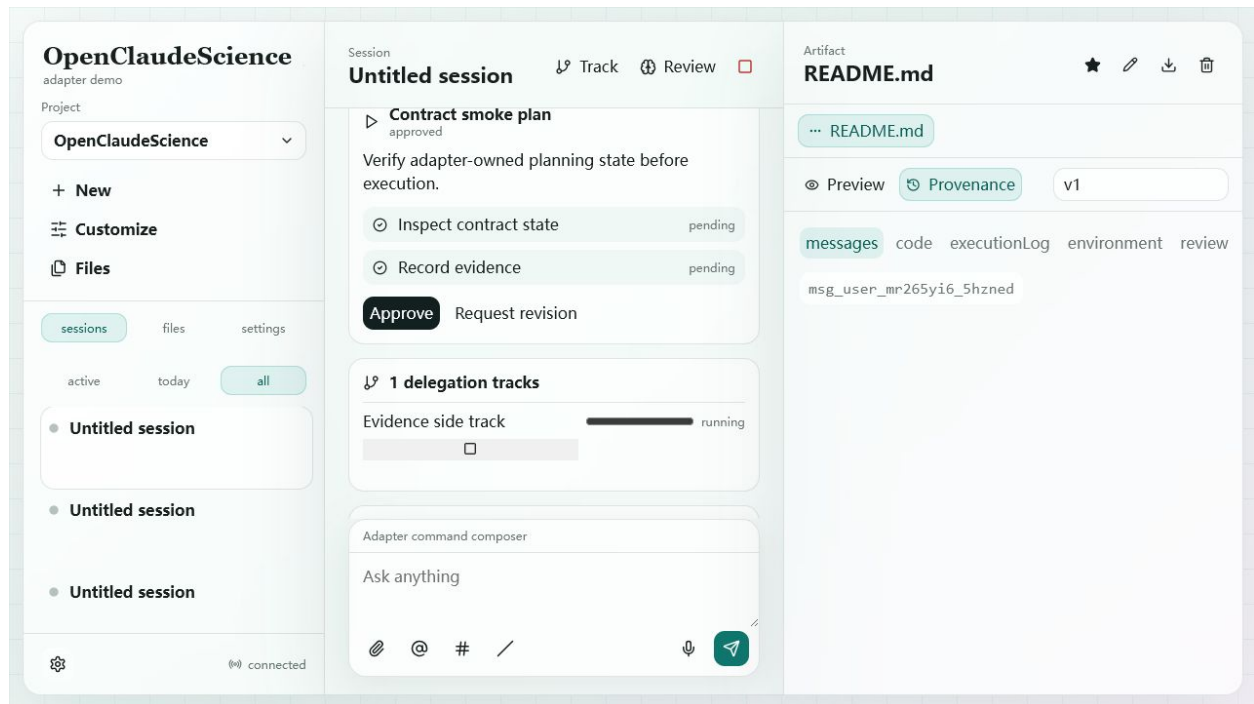

Loop 06 provenance tabs

Loop 07 - Plan Proposal And Approval


Verdict: Pass with caveat.

Operation: sent plan . propose over WebSocket, then clicked Approve.

Expected: plan visible in conversation, status becomes approved, steps remain pending until execution evidence exists.

Observed: UI displayed Contract smoke plan; backend status became approved; steps stayed pending.

Caveat: UI still renders Approve/Request revision after the plan is already approved.

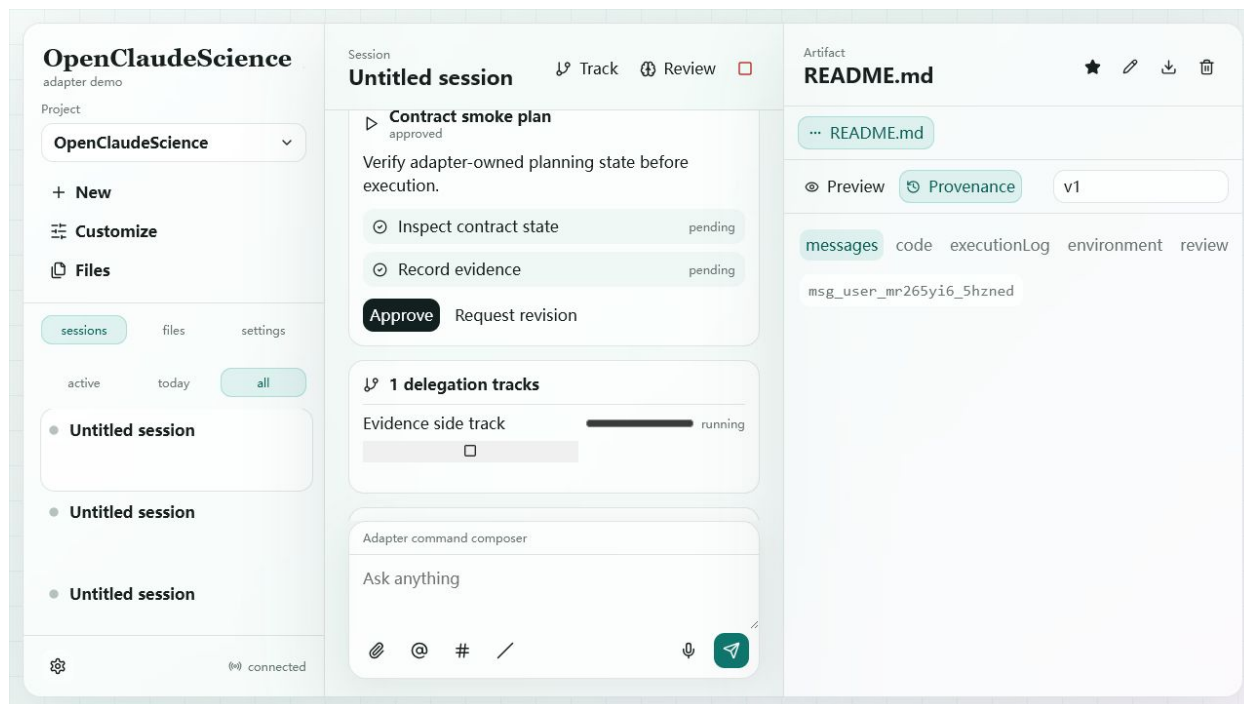

Loop 07 plan approved

Loop 08 - Annotation Staging And Commit


Verdict: Pass with caveat.

Operation: staged a markdown annotation, then sent the next composer message.


Expected: composer chip appears, next message commits annotation, chip clears.

Observed: annotation ann_D7RaumuVucnF was staged then committed; 1 comments staged appeared before send and disappeared after commit.

Caveat: for the annotation send turn, backend and UI showed assistant reply timestamped before the user message.

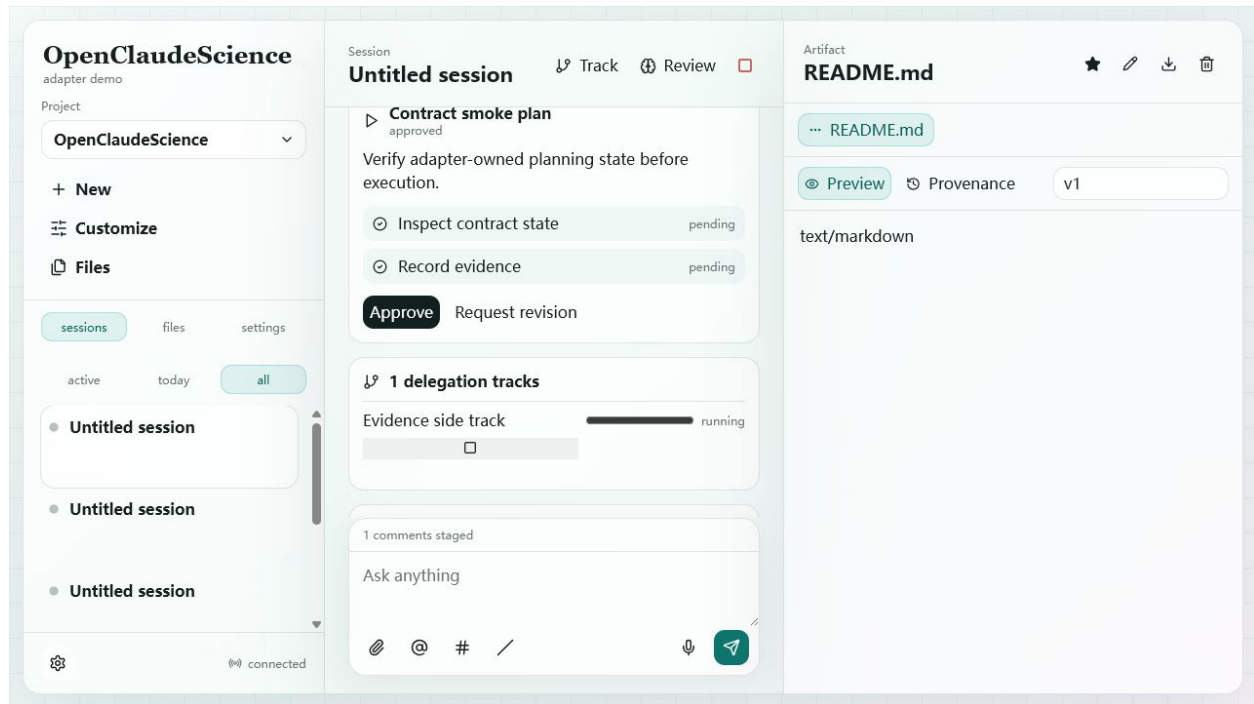

Loop 08 annotation staged

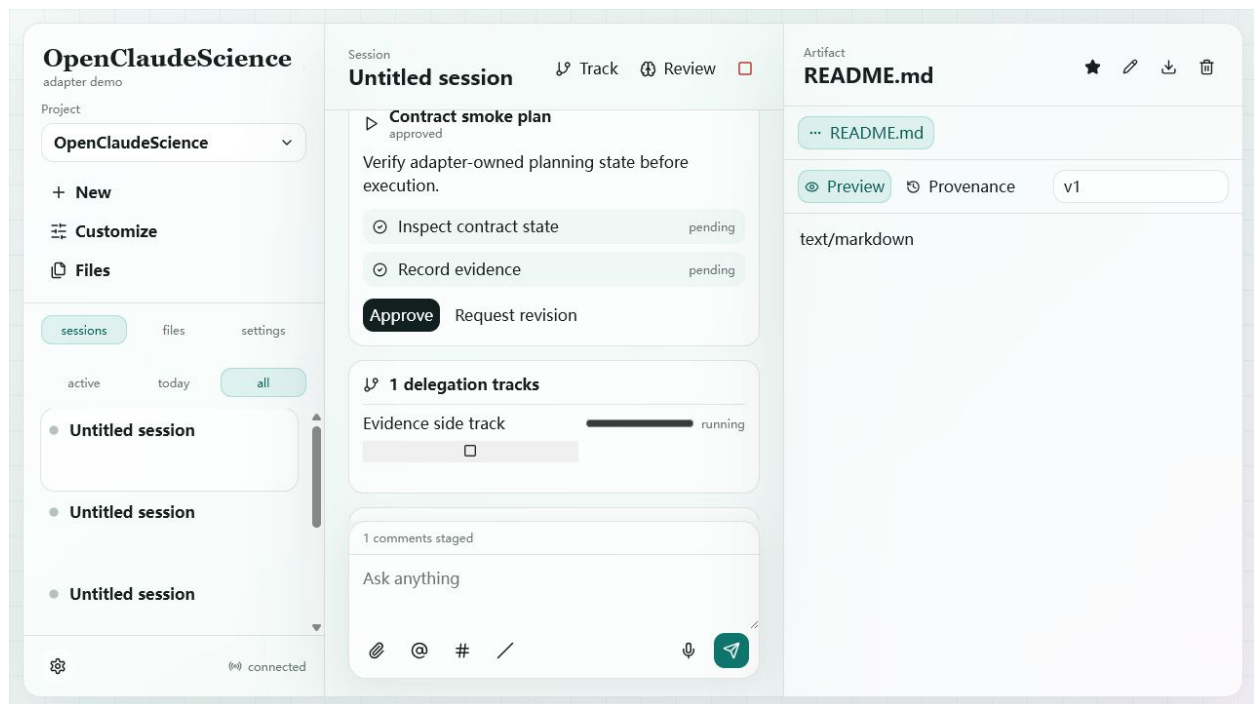

Loop 08 annotation committed

Loop 09 - Reviewer Failure And Manual Findings


Verdict: Fail.

Operation: clicked Review with no findings payload, then sent manual reviewer .run with one linked finding.

Expected: no-finding review fails explicitly; manual finding appears as Reviewer · 1 findings card and in artifact provenance.

Observed: UI showed explicit error toast. Backend created completed review rev_7LSj4zBzEqHe and finding finding_UuNsFoDhG2CR; provenance review tab included the finding. Frontend did not render the findings card, only started/completed toasts.

Likely cause: backend finding payload uses id and lacks sessionId; frontend expects findingId and filters by sessionId.

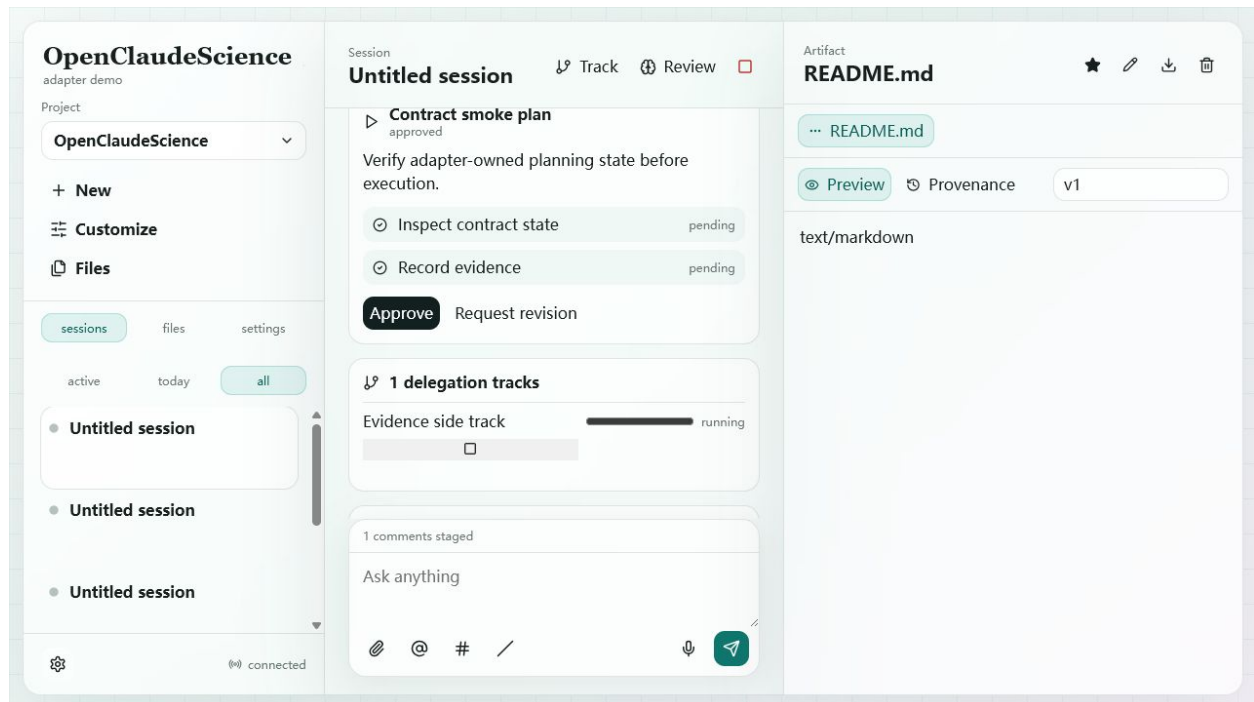

Loop 09 reviewer failure/card missing

Loop 10 - Delegation Track And Remote Job Lifecycle


Verdict: Pass with caveat.

Operation: clicked Track, then submitted/updated a remote job and appended a log.

Expected: track and remote job status/log render; backend records lifecycle and same-session artifact linkage.

Observed: UI showed 1 delegation tracks, Evidence side track, Remote jobs, final status completed, and log line. Backend status was succeeded and linked the README artifact.

Caveat: backend succeeded is normalized to frontend completed.

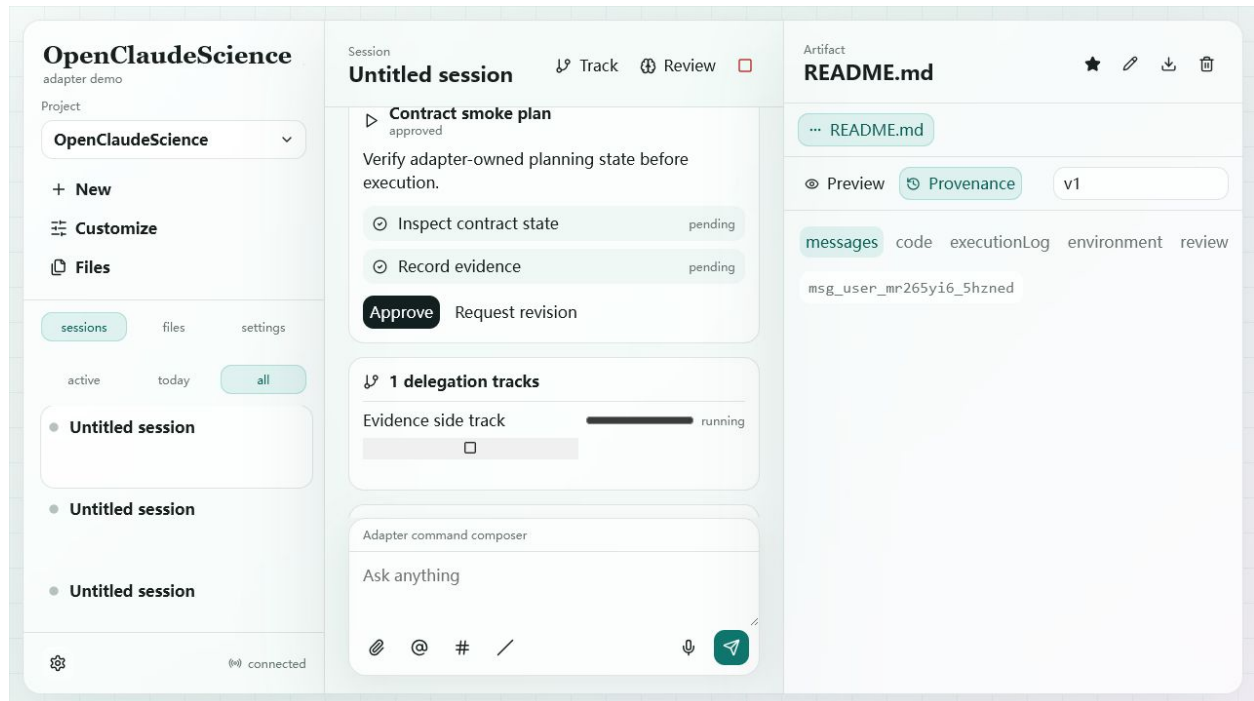

Loop 10 remote job

Loop 11 - Permission Cards And Settings Snapshot


Verdict: Blocked / not covered as pass.

Operation: queried `/v1/permissions` and checked Settings.

Expected: permission card can be rendered and approved/denied when runtime emits a permission prompt.

Observed: `/v1/permissions` returned empty permissions/grants. Settings includes Permissions section. No deterministic real OpenCode permission prompt was available in this managed runtime run, and the contract has no dev-only command to synthesize `permission.requested`.

Follow-up: add a deterministic permission-test hook in adapter dev mode, or configure OpenCode permission policy to reliably ask for a safe shell/network/file operation.

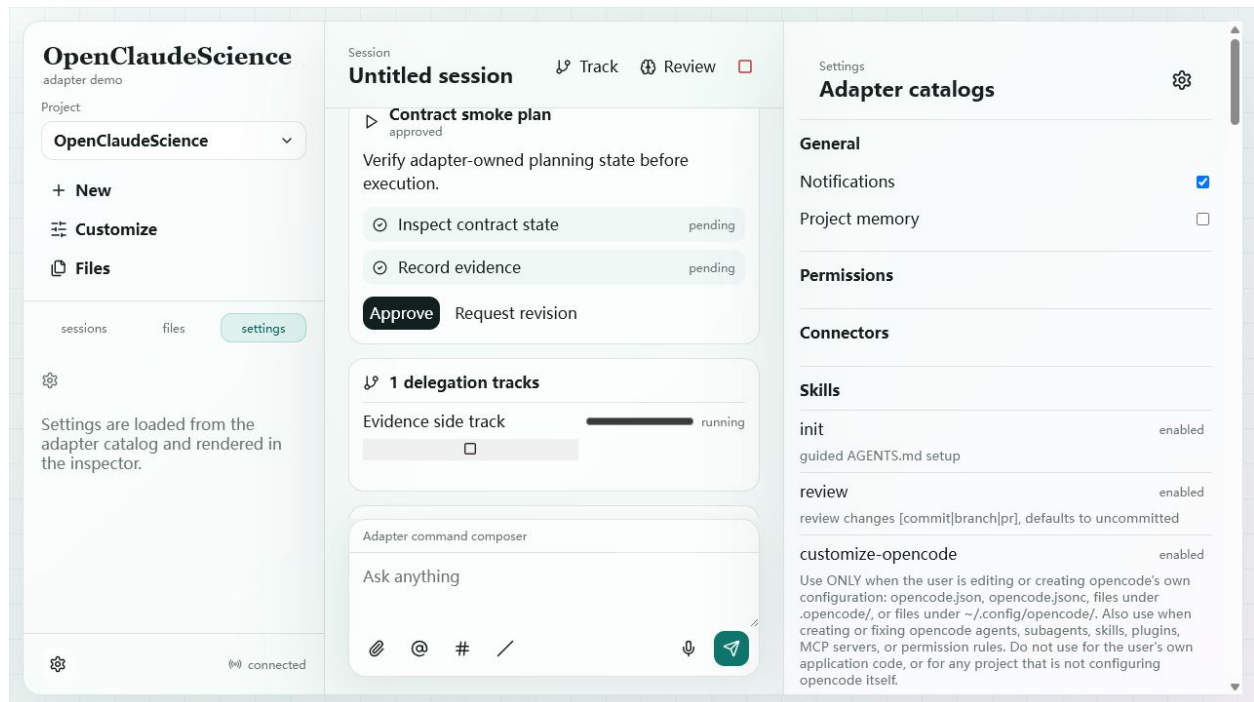

Loop 11 settings permissions