

Flood alert application using android

Presented By:

Rohit Iyer (510516084)

Parnavi Sen (510516011)

Sukrita Saha (510516082)

Mamon Almas (510516015)

under the supervision of

Prof. Ashish Kumar Layek

Introduction- the issue

- As the globe undergoes extreme climate changes, disaster events and their disaster scale continue to increase; therefore, it has become imperative to devise disaster prevention measures.
- The cases of flood related disasters have drastically increased especially in India with a dense population in coastal areas.
- Other than cyclones, monsoonal floods cause mayhem as well, with commuters getting stuck in waterlogged streets, open wires electrifying nescient citizens,etc .




Motivation

- Destruction due to floods can only be mitigated by immediate response to crisis situation.
- If we are able to integrate such disaster response systems with cutting edge technology, we would be better equipped to handle crises.
- In this project, we develop an android application which would take as input the sets of images belonging to flood affected areas from rescue personnels, authenticate and filter them using deep learning approaches.
- The severity of floods is estimated and plotted on a map using the geolocations of the images.
- Subsequently the affected areas (also termed as **“hotspots”**) are discovered for immediate relief operations.

Flood Alert Application

Key features of the flood alert application:

- Takes images of affected locations from relief workers.
- Authenticates and filters flood images using an AI model.
- Detects the clusters and hotspots that have suffered havoc by the floods
- Maps the periphery of the areas that should be avoided by the people and needs relief aid by NDRF and civic volunteers

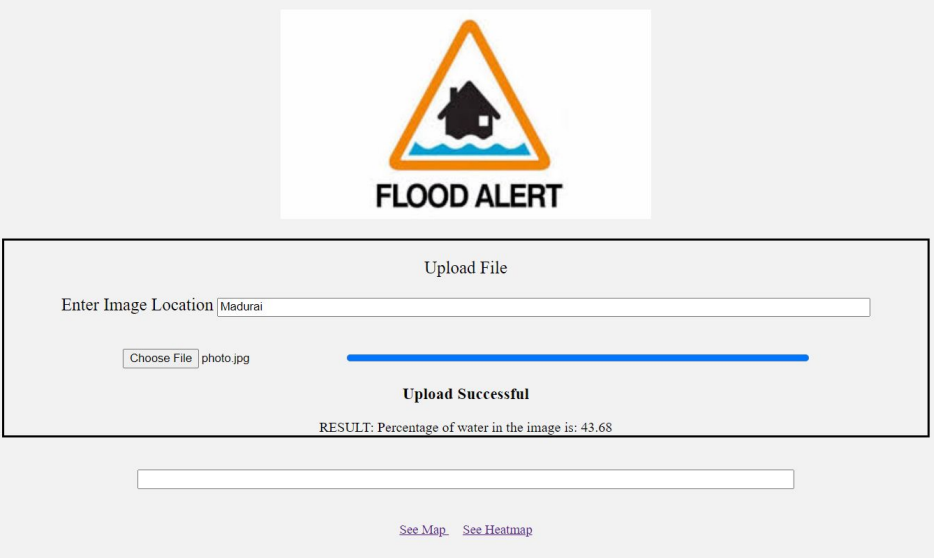

The image shows a web application interface for flood alerts. At the top, there is a logo consisting of a yellow triangle with a black house icon inside, and the text 'FLOOD ALERT' below it. Below the logo is a section titled 'Upload File'. Inside this section, there is a text input field labeled 'Enter Image Location' with the value 'Madurai'. Below the input field is a button labeled 'Choose File' and a file name 'photo.jpg'. A blue progress bar is shown below the file name. Below the progress bar, the text 'Upload Successful' is displayed, followed by the result: 'RESULT: Percentage of water in the image is: 43.68'. At the bottom of the interface, there are two links: 'See Map' and 'See Heatmap'.

Image uploaded undergoing authentication


Uniqueness of our Flood Alert Application

- All images are authenticated using our machine learning model as well as the geolocation of the images to avoid fake images
- The application enables the user to view the clusters of affected zones in his/her city and thus avoid travel there.
- Delineation of flood risk hotspots is a very challenging task for the authorities which we have automated. The detailed boundary can be used as a reference by civic authorities, power departments, municipal corporations and other local authorities that need to provide urgent relief aid to the affected people.
- The ease of use, responsive nature of the application and the prompt flow of real time information directly from the men on ground providing relief work and subsequent analysis of the data for proper visualisation makes the application unique and highly beneficial.

System design (1/2)

Framework:

- Android webview hosts the html form.
- Javascript call executed on button click.
- Server script spawns a child process.
- Python code executed in the backend.
- Backend code accesses the server database.
- Returns required data JSON format.

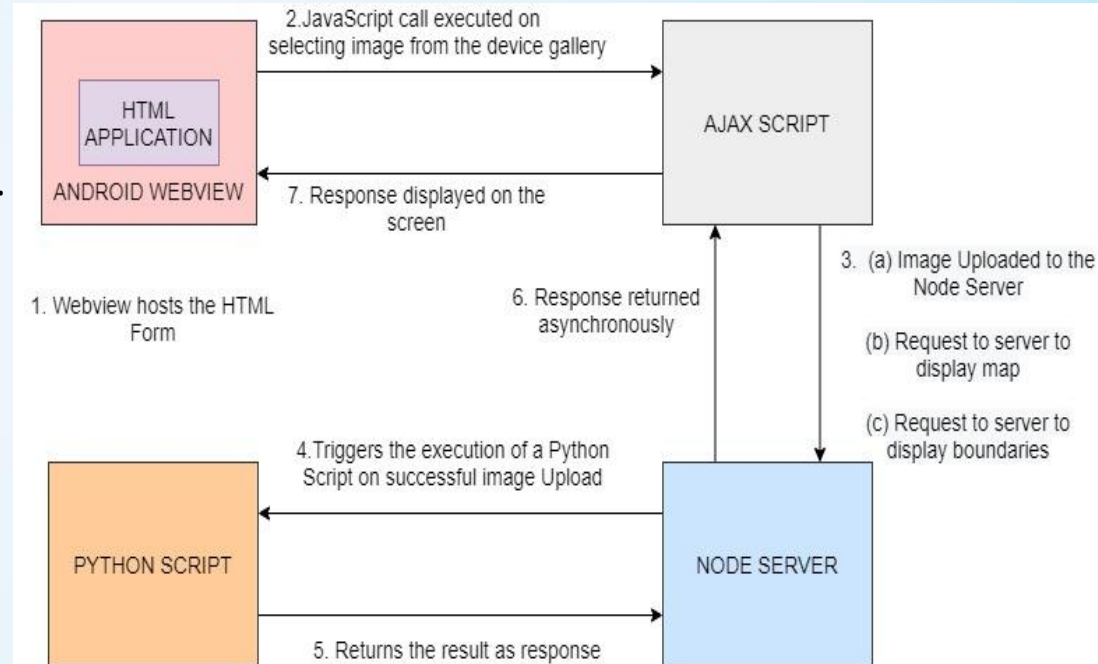

System design (2/2)


When multiple requests are sent to the server:

```
const {spawn} = require('child_process');  
const child = spawn('python',["code.py",  
arguments]);
```

The **spawn** method spawns an external application in a new process and returns a streaming interface for I/O . spawn returns a **ChildProcess** object.

As spawn returns a stream based object, it's great for handling applications that produce **large amounts of data**.

The python script performs the required task and returns the output as a response back to the server.

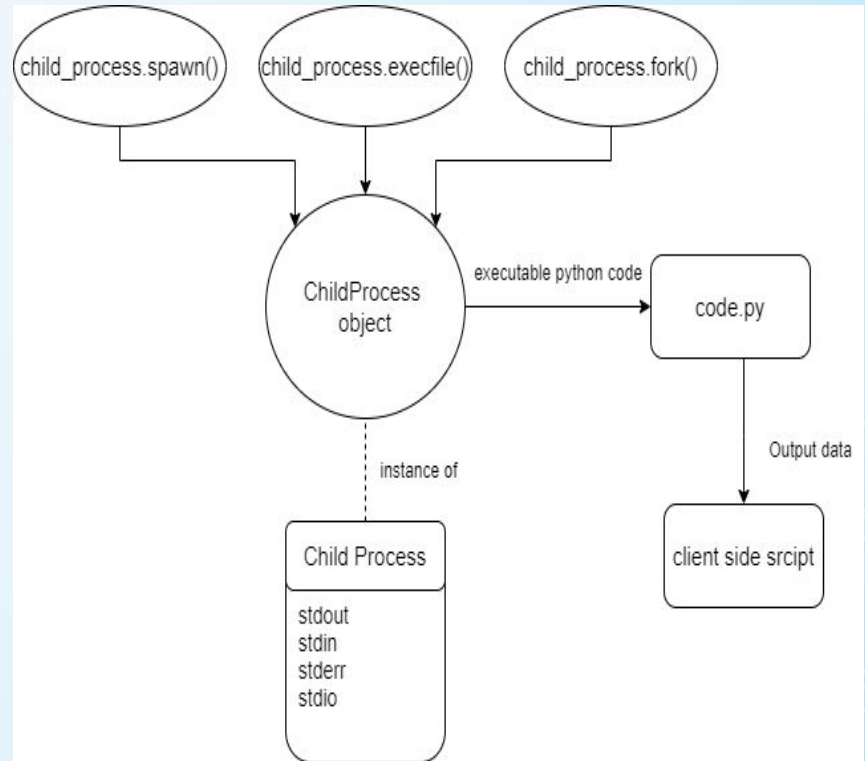

Backend script

The implementation of the backend code was done in python. There are two python scripts:


1. For training using the available datasets.
2. Prediction of images provided by rescue personnel.

Training Data:

1. **Generation of flood-water training samples:** To generate flood-water training samples, several flood Images are collected from www.google.com with the keyword pattern: " Flood", for example, "Orissa Flood", "Mumbai Flood" etc.
2. **Generation of non-water training samples:** To generate non-water samples, various keywords were used to download images, a few of them being: animals, cars, paintings, face, flowers, house, text, trees etc. However, we excluded any image having some water presence.




Non water image



Flood water image

Generation of training dataset

- The proposed CNN model is trained using two different kinds of image samples:
(i) flood-water and (ii) non-water.
- We use training sample dimension of $48 \times 48 \times 3$. We run a non overlapping window of the same size over the entire set of images (both water and non water) and thus create dataset of images.
- The window size $48 \times 48 \times 3$ is moved from left to right and top to bottom, and image under the window is cropped to produces several image patches.
- Total dataset size : 54k images of size $48 \times 48 \times 3$.

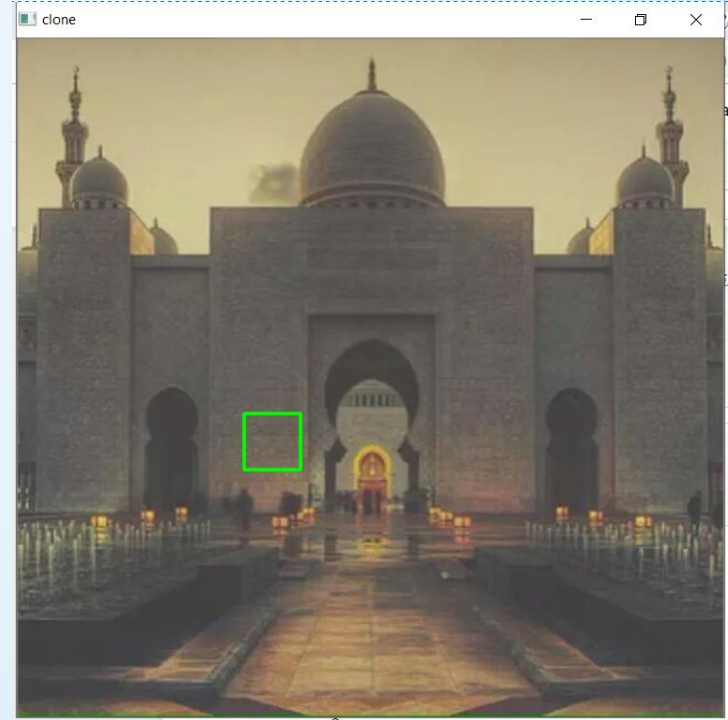


Flood detector model

In our work, we used a CNN based flood water detector model.

We use 2 approaches to create model:

1. Creating our own model for training and prediction.
2. Using transfer learning and performing layer unfreezing

We used the VGG19 pretrained model in our second approach as the depth of the network is a critical component for good performance. The VGG19 model consists 16 convolution layers and 3 fully connected layers.

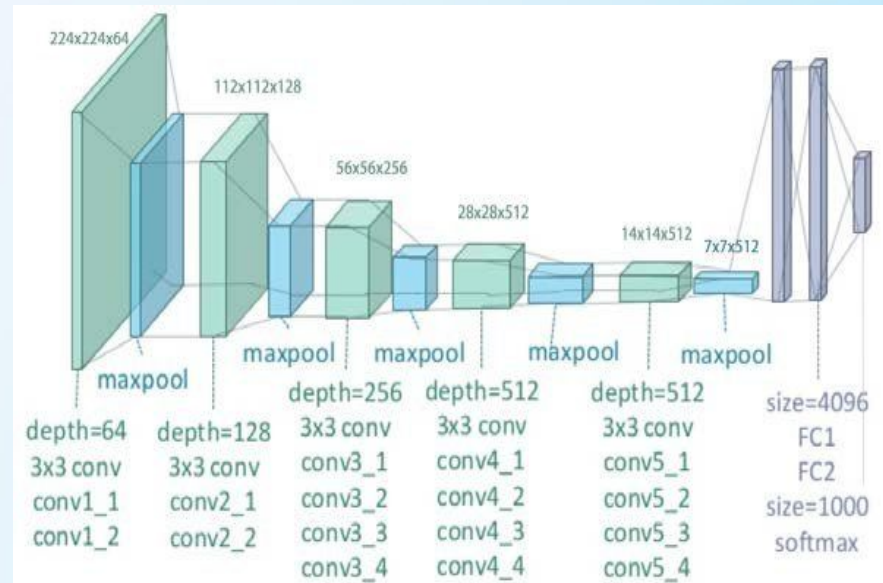

Model created

Model with 4 Convolution and Max pooling layers followed by 2 fully connected layers and softmax activation at the output.

Activation function used are Rectifier Linear Unit.

Total no. of parameters:
4,980,482

Training Accuracy: 88.74%

Validation Accuracy: 88.23%

Serial No.	Layer Type	Filter Dimension	Number of Filters	Output Dimension
1	Input	-	-	48 x 48 x 3
2	Convolution + ReLu + Dropout (0.2) + Max Pooling	3 x 3 x 3 2 x 2	64	48 x 48 x 64 24 x 24 x 64
3	Convolution + ReLu + Dropout (0.2) + Max Pooling	3x 3 x 3 2 x 2	128	24 x 24 x 128 12 x 12 x 128
4	Convolution + ReLu + Dropout (0.2) + Max Pooling	3x 3 x 3 2 x 2	256	12 x 12 x 256 6 x 6 x 256
5	Convolution + ReLu + Dropout (0.2) + Max Pooling	3 x 3 x 3 2 x 2	512	6 x 6 x 512 3 x 3 x 512
6	Fully Connected (64) Dropout (0.2)	-	-	1 x 1 x 64
7	Fully Connected (2) Softmax Output	-	-	1 x 1 x 2 1 x 1 x 2

Transfer learning


- With transfer learning, instead of starting the learning process from scratch, we start from patterns that have been learned when solving a different problem.
- While using a pre-trained model remove the original classifier, we add a new classifier that fits your purposes.
- One of the **important features** of transfer learning is that we only load the weights at each layer of the pretrained model which are independent of the size of the input image. Thus images of any size can be trained using the model.
 - e.g VGG19 model usually takes input image of size 224 x 224 x 3
 - However in our case, our input images are of size 48 x 48 x 3.

Strategies of transfer learning

There are 3 ways of using transfer learning:

1. We use the architecture of the pre-trained model and train it according to your dataset.
2. Train some layers and leave the others frozen.
3. Freezing the entire convolutional base.

All these 3 methods were experimented with.

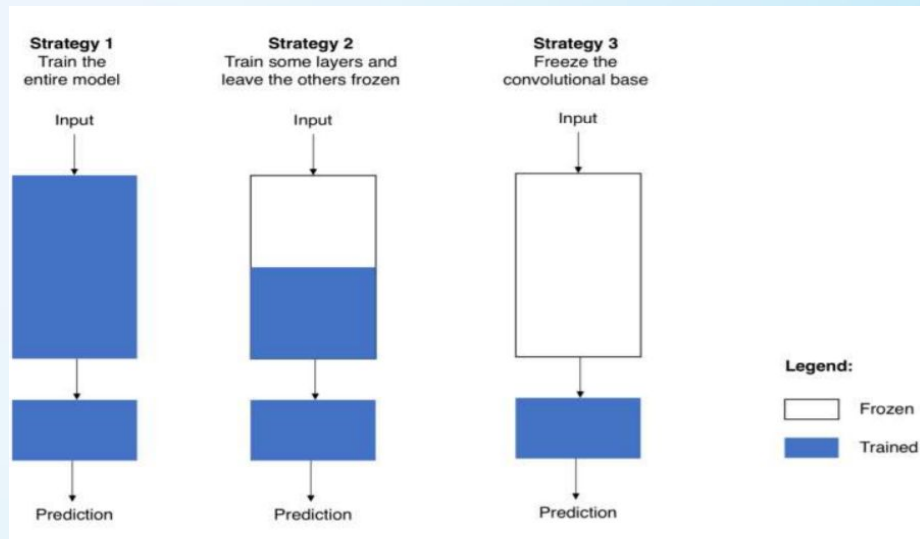

Experimental approaches

Description	Freezing entire convolutional base	Some layers unfrozen, all others unfrozen	All the layers Unfrozen
Properties	Might lead to underfitting Used when data is very similar to benchmark data used in pre trained model.	Playing with the Dichotomy	Might lead to overfitting. Used when data is not similar to benchmark data used in pre trained model.
Model Summary	Total params: 20,090,306 Trainable params: 0 Non-trainable params: 20,090,306	Total params: 20,090,306 Trainable params: 9,505,154 Non-trainable params: 1,05,85,152 (Layers After Convolution layer block_5 conv_1 are unfrozen)	Total params: 20,090,306 Trainable params: 20,090,306 Non-trainable params: 0

Results obtained from various scenarios

Freezing entire convolutional base				Some layers unfrozen, all others unfrozen				All the layers Unfrozen			
Class Label	Precision	Recall	F - score	Class Label	Precision	Recall	F - score	Class Label	Precision	Recall	F - score
0 (non water)	0.99	0.98	0.99	0 (non water)	0.99	0.99	0.99	0 (non water)	0.99	0.98	0.99
1 (water)	0.89	0.89	0.89	1 (water)	0.91	0.89	0.90	1 (water)	0.89	0.95	0.92
Accuracy: 94%				Accuracy: 97.7%				Accuracy: 98.2%			
Model provides least accuracy among the three.				Appreciable accuracy with good performance on test data as wells as prediction				High training and test accuracy but performs moderately in prediction and image binarization.			

Response matrix generation (heatmap)

Overlapping sliding window approach to generate the response matrix for the input image.


As a preprocessing step, the input image is zero padded in all the sides of the images. 48 zeros are padded on the four sides of the image under test.

Steps for Response Matrix Generation:

- i. A Matrix named mask is prepared of the same dimensions of the input image (only 1 channel) ($48 \times 48 \times 1$) containing zeros.
- ii. Each image patch ($48 \times 48 \times 3$) is fed to the flood-water-detector model. The output is a prediction of value 1 (water) or 0 (non water).
- iii. This value is added to all 48×48 cells in the response matrix mask




Algorithm for response matrix generation

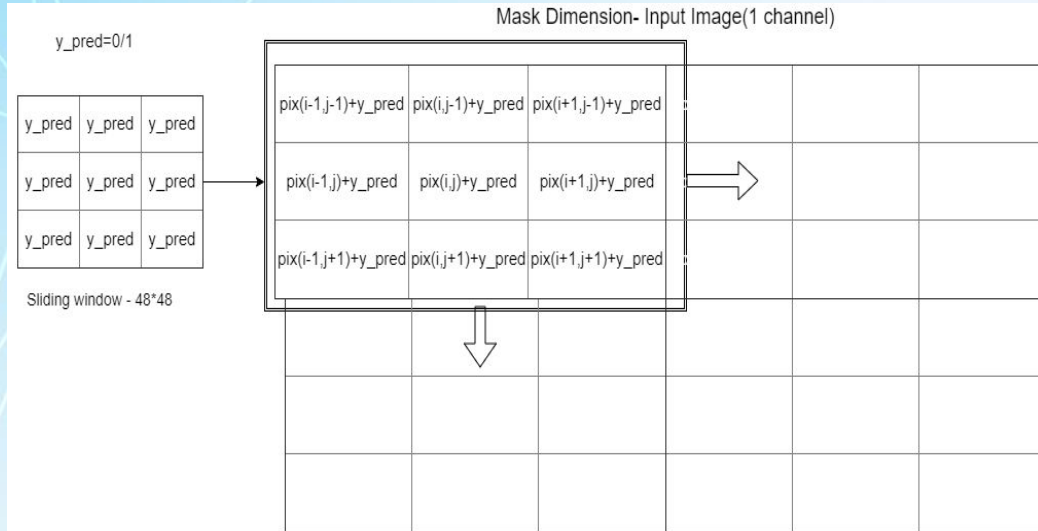

$mask[y:y + winW, x:x + winH]=$
 $mask[y:y + winW, x:x + winH]+ np.full((48,48), y_pred)$
 where,
 $winW = winH = 48$
 $y_pred = 0$ if image patch = non water
 $y_pred = 1$ if image patch = water



Input Image

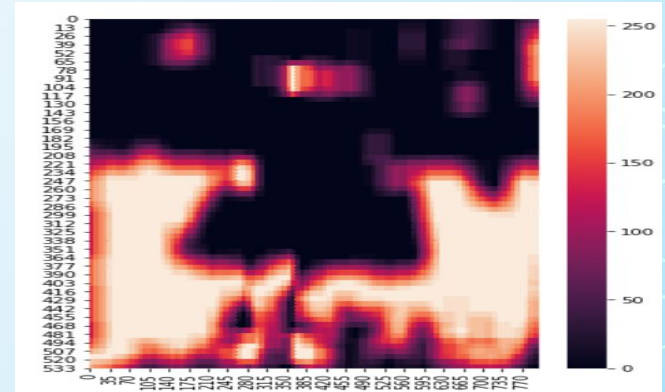

Heatmap

Flood region identification (1/2)

First the response matrix is divided by the maximum value in the response matrix .

$$\text{mask}[i,j] = \text{mask}[i,j] / \text{maxval}$$

Then we convert the value in the matrix mask to 0 or 255 depending upon a threshold:

$$\text{img}[i,j] = 0 \text{ if } \text{mask}[i,j] \leq T$$

$$\text{img}[i,j] = 255 \text{ if } \text{mask}[i,j] > T$$

$T \rightarrow$ Threshold

$$0 < T < 1$$

Region covered by water: After the image binarization, the percentage of image covered by water is calculated as follows:

$$\% \text{ of image covered by water} = \frac{\text{No. of water pixels}}{\text{Total no. of pixels}} * 100$$

If percentage of water in image < 30%, it is discarded.



Flood region identification (2/2)

We also used the Otsu Algorithm for the image binarization which is a thresholding method for image binarization.

The algorithm divides the image histogram into two classes, by using a threshold such as the in-class variability is very small.

Function $g(x, y)$ can be defined over every pixel value of the

original image $f(x, y)$

that defines the new threshold image.


$$g(x, y) = 0 \quad x < T$$

$$1 \quad x \geq T$$

Where the threshold is T .



Flowchart

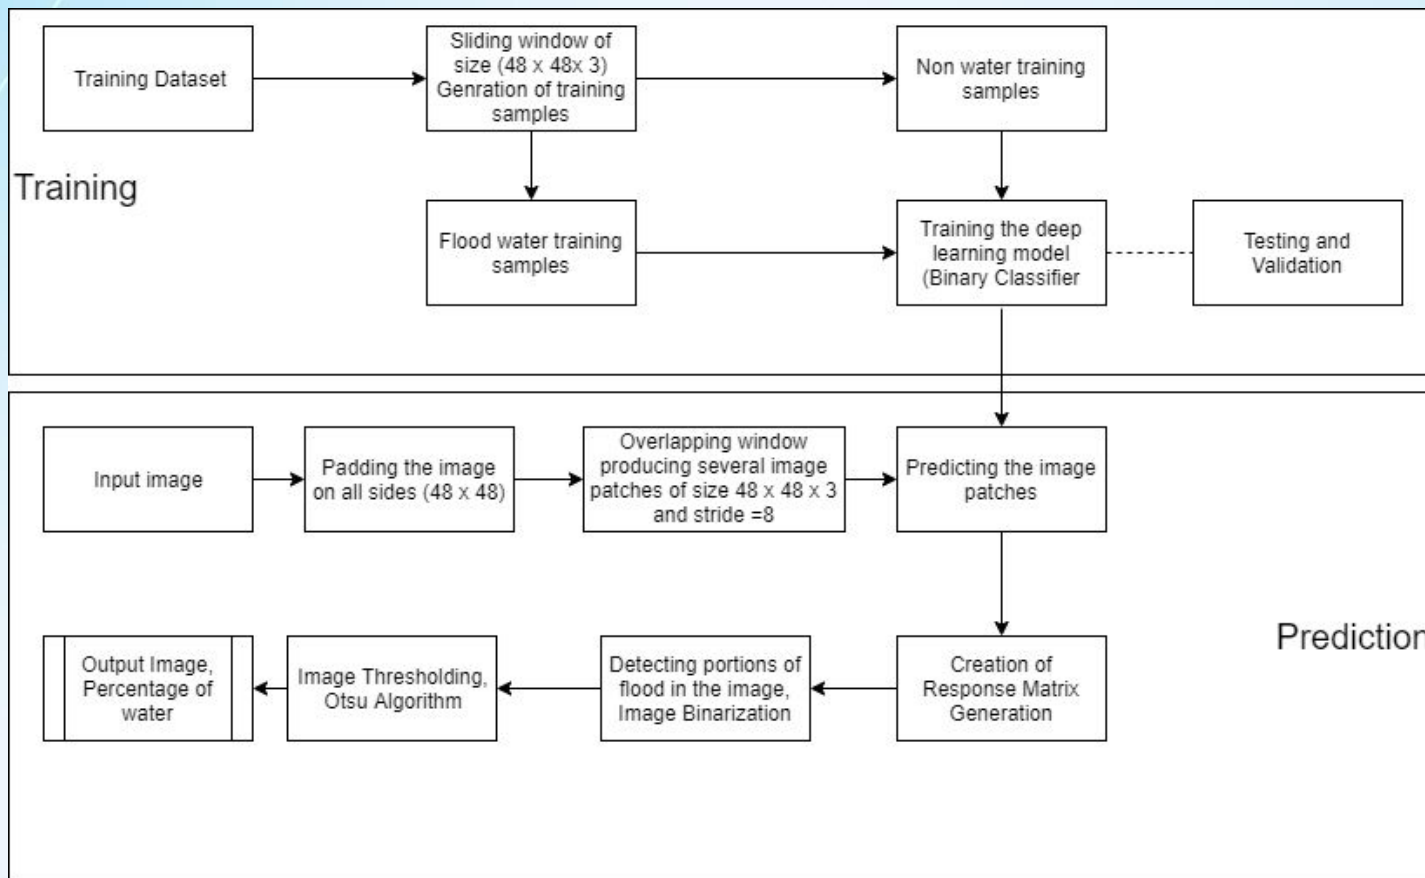

Simulation

Selenium webdriver to emulate human browsing the website on the web browser (Chrome) and scroll down till the end of the album page.

Algorithm for selecting coordinates:

In order to simulate a real world scenario, we identified certain regions in cities that are low lying areas or are prone to floods. Example in Mumbai the areas of Andheri, Kurla, Juhu, etc were identified.

Coordinates of these locations were taken as cluster centres.


Each cluster centre is assigned a scrapped image and other images are distributed randomly to each of the clusters.

Coordinates for the images were assigned randomly within 2km radius of the cluster centre. This algorithm, is just for a simulated scenario and is based on ideal conditions.

```
cluster_size=random.randrange(10,150,1) # Lower limit =10, Upper limit=150  
  
covariance =  $\begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$  # covariance matrix  
  
x,y = np.random.multivariate_normal(cluster_center , covariance , cluster_size)  
  
img_coodinates = cluster_center_coordinates - [(2km) (2km)] + ( [4Km] * [x y] )  
where, 4 km is the diameter.
```


Working with the simulated scenario

- All the images which have flood water content less than a specified threshold are removed.
- The deep learning model is used to calculate the water percentage which has been explained previously in detail.
- All the images are plotted on terrain maps using the “ Maps JavaScript API “.
- Markers are added for each image location.
- Each marker has an on click event which opens the image in an infobox and its details.

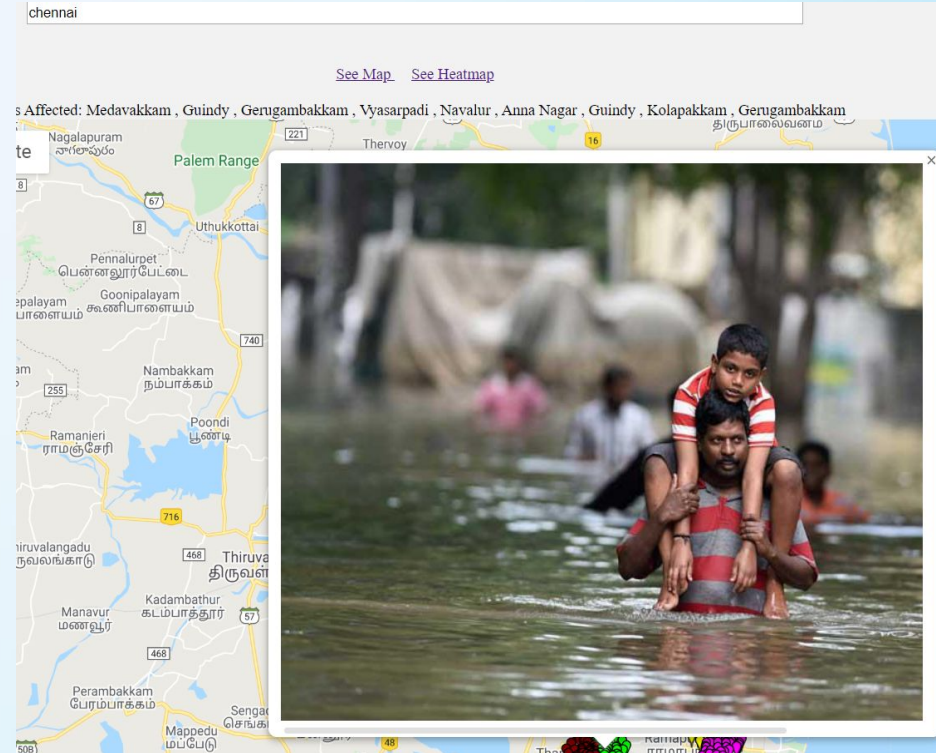

Clustering (1/2)

- The most suitable algorithm for clustering when the number of cluster centres and the shape of cluster is not known is the **DBSCAN algorithm**.
- DBSCAN groups together points that are close to each other based on a distance measurement and a minimum number of points. Parameters in DBSCAN algorithm are MinPts, eps, distance measure.
- The DBSCAN algorithm gives the total number of estimated clusters. Using this we further implemented the **k - means algorithm** which gives the cluster centers.

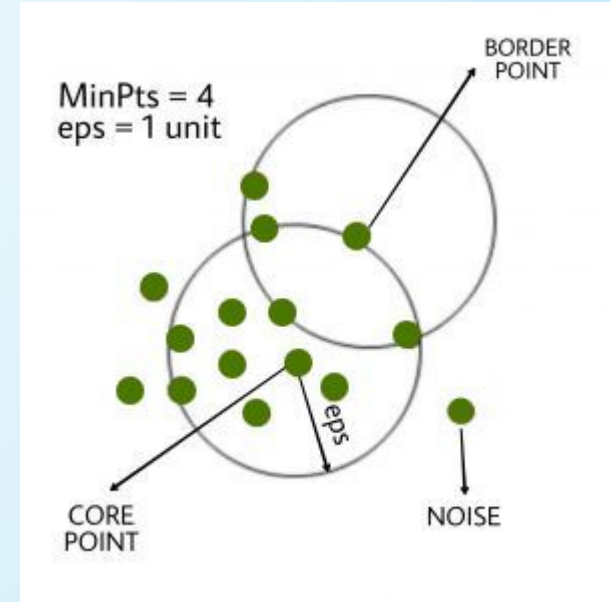


Clustering (2/2)

Parameters Used:

- Distance measure = 'Haversine'
- Epsilon = 2 (km) /R
- min_samples=5
- Algorithm used for DBSCAN is 'ball tree'.


where $R = 6373$ km is the radius of earth

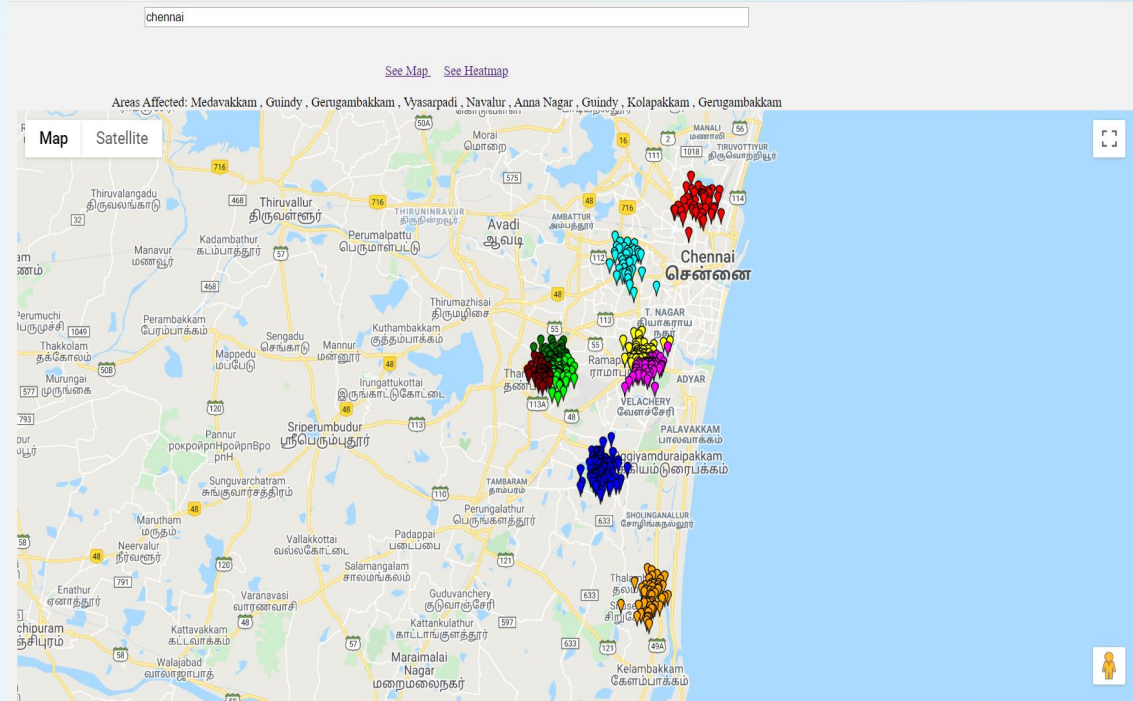

Clusters of affected zones in Chennai

Generating heatmap

- A heatmap is a visualization used to depict the intensity of data at geographical points. Areas of higher intensity will be colored red, and areas of lower intensity will appear green.
- Heatmap layer has been implemented in our project using the **google.maps.visualization** library provided by google maps.

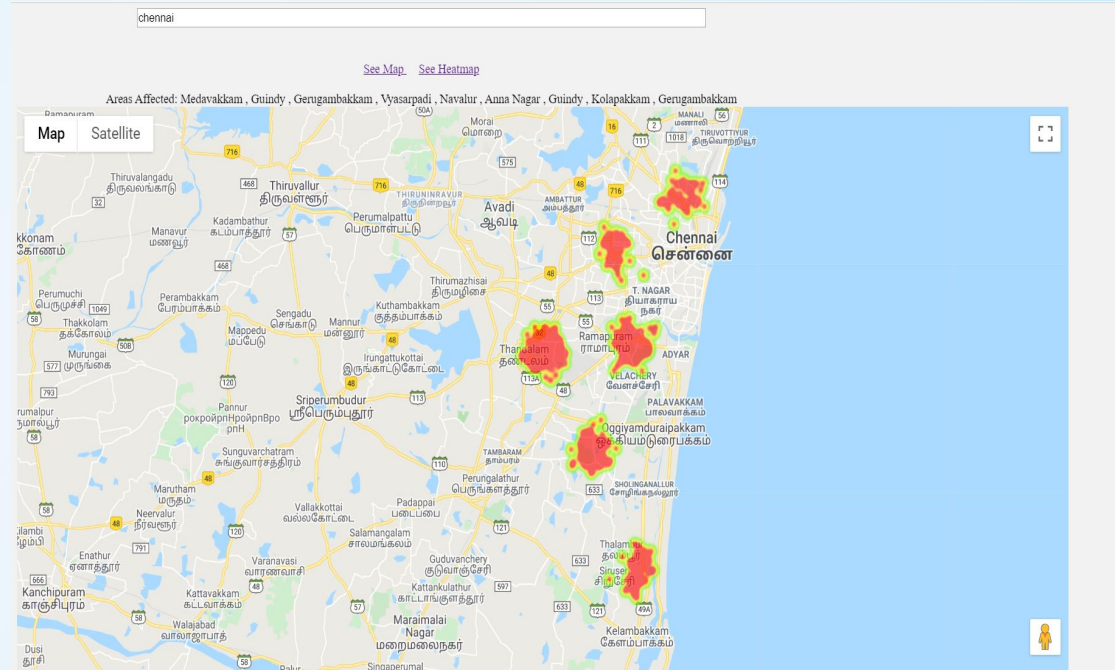

Heatmap of affected zones in Chennai

Identifying affected localities

- Coordinates of the cluster centres can be retrieved after applying the k - means clustering on the set of images. These coordinates are helpful in order to find the center of the affected regions.
- The **Geocoding API** is a service that provides geocoding and reverse geocoding of addresses.



Cluster centres in Kolkata

Generating boundaries to identify “hotspots”


- By generating boundaries to the existing clusters of affected regions we can define certain regions as “ **hotspots** ” which can be immediately cordoned off so as to allow only rescue personnels, volunteers and health workers to access the area and provide relief support to the gravely affected residents of the area.
- Boundaries are created with the Graham Scan algorithm which creates the smallest polygon encompassing all the coordinates.
- **Convex Hull:** For a given set of points S , the convex hull, denoted as $CH(S)$, is the intersection of all convex regions containing S . Graham scan algorithm is used to find the convex hull of a set of points.

Graham scan algorithm

Choosing the bottommost point as an anchor, all other points are ordered based on the angles they form about this anchor. The hull is constructed by following this ordering, adding points for left hull turns and deleting for right turns.

Algorithm 1 Graham scan algorithm

```
1:  $i \leftarrow 2, j \leftarrow 3, k \leftarrow 4$ 
2: while  $k \leq n$  do
3:   if  $P_i P_j P_k$  is a right turn then
4:     while  $P_i P_j P_k$  is a right turn do
5:       Remove edges  $P_i P_j$  and  $P_j P_k$ 
6:       Add edge  $P_i P_k$ 
7:        $j = k, k = k + 1$ 
8:     end while
9:   else
10:    Add edge  $P_j P_k$  as hull edge
11:     $i = j, j = k, k = k + 1$ 
12:   end if
13: end while
```

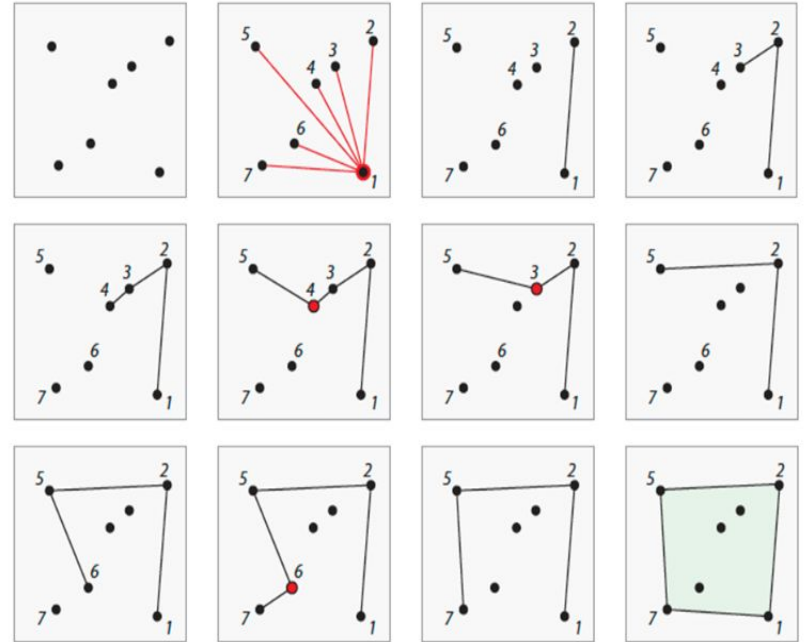

The algorithm takes $O(n \log n)$ time if we use a $O(n \log n)$ sorting algorithm

Hotspots identified in the city of Mumbai


mumbai

[See Map](#) [See Heatmap](#)

Areas Affected: Mumbai Central , Malad West , Mulund West , Andheri East , Thane , Powai , Andheri West , Borivali West , Chembur , Vikhroli West , Dadar , Gorai , Andheri W

Map

Satellite

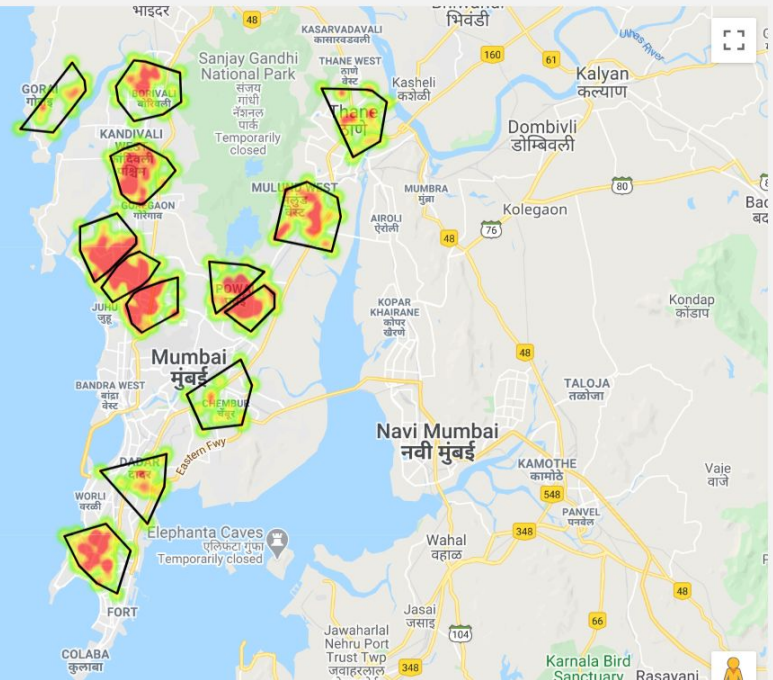

Results

1. The model developed is very accurate (95%) in detecting water and non water regions in the image.
2. The deep learning approach to calculate the percentage of flood water in the image effectively filters out unwanted and wrong images that have been uploaded to the application.
3. Citizens travelling across the city and public transport can be made cautious to restrain themselves from travelling to such disaster affected regions.
4. The localities identified as ' hotspots ' would quickly alert the rescue personnels and civic volunteers to carry out relief operations in those zones.

Future Scope

1. Over a period of time the data can be analyzed and potential flood prone “hotspots” can be identified which need robust infrastructure, road maintenance and **storm water drainage** facilities.
2. Strategic location of emergency shelter homes can be found out,
3. Such data would be very useful for municipal corporations and NDRF teams working during crisis periods.

Challenges

1. The results obtained using the deep learning models had a very good training accuracy as well as test accuracy. However, it performed moderately in image segmentation. Thus there is a need for performing other image segmentation and preprocessing techniques and a comparative study between different techniques.
2. Certain portions in the water which have reflections or shadows, are treated as non water objects. There is scope for improvement in this aspect.
3. Only those images having locations in their metadata can be accepted by the application.
4. Deliberately manipulating image metadata and uploading fake images remains a challenge.
5. To make the application useful, there must be general awareness among the public and eagerness to contribute towards the benefit of the society.

References

1. Detection of Flood Images Posted on Online Social Media for Disaster Response Ashish Kumar Layek* , Soham Poddar† , Sekhar Mandal‡ Dept. of Computer Science & Technology, Indian Institute of Engineering Science & Technology, Shibpur, Howrah, India Email: * ashish@cs.iiests.ac.in, † sohampoddar26@gmail.com , ‡ sekhar@cs.iiests.ac.in
2. Flood Alerts System with Android Application Mohamad Nazrin Napiah Department of Computer System & Technology Faculty of Computer Science & Information Technology University of Malaya nazrin23@siswa.um.edu.my
3. Automated Image Identification Method for Flood Disaster Monitoring In Riverine Environments: a Case Study in Taiwan Jyh-Horng Wu, Chien-Hao Tseng, Lun-Chi Chen, Shi-Wei Lo, Fang-Pang Lin National Center for High-Performance Computing, National Applied Research Laboratories, Taiwan
4. FLOOD-WATER LEVEL ESTIMATION FROM SOCIAL MEDIA IMAGES P. Chaudhary¹ , S. D'Aronco¹ , M. Moy de Vitry² , J. P. Leita² , J. D. Wegner¹
5. <https://developers.google.com/maps>
6. <https://towardsdatascience.com/image-scraping-with-python-a96feda8af2d>
7. <https://towardsdatascience.com/a-comprehensive-hands-on-guide-to-transfer-learning-with-real-world-applications-in-deep-learning-212bf3b2f27a>
8. <https://medium.com/kansas-city-machine-learning-artificial-intelligence/an-introduction-to-transfer-learning-in-machine-learning-7efd104b6026>
9. <https://whatis.techtarget.com/definition/image-metadata>



THANK YOU