

A tool set for random number generation on GPUs in R

Ruoyong Xu
University of Toronto

Patrick Brown
University of Toronto

Pierre L'Ecuyer
University of Montréal

Abstract

We introduce the R package **clrng** that leverages the **gpuR** package, and can generate random numbers on GPU by utilizing the **clRNG** (OpenCL) library. Parallel processing by graphics processing unit (GPU) can be used to speed up computationally intensive tasks, which when combined with R, it can largely improve R's downsides in terms of slow speed, memory usage and computation mode. **clrng** enables reproducible research by setting random streams on GPU and can thus accelerate several types of simulation and modelling. This package is portable and flexible, developers can use its random number generation kernel for various other purposes and applications.

Keywords: GPU, **clrng** package, parallel computing, **clRNG** library.

1. Introduction

In recent years, parallel computing with R [R Core Team 2021] has become a very important topic and attracted lots of interest from researchers [see Eddelbuettel 2021b, for a review]. Although R is one of the most popular statistical software with many advantages, it has drawbacks in memory usage and computation mode aspects [Zhao 2016]. To be more specific, (1) R requires all data to be loaded into the main memory (RAM) and thus can handle a very limited size of data; (2) R is a single-threaded program, it can not effectively use all the computing cores of multi-core processors. Parallel computing is the solution to these drawbacks, for an overview of current parallel computing approaches with R, see CRAN Task View by Eddelbuettel [2021a] at <https://cran.r-project.org/web/views/HighPerformanceComputing.html>.

Graphics Processing Units (GPUs) have the potential to make an important contribution to parallel computing with R. GPUs can perform thousands of computations simultaneously, which makes them powerful for doing massively parallel computing, and they are relatively cheap compared to multicore CPU's. Although there have been a number of R packages developed which provide some GPU capability, they inevitably come with some limitations. Packages such as **gputools**, **gpumatrix**, **cudaBayesreg**, **rpud** (available on github), are no longer maintained, the popular **tensorflow** [Allaire, Eddelbuettel, Golding, and Tang 2016] package uses GPU via Python, which makes it difficult to include as a dependency for new R packages. All of these mentioned packages are restricted to R users with NVIDIA GPUs. **gpuR** [Determan Jr. 2017] is the only R package with a convenient and flexible interface between R and GPUs, and it is compatible with many GPU devices. By utilizing the **ViennaCL**

[Rupp, Tillet, Rudolf, Weinbub, Morhammer, Grasser, Jungel, and Selberherr 2016] library, it provides a bridge between R and non-proprietary GPUs through the OpenCL (Open Computing Language) backend, which when combined with **Rcpp** [Eddelbuettel and François 2011] gives a building block for other R packages.

Random number generation is critical in simulation-based statistical inference, machine learning and many other scientific fields. While most random number generators are sequential, the R packages **parallel**, **future** [Bengtsson 2021] and **rlecuyer** [Hana Sevcikova 2015] are able to generate random numbers in parallel on multicore CPUs. More specifically, **parallel** writes an interface for the **RngStreams**, a C++ library by L’Ecuyer, Simard, Chen, and Kelton [2002] which is based on a combined multiple-recursive generator (MRG) MRG32k3a. **future** and **rlecuyer** also uses the combined MRG algorithm for generating random numbers. For up-to-date review papers on the generation of random numbers on parallel devices, and GPUs in particular, see: L’Ecuyer [2015]; L’Ecuyer, Munger, Oreshkin, and Simard [2017]; L’Ecuyer, Nadeau-Chamard, Chen, and Lebar [2021].

The **clrng** package described here is currently the only R package that is able to generate random numbers on GPUs. Accomplishing this is complicated because each process must produce an independent sequence of random numbers, and in order to ensure reproducibility it should be possible to save and restore the current state of each stream of numbers at any point. Here we introduce the R package **clrng** that leverages the **gpuR** package, and can generate random numbers on GPU by using the **clRNG** [L’Ecuyer, Munger, and Kemerchou 2015] library, and can thus accelerate several types of statistical simulation and modelling.

The remaining sections are organized as follows: In Section 2, we introduce streams and the use of streams in work-items on a GPU device for generating uniform random numbers, and the usage of `clrng::runif()`. In Section 3, we introduce two non-uniform RNGs in **clrng**, as examples for users to develop other RNGs of interest on GPUs in R. In Section 4, we apply GPU-generated uniform random numbers in Monte Carlo simulation for Fisher’s exact test, we introduce how the random numbers are used and how the algorithm is parallelized and implemented on GPU. Then we provide two real data examples to demonstrate the function usage and its R performance. In Section 5, we show a useful application of normal random numbers on GPU, using them to simulate batches of Gaussian random surfaces with Matérn covariance matrices simultaneously, the simulation also uses GPU-enabled functions from our other package **gpuBatchMatrix**. Finally, the paper concludes with a short summary and a discussion in Section 6.

2. Uniform random number generation

Uniform random number generators (RNGs) are the foundation for simulating random numbers from all types of probability distributions. L’Ecuyer [2012] summarized the usual two steps to generate a random variable in computational statistics: (1) generating independent and identically distributed (i.i.d.) uniform random variables on the interval $(0, 1)$, (2) applying transformations to these i.i.d. $U(0, 1)$ random variables to get samples from the desired distribution. L’Ecuyer [2012] and Robert and Casella [2004] present many general transformation methods for generating non-uniform random variables, for example, the most frequently used inverse transform method, the Box-Muller algorithm [Box 1958] for Gaussian random variable generation, and so on, which are all built on uniform random variables.

clRNG is an OpenCL library for uniform random number generation, it provides four different RNGs: the MRG31k3p, MRG32k3a, LFSR113, and Philox-4×32-10 generators. These four RNGs use different types of constructions. The **clrng** package uses the MRG31k3p RNG, making it able to generate random numbers on GPUs. We choose MRG31k3p as the base generator for the following reasons: the original **RNGStreams** package [L'Ecuyer *et al.* 2002] was built with MRG32k3a, which was designed to be implemented in double precision, and not with 32-bit integers. The MRG31k3p generator was designed later, specifically for 32-bit integer arithmetic, so it runs faster on the 32-bit GPUs. The MRG31k3p generator was introduced in the paper [L'Ecuyer and Touzin 2000]. It is also faster than Philox-4×32-10. MRG31k3p was also statistically tested extensively and successfully, [see L'Ecuyer and Simard 2007].

In what follows, we will illustrate how to create streams and how to use streams to generate uniform random numbers.

2.1. Creating streams

Random number generation is more complicated when the RNG algorithm is run in parallel processes in R, there is a risk that the generated sequences of random numbers have correlation. **clrng** uses multiple distinct streams that are used in work-items that executes in parallel on a GPU device. A popular way of obtaining multiple streams is to take an RNG with a long period and cut the RNG's sequence into very long disjoint pieces of equal length Z , and use each piece as a separate stream. Creating a new stream amounts to computing its starting point. Each of these streams can also be partitioned into substreams with equally-spaced starting points [L'Ecuyer *et al.* 2002; L'Ecuyer 2015], although this is not currently implemented in **clrng**. In general, a stream object contains three elements: the current state of the stream, the initial state of the stream (or seed), and the initial state of the current substream (by default it is equal to the seed). Streams are created sequentially in the way that whenever the user creates a new stream, the software automatically jumps ahead by Z steps to find its initial state, and the three states in the stream object are set to it.

In the clRNG library, the MRG31k3p RNG's entire period of length approximately 2^{185} is divided into approximately 2^{51} non-overlapping streams of length $Z = 2^{134}$. The state (and seed) of each stream is a vector of six 31-bit integers. This size of state is appropriate for having streams running in work-items on GPU cards, while providing a sufficient period length for most applications. The initial state of the first stream (also called "initial seed for the package" in clRNG and "initial" in **clrng**) for the MRG31k3p is by default (12345, 12345, 12345, 12345, 12345, 12345).

clrng is able to create streams both on the host and on the GPU device. The `createStreamsCpu()` function does the former. The R output below creates 4 streams on the host.

```
R> # creating streams on CPU
R> library("clrng")
R> myStreamsCpu <- createStreamsCpu(n = 4, initial = 12345)
R> t(myStreamsCpu)
```

| ## | | [,1] | [,2] | [,3] | [,4] |
|----|--------------|-------|-----------|------------|------------|
| ## | current.g1.1 | 12345 | 336690377 | 502033783 | 739421137 |
| ## | current.g1.2 | 12345 | 597094797 | 1322587635 | 1475938232 |

```
## current.g1.3 12345 1245771585 1964121530 730262207
## current.g2.1 12345 85196284 1949818481 1630192198
## current.g2.2 12345 523477687 1607232546 324551134
## current.g2.3 12345 2094976052 1462898381 795289868
## initial.g1.1 12345 336690377 502033783 739421137
## initial.g1.2 12345 597094797 1322587635 1475938232
## initial.g1.3 12345 1245771585 1964121530 730262207
## initial.g2.1 12345 85196284 1949818481 1630192198
## initial.g2.2 12345 523477687 1607232546 324551134
## initial.g2.3 12345 2094976052 1462898381 795289868
```

`createStreamsCpu()` has two arguments:

- `n`: number of streams to create.
- `initial`: vector of length 6, recycled if shorter.

We move streams to the GPU by converting them to a ‘`vclMatrix`’. `createStreamsGpu()` creates streams directly on the GPU and returns a ‘`vclMatrix`’, which makes it slightly more efficient when the number of streams is large. However, any data is lost when the R session is terminated.

```
R> # creating streams on GPU
R> myStreamsGpu = vclMatrix(myStreamsCpu)
R> myStreamsGpu2 = createStreamsGpu(n = 4, initial = 12345)
```

2.2. Using streams to generate uniform random numbers

The streams created sequentially are then used by the GPU’s work-items to generate random numbers. In `clrng` each work-item takes one distinct stream to generate random numbers, so the number of streams should always be greater than the number of total work-items in use. The main part of the kernel (OpenCL functions for execution on the device) for generating uniform random numbers is shown in Listing 2.2. Users can set `verbose=2` in `runif()` to print out the kernels. Kernels are written in the OpenCL C language, in which `__kernel` declares a function as a kernel, pointer kernel arguments must be declared with an address space qualifier, for example `__global` and `__local`. Here the pointers to `streams` and to the output matrix `out` on the global memory are passed to the kernel as arguments. `Nrow` and `Ncol` represent row and column number of the matrix `out` respectively. `Npad` is the internal number of columns of `out`, `NpadStreams` is the internal number of columns of `streams` (these variables are defined in macros not shown here). `index` represents the position of a work-item when mapping it to a one-dimensional data structure. Each stream’s current state is copied to the private memory of each work-item by the function `streamsToPrivate()`, in which `g1` and `g2` point to the first three and second three elements of stream states, respectively, and `startvalue` tells the starting position of the particular stream to be copied to the work-item. The function `clrngMrg31k3pNextState()` generates an uniform random integer named `temp` between 1 and 2147483647, the value of `temp` is then scaled to be in the interval (0,1) by multiplying it by a constant `mrg31k3p_NORM_c1`, which is defined to be `1/2147483648`

depending on the precision type. If to generate random integers, `temp` is not scaled. At the end of generating random numbers, streams are transferred back to global memory through the function `streamsFromPrivate()`.

```
__kernel void mrg31k3pMatrix(
    __global int* streams,
    __global float* out,
    int Nrow, int Ncol, int Npad){

    int Drow, Dcol;
    uint g1[3], g2[3];
    float temp, fact = mrg31k3p_NORM_cl;

    streamsToPrivate(streams, g1, g2, startvalue);

    for(Drow=get_global_id(0); Drow < Nrow;
        Drow += get_global_size(0)){

        for(Dcol=get_global_id(1); DcolBlock < Ncol;
            Dcol += get_global_size(1)){

            temp = fact * clrngMrg31k3pNextState(g1, g2);
            out[Drow * Npad + Dcol] = temp;

        } // Dcol
    } // Drow

    streamsFromPrivate(streams, g1, g2, startvalue);

} // kernel
```

Now we use the streams created in section 2.1 to generate a vector of double-precision i.i.d. $U(0, 1)$ random numbers with `clrng::runif()`. To view the generated random numbers, we need to convert them to R vectors or matrices, by doing this, the random numbers are moved from the global memory of the GPU device to the host.

```
R> as.vector(clrng::runif(n = 6, streams = myStreamsGpu, Nglobal = c(2,
+ 2)))
```

```
## [1] 0.735 0.842 0.614 0.216 0.110 0.870
```

The arguments of the `clrng::runif()` are described as follows:

- **n**: a vector of length 2 specifying the row and column number if to create a matrix, or a number specifying the length if to create a vector.
- **streams**: streams for random number generation.
- **Nglobal**: global index space. Default is set as (64, 8).
- **type**: “double” or “float” or “integer” format of generated random numbers.
- **verbose**: print extra information if `verbose > 1`. Default is FALSE.

Reusing `myStreamsGpu` will produce a vector different from `sim_1`. Because each time a random number is generated, the current state of the stream advances by one position.

Unlike the objects created by R, by default they remain in the memory after a restart. Streams created on GPU does not remain in the memory when a new R session begins. However, we can save the streams on the CPU in a file using the `saveRDS()` function, and later recall the streams with the `readRDS()` function, in this way we can reproduce the exact same sequence of random numbers in simulations. Below is the code that saves streams to a data file called `streams_from_GPU.rds` on CPU and then load it back and transfer it to GPU.

```
R> saveRDS(as.matrix(createStreamsGpu(n = 4)), "myStreams.rds")
R> # Load the streams object as streams_saved
R> streams_saved <- vclMatrix(readRDS("myStreams.rds"))
```

3. Some non-uniform random number generation

3.1. Normal random number generation

We apply the Box-Muller transformation to $U(0, 1)$ random numbers to generate standard normal random numbers. As shown in Algorithm 1, Box-Muller algorithm takes two independent, standard uniform random variables U_1 and U_2 and produces two independent, standard Gaussian random variables X and Y , where R and Θ are polar coordinate random variables. The Box-Muller algorithm is a very good choice for Gaussian transform on GPU compared to other transform methods [Howes and Thomas 2007], because this algorithm has no branching or looping, which are the things GPU is not good at.

Algorithm 1: Box-Muller algorithm.

- 1, Generate U_1, U_2 i.i.d. from $U(0, 1)$;
- 2, Define

$$\begin{aligned} R &= \sqrt{-2 * \log U_1}, \\ \Theta &= 2\pi * U_2, \\ X &= R * \cos(\Theta), \\ Y &= R * \sin(\Theta); \end{aligned}$$

- 3, Take X and Y as two independent draws from $N(0, 1)$;
-

Listing 3.1 shows a fragment of the kernel that generates standard Gaussian random numbers. Aside from using local memory and the part that does the Box-Muller transformation, this kernel is the same with the kernel for generating uniform random numbers shown in Listing 2.2. If developers want to use other Gaussian transform methods, this kernel is easy to be adapted and incorporated in other R packages. This kernel executes over a 2-dimensional index space with 1×2 work-groups. `part[0]` and `part[1]` correspond to R and Θ in the formulas respectively. `PI_2` is defined to be $\pi/2$. As the work-items in a work-group proceed at different rates, `barrier(CLK_LOCAL_MEM_FENCE)` ensures correct ordering of memory opera-

tions to local memory, so that Gaussian random numbers $(X_1, Y_1), \dots, (X_n, Y_n)$ are generated in pairs correctly, errors such as $(X_n, Y_{(n-1)})$ or $(X_{(n-1)}, Y_{(n)})$ are avoided.

```

__kernel void mrg31k3pMatrix(
    __global int* streams,
    __global double* out,
    int Nrow, int Ncol, int Npad, int NpadStreams){

    int Drow, Dcol;
    uint g1[3], g2[3];
    local double part[2];
    int startvalue = (get_global_id(0) * get_global_size(1) +
        get_global_id(1)) * NpadStreams;

    double sinOrCosPart1, addForSine = - get_local_id(1) * PI_2;
    double temp, fact = mrg31k3p_NORM_cl;
    if(get_local_id(1)){
        fact = TWOPI_mrg31k3p_NORM_cl;
    }

    streamsToPrivate(streams, g1, g2, startvalue);

    for(Drow=get_global_id(0); Drow < Nrow;
        Drow += get_global_size(0)){

        for(Dcol=get_global_id(1); DcolBlock < Ncol;
            Dcol += get_global_size(1)){

            temp = fact * clrngMrg31k3pNextState(g1, g2);
            part[get_local_id(1)] = temp;

            if(!get_local_id(1)) {
                part[0] = sqrt(-2.0*log(part[0]));
            }
            barrier(CLK_LOCAL_MEM_FENCE);

            // sine for local[1], cos for local[0]
            sinOrCosPart1 = cos(part[1] + addForSine);
            out[Drow * Npad + Dcol] = part[0]*sinOrCosPart1;

            barrier(CLK_LOCAL_MEM_FENCE);
        } //Dcol
    } //Drow
    streamsFromPrivate(streams, g1, g2, startvalue);
} //kernel

```

We generate a large-size matrix of 100 million double-precision Gaussian random numbers, and compare the run-time between using `stats::rnorm()` and `clrng::rnorm()`. The best performance we have seen using `clrng::rnorm()` is above 160 times faster with 512×128 work-items than using the `stats::rnorm()`. The difference in elapsed time becomes larger when matrix size goes larger.

```
R> streams <- createStreamsGpu(n = 512 * 128)
```

```
R> system.time(clrng::rnorm(c(10000, 10000), streams = streams,
+   Nglobal = c(512, 128), type = "double"))

##      user  system elapsed
##    0.038   0.010   0.049

R> system.time(matrix(stats::rnorm(10000^2), 10000, 10000))

##      user  system elapsed
##    6.978   0.847   7.821
```

3.2. Exponential random number generation

The exponential random variates are produced by applying the inverse transform method on i.i.d. $U(0,1)$ random numbers. The random variable $X \sim \text{Exponential}(\lambda)$ has cumulative distribution function $F_X(x) = 1 - e^{-\lambda x}$ for $x \geq 0$ and $\lambda > 0$. The inverse of $F_X(\cdot)$ is $F_X^{-1}(y) = -(1/\lambda) \log(1 - y)$, for $0 \leq y < 1$. The kernel is not shown because it is mostly same as the kernel for uniform and normal random numbers, except for the part that does the inverse transform.

Below is an example that produces a 2×4 matrix of Exponential random numbers with expectation equal to 1.

```
R> r_matrix <- clrng::rexp(c(2, 4), rate = 1, Nglobal = c(2,
+   2), type = "double")
R> as.matrix(r_matrix)

##      [,1] [,2] [,3] [,4]
## [1,] 0.565 0.333 0.395 0.0932
## [2,] 1.535 0.866 0.124 0.0315
```

The arguments of the `clrng::rexp()` are described as follows:

- **n**: a vector of length 2 specifying the row and column number if to create a matrix, or a number specifying the length if to create a vector.
- **streams**: streams. If missing, a stream with random initial state is supplied.
- **Nglobal**: global index space. Default is (64, 8).
- **type**: “double” or “float” format of generated random numbers.
- **verbose**: print extra information if `verbose > 1`. Default is FALSE.

4. An application of uniform RNG: Fisher’s simulation

The GPU-generated random numbers can be applied in suitable statistical simulations to accelerate the performance. One application of GPU-generated random numbers in **clrng** is

Monte Carlo simulation for Fisher's exact test. Fisher's exact test is applied for analyzing usually 2×2 contingency tables when one of the expected values in table is less than 5. Different from methods which rely on approximation, Fisher's exact test computes directly the probability of obtaining each possible combination of the data for the same row and column totals (marginal totals) as the observed table, and get the exact p-value by adding together all the probabilities of tables as extreme or more extreme than the one observed. However, when the observed table gets large in terms of sample size and table dimensions, the number of combinations of cell frequencies with the same marginal totals gets very large, [Mehta and Patel 2011, p. 23] shows a 5×6 observed table that has 1.6 billion possible tables. Calculating the exact P-values may lead to very long run-time and can sometimes exceed the memory limits of your computer. Hence, the option `simulate.p.value = TRUE` in `stats::fisher.test()` is provided, which enables computing p-values by Monte Carlo simulation for tables larger than 2×2 .

The test statistic calculated for each random table is $-\sum_{i,j} \log(n_{ij}!)$, $i = (1, \dots, I)$, $j = (1, \dots, J)$, (i.e., minus log-factorial of table), where I and J are the row and column number of the observed table. This test statistic can also be independently calculated for a table by `clrng::logfactSum()`. Given an observed table and a number of replicates B , the Monte Carlo simulation for Fisher's exact test does the following steps:

1. Calculate the test statistic for the observed table.
2. In each iteration, simulate a random table with the same dimensions and marginal totals as the observed table using the `rcont2()` algorithm, compute and sometimes save the test statistic from the random table.
3. Count the number of iterations (*Counts*) that have test statistics less or equal to the one from the observed table.
4. Estimate p-value using $\frac{1+Counts}{B+1}$.

Step 1 and step 2-3 are done on a GPU with two kernels enqueued sequentially. For step 2, `clrng::fisher.sim()` adapted the function `rcont2()` used by `stats::fisher.test()` for constructing random two-way tables with given marginal totals. The algorithm [see Patefield 1981] samples the entries row by row, one at a time, conditional on the values of the entries already sampled. The conditional probabilities for the possible values of the next entry are updated dynamically each time a new entry is sampled. Then this entry is sampled by standard inversion of the cumulative distribution function, using one $U(0, 1)$ random number. For an $I \times J$ table, this requires $(I-1)(J-1)$ random numbers (the last column and last row do not need to be sampled). Finally, one can compute the test statistic for this newly sampled table. On a GPU, this step can be replicated say n times in parallel by creating n distinct random streams and launching n separate work-items. Each work-item takes a random stream as input, performs all of Step 2 and 3, and returns the value of the test statistic on the GPU. Computing the p-value on the CPU (Step 4) is then a trivial operation. Step 2 of saving test statistics from the random tables is made optional, which can reduce the run-time. By the way, there are a lot of other more recent methods for sampling (larger) contingency tables, many of them use Markov Chain Monte Carlo, the use of streams and GPU would be quite different in that case. See for examples [Miller and Harrison 2013; Kayibi, Pirzada, and Chishti 2018; Dyer, Kannan, and Mount 1997]. Doing the `fisher.sim()` function on GPU

opens up many possibilities for future work, the specific implementation we’ve done for the tables isn’t necessarily the optimal one.

The arguments of the `clrng::fisher.sim()` are described as follows:

- `x`: a contingency table, a “vclMatrix” object.
- `N`: number of simulation runs.
- `streams`: streams.
- `type`: “double” or “float” of returned test statistics.
- `returnStatistics`: if TRUE, return all test statistics.
- `Nglob`: global index space. Default is set as (64, 16).

Users request N number of replicates, while the actual number of replicates to be executed on GPU is larger (`ceiling(N/prod(Nglob))*prod(Nglob)`). We show the advantage of `clrng::fisher.sim()` by computing the p-values for two real data examples: one with a relatively big p-value and another with a very small p-value, and compare the run-time with using `stats::fisher.test()` for each of the data sets on two computers: one with a very good CPU and an ordinary GPU, the other is equipped with an excellent GPU and an ordinary CPU. The R outputs for testing on computer 2 is shown in the following.

4.1. Comparing run-time: Month data example

The 2-way contingency tables consist of selected data from the 2018 Natality public use data [for Health Statistics 2019] from the Centers for Disease Control and Prevention’s National Center for Health Statistics (NCHS), the 2018 natality data file may be downloaded at https://www.cdc.gov/nchs/data_access/VitalStatsOnline.htm. Table 1 is a 12×12 table that shows frequencies for congenital anomalies of the newborn by birth month in 2018 within the United States. The column variables of these two tables represent the twelve categories of congenital anomalies of the newborn: 1) Anencephaly; 2) Meningomyelocele/Spina bifida; 3) Cyanotic congenital heart disease; 4) Congenital diaphragmatic hernia; 5) Omphalocele; 6) Gastroschisis; 7) Limb reduction defect; 8) Cleft lip with or without cleft palate; 9) Cleft palate alone; 10) Down syndrome; 11) Suspected chromosomal disorder; and 12) Hypospadias. The first 5 rows of the table are displayed below.

```
«monthDataForScript, include=FALSE, purl=TRUE»- knitr::kable(month) @
```

```
R> streams <- createStreamsGpu(n = 256 * 64, initial = 666)
R> month_gpu <- vclMatrix(month, type = "integer")
R> system.time(result_month <- clrng::fisher.sim(month_gpu, 1000000,
+   streams = streams, type = "double", returnStatistics = TRUE,
+   Nglob = c(256, 64)))
```

```
##   user  system elapsed
## 0.323   0.003   0.325
```

```
R> result_month$threshold
```

```
## [1] -47955
```

Table 1: Monthly birth anomaly data

| | Ane | Men | Cya | Her | Omp | Gas | Lim | Cle | Pal | Dow | Chr | Hyp |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Jan | 29 | 55 | 172 | 46 | 39 | 73 | 48 | 183 | 77 | 103 | 102 | 174 |
| Feb | 25 | 45 | 175 | 35 | 31 | 55 | 34 | 142 | 81 | 115 | 100 | 180 |
| Mar | 31 | 48 | 182 | 41 | 47 | 72 | 40 | 200 | 86 | 90 | 96 | 180 |
| Apr | 34 | 45 | 186 | 36 | 32 | 75 | 42 | 173 | 56 | 87 | 90 | 193 |
| May | 33 | 40 | 187 | 46 | 24 | 80 | 35 | 180 | 75 | 91 | 100 | 197 |
| Jun | 34 | 48 | 189 | 35 | 33 | 75 | 45 | 154 | 74 | 102 | 100 | 182 |
| Jul | 26 | 43 | 198 | 34 | 21 | 74 | 36 | 179 | 79 | 86 | 92 | 193 |
| Aug | 24 | 41 | 189 | 44 | 43 | 62 | 48 | 183 | 88 | 109 | 94 | 194 |
| Sept | 34 | 44 | 147 | 40 | 37 | 66 | 36 | 158 | 73 | 112 | 103 | 196 |
| Oct | 25 | 43 | 207 | 45 | 31 | 65 | 49 | 181 | 77 | 108 | 115 | 220 |
| Nov | 36 | 55 | 188 | 39 | 39 | 62 | 43 | 144 | 68 | 98 | 79 | 173 |
| Dec | 23 | 48 | 196 | 31 | 31 | 71 | 31 | 177 | 86 | 86 | 73 | 156 |

```
R> result_month$simNum
```

```
## [1] 1015808
```

```
R> result_month$counts
```

```
## [1] 410825
```

```
R> result_month$p.value
```

```
## [1] 0.404
```

We got 410825 cases whose test statistics are below the observed threshold based on an actual number of 1015808 simulations, so the p-value from `clrng::fisher.sim()` for this table is about 0.40443, which is close enough to the p-value from `stats::fisher.test()`. `clrng::fisher.sim()` takes about 0.31 seconds, **clrng** accounts for 2.17% of the elapsed time on CPU.

```
R> # using CPU
```

```
R> system.time(result_monthcpu <- stats::fisher.test(month, simulate.p.value = TRUE,
+   B = 1015808))
```

```
##   user  system elapsed
## 14.791   0.027  14.826
```

```
R> result_monthcpu$p.value
```

```
## [1] 0.405
```

Table 2: Day-of-week birth anomaly data

| | Ane | Men | Cya | Her | Omp | Gas | Lim | Cle | Pal | Dow | Chr | Hyp |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Mon | 30 | 34 | 173 | 37 | 23 | 80 | 49 | 191 | 83 | 122 | 109 | 216 |
| Tue | 60 | 121 | 383 | 80 | 83 | 131 | 71 | 349 | 146 | 164 | 168 | 352 |
| Wed | 51 | 106 | 417 | 92 | 73 | 145 | 72 | 333 | 136 | 179 | 196 | 351 |
| Thu | 60 | 86 | 362 | 69 | 74 | 120 | 85 | 326 | 132 | 220 | 187 | 359 |
| Fri | 52 | 94 | 347 | 87 | 59 | 123 | 68 | 323 | 145 | 170 | 166 | 345 |
| Sat | 52 | 63 | 323 | 67 | 64 | 135 | 73 | 316 | 170 | 189 | 188 | 357 |
| Sun | 49 | 51 | 211 | 40 | 32 | 96 | 69 | 216 | 108 | 143 | 130 | 258 |

4.2. Comparing run-time: Week data example

Table 2 is a 7×12 table shows frequencies for congenital anomalies of the newborn by birth day of week in 2018 within the United States.

```
R> week_GPU <- gpuR::vclMatrix(week, type = "integer")
R> system.time(result_week <- clrng::fisher.sim(week_GPU, 10000000,
+   streams = streams, type = "double", returnStatistics = TRUE,
+   Ngloba1 = c(256, 64)))

##      user  system elapsed
##    1.932    0.025    1.955

R> result_week$threshold

## [1] -54990

R> result_week$simNum

## [1] 10010624

R> result_week$counts

## [1] 1193

R> result_week$p.value

## [1] 0.000119
```

The “week” table has a much smaller p-value: around 0.000125, which should require a larger number of simulations to get a more accurate p-value. With more than ten million simulations, we get 1205 cases and a p-value around 0.000120472 by `fisher.sim()`. `stats::fisher.test()` takes 92.45 seconds, while `fisher.sim()` takes about 1.95 seconds, the GPU elapsed time is decreased to about 2.10% of the time taken on CPU.

Table 3: Summary of comparisons of Fisher's test simulation on different devices. Computer 1 is equipped with CPU Intel Xenon W-2145 3.7Ghz and AMD Radeon VII. Computer 2 is equipped with VCPU Intel Xenon Skylake 2.5Ghz and VGPU Nvidia Tesla V100.

| B | Computer 1 | | Computer 2 | | Data |
|----------|--------------|------------|--------------|-------------|-------|
| | Intel 2.5ghz | AMD Radeon | Intel 3.7ghz | NVIDIA V100 | |
| P-value | | | | | |
| 1M | 0.403804 | 0.403507 | 0.4035606 | 0.403507 | month |
| 10M | 0.0001251 | 0.0001274 | 0.0001202 | 0.0001274 | week |
| Run-time | | | | | |
| 1M | 10.74 | 2.28 | 14.8 | 0.32 | month |
| 10M | 63.24 | 10.82 | 92 | 1.95 | week |

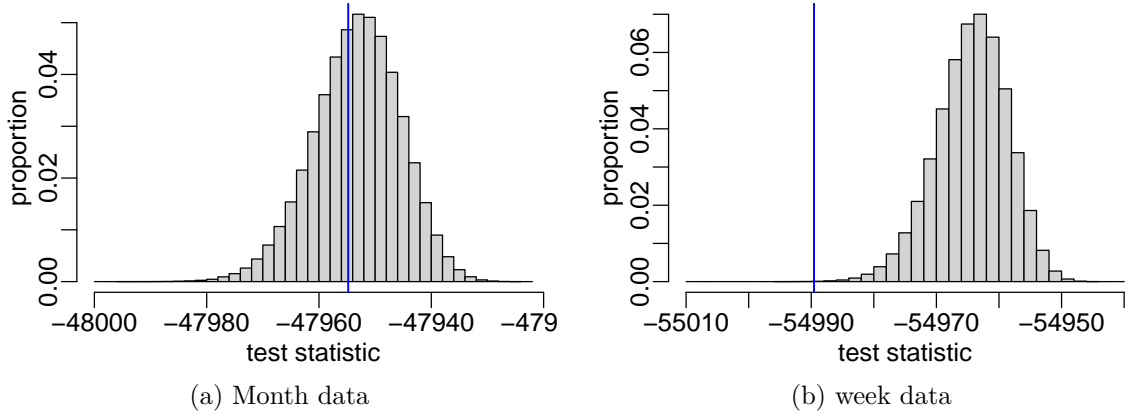


Figure 1: Approximate sampling distributions of the test statistics from the two examples Month and Week. The test statistic values of the observed tables are marked with a blue vertical line on each plot.

```
R> # using CPU
R> system.time(result_weekcpu <- fisher.test(week, simulate.p.value = TRUE,
+      B = 10010624))
```

```
##      user  system elapsed
##  92.369   0.143   92.455
```

```
R> result_weekcpu$p.value
```

```
## [1] 0.000127
```

4.3. A summary of the results

We summarized the comparison results in Table 3 and plot the test statistics in Figure 1.

5. An application of normal RNG: Gaussian surface simulation

Given a parameter space X , a random field U on X is a collection of random variables $\{U_x : x \in X\}$. A Gaussian random field is a random field with the property that for any positive integer n and any set of locations $x_1, \dots, x_n \in X$, the joint distribution of $U = (U_{x_1}, \dots, U_{x_n})$ is multivariate Gaussian. The expectation of U and covariance function Σ completely determine the distribution of U , where

$$U = [U(x_1), \dots, U(x_n)]^\top \sim \text{MVN}(0, \Sigma),$$

$$\Sigma_{ij} = \text{COV}[U(x_i), U(x_j)] = \sigma^2 \frac{2^{\kappa-1}}{\Gamma(\kappa)} \left(\sqrt{8\kappa} \frac{|x_i - x_j|}{\phi} \right)^\kappa K_\kappa \left(\sqrt{8\kappa} \frac{|x_i - x_j|}{\phi} \right),$$

where MVN stands for the multivariate normal distribution, and Σ is the covariance matrix. A common choice for Σ is the Matérn covariance [Matérn 1960]. The Matérn covariance between $U(x_i)$ and $U(x_j)$ takes the above form, where σ^2 the variance of the random field U . $\Gamma(\cdot)$ is the standard gamma function. ϕ is the range parameter or scale parameter with the dimension of distance, it controls the rate of decay of the correlation as distance increases. $K_\kappa(\cdot)$ is the modified Bessel function of the second kind with order κ , κ is the shape parameter which determines the smoothness of $U(x)$, specifically, $U(x)$ is m times mean-square differentiable if and only if $\kappa > m$. There are several alternative parameterisations of Matérn covariance functions in literature [see Haskard 2007]. In **clrng**, we use the above form for computing Matérn covariance.

Liu, Li, Sun, and Yu [2019] gives a comprehensive review on seven popular methods for Gaussian random field generation, all of these methods except matrix decomposition method, are approximations and has specific requirements on the type of grid or covariance functions. The matrix decomposition method is exact, it works for all covariance functions and can generate random field on all types of grids. Other R packages that offer simulation of Gaussian random fields such as **geoR** [Ribeiro Jr. and Diggle 2001], does not work for large number of locations; the **RandomFields** [Schlather, Malinowski, Menck, Oesting, and Strokorb 2015; Schlather, Malinowski, Oesting, Boecker, Strokorb, Engelke, Martini, Ballani, Moreva, Auel, Menck, Gross, Ober, Ribeiro, Ripley, Singleton, Pfaff, and R Core Team 2020] package can use different methods for simulation of Gaussian fields, among which the modified circulant embedding method [Dietrich and Newsam 1997] for covariance matrix decomposition is also an exact method, however, it works only for isotropic Gaussian fields and on rectangular grids. **clrng** does simulation of exact Gaussian fields on the GPU as it relies on the matrix decomposition method. The implementation of this method is as follows.

Suppose $U = (U_1, U_2, \dots, U_n)^\top$ is a Gaussian random field with mean μ and covariance matrix Σ , without loss of generality, we assume mean value zero ($\mu = 0$). Since covariance matrix Σ is symmetric and positive-definite, we can take Cholesky decomposition of Σ , then we can

simulate random samples from U using Algorithm 2,

Algorithm 2: Gaussian random fields simulation using covariance matrix decomposition method.

- 1, Calculate the covariance matrix Σ between locations;
 - 2, Compute the Cholesky decomposition of $\Sigma = L \cdot D \cdot L^\top$, where L is a lower unit triangular matrix, and D is a diagonal matrix;
 - 3, Generate on GPU a random matrix $Z = (Z_1, Z_2, \dots, Z_n) \sim \text{MVN}(0, I_n)$, where I_n is a $n \times n$ identity matrix;
 - 4, Compute the random samples from U in batches using $U = L \cdot D^{\frac{1}{2}} \cdot Z$;
-

The matrix decomposition method is straightforward to implement. However, when the number of locations n is large, the cost of Cholesky decomposition of the covariance matrix is $\mathcal{O}(n^3)$, and the cost of matrix-vector multiplication $L * Z$ to generate the random field U is $\mathcal{O}(n^2)$ [Liu *et al.* 2019]. Our other R package **gpuBatchMatrix** is able to compute batches of Matérn covariance matrices in parallel, and do Cholesky decomposition and matrix-matrix multiplication in batches in parallel on GPU. The following shows an example, in which we simulate on GPU eight Gaussian random fields of Matérn covariance at one time with four sets of parameters, by taking advantage of the GPU-capabilities offered by **clrng** and **gpuBatchMatrix** together.

5.1. Simulating Gaussian random fields with Matérn covariances

```
R> library("gpuR")
R> library("clrng")
R> library("gpuBatchMatrix")
R> library("geostatsp")
```

Step 1, set up a 51×80 raster using the 'swissRain' data from **geostatsp**.

```
R> NlocalCache = 1000
R> Nglobal = c(128, 64, 2)
R> Nlocal = c(4, 2, 2)
R> theType = "double"
```

```
R> data("swissRain", package = "geostatsp")
R> myRaster = geostatsp::squareRaster(swissBorder, 80)
R> myRaster
```

```
## class      : RasterLayer
## dimensions : 51, 80, 4080 (nrow, ncol, ncell)
## resolution : 4358, 4358 (x, y)
## extent     : 2485351, 2833996, 1075013, 1297275 (xmin, xmax, ymin, ymax)
## crs        : +proj=somerc +lat_0=46.9524055555556 +lon_0=7.43958333333333 +k_0=1 +x_0=2
```

Step 2, create 4 parameter sets as a small example.

```
R> params
```

```
##      shape range variance nugget anisoRatio
## [1,]  1.25 50000      1.5      0         1
## [2,]  2.15 60000      2.0      0         4
## [3,]  0.60 30000      2.0      0         2
## [4,]  3.00 30000      2.0      0         2
##      anisoAngleRadians
## [1,]                0.000
## [2,]                0.449
## [3,]                0.449
## [4,]                0.449
```

Step 3, compute the Matérn covariance matrices using `gpuBatchMatrix::maternBatch()`, the returned Matérn covariance matrices are each of size 4080×4080 and are stacked by row in the output `maternCov`.

```
R> maternCov = gpuBatchMatrix::maternBatch(params, myRaster,
+     Ngloba1 = c(128, 64), Nlocal = c(16, 4))
R> dim(maternCov)
```

```
## [1] 16320 4080
```

Step 4, perform Cholesky decomposition of `maternCov`. The first argument in `cholBatch()` specifies the object to take Cholesky decomposition. Computed unit lower triangular matrices L_i 's are stacked by row and stored in `maternCov`. The diagonal values of each D_i are returned and stored in each row of `diagMat`. For example, if each batch Σ_i is of size $n \times n$, then each batch D_i is $1 \times n$.

```
R> diagMat = gpuBatchMatrix::cholBatch(maternCov, Ngloba1 = c(128,
+     8), Nlocal = c(32, 8))
```

$$\begin{bmatrix} \Sigma_1 \\ \Sigma_2 \\ \Sigma_3 \\ \vdots \end{bmatrix} \rightarrow \begin{bmatrix} L_1 \\ L_2 \\ L_3 \\ \vdots \end{bmatrix} \text{ and } \begin{bmatrix} D_1 \\ D_2 \\ D_3 \\ \vdots \end{bmatrix} \quad (1)$$

Step 5, create some streams on GPU to generate 2 standard Gaussian random vectors $\mathbf{zmatGpu} = (Z_1, Z_2)$ using `clrng::rnorm()`, in which `c(nrow(maternCov), 2)` specifies the number of rows and columns of `zmatGpu`.

```
R> streamsGpu <- createStreamsGpu(n = 128 * 64)
```

```
R> zmatGpu = clrng::rnorm(c(nrow(maternCov), 2), streams = streamsGpu,
+     Ngloba1 = c(128, 64), type = theType)
```


Step 6, compute $U = L * D^{(1/2)} * Z$ in batches, see the following illustration for the matrix operation that `multiplyLowerDiagonalBatch()` does. `maternCov`, `diagMat`, and `zmatGpu` correspond to the matrices L , D and $Z = (Z_1, Z_2)$ respectively.

```
R> simMat = gpuBatchMatrix::multiplyLowerDiagonalBatch(maternCov,
+   diagMat, zmatGpu, diagIsOne = TRUE, transformD = "sqrt",
+   Ngloba1 = c(128, 64, 2), Nlocal = c(8, 2, 1), NlocalCache = 1000)
```

$$\begin{bmatrix} L_1 \\ L_2 \\ L_3 \\ \vdots \end{bmatrix} * \begin{bmatrix} D_1 \\ D_2 \\ D_3 \\ \vdots \end{bmatrix} * \begin{bmatrix} Z_{11} & Z_{12} \end{bmatrix} = \begin{bmatrix} L_1 D_1 Z_{11} & L_1 D_1 Z_{12} \\ L_2 D_2 Z_{11} & L_2 D_2 Z_{12} \\ L_3 D_3 Z_{11} & L_3 D_3 Z_{12} \\ \vdots & \vdots \end{bmatrix} \quad (2)$$

Step 7, Finally, plot the 10 realizations.

```
R> simRaster = raster::brick(myRaster, nl = ncol(simMat) * nrow(params))
R> values(simRaster) = as.vector(as.matrix(simMat))
```


6. Discussion

The package **clrng** has been created to make GPU-generated uniform and normal random numbers accessible for R users, it enables reproducible research in simulations by setting seeds in streams on GPU. We further applied the GPU-generated random numbers in suitable statistical simulations, such as the Monte Carlo simulation for Fisher's exact test, and (exact) Gaussian spatial surfaces simulation, for which we are able to calculate quantiles for the normal distribution, compute Matérn covariance matrices, do Cholesky decomposition and matrix multiplication in batches on GPU. Most of these functions uses local memory on GPU. Comparison of performance between using **clrng** and using classic R on CPU for some real data examples has demonstrated significant improvement in execution time.


By leveraging the **gpuR** package, **clrng** provides a user-friendly interface that bridges R and OpenCL, users can use the facilities in our package without the need to know the complex OpenCL or even the C++ code. **clrng** is portable as its backend OpenCL supports multiple types of processors, and it is also flexible as its kernels can be incorporated or reconstructed in other R packages for other applications.

clrng is limited by the number and type of OpenCL RNGs used and the features of the **gpuR** package, as it depends upon the **gpuR** package. If developers wants to use our package to do something that's not supported in **gpuR**, for example "sparse" class objects, they would have to write OpenCL code to implement it.


Future work on **clrng** package could be: (1) Explore other RNGs, for example the MRG32k3a, LFSR113, and Philox-4×32-10 generators in **clrng** library, and compare the R performance between using different GPU RNGs. (2) Now that the package can do Cholesky decomposition and matrix multiplication in batches on GPU, which is a motivation for us to work on parallel likelihood evaluations on GPU for Gaussian spatial models in the next step. (3) Create a

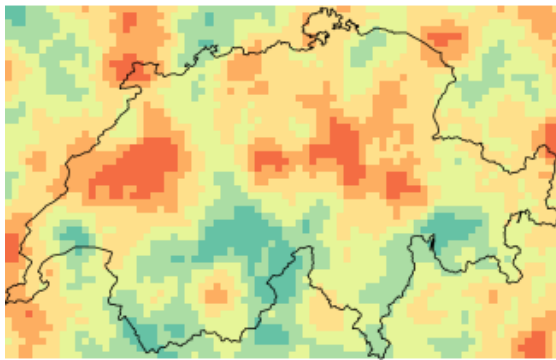


(a) parameter 1, simulation 1

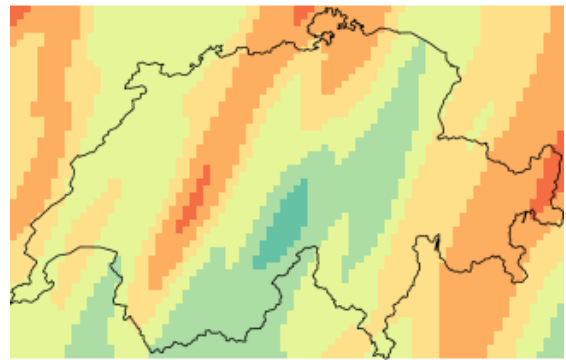


(b) parameter 2, simulation 1

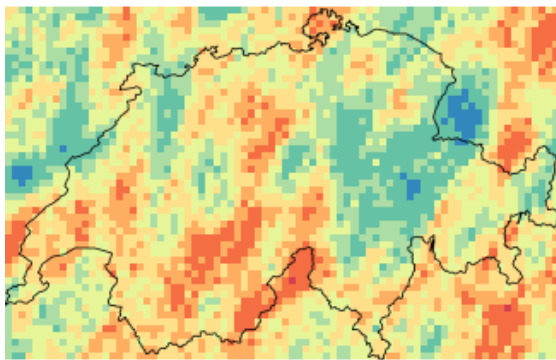


(c) parameter 3, simulation 1

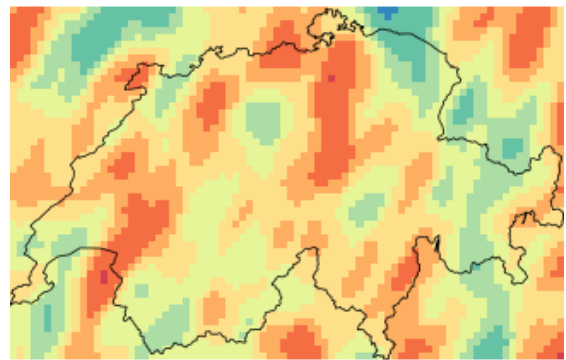


(d) parameter 4, simulation 1

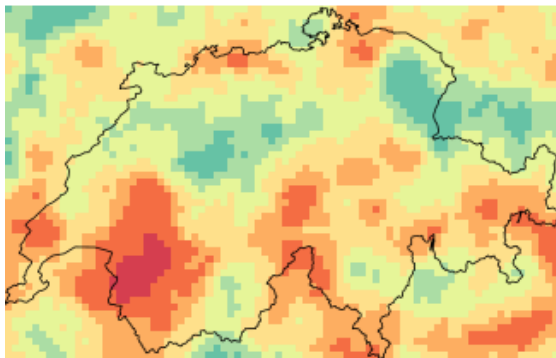


(e) parameter 1, simulation 2

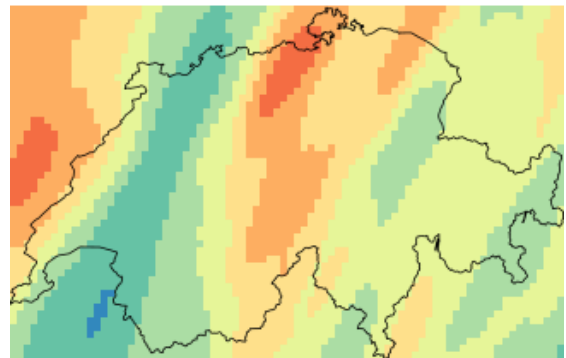

(f) parameter 2, simulation 2

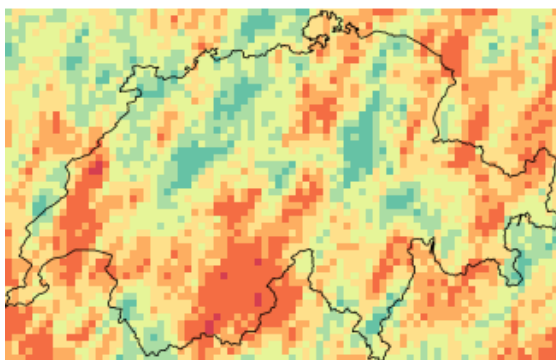

(g) parameter 3, simulation 2

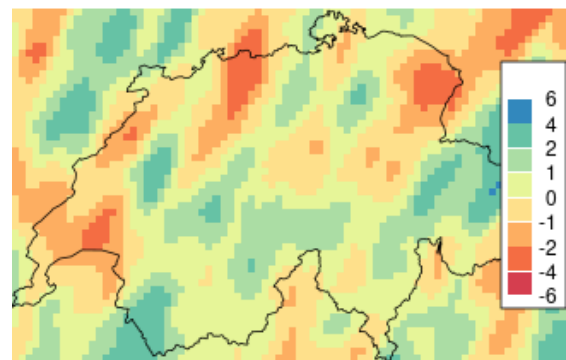

(h) parameter 4, simulation 2

Figure 2: Simulated Gaussian random fields

“sparse” matrix class on GPU and use it for simulating Gaussian random fields with sparse correlation structures such as the Gaussian Markov random fields.

References

- Allaire J, Eddelbuettel D, Golding N, Tang Y (2016). *tensorflow: R Interface to TensorFlow*. URL <https://github.com/rstudio/tensorflow>.
- Bengtsson H (2021). “A Unifying Framework for Parallel and Distributed Processing in R using Futures.” 10.32614/RJ-2021-048, URL <https://journal.r-project.org/archive/2021/RJ-2021-048/index.html>.
- Box GE (1958). “A note on the generation of random normal deviates.” *Ann. Math. Statist.*, **29**, 610–611.
- Determan Jr C (2017). *gpuR: GPU Functions for R Objects*. R package version 2.0.0, URL <http://github.com/cdeterman/gpuR>.
- Dietrich C, Newsam G (1997). “Fast and Exact Simulation of Stationary Gaussian Processes through Circulant Embedding of the Covariance Matrix.” *SIAM J. Sci. Comput.*, **18**, 1088–1107.
- Dyer M, Kannan R, Mount J (1997). “Sampling contingency tables.” *Random Structures & Algorithms*, **10**(4), 487–506.
- Eddelbuettel D (2021a). “CRAN Task View: High-Performance and Parallel Computing with R.” <https://cran.r-project.org/web/views/HighPerformanceComputing.html>. Version: 2021-11-08.
- Eddelbuettel D (2021b). “Parallel computing with R: A brief review.” *Wiley Interdisciplinary Reviews: Computational Statistics*, **13**(2), e1515.
- Eddelbuettel D, François R (2011). “Rcpp: Seamless R and C++ Integration.” *Journal of Statistical Software*, **40**(8), 1–18. doi:10.18637/jss.v040.i08. URL <https://www.jstatsoft.org/v40/i08/>.
- for Health Statistics NC (2019). “Natality 2018. Public use file.” Annual internet product. 2019. Available at http://www.cdc.gov/nchs/data_access/VitalStatsOnline.htm.
- Hana Sevcikova Tony Rossini PL (2015). “Package ‘rlecuyer’” URL <https://cran.r-project.org/web/packages/rlecuyer/index.html>.
- Haskard KA (2007). *An anisotropic Matern spatial covariance model: REML estimation and properties*. Ph.D. thesis.
- Howes L, Thomas D (2007). “Efficient random number generation and application using CUDA.” *GPU gems*, **3**, 805–830.

- Kayibi KK, Pirzada S, Chishti T (2018). “Sampling contingency tables.” *AKCE International Journal of Graphs and Combinatorics*, **15**(3), 298–306. ISSN 0972-8600. doi:<https://doi.org/10.1016/j.akcej.2017.10.001>. URL <https://www.sciencedirect.com/science/article/pii/S0972860017302396>.
- L’Ecuyer P (2015). “Random Number Generation with Multiple Streams for Sequential and Parallel Computers.” In L Yilmaz, WKV Chan, I Moon, TMK Roeder, C Macal, MD Rossetti (eds.), *Proceedings of the 2015 Winter Simulation Conference*, pp. 31–44. Piscataway, New Jersey: Institute of Electrical and Electronics Engineers, Inc.
- L’Ecuyer P, Munger D, Oreshkin B, Simard R (2017). “Random Numbers for Parallel Computers: Requirements and Methods, with Emphasis on GPUs.” *Mathematics and Computers in Simulation*, **135**, 3–17. Open access at <http://dx.doi.org/10.1016/j.matcom.2016.05.005>.
- L’Ecuyer P, Nadeau-Chamard O, Chen YF, Lebar J (2021). “Multiple Streams with Recurrence-Based, Counter-Based, and Splittable Random Number Generators.” In *Proceedings of the 2021 Winter Simulation Conference*. To appear, see <https://www-labs.iro.umontreal.ca/~lecuyer/myftp/papers/wsc21rng.pdf>.
- L’Ecuyer P, Simard R (2007). “TestU01: A C Library for Empirical Testing of Random Number Generators.” *ACM Transactions on Mathematical Software*, **33**(4), Article 22.
- L’Ecuyer P, Simard R, Chen EJ, Kelton WD (2002). “An object-oriented random-number package with many long streams and substreams.” *Operations research*, **50**(6), 1073–1075.
- L’Ecuyer P, Touzin R (2000). “Fast Combined Multiple Recursive Generators with Multipliers of the Form $a = \pm 2^q \pm 2^r$.” In JA Joines, RR Barton, K Kang, PA Fishwick (eds.), *Proceedings of the 2000 Winter Simulation Conference*, pp. 683–689. IEEE Press.
- Liu Y, Li J, Sun S, Yu B (2019). “Advances in Gaussian random field generation: a review.” *Computational Geosciences*, **23**(5), 1011–1047.
- L’Ecuyer P (2012). “Random number generation.” In G J, H W, M Y (eds.), *Handbook of computational statistics*, pp. 35–71. Springer, Berlin, Heidelberg.
- L’Ecuyer P, Munger D, Kemerchou N (2015). “clRNG: a random number API with multiple streams for OpenCL.” Report, URL <https://www-labs.iro.umontreal.ca/~lecuyer/myftp/papers/clrng-api.pdf>.
- Matérn B (1960). “Spatial variation, Technical Report.” *Statens Skogsforskningsinstitut, Stockholm*.
- Mehta CR, Patel NR (2011). “IBM SPSS exact tests.” *Armonk, NY: IBM Corporation*, pp. 23–24.
- Miller JW, Harrison MT (2013). “Exact sampling and counting for fixed-margin matrices.” *The Annals of Statistics*, **41**(3), 1569 – 1592. doi:[10.1214/13-AOS1131](https://doi.org/10.1214/13-AOS1131). URL <https://doi.org/10.1214/13-AOS1131>.
- Patefield W (1981). “Algorithm AS 159: An Efficient Method of Generating Random $R \times C$ Tables with Given Row and Column Totals.” *Applied Statistics*, **30**(1), 91–7.

- R Core Team (2021). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. URL <https://www.R-project.org>.
- Ribeiro Jr P, Diggle P (2001). “geoR: a package for geostatistical analysis.” *R-NEWS*, **1**(2), 15–18. ISSN 1609-3631. URL <http://cran.R-project.org/doc/Rnews>.
- Robert CP, Casella G (2004). “Random variable generation.” In *Monte Carlo Statistical Methods*, pp. 35–77. Springer.
- Rupp K, Tillet P, Rudolf F, Weinbub J, Morhammer A, Grasser T, Jungel A, Selberherr S (2016). “ViennaCL—linear algebra library for multi-and many-core architectures.” *SIAM Journal on Scientific Computing*, **38**(5), S412–S439.
- Schlather M, Malinowski A, Menck PJ, Oesting M, Strokorb K (2015). “Analysis, Simulation and Prediction of Multivariate Random Fields with Package RandomFields.” *Journal of Statistical Software*, **63**(8), 1–25. URL <http://www.jstatsoft.org/v63/i08/>.
- Schlather M, Malinowski A, Oesting M, Boecker D, Strokorb K, Engelke S, Martini J, Ballani F, Moreva O, Auel J, Menck PJ, Gross S, Ober U, Ribeiro P, Ripley BD, Singleton R, Pfaff B, R Core Team (2020). *RandomFields: Simulation and Analysis of Random Fields*. R package version 3.3.8, URL <https://cran.r-project.org/package=RandomFields>.
- Zhao P (2016). “R with Parallel Computing from User Perspectives.” URL <https://parallelr.com/2016/09/10/r-with-parallel-computing/>.

Affiliation:

Pierre L'Ecuyer

Department of Computer Science and Operations Research

University of Montréal

Pavillon André-Aisenstadt, 2920 chemin de la Tour, Montréal, QC, Canada, H3T 1J4

E-mail: lecuyer@iro.umontreal.ca