

INTRODUCTION TO THE FLCORE PACKAGE

FLR Core Team

December 1, 2010



① INTRODUCTION

OUTLINE

① INTRODUCTION

② BASIC CLASSES

OUTLINE

① INTRODUCTION

② BASIC CLASSES

③ COMPOSITE CLASSES

OUTLINE

① INTRODUCTION

② BASIC CLASSES

③ COMPOSITE CLASSES

④ LIST CLASSES

OUTLINE

① INTRODUCTION

② BASIC CLASSES

③ COMPOSITE CLASSES

④ LIST CLASSES

⑤ MODEL CLASSES

FLCORE STRUCTURE

Follows S4 paradigm with structured data implemented as classes and several methods to apply on objects of the classes.

FLCORE STRUCTURE

Follows S4 paradigm with structured data implemented as classes and several methods to apply on objects of the classes.

- ▶ Classes - empty definitions of data

FLCORE STRUCTURE

Follows S4 paradigm with structured data implemented as classes and several methods to apply on objects of the classes.

- ▶ Classes - empty definitions of data
- ▶ Objects - instances of the classes which have data following the class definition

FLCORE STRUCTURE

Follows S4 paradigm with structured data implemented as classes and several methods to apply on objects of the classes.

- ▶ Classes - empty definitions of data
- ▶ Objects - instances of the classes which have data following the class definition
- ▶ Methods - implementation of actions to be executed on objects depending on its class

INTRODUCTION
TO FLCORE

FLR CORE
TEAM

INTRODUCTION

BASIC
CLASSES

COMPOSITE
CLASSES

LIST CLASSES

MODEL
CLASSES

INSIDE FLCORE

INSIDE FLCORE

- ▶ Basic classes:
FLArray, FLQuant, FLCohort, FLQuantPoint, FLPar

INSIDE FLCORE

- ▶ Basic classes:
FLArray, FLQuant, FLCohort, FLQuantPoint, FLPar
- ▶ Composite classes:
FLComp, FLBiol, FLCatch, FLFleet, FLIndex, FLMetier, FLModel, FLStock

INSIDE FLCORE

- ▶ Basic classes:
FLArray, FLQuant, FLCohort, FLQuantPoint, FLPar
- ▶ Composite classes:
FLComp, FLBiol, FLCatch, FLFleet, FLIndex, FLMetier, FLModel, FLStock
- ▶ Lists of classes:
FLLst, FLBiols, FLCatches, FLCohorts, FLFleets, FLIndices, FLMetiers, FLQuants, FLStocks

INSIDE FLCORE

- ▶ Basic classes:
FLArray, FLQuant, FLCohort, FLQuantPoint, FLPar
- ▶ Composite classes:
FLComp, FLBiol, FLCatch, FLFleet, FLIndex, FLMetier, FLModel, FLStock
- ▶ Lists of classes:
FLLst, FLBiols, FLCatches, FLCohorts, FLFleets, FLIndices, FLMetiers, FLQuants, FLStocks
- ▶ Model class:
FLModel, FLGrowth, FLSR

INSIDE FLCORE

- ▶ Basic classes:
FLArray, FLQuant, FLCohort, FLQuantPoint, FLPar
- ▶ Composite classes:
FLComp, FLBiol, FLCatch, FLFleet, FLIndex, FLMetier, FLModel, FLStock
- ▶ Lists of classes:
FLLst, FLBiols, FLCatches, FLCohorts, FLFleets, FLIndices, FLMetiers, FLQuants, FLStocks
- ▶ Model class:
FLModel, FLGrowth, FLSR
- ▶ Methods

BASIC CLASSES

	parent	nSlots	virtual	child	distance
FLArray.1	array	2	FALSE	FLQuant	1.00
FLArray.1.1	array	2	FALSE	FLCohort	1.00
FLArray.1.2	array	2	FALSE	FLQuantPoint	2.00
FLCohort	FLArray	2	FALSE		
FLQuant	FLArray	2	FALSE	FLQuantPoint	1.00
FLQuantPoint	FLQuant	2	FALSE		

FLQUANT

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

FLQUANT

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

- ① User defined (age, length etc.)

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

- ① User defined (age, length etc.)
- ② Year

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

- ① User defined (age, length etc.)
- ② Year
- ③ Unit (substocks, male/female)

FLQUANT

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

- ① User defined (age, length etc.)
- ② Year
- ③ Unit (substocks, male/female)
- ④ Season

FLQUANT

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

- ① User defined (age, length etc.)
- ② Year
- ③ Unit (substocks, male/female)
- ④ Season
- ⑤ Area

Six dimensional array used to store data of a particular type (e.g. catch numbers).

Dimensions are:

- ① User defined (age, length etc.)
- ② Year
- ③ Unit (substocks, male/female)
- ④ Season
- ⑤ Area
- ⑥ Iter

FLQUANT EXAMPLE

```
> flq <- window(landings.n(ple4), start = 1995, end = 2001)
> dimnames(flq)
```

```
$age
[1] "1" "2" "3" "4" "5" "6" "7" "8" "9" "10"
```

```
$year
[1] "1995" "1996" "1997" "1998" "1999" "2000" "2001"
```

```
$unit
[1] "unique"
```

```
$season
[1] "all"
```

```
$area
[1] "unique"
```

```
$iter
[1] "1"
```

FLQUANT METHODS

```
> getClassMethods("FLQuant", "package:FLCore")
```

```
[1] "areaMeans"      "areaSums"      "areaVars"      "as.FLQuant"
[5] "barchart"       "[<-"           "["             "bubbles"
[9] "bwplot"         "capacity<-"    "catch<-"       "catch.n<-"
[13] "catch.q<-"      "catch.wt<-"    "coerce"         "crewshare<-"
[17] "cv"             "dimMeans"      "dimnames<-"     "dims"
[21] "dimSums"        "dimVars"       "discards<-"     "discards.n<-"
[25] "discards.sel<-" "discards.wt<-" "dotplot"        "effort<-"
[29] "effshare<-"     "E"             "fcost<-"        "fec<-"
[33] "FLBiol"         "FLCatch"       "FLCohort"       "FLIndex"
[37] "FLMetier"       "FLQuant"       "FLQuantPoint"   "FLStock"
[41] "harvest<-"      "harvest.spwn<-" "histogram"       "index<-"
[45] "index.q<-"      "index.var<-"   "iter<-"         "iterMeans"
[49] "iters"          "iterVars"      "jackknife"       "landings<-"
[53] "landings.n<-"   "landings.sel<-" "landings.wt<-"   "logLARI"
[57] "mat<-"          "m<-"           "m.spwn<-"       "names"
[61] "n<-"            "plot"          "price<-"        "print"
[65] "propagate"      "pv"            "quant"          "quantile"
[69] "quantMeans"     "quantSums"     "quantTotals"    "quantVars"
[73] "rec<-"          "r"             "rlnorm"         "rnorm"
[77] "rpois"          "rSq"           "seasonMeans"     "seasonSums"
[81] "seasonVars"     "sel.pattern<-" "setPlusGroup"    "sp"
[85] "spr0"           "spwn<-"        "ssb<-"          "stock<-"
[89] "stock.n<-"      "stock.wt<-"    "striplot"       "sweep"
[93] "unitMeans"      "units"         "unitSums"       "unitVars"
[97] "vcost<-"        "window"        "wt<-"           "xyplot"
[101] "yearMeans"      "yearSums"      "yearTotals"     "yearVars"
```

FLQUANTPOINT

Six dimensional array used to summarize FLQuant objects.

```
> dimnames(FLQuantPoint(flq))

$age
[1] "1" "2" "3" "4" "5" "6" "7" "8" "9" "10"

$year
[1] "1995" "1996" "1997" "1998" "1999" "2000" "2001"

$unit
[1] "unique"

$season
[1] "all"

$area
[1] "unique"

$iter
[1] "mean" "median" "var" "uppq" "lowq"
```

FLQUANTPOINT METHODS

```
> getClassMethods("FLQuantPoint", "package:FLCore")

[1] "[<-"      "coerce"    "lowq<-"   "lowq"      "mean"      "mean<-"
[7] "median<-" "median"    "plot"     "quantile"  "rgamma"    "rlnorm"
[13] "rnorm"    "show"      "summary"  "uppq<-"   "uppq"      "var<-"
[19] "var"
```

FLCohort

Six dimensional array used to store cohort data.

```
> dimnames(FLCohort(flq))
```

```
$age  
[1] "1" "2" "3" "4" "5" "6" "7" "8" "9" "10"
```

```
$cohort  
[1] "1985" "1986" "1987" "1988" "1989" "1990" "1991" "1992" "1993" "1994"  
[11] "1995" "1996" "1997" "1998" "1999" "2000"
```

```
$unit  
[1] "unique"
```

```
$season  
[1] "all"
```

```
$area  
[1] "unique"
```

```
$iter  
[1] "1"
```

FLCOHORT EXAMPLE

```
> flq[1:4, 1:5]
```

```
An object of class "FLQuant"
```

```
, , unit = unique, season = all, area = unique
```

	year				
age	1995	1996	1997	1998	1999
1	7751	1104	892	196	549
2	36575	42496	42855	30401	8689
3	81398	64382	86948	68920	155971
4	78370	46359	43669	56329	39857

```
units: thousands
```

```
> FLCohort(flq[1:4, 1:5])
```

```
An object of class "FLCohort"
```

```
, , unit = unique, season = all, area = unique
```

	cohort							
age	1991	1992	1993	1994	1995	1996	1997	1998
1	NA	NA	NA	7751	1104	892	196	549
2	NA	NA	36575	42496	42855	30401	8689	NA
3	NA	81398	64382	86948	68920	155971	NA	NA
4	78370	46359	43669	56329	39857	NA	NA	NA

```
units: thousands
```

FLCOHORT METHODS

```
> getClassMethods("FLCohort", "package:FLCore")
```

```
[1] "bubbles"      "ccplot"      "coerce"      "dimnames<-"  "dims"
[6] "flc2flq"      "FLCohort"    "iter<-"      "plot"        "propagate"
[11] "show"         "xyplot"
```

A two dimensional array used to store parameter's data.

```
> dimnames(new("FLPar"))
```

```
$param  
[1] ""
```

```
$iter  
[1] "1"
```


FLPAR METHODS

```
> getClassMethods("FLPar", "package:FLCore")
```

[1]	"ab"	"Arith"	"as.data.frame"	"[<-"
[5]	"["	"coerce"	"convertFLPar"	"densityplot"
[9]	"dims"	"FLPar"	"fmle"	"histogram"
[13]	"iter<-"	"iter"	"mean"	"median"
[17]	"names<-"	"names"	"params<-"	"plot"
[21]	"propagate"	"show"	"splom"	"summary"
[25]	"sv"	"sweep"	"units<-"	"units"
[29]	"var"			

COMPOSITE CLASSES

Classes that use FLQuant classes to define their slots.

	parent	nSlots	virtual	child	distance
FLBiol	FLComp	8	FALSE		
FLCatch	FLComp	13	FALSE		
FLFleet	FLComp	8	FALSE		
FLIndex	FLComp	12	FALSE		
FLMetier	FLComp	7	FALSE		
FLStock	FLComp	20	FALSE		

FLSTOCK

Represents a fish stock and comprises a number of slots.

```
> showClass("FLStock")
```

```
Class "FLStock" [package "FLCore"]
```

Slots:

Name:	catch	catch.n	catch.wt	discards	discards.n
Class:	FLQuant	FLQuant	FLQuant	FLQuant	FLQuant

Name:	discards.wt	landings	landings.n	landings.wt	stock
Class:	FLQuant	FLQuant	FLQuant	FLQuant	FLQuant

Name:	stock.n	stock.wt	m	mat	harvest
Class:	FLQuant	FLQuant	FLQuant	FLQuant	FLQuant

Name:	harvest.spwn	m.spwn	name	desc	range
Class:	FLQuant	FLQuant	character	character	numeric

Extends: "FLComp"

FLStock EXAMPLE

```
> summary(ple4)
```

An object of class "FLStock"

Name: Plaice in IV

Description: Imported from a VPA file. (N:\Projecten\ICES WG\Demersale werkgroep WGNSSK\2009\st

Range:	min	max	pgroup	minyear	maxyear	minfbar
1	10	10	1957	2008	2	6

Quant: age

```
catch      : [ 1 52 1 1 1 1 ], units = tonnes
catch.n    : [ 10 52 1 1 1 1 ], units = thousands
catch.wt   : [ 10 52 1 1 1 1 ], units = kg
discards   : [ 1 52 1 1 1 1 ], units = tonnes
discards.n : [ 10 52 1 1 1 1 ], units = thousands
discards.wt : [ 10 52 1 1 1 1 ], units = kg
landings   : [ 1 52 1 1 1 1 ], units = tonnes
landings.n : [ 10 52 1 1 1 1 ], units = thousands
landings.wt : [ 10 52 1 1 1 1 ], units = kg
stock      : [ 1 52 1 1 1 1 ], units = tonnes
stock.n    : [ 10 52 1 1 1 1 ], units = thousands
stock.wt   : [ 10 52 1 1 1 1 ], units = kg
m          : [ 10 52 1 1 1 1 ], units = NA
mat        : [ 10 52 1 1 1 1 ], units = NA
harvest    : [ 10 52 1 1 1 1 ], units = f
harvest.spwn : [ 10 52 1 1 1 1 ], units = NA
m.spwn     : [ 10 52 1 1 1 1 ], units = NA
```


FLStock METHODS

```
> getClassMethods("FLStock", "package:FLCore")
```

[1] "as.FLBIol"	"as.FLSR"	"[<-"	"["
[5] "+"	"catch<-"	"catch"	"catch.n<-"
[9] "catch.n"	"catch.wt<-"	"catch.wt"	"coerce"
[13] "computeCatch"	"computeDiscards"	"computeLandings"	"computeStock"
[17] "dimnames<-"	"discards<-"	"discards"	"discards.n<-"
[21] "discards.n"	"discards.wt<-"	"discards.wt"	"expand"
[25] "fapex"	"fbar"	"harvest<-"	"harvest"
[29] "harvest.spwn<-"	"harvest.spwn"	"landings<-"	"landings"
[33] "landings.n<-"	"landings.n"	"landings.wt<-"	"landings.wt"
[37] "mat<-"	"mat"	"m<-"	"m"
[41] "m.spwn<-"	"m.spwn"	"plot"	"rec"
[45] "r"	"setPlusGroup"	"sp"	"spr0"
[49] "ssb"	"ssbpurec"	"stock<-"	"stock"
[53] "stock.n<-"	"stock.n"	"stock.wt<-"	"stock.wt"
[57] "summary"	"survprob"	"trim"	"tsb"

FLStock PLOT

Plaice in IV

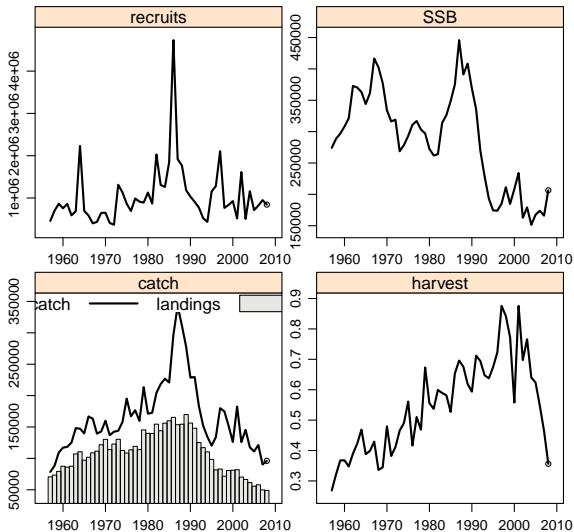

Represents a biological population

```
> showClass("FLBiol")
```

```
Class "FLBiol" [package "FLCore"]
```

```
Slots:
```

Name:	n	m	wt	fec	spwn	name	desc
Class:	FLQuant	FLQuant	FLQuant	FLQuant	FLQuant	character	character

Name:	range
Class:	numeric

```
Extends: "FLComp"
```

FLBIOL EXAMPLE

```
> summary(flbiol)

An object of class "FLBiol"

Name: Plaice in IV
Description: Imported from a VPA file. ( N:\Projecten\ICES WG\Demersale werkgroep WGNSSK\2009\st
Range:      min      max      pgroup      minyear      maxyear      minfbar
           1        10        10        1957         2008         2         6
Quant: age


n          : [ 10 52 1 1 1 1 ], units = thousands
m          : [ 10 52 1 1 1 1 ], units = NA
wt         : [ 10 52 1 1 1 1 ], units = kg
fec        : [ 10 52 1 1 1 1 ], units = NA
spwn       : [ 10 52 1 1 1 1 ], units = NA
```


FLBIOL METHODS

```
> getClassMethods("FLBiol", "package:FLCore")
```

[1]	"as.FLBiol"	"as.FLSR"	"catch.n"	"coerce"
[5]	"computeStock"	"fbar"	"fec<-"	"fec"
[9]	"harvest"	"leslie"	"mean.lifespan"	"m<-"
[13]	"m"	"n<-"	"n"	"plot"
[17]	"rec"	"r"	"setPlusGroup"	"spwn<-"
[21]	"spwn"	"ssb"	"ssn"	"summary"
[25]	"survprob"	"tsb"	"wt<-"	"wt"

FLBIOL PLOT

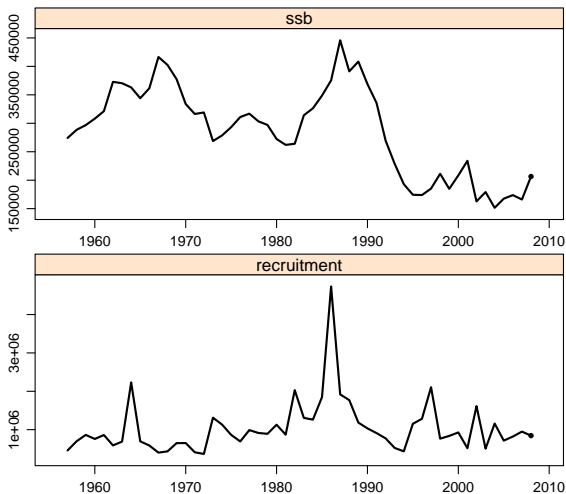

FLINDEX

Represents a index (e.g. index of abundance from a survey)

```
> showClass("FLIndex")
```

```
Class "FLIndex" [package "FLCore"]
```

Slots:

Name:	type	distribution	index	index.var	catch.n
Class:	character	character	FLQuant	FLQuant	FLQuant

Name:	catch.wt	effort	sel.pattern	index.q	name
Class:	FLQuant	FLQuant	FLQuant	FLQuant	character

Name:	desc	range
Class:	character	numeric


```
Extends: "FLComp"
```


FLINDEX METHODS

```
> getClassMethods("FLIndex", "package:FLCore")
```

```
[1] "["                "catch.n<-"      "catch.n"        "catch.wt<-"
[5] "catch.wt"         "coerce"          "computeCatch"    "dims"
[9] "effort<-"         "effort"          "index<-"         "index"
[13] "index.q<-"        "index.q"         "index.var<-"     "index.var"
[17] "plot"             "sel.pattern<-"  "sel.pattern"     "summary"
[21] "trim"             "type<-"         "type"
```

FLBIOL PLOT

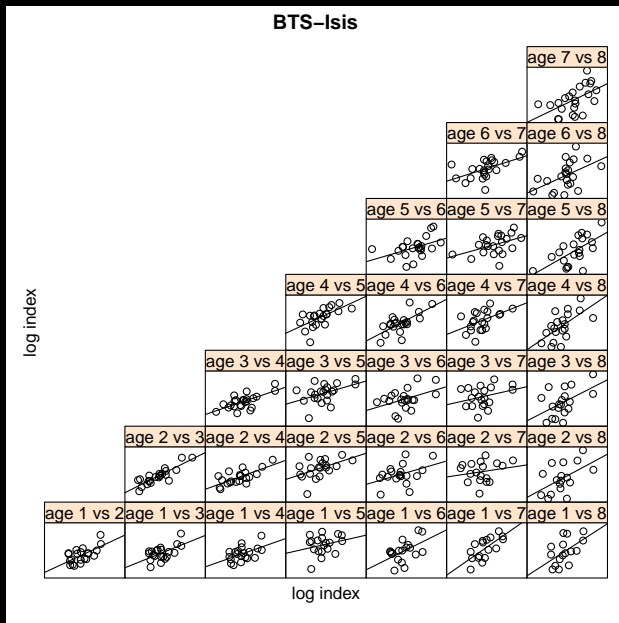

FLCATCH

Represents the catch of a fleet

```
> showClass("FLCatch")
```

```
Class "FLCatch" [package "FLCore"]
```

```
Slots:
```

Name:	landings	landings.n	landings.wt	landings.sel	discards
Class:	FLQuant	FLQuant	FLQuant	FLQuant	FLQuant

Name:	discards.n	discards.wt	discards.sel	catch.q	price
Class:	FLQuant	FLQuant	FLQuant	FLQuant	FLQuant

Name:	name	desc	range
Class:	character	character	numeric

```
Extends: "FLComp"
```

FLINDEX EXAMPLE

```
> summary(bt4[["TBB"]][["ple"]])
```

An object of class "FLCatch"

Name: ple
Description: North Sea Plaice

Range:	min	max	pgroup	minyear	maxyear
1	15	NA	1957	2001	

Quant: age

landings	:	[1 45 1 1 1 1],	units = tonnes
landings.n	:	[15 45 1 1 1 1],	units = thousands
landings.wt	:	[15 45 1 1 1 1],	units = kg
landings.sel	:	[15 45 1 1 1 1],	units = NA
discards	:	[1 45 1 1 1 1],	units = tonnes
discards.n	:	[15 45 1 1 1 1],	units = thousands
discards.wt	:	[15 45 1 1 1 1],	units = kg
discards.sel	:	[15 45 1 1 1 1],	units = NA
catch.q	:	[15 45 1 1 1 1],	units = thousands
price	:	[15 45 1 1 1 1],	units = NA

FLCATCH METHODS

```
> getClassMethods("FLCatch", "package:FLCore")
```

[1]	"[<-"	"["	"catches<-"	"catch"
[5]	"catchNames"	"catch.n"	"catch.q<-"	"catch.q"
[9]	"catch.sel"	"catch.wt"	"coerce"	"computeCatch"
[13]	"computeDiscards"	"computeLandings"	"discards<-"	"discards"
[17]	"discards.n<-"	"discards.n"	"discards.sel<-"	"discards.sel"
[21]	"discards.wt<-"	"discards.wt"	"FLFleet"	"FLMetier"
[25]	"landings<-"	"landings"	"landings.n<-"	"landings.n"
[29]	"landings.sel<-"	"landings.sel"	"landings.wt<-"	"landings.wt"
[33]	"price<-"	"price"	"revenue"	"setPlusGroup"
[37]	"summary"	"trim"		

FLMETIER

Represents a fleet's metier (classification of activity targeting a species or group of species, in a specific period and area, with a particular gear)

```
> showClass("FLMetier")
```

```
Class "FLMetier" [package "FLCore"]
```

Slots:

Name:	gear	effshare	vcost	catches	name	desc	range
Class:	character	FLQuant	FLQuant	FLCatches	character	character	numeric

Extends: "FLComp"

FLMETIER EXAMPLE

```
> summary(bt4[["TBB"]])
```

An object of class "FLMetier"

Name: TBB

Description:

Range:	min	max	pgroup	minyear	maxyear
1	15	NA	1957	2001	

Gear : NA

Quant: age

effshare : [1 45 1 1 1 1], units = NA

vcost : [1 45 1 1 1 1], units = NA

Catches:

ple : [15 45 1 1 1 1]

sol : [10 45 1 1 1 1]


FLMETIER METHODS

```
> getClassMethods("FLMetier", "package:FLCore")
```

[1]	"["	"["["	"catches<-"	"catches"
[5]	"catch"	"catchNames"	"catch.n"	"catch.q<-"
[9]	"catch.q"	"catch.sel"	"catch.wt"	"coerce"
[13]	"computeCatch"	"computeDiscards"	"computeLandings"	"discards<-"
[17]	"discards"	"discards.n<-"	"discards.n"	"discards.sel<-"
[21]	"discards.sel"	"discards.wt<-"	"discards.wt"	"effshare<-"
[25]	"effshare"	"FLFleet"	"gear<-"	"gear"
[29]	"iter"	"landings<-"	"landings"	"landings.n<-"
[33]	"landings.n"	"landings.sel<-"	"landings.sel"	"landings.wt<-"
[37]	"landings.wt"	"metier<-"	"price<-"	"price"
[41]	"propagate"	"revenue"	"summary"	"trim"
[45]	"vcost<-"	"vcost"		

FLFLEET

A more complicated class with three levels: Fleet, Metier and Catch

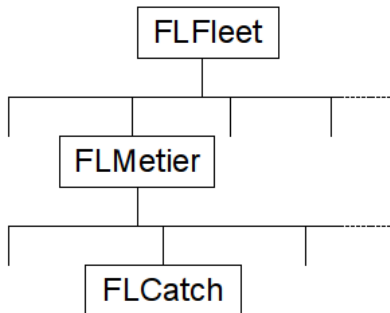

effort
fixed costs

FLMetiers

effort share
variable costs

FLCatches

landings
catchability
etc.

FLFLEET

```
> showClass("FLFleet")
```

```
Class "FLFleet" [package "FLCore"]
```

```
Slots:
```

```
Name:      effort      fcost  capacity crewshare  metiers      name      desc
Class:  FLQuant  FLQuant  FLQuant  FLQuant FLMetiers character character
```

```
Name:      range
Class:  numeric
```

```
Extends: "FLComp"
```

An object of class "FLFleet"

Name: beam trawl fleet

Description: Example of an FLFleet

Range:	min	max	pgroup	minyear	maxyear
	0	0	NA	1957	2001

Quant: age

```
effort      : [ 1 45 1 1 1 1 ], units = NA
```

```
fcost      : [ 1 45 1 1 1 1 ], units = NA
```

```
capacity      : [ 1 45 1 1 1 1 ], units = NA
```

```
crewshare      : [ 1 45 1 1 1 1 ], units = NA
```

Metiers:

TBB :

```
ple : [ 15 45 1 1 1 1 ]
```

```
sol : [ 10 45 1 1 1 1 ]
```

FLFLEET METHODS

```
> getClassMethods("FLFleet", "package:FLCore")
```

[1]	"as.data.frame"	"as.FLIndex"	"["	"["
[5]	"capacity<-"	"capacity"	"catches"	"catch"
[9]	"catchNames"	"catch.n"	"catch.q<-"	"catch.q"
[13]	"catch.sel"	"catch.wt"	"coerce"	"computeCatch"
[17]	"computeDiscards"	"computeLandings"	"crewshare<-"	"crewshare"
[21]	"dims"	"discards<-"	"discards"	"discards.n<-"
[25]	"discards.n"	"discards.sel<-"	"discards.sel"	"discards.wt<-"
[29]	"discards.wt"	"effort<-"	"effort"	"effshare"
[33]	"fcost<-"	"fcost"	"FLFleet"	"iter"
[37]	"landings<-"	"landings"	"landings.n<-"	"landings.n"
[41]	"landings.sel<-"	"landings.sel"	"landings.wt<-"	"landings.wt"
[45]	"metier<-"	"metier"	"metiers<-"	"metiers"
[49]	"price<-"	"price"	"propagate"	"revenue"
[53]	"summary"	"trim"	"vcost"	"window"

LIST CLASSES

	parent	nSlots	virtual	child	distance
FLBiols	FLlst	4	FALSE		
FLCatches	FLlst	4	FALSE		
FLCohorts	FLlst	4	FALSE		
FLFleets	FLlst	4	FALSE		
FLIndices	FLlst	4	FALSE		
FLMetiers	FLlst	4	FALSE		
FLQuants	FLlst	4	FALSE		
FLStocks	FLlst	4	FALSE		

A list of other classes

```
> showClass("FLlist")
```

```
Class "FLlist" [package "FLCore"]
```

```
Slots:
```

```
Name:      .Data      names      desc      lock
Class:      list character character      logical
```

```
Extends:
```

```
Class "list", from data part
```

```
Class "vector", by class "list", distance 2
```

```
Known Subclasses: "FLStocks", "FLIndices", "FLBiols", "FLCatches", "FLMetiers", "FLFleets",  
"FLQuants", "FLCohorts"
```

FLLST EXAMPLE #1

```
> summary(ple4.indices)
```

An object of class "FLIndices"

Elements: BTS-Isis BTS-Tridens SNS

Name: BTS-Isis

Description: Plaice in IV . Imported from VPA file.

Range:	min	max	pgroup	minyear	maxyear	startf
1	8	NA	1985	2008	0.66	0.75

Quant: age

dim: 8 24 1 1 1 1

Name: BTS-Tridens

Description: Plaice in IV . Imported from VPA file.

Range:	min	max	pgroup	minyear	maxyear	startf
1	9	NA	1996	2008	0.66	0.75

Quant: age

dim: 9 13 1 1 1 1

Name: SNS

Description: Plaice in IV . Imported from VPA file.

Range:	min	max	pgroup	minyear	maxyear	startf
1	3	NA	1982	2008	0.66	0.75

Quant: age

dim: 3 27 1 1 1 1

FLLST EXAMPLE #2

```
> flqs <- FLQuants(f1 = catch(ple4), f2 = landings(ple4))  
> summary(flqs)
```

An object of class "FLQuants"

Elements: f1 f2

Name: f1

```
dim   : 1 52 1 1 1 1  
quant: age  
units: tonnes
```

```
Min    : 78422.95  
1st Qu.: 126077.3  
Mean   : 165127  
Median : 151975.4  
3rd Qu.: 182754.8  
Max    : 342985.1  
NAs    : 0 %
```

Name: f2

```
dim   : 1 52 1 1 1 1  
quant: age  
units: tonnes
```

```
Min    : 48874  
1st Qu.: 81541.75  
Mean   : 108403.7  
Median : 110466  
3rd Qu.: 132758.5  
Max    : 169818  
NAs    : 0 %
```

FLIST METHODS

```
> getClassMethods("FLlst", "package:FLCore")
```

```
[1] "[<-"      "["          "[[<-"      "$<-"      "coerce"
[6] "lapply"    "model.frame" "names"      "range"     "summary"
[11] "window"
```

MODEL CLASSES

	parent	nSlots	virtual	child	distance
FLGrowth	FLModel	15	FALSE		
FLSR	FLModel	18	FALSE		

FLSR

Represents a stock-recruitment relationship and allows the estimation of its parameters.

```
> showClass("FLSR")
```

```
Class "FLSR" [package "FLCore"]
```

```
Slots:
```

Name:	rec	ssb	covar	logerror	model	logl	gr
Class:	FLQuant	FLQuant	FLQuants	logical	formula	function	function

Name:	initial	params	logLik	vcov	hessian	details	residuals
Class:	function	FLPar	logLik	array	array	list	FLArray

Name:	fitted	name	desc	range
Class:	FLArray	character	character	numeric

```
Extends:
```

```
Class "FLModel", directly
```

```
Class "FLComp", by class "FLModel", distance 2
```

FLSR EXAMPLE

```
> summary(nsher)
```

An object of class "FLSR"

Name: Autumn spawning herring in IV, V 3/4/2005 14:46

Description: 'rec' and 'ssb' slots obtained from a 'FLStock' object

Range:

Quant: age

```
rec      : [ 1 45 1 1 1 1 ], units = NA
ssb      : [ 1 45 1 1 1 1 ], units = NA
residuals : [ 1 45 1 1 1 1 ], units = NA NA
fitted   : [ 1 45 1 1 1 1 ], units = NA
```

Model: rec ~ a * ssb * exp(-b * ssb)

Parameters:

```
  params
iter    a      b
1 119.4 0.009027
```

Log-likelihood: 16.352(0)

Variance-covariance:

```
      a      b
a 258.66388793 1.838394e-02
b  0.01838394 2.002586e-06
```



FLSR METHODS

```
> getClassMethods("FLSR", "package:FLCore")
```

```
[1] "ab"          "covar<-" "covar"    "fmle"      "lowess"    "plot"      "rec<-"  
[8] "rec"         "spr0"     "ssb<-"    "ssb"       "summary"   "sv"
```

FLSR PLOT

NULL

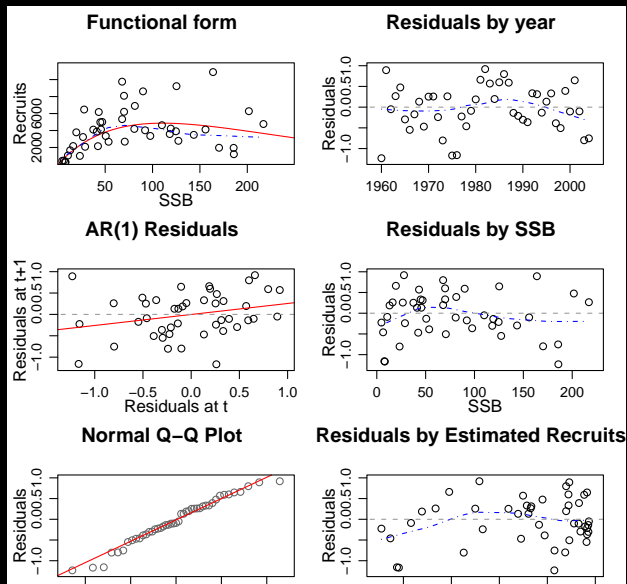

SLOT ACCESSORS

SLOT ACCESSORS

- Try to avoid using @ to access slots

SLOT ACCESSORS

- ▶ Try to avoid using @ to access slots
- ▶ Use accessors instead

SLOT ACCESSORS

- ▶ Try to avoid using @ to access slots
- ▶ Use accessors instead
- ▶ e.g. `landings.n(stock)` not `stock@landings.n`

SLOT ACCESSORS

- ▶ Try to avoid using @ to access slots
- ▶ Use accessors instead
- ▶ e.g. landings.n(stock) not stock@landings.n
- ▶ Protects against internal changes

SLOT ACCESSORS

- ▶ Try to avoid using @ to access slots
- ▶ Use accessors instead
- ▶ e.g. landings.n(stock) not stock@landings.n
- ▶ Protects against internal changes
- ▶ e.g. catch slots removed from FLCatch

SLOT ACCESSORS

- ▶ Try to avoid using @ to access slots
- ▶ Use accessors instead
- ▶ e.g. landings.n(stock) not stock@landings.n
- ▶ Protects against internal changes
- ▶ e.g. catch slots removed from FLCatch
- ▶ But accessor catch() still works