

Deep Generative Models

Lecture 11

Roman Isachenko

Moscow Institute of Physics and Technology

2023, Autumn

Recap of previous lecture

Theorem

Let $\pi(\mathbf{x})$ and $p(\mathbf{x})$ be two distributions in \mathcal{X} , a compact metric space. Let γ be the optimal transportation plan between $\pi(\mathbf{x})$ and $p(\mathbf{x})$. Then

$$\mathbb{P}_{(\mathbf{y}, \mathbf{z}) \sim \gamma} \left[\nabla f^*(\hat{\mathbf{x}}_t) = \frac{\mathbf{z} - \hat{\mathbf{x}}_t}{\|\mathbf{z} - \hat{\mathbf{x}}_t\|} \right] = 1.$$

Gradient penalty

$$W(\pi || p) = \underbrace{\mathbb{E}_{\pi(\mathbf{x})} f(\mathbf{x}) - \mathbb{E}_{p(\mathbf{x})} f(\mathbf{x})}_{\text{original critic loss}} + \lambda \underbrace{\mathbb{E}_{U[0,1]} \left[(\|\nabla f(\hat{\mathbf{x}})\|_2 - 1)^2 \right]}_{\text{gradient penalty}}.$$

Samples $\hat{\mathbf{x}}_t = t\mathbf{y} + (1-t)\mathbf{z}$ with $t \in [0, 1]$ are uniformly sampled along straight lines between pairs of points: \mathbf{y} from the data distribution $\pi(\mathbf{x})$ and \mathbf{z} from the generator distribution $p(\mathbf{x}|\theta)$.

Recap of previous lecture

$$f(\mathbf{x}, \phi) = \mathbf{W}_{K+1} \sigma_K (\mathbf{W}_K \sigma_{K-1} (\dots \sigma_1 (\mathbf{W}_1 \mathbf{x}) \dots)).$$

- ▶ σ_k is a pointwise nonlinearities. We assume that $\|\sigma_k\|_L = 1$ (it holds for ReLU).
- ▶ $\mathbf{g}(\mathbf{x}) = \mathbf{W}\mathbf{x}$ is a linear transformation ($\nabla \mathbf{g}(\mathbf{x}) = \mathbf{W}$).

$$\|\mathbf{g}\|_L = \sup_{\mathbf{x}} \|\nabla \mathbf{g}(\mathbf{x})\|_2 = \|\mathbf{W}\|_2.$$

Critic spectral norm

$$\|f\|_L \leq \|\mathbf{W}_{K+1}\|_2 \cdot \prod_{k=1}^K \|\sigma_k\|_L \cdot \|\mathbf{W}_k\|_2 = \prod_{k=1}^{K+1} \|\mathbf{W}_k\|_2.$$

Spectral Normalization GAN

If we replace the weights in the critic $f(\mathbf{x}, \phi)$ by $\mathbf{W}_k^{SN} = \mathbf{W}_k / \|\mathbf{W}_k\|_2$, we will get $\|f\|_L \leq 1$.

Power iteration approximates the value of $\|\mathbf{W}\|_2$.

Recap of previous lecture

f-divergence minimization

$$D_f(\pi || p) = \mathbb{E}_{p(\mathbf{x})} f\left(\frac{\pi(\mathbf{x})}{p(\mathbf{x})}\right) \rightarrow \min_p .$$

Here $f : \mathbb{R}_+ \rightarrow \mathbb{R}$ is a convex, lower semicontinuous function satisfying $f(1) = 0$.

Variational divergence estimation

$$D_f(\pi || p) \geq \sup_{T \in \mathcal{T}} [\mathbb{E}_\pi T(\mathbf{x}) - \mathbb{E}_p f^*(T(\mathbf{x}))],$$

Fenchel conjugate

$$f^*(t) = \sup_{u \in \text{dom}_f} (ut - f(u)), \quad f(u) = \sup_{t \in \text{dom}_{f^*}} (ut - f^*(t))$$

Note: To evaluate lower bound we only need samples from $\pi(\mathbf{x})$ and $p(\mathbf{x})$. Hence, we could fit implicit generative model.

Recap of previous lecture

How to evaluate likelihood-free models?

$p(y|x)$ – pretrained image classification model (e.g. ImageNet classifier).

What do we want from samples?

- ▶ Sharpness



$p(y|x)$ has low entropy (each image x should have distinctly recognizable object).

- ▶ Diversity



$p(y) = \int p(y|x)p(x)dx$ has high entropy (there should be as many classes generated as possible).

Outline

1. Evaluation of likelihood-free models

Inception score

Frechet Inception Distance

Precision-Recall

Outline

1. Evaluation of likelihood-free models

Inception score

Frechet Inception Distance

Precision-Recall

Outline

1. Evaluation of likelihood-free models

Inception score

Frechet Inception Distance

Precision-Recall

Evaluation of likelihood-free models

What do we want from samples?

- ▶ Sharpness \Rightarrow low $H(y|\mathbf{x}) = - \sum_y \int_{\mathbf{x}} p(y, \mathbf{x}) \log p(y|\mathbf{x}) d\mathbf{x}$.
- ▶ Diversity \Rightarrow high $H(y) = - \sum_y p(y) \log p(y)$.

Inception Score

$$\begin{aligned} IS &= \exp(H(y) - H(y|\mathbf{x})) \\ &= \exp \left(- \sum_y p(y) \log p(y) + \sum_y \int_{\mathbf{x}} p(y, \mathbf{x}) \log p(y|\mathbf{x}) d\mathbf{x} \right) \\ &= \exp \left(\sum_y \int_{\mathbf{x}} p(y, \mathbf{x}) \log \frac{p(y|\mathbf{x})}{p(y)} d\mathbf{x} \right) \\ &= \exp \left(\mathbb{E}_{\mathbf{x}} \sum_y p(y|\mathbf{x}) \log \frac{p(y|\mathbf{x})}{p(y)} \right) = \exp (\mathbb{E}_{\mathbf{x}} KL(p(y|\mathbf{x}) || p(y))) \end{aligned}$$

Outline

1. Evaluation of likelihood-free models

Inception score

Frechet Inception Distance

Precision-Recall

Evaluation of likelihood-free models

Theorem (informal)

If $\pi(\mathbf{x})$ and $p(\mathbf{x}|\theta)$ has moment generation functions then

$$\pi(\mathbf{x}) = p(\mathbf{x}|\theta) \Leftrightarrow \mathbb{E}_\pi \mathbf{x}^k = \mathbb{E}_p \mathbf{x}^k, \quad \forall k \geq 1.$$







This is intractable to calculate all moments.

Frechet Inception Distance

$$FID(\pi, p) = \|\mathbf{m}_\pi - \mathbf{m}_p\|_2^2 + \text{Tr} \left(\boldsymbol{\Sigma}_\pi + \boldsymbol{\Sigma}_p - 2\sqrt{\boldsymbol{\Sigma}_\pi \boldsymbol{\Sigma}_p} \right)$$

- ▶ Representations are the outputs of the intermediate layer from the pretrained classification model.
- ▶ $\mathbf{m}_\pi, \boldsymbol{\Sigma}_\pi$ are the mean vector and the covariance matrix of feature representations for samples from $\pi(\mathbf{x})$
- ▶ $\mathbf{m}_p, \boldsymbol{\Sigma}_p$ are the mean vector and the covariance matrix of feature representations for samples from $p(\mathbf{x}|\theta)$.

Evaluation of likelihood-free models

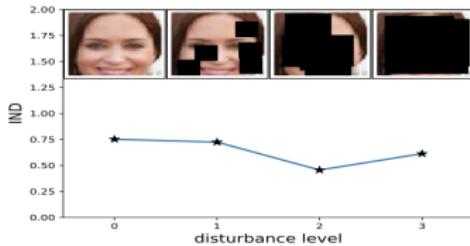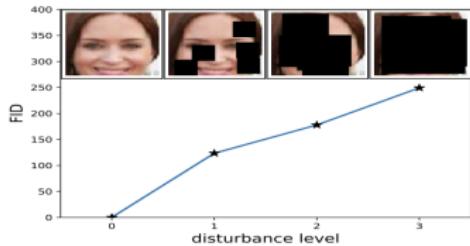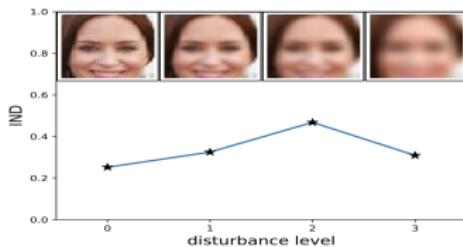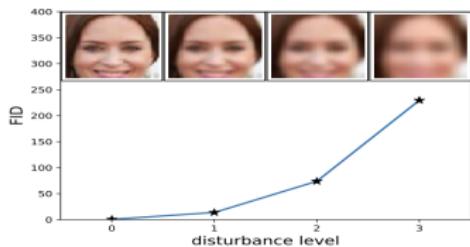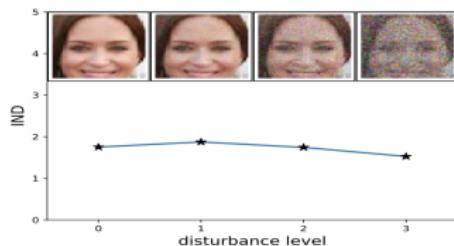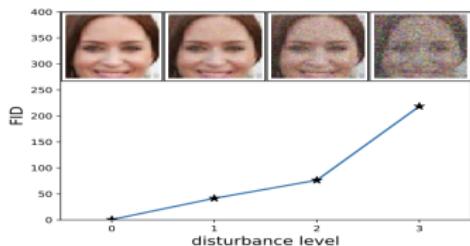

Limitations

Inception Score

$$IS = \exp(\mathbb{E}_{\mathbf{x}} KL(p(y|\mathbf{x}) || p(y)))$$

- ▶ If generator produces images with a different set of labels from the classifier training set, IS will be low.
- ▶ If generator produces one image per class, the IS will be perfect (there is no measure of intra-class diversity).

Frechet Inception Distance

$$FID = \|\mathbf{m}_\pi - \mathbf{m}_p\|_2^2 + \text{Tr} \left(\boldsymbol{\Sigma}_\pi + \boldsymbol{\Sigma}_p - 2\sqrt{\boldsymbol{\Sigma}_\pi \boldsymbol{\Sigma}_p} \right)$$

- ▶ Needs a large sample size for evaluation.
- ▶ Calculation of FID is slow.
- ▶ Estimates only two sample moments.

Both scores depend on the pretrained classifier $p(y|\mathbf{x})$.

Barratt S., Sharma R. A Note on the Inception Score, 2018

Heusel M. et al. GANs Trained by a Two Time-Scale Update Rule Converge to a Local Nash Equilibrium, 2017

Outline

1. Evaluation of likelihood-free models

Inception score


Frechet Inception Distance

Precision-Recall


Precision-Recall for Generative Models

What do we want from samples


- ▶ **Sharpness:** generated samples should be of high quality.
- ▶ **Diversity:** their variation should match that observed in the training set.

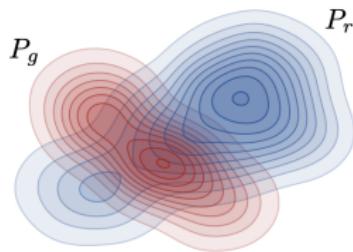

(a) Example distributions



(b) Precision

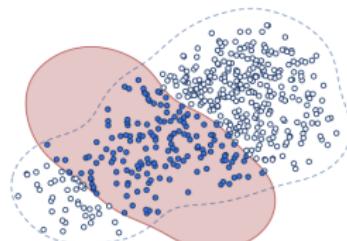

(c) Recall

- ▶ **Precision** denotes the fraction of generated images that are realistic.
- ▶ **Recall** measures the fraction of the training data manifold covered by the generator.

Precision-Recall for generative models

- ▶ $\mathcal{S}_\pi = \{\mathbf{x}_i\}_{i=1}^n \sim \pi(\mathbf{x})$ – real samples;
- ▶ $\mathcal{S}_p = \{\mathbf{x}_i\}_{i=1}^n \sim p(\mathbf{x}|\theta)$ – generated samples.

Embed samples using pretrained classifier network (as previously):

$$\mathcal{G}_\pi = \{\mathbf{g}_i\}_{i=1}^n, \quad \mathcal{G}_p = \{\mathbf{g}_i\}_{i=1}^n.$$


Define binary function:

$$f(\mathbf{g}, \mathcal{G}) = \begin{cases} 1, & \text{if exists } \mathbf{g}' \in \mathcal{G} : \|\mathbf{g} - \mathbf{g}'\|_2 \leq \|\mathbf{g}' - \text{NN}_k(\mathbf{g}', \mathcal{G})\|_2; \\ 0, & \text{otherwise.} \end{cases}$$

$$\text{Precision}(\mathcal{G}_\pi, \mathcal{G}_p) = \frac{1}{n} \sum_{\mathbf{g} \in \mathcal{G}_p} f(\mathbf{g}, \mathcal{G}_\pi); \quad \text{Recall}(\mathcal{G}_\pi, \mathcal{G}_p) = \frac{1}{n} \sum_{\mathbf{g} \in \mathcal{G}_\pi} f(\mathbf{g}, \mathcal{G}_p).$$






(a) True manifold

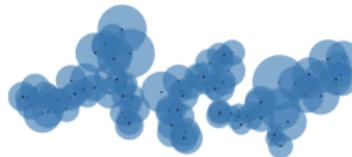

(b) Approx. manifold

Precision-Recall for generative models

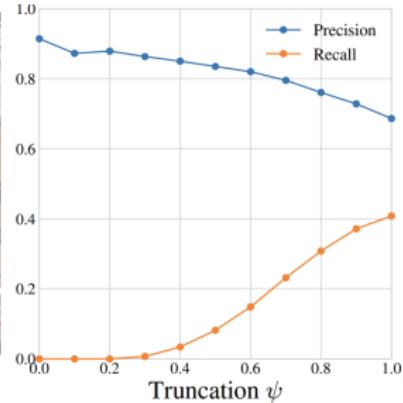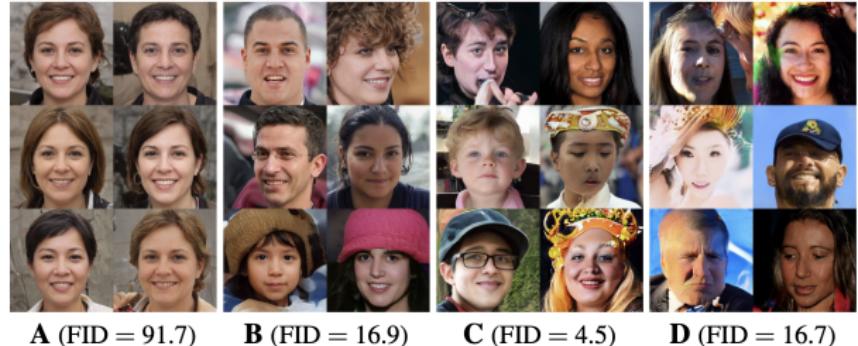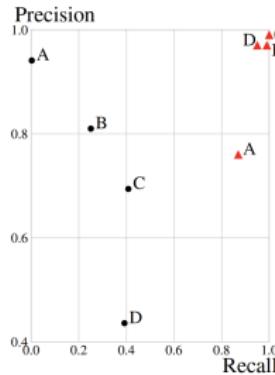

Truncation trick

BigGAN: truncated normal sampling

$$p(\mathbf{z}|\psi) = \mathcal{N}(\mathbf{z}|0, \mathbf{I}) / \int_{-\infty}^{\psi} \mathcal{N}(\mathbf{z}|0, \mathbf{I}) d\mathbf{z}$$

Components of $\mathbf{z} \sim \mathcal{N}(0, \mathbf{I})$ which fall outside a predefined range are resampled.

StyleGAN

$$\mathbf{z}' = \hat{\mathbf{z}} + \psi \cdot (\mathbf{z} - \hat{\mathbf{z}}), \quad \hat{\mathbf{z}} = \mathbb{E}_{\mathbf{z}} \mathbf{z}$$

- ▶ Constant ψ is a tradeoff between diversity and fidelity.
- ▶ $\psi = 0.7$ is used for most of the results.

Brock A., Donahue J., Simonyan K. Large Scale GAN Training for High Fidelity Natural Image Synthesis, 2018

Karras T., Laine S., Aila T. A Style-Based Generator Architecture for Generative Adversarial Networks, 2018

Summary

- ▶ Inception Score and Frechet Inception Distance are the common metrics for GAN evaluation, but both of them have drawbacks.
- ▶ Precision-recall allows to select model that compromises the sample quality and the sample diversity.
- ▶ Truncation tricks help to select model with compromised samples: diverse and sharp.