

Deep Generative Models

Lecture 12

Roman Isachenko




AI Masters

2026, Spring

Recap of Previous Lecture

$$\mathbb{E}_{t \sim U[0,1]} \mathbb{E}_{\mathbf{x} \sim p_t(\mathbf{x})} \|\mathbf{v}(\mathbf{x}, t) - \mathbf{v}_\theta(\mathbf{x}, t)\|^2 \rightarrow \min_{\theta}$$

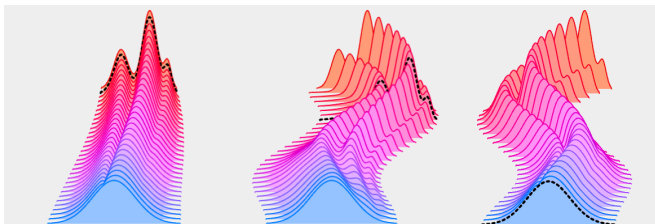

Problem: The true vector field $\mathbf{v}(\mathbf{x}, t)$ is **unknown**.

$$p_t(\mathbf{x}) = \int p_t(\mathbf{x}|\mathbf{z})p(\mathbf{z})d\mathbf{z}$$
$$\frac{\partial p_t(\mathbf{x}|\mathbf{z})}{\partial t} = -\text{div}(\mathbf{v}(\mathbf{x}, \mathbf{z}, t)p_t(\mathbf{x}|\mathbf{z})).$$

Recap of Previous Lecture

Conditional Flow Matching (CFM)

$$\mathbb{E}_{t \sim U[0,1]} \mathbb{E}_{\mathbf{z} \sim p(\mathbf{z})} \mathbb{E}_{\mathbf{x} \sim p_t(\mathbf{x}|\mathbf{z})} \|\mathbf{v}(\mathbf{x}, \mathbf{z}, t) - \mathbf{v}_\theta(\mathbf{x}, t)\|^2 \rightarrow \min_{\theta}$$

If $\text{supp}(p_t(\mathbf{x})) = \mathbb{R}^m$, then the optimal value of the FM objective equals the optimum for CFM.

Training

1. Sample a time $t \sim U[0, 1]$, $\mathbf{z} \sim p(\mathbf{z})$, $\mathbf{x}_t \sim p_t(\mathbf{x}|\mathbf{z})$.
2. Compute the loss $\mathcal{L} = \|\mathbf{v}(\mathbf{x}_t, \mathbf{z}, t) - \mathbf{v}_\theta(\mathbf{x}_t, t)\|^2$.

Sampling

1. Sample $\mathbf{x}_0 \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$.
2. Solve the ODE to obtain $\mathbf{x}_1$:

$$\mathbf{x}_1 = \psi_1(\mathbf{x}_0) = \text{ODESolve}_v(\mathbf{x}_0, \theta, t_0 = 0, t_1 = 1).$$

Outline

Summary