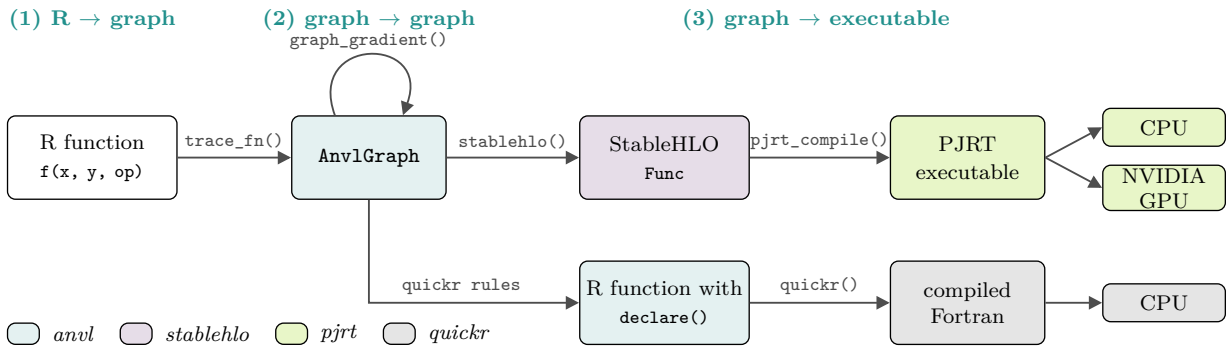

(1) R → graph
(2) graph → graph
graph_gradient()
(3) graph → executable
R function
f(x, y, op)
trace_fn()
AnvlGraph
stablehlo()
StableHLO
Func
pjrt_compile()
PJRT
executable
CPU
NVIDIA
GPU
quickr rules
R function with
declare()
quickr()
compiled
Fortran
CPU
anvl
stablehlo
pjrt
quickr