Deep Learning

Review
UG-3, Jan 2025-26
Shaik Mohammad Rafi B

Intelligence

the ability to understand, learn and think

Natural/Real Intelligence

Artificial Intelligence

human-defined rules

Machine Learning

Statistical ML

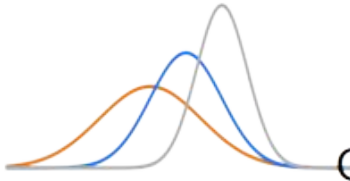

GMMs, HMMs etc

ANNs



Deep Learning

Raw data

Documents → **1Dim:** Articles, records, stories, poems

Images → **2Dim:** Photographs, satellite, thermal, medical

Numbers → **1Dim:** EEG, ECG, Seismic, weather, stock market

Sounds → **1Dim:** Speech, Music, bird/animal, Vehicles etc

●●●

Features & patterns

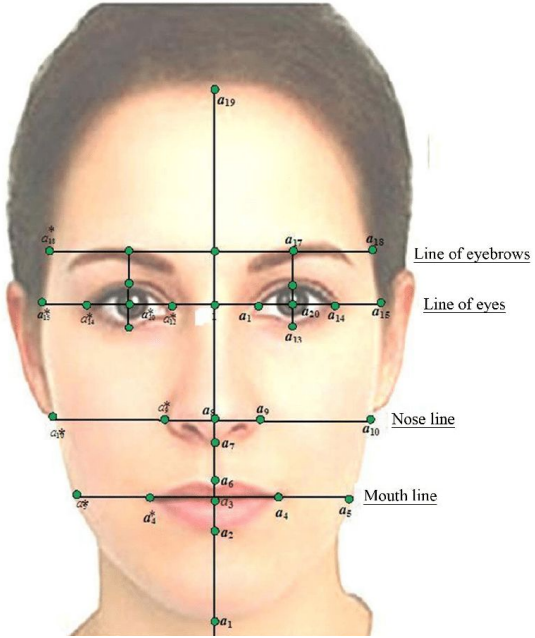

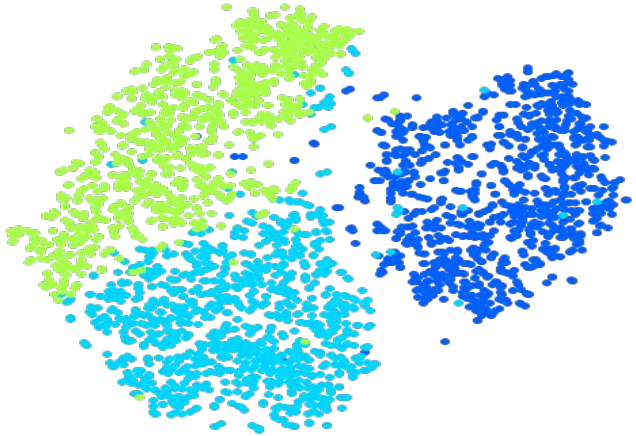

Features:
Measurable descriptors of an entity

Pattern:
Systematic arrangement or combination of features

Feature learning through Deep Neural Nets

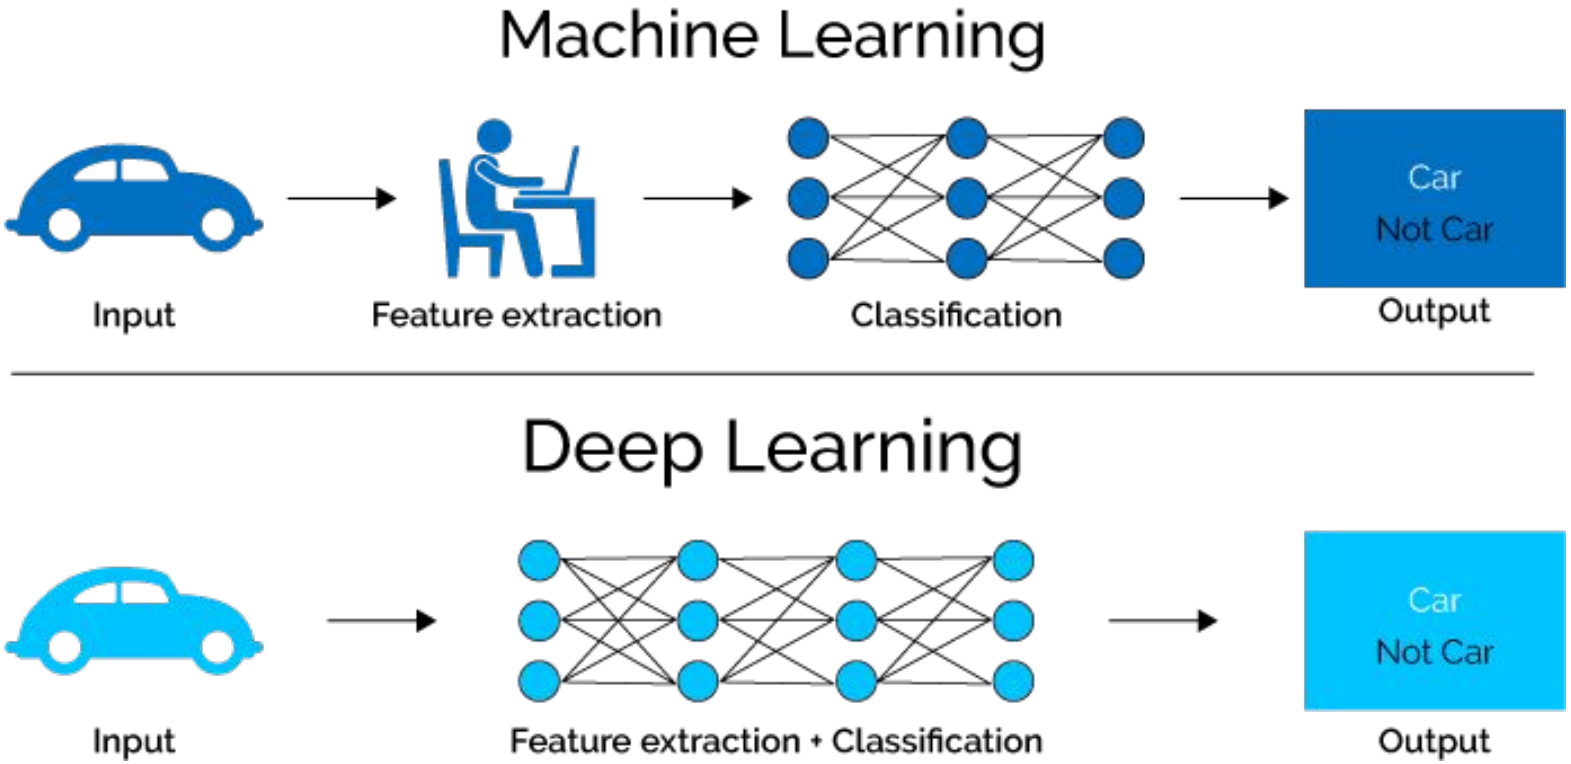

Feed Forward Neural Network

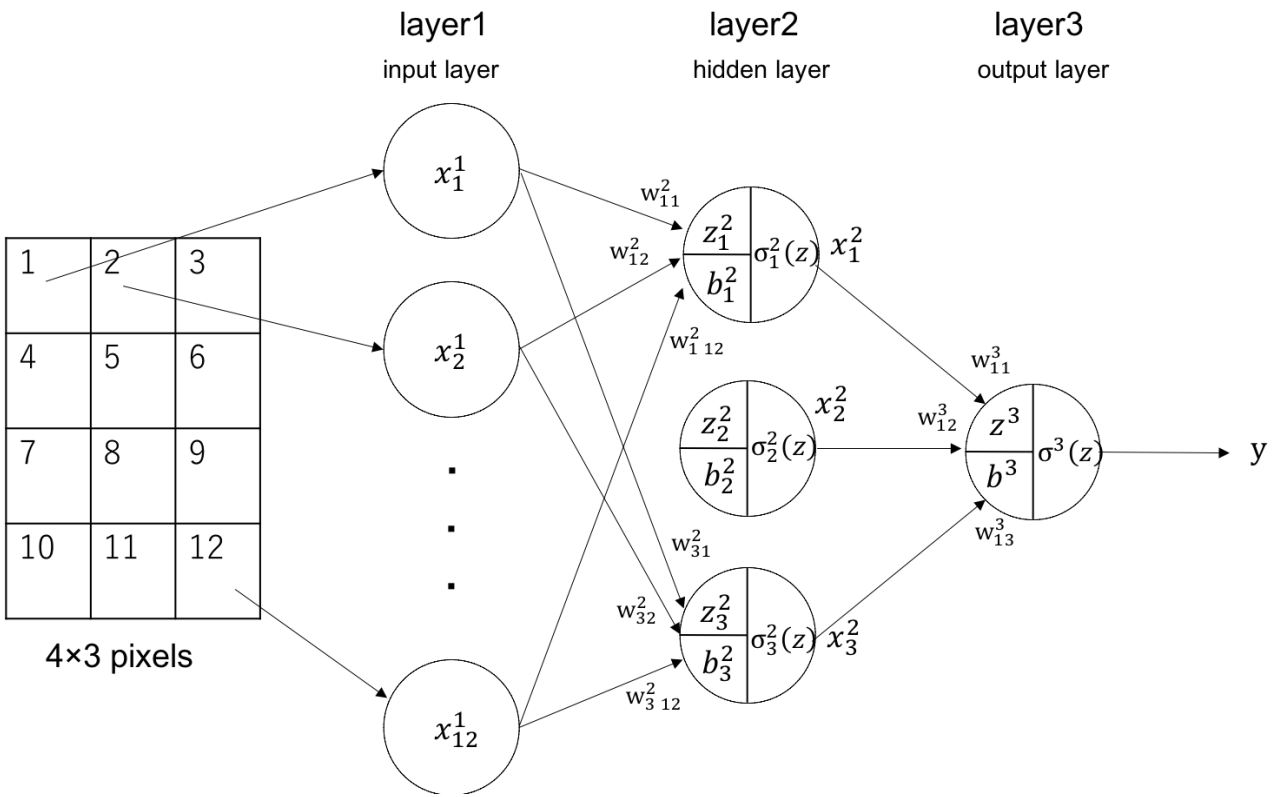

Convolutional Neural network

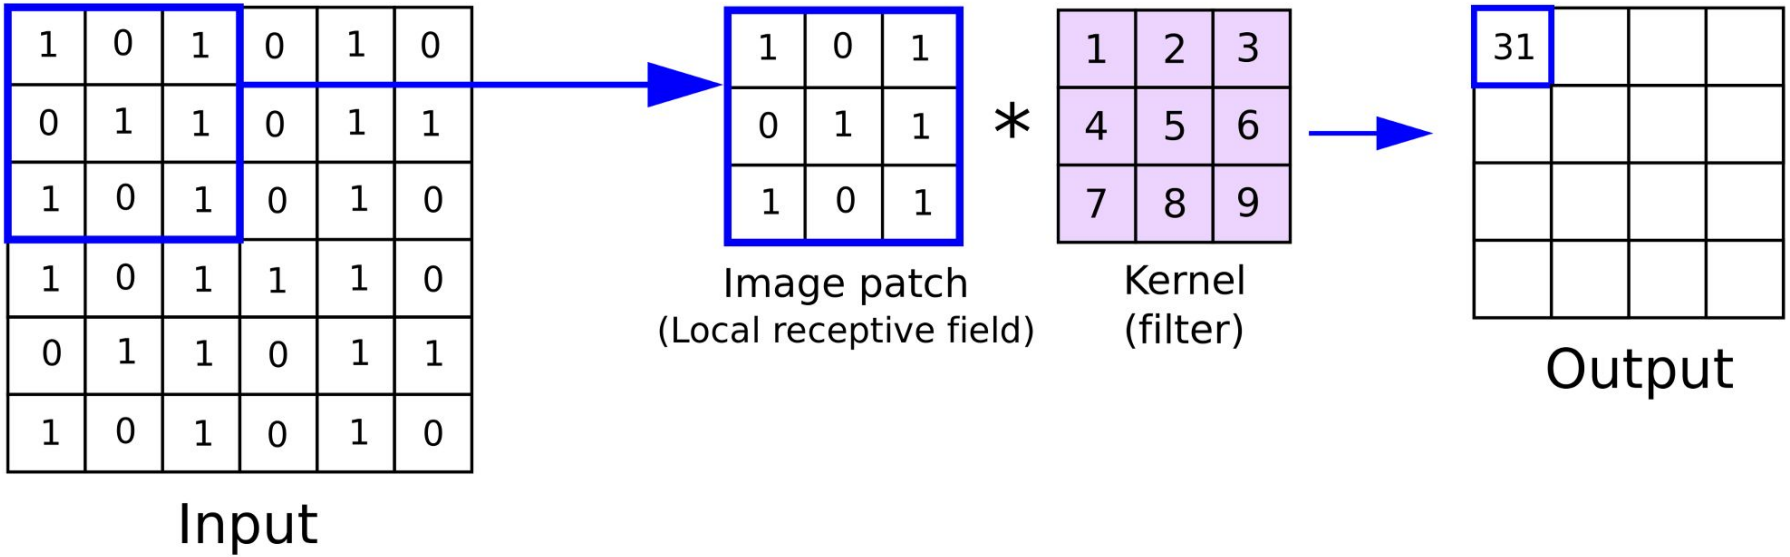

Convolution Operation

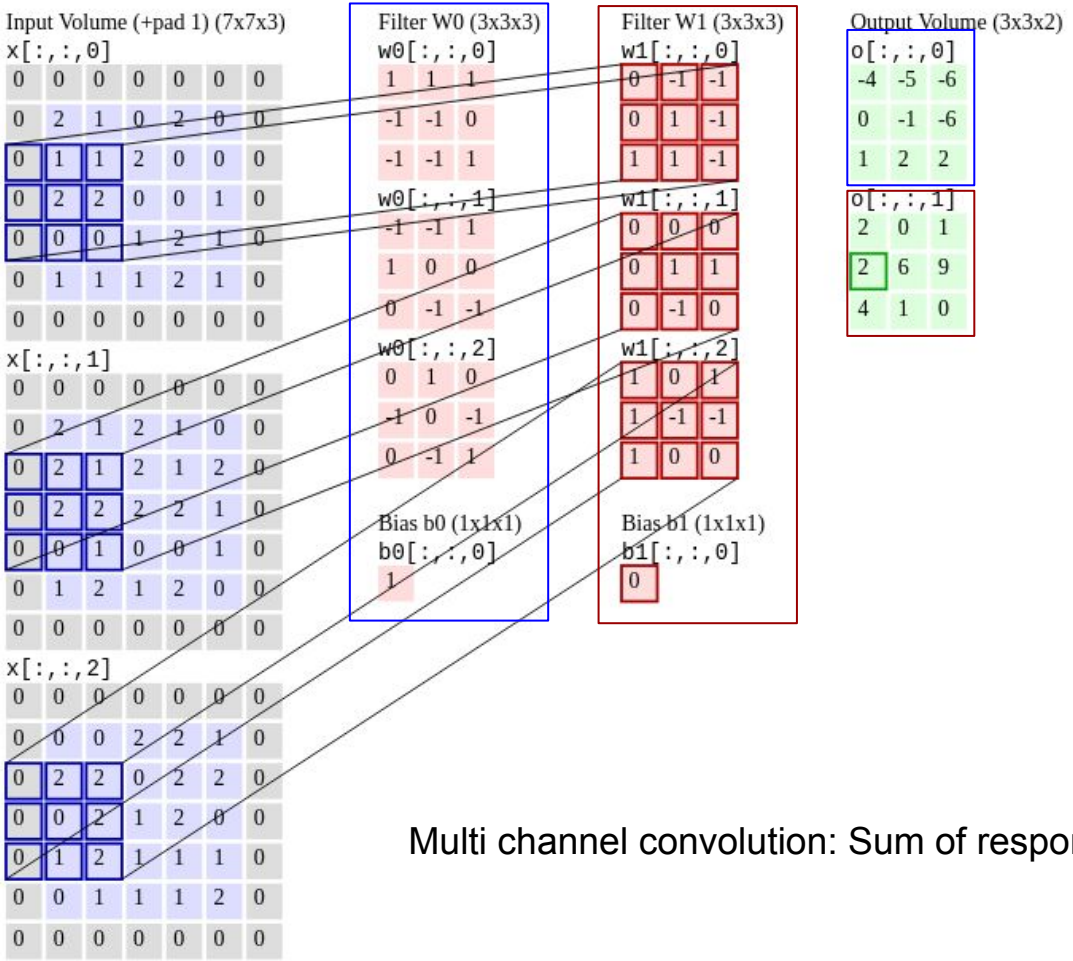

Multi channel convolution: Sum of responses

Convolutional Neural network

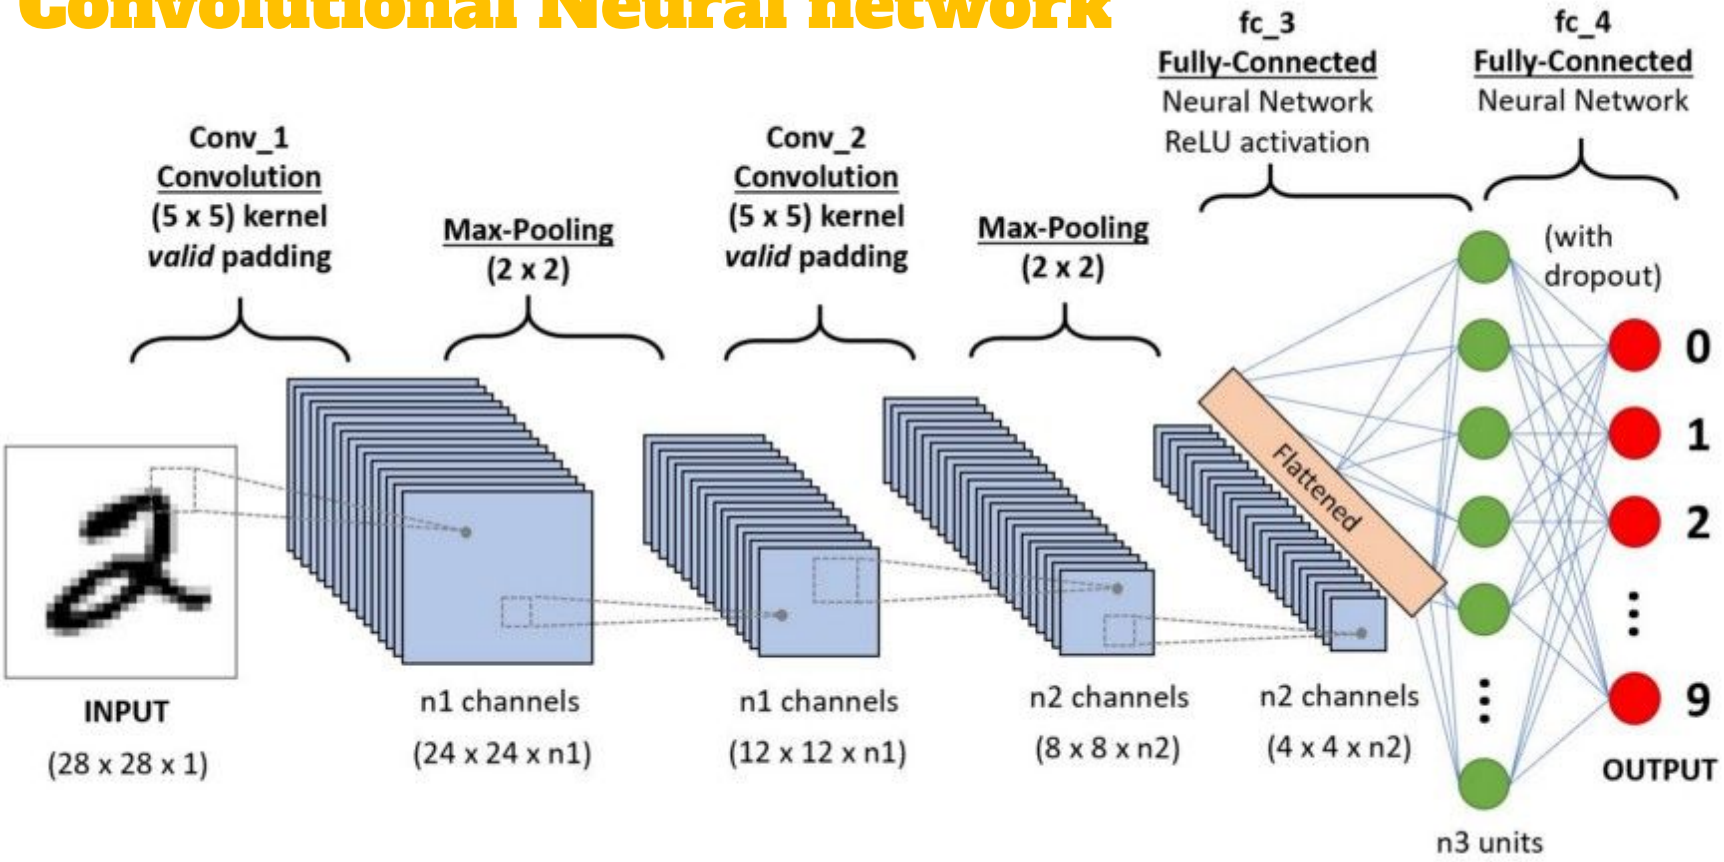

Recurrent Neural Network

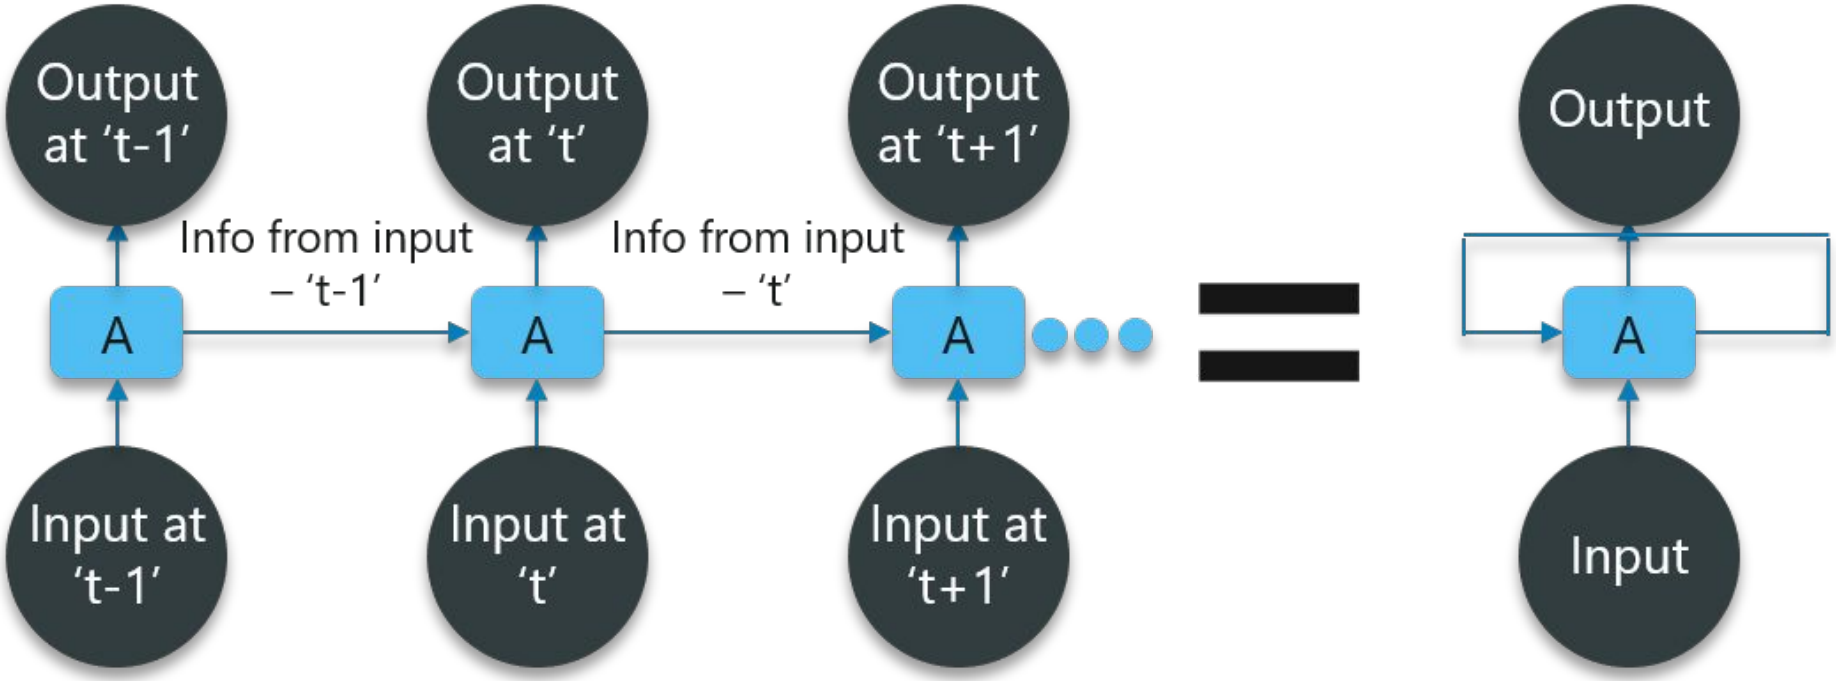

Recurrent Neural Network

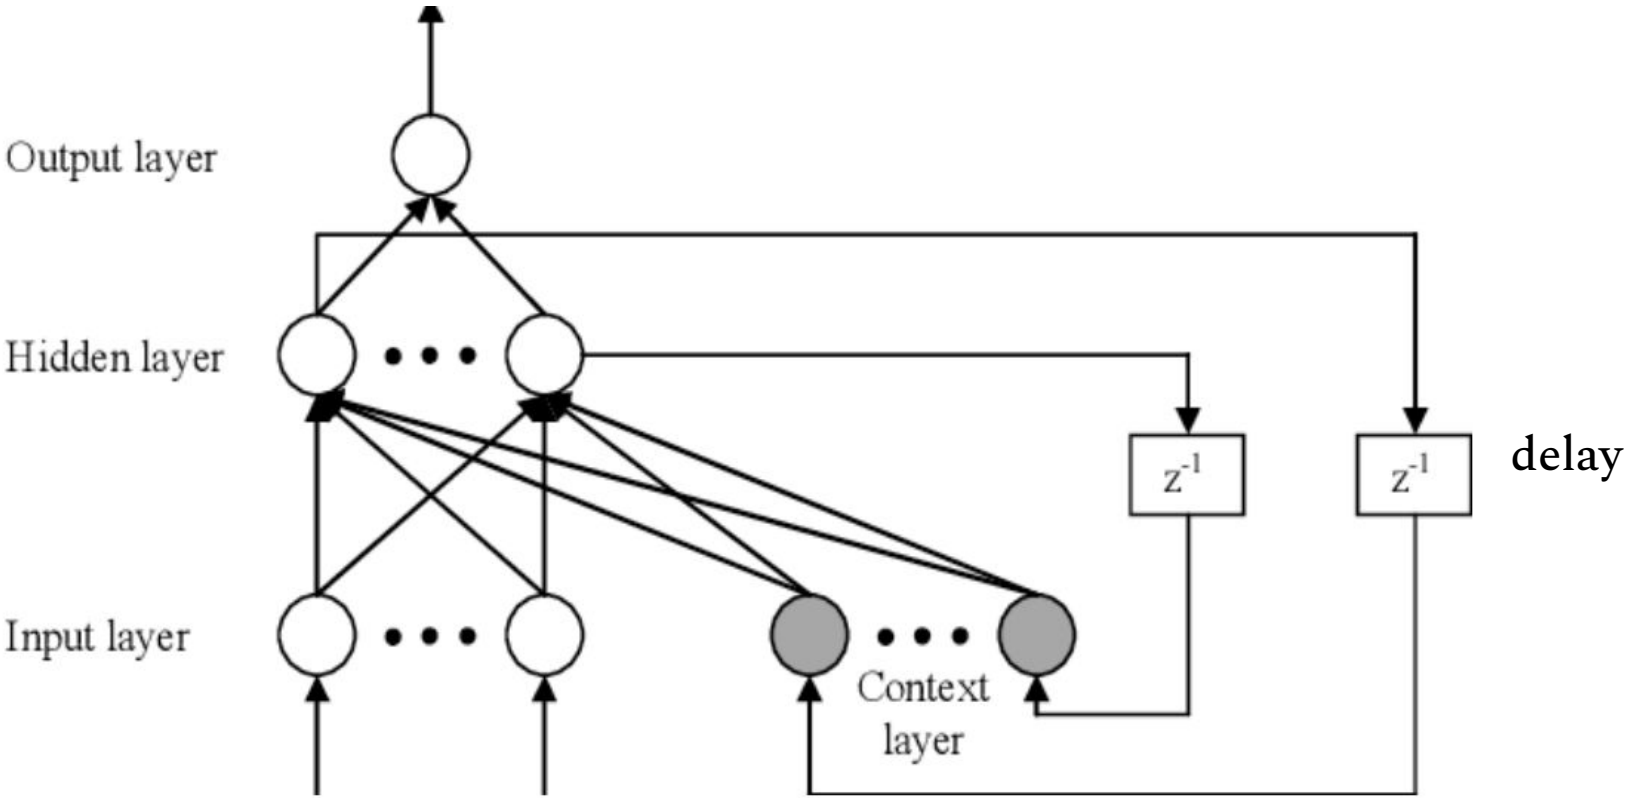

Sentiment Analysis

LSTM replaces RNN cell to avoid vanishing and exploding gradients through gating mechanism.

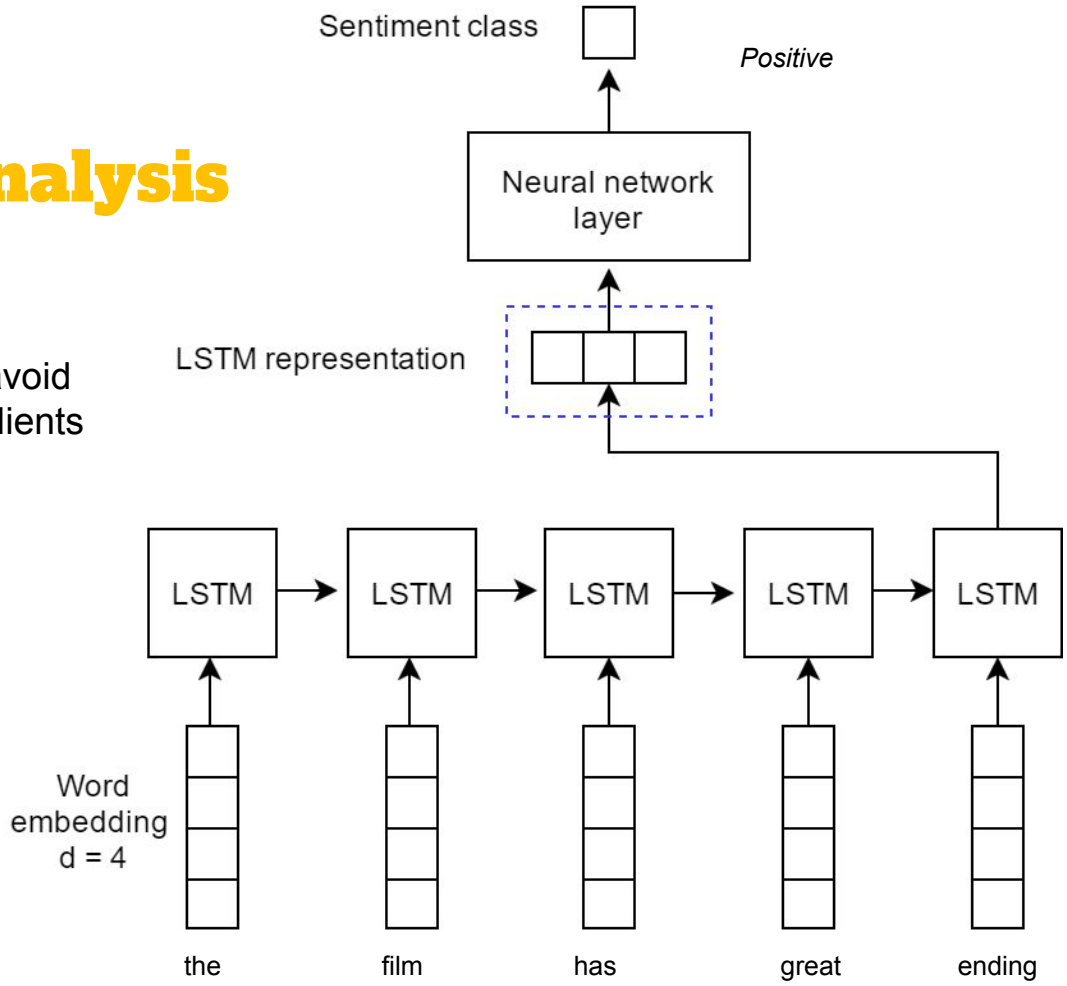

Generative Adversarial Network

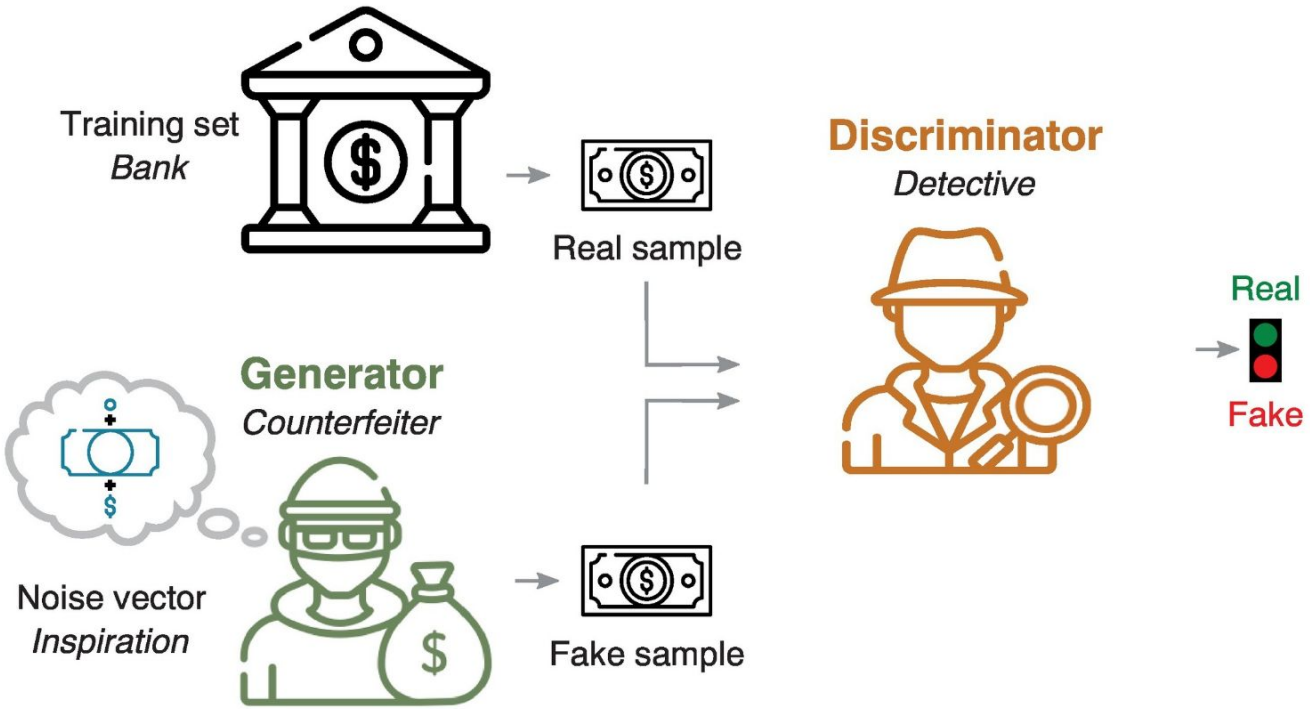

Generative Adversarial Network

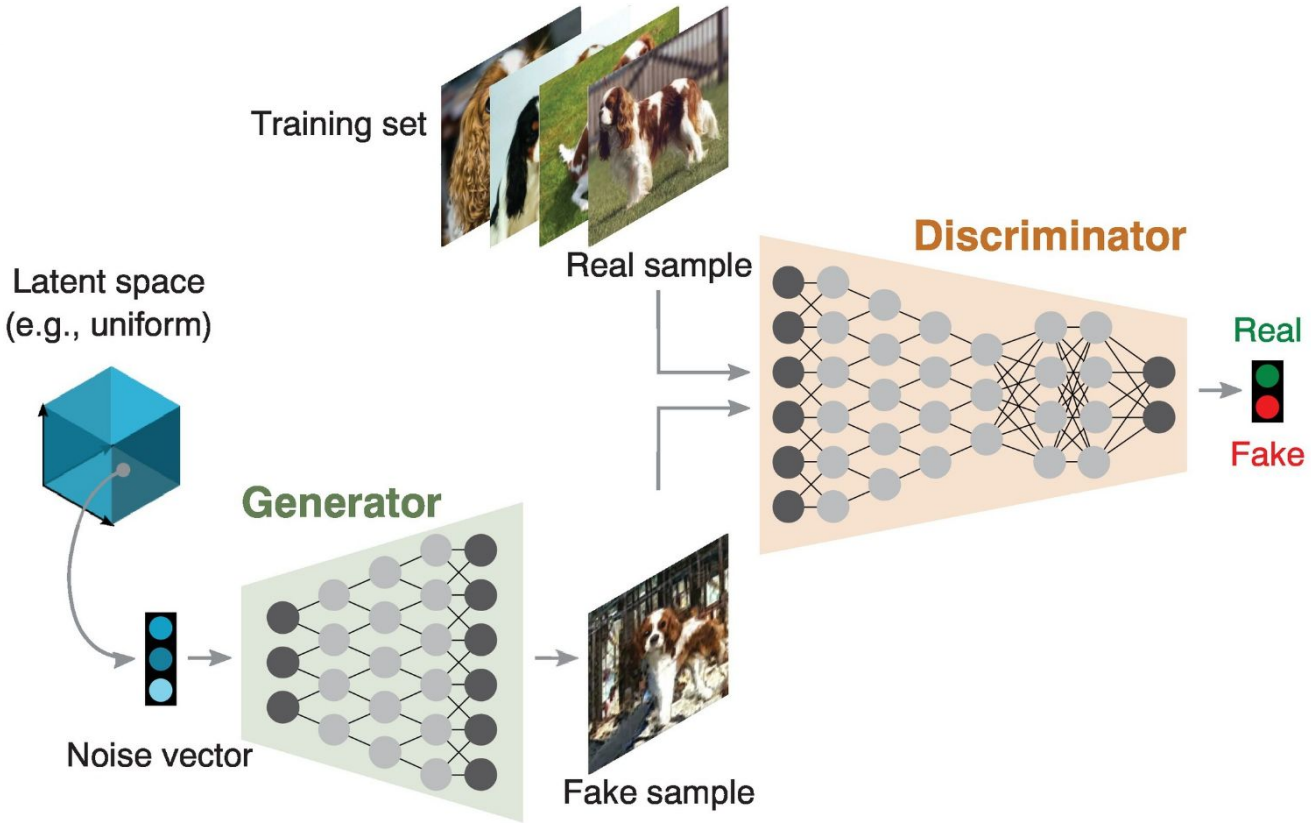

Diffusion Models

Deep Generative models: Generate real data from noise

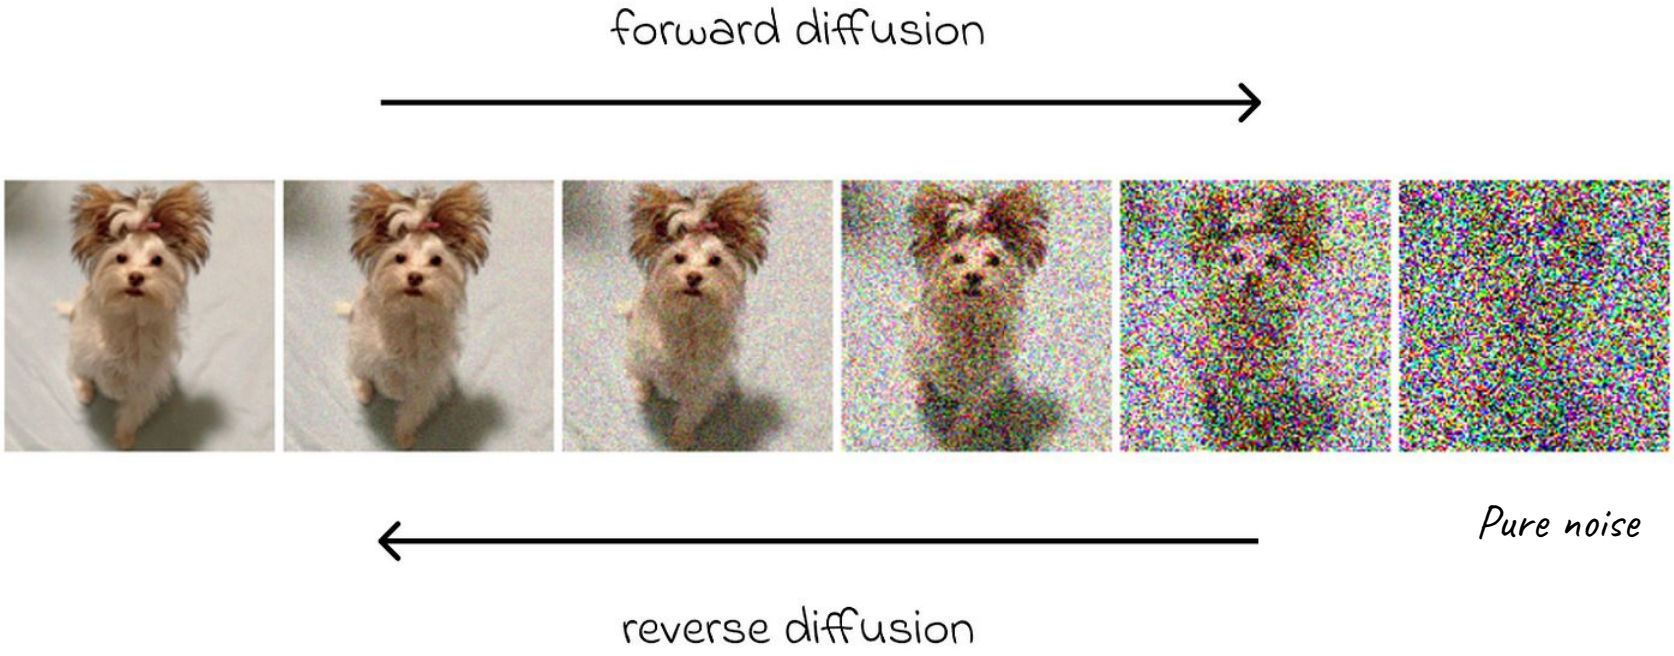

- The goal of the model is to detect the added noise and reconstruct the previous image.
- The predicted image is then compared to the actual image to calculate the loss.

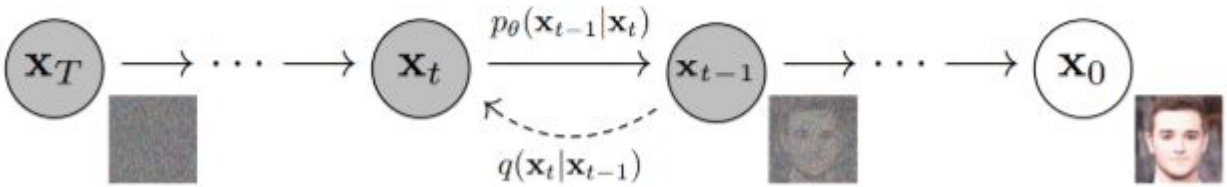

- The noisy image at step t and the value of t itself is input to the model.
- The model predicts the noise that was added to the image to get it to that state.
- Mean Squared Error (MSE) between the *actual* noise added and the *predicted* noise.

Reconstruction: Once trained, to "reconstruct" or generate an image, we start with pure noise at t=T.

- The model predicts the noise in the current image.
- We subtract a portion of that predicted noise to get a "slightly cleaner" image (t-1).
- We repeat this iteratively until we reach t=0

Self Attention in DNNs

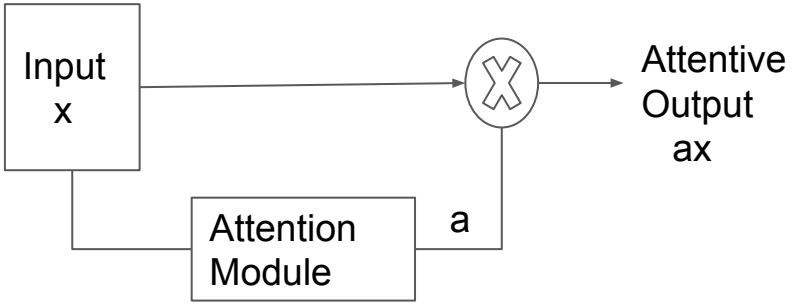

Self Attention in DNNs

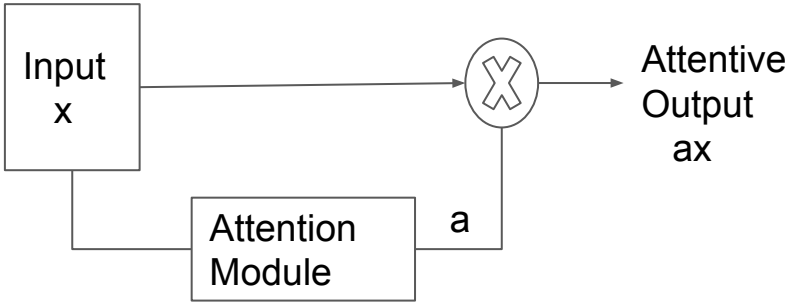

Self Attention in DNNs

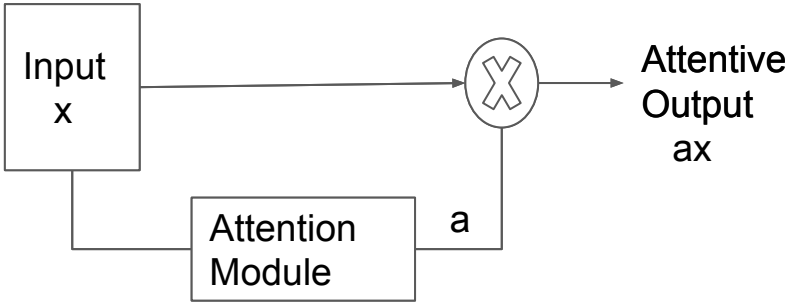

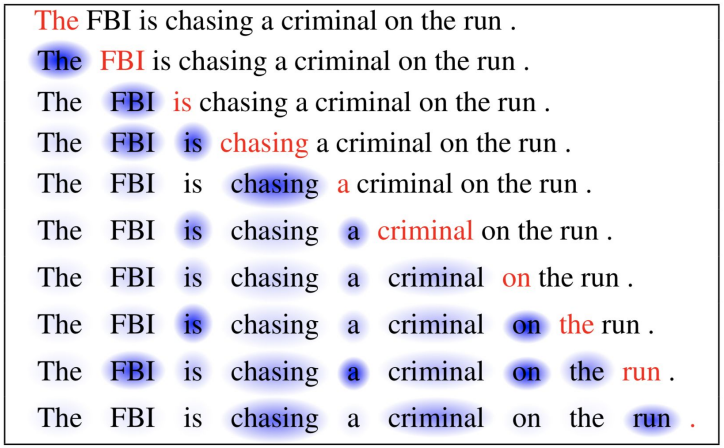

Self Attention in DNNs

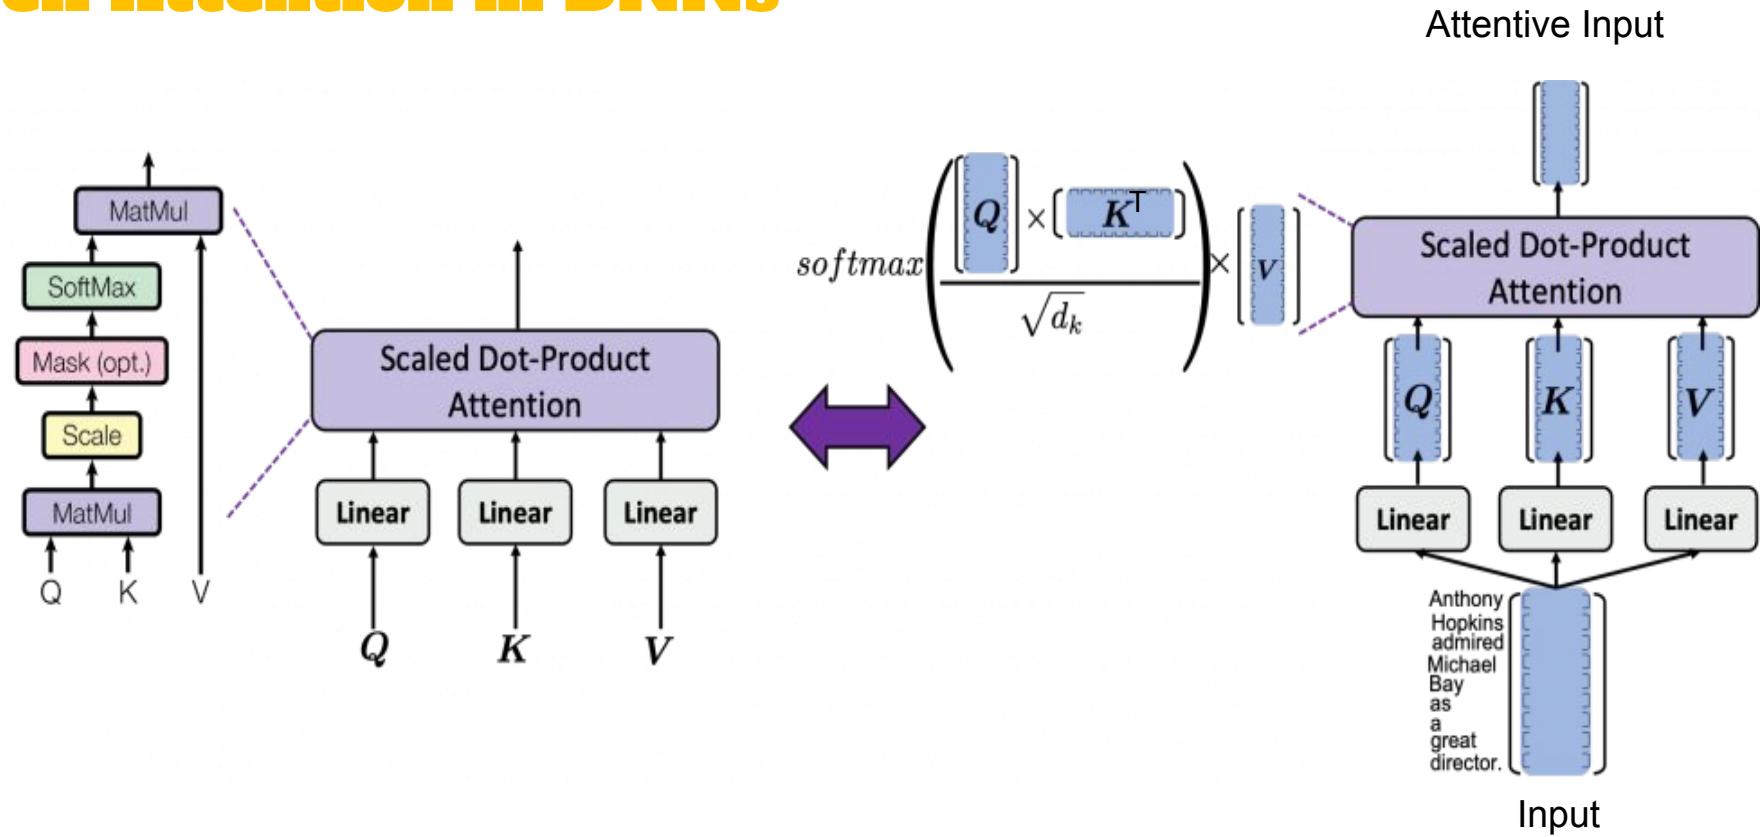

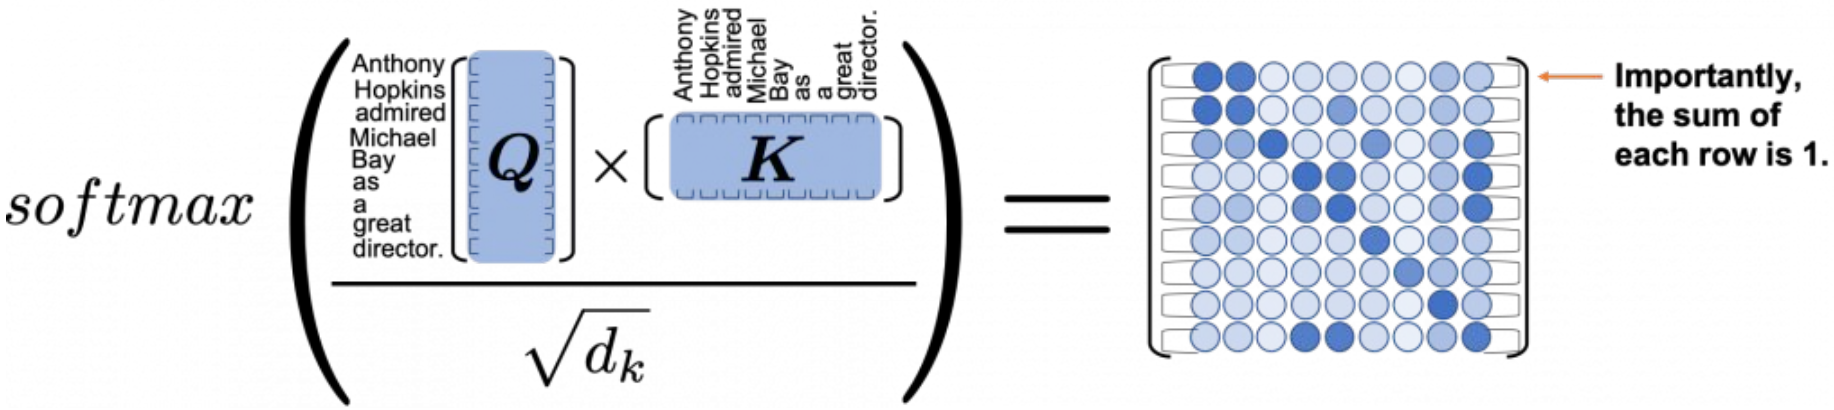

Anthony Hopkins admired Michael Bay as a great director

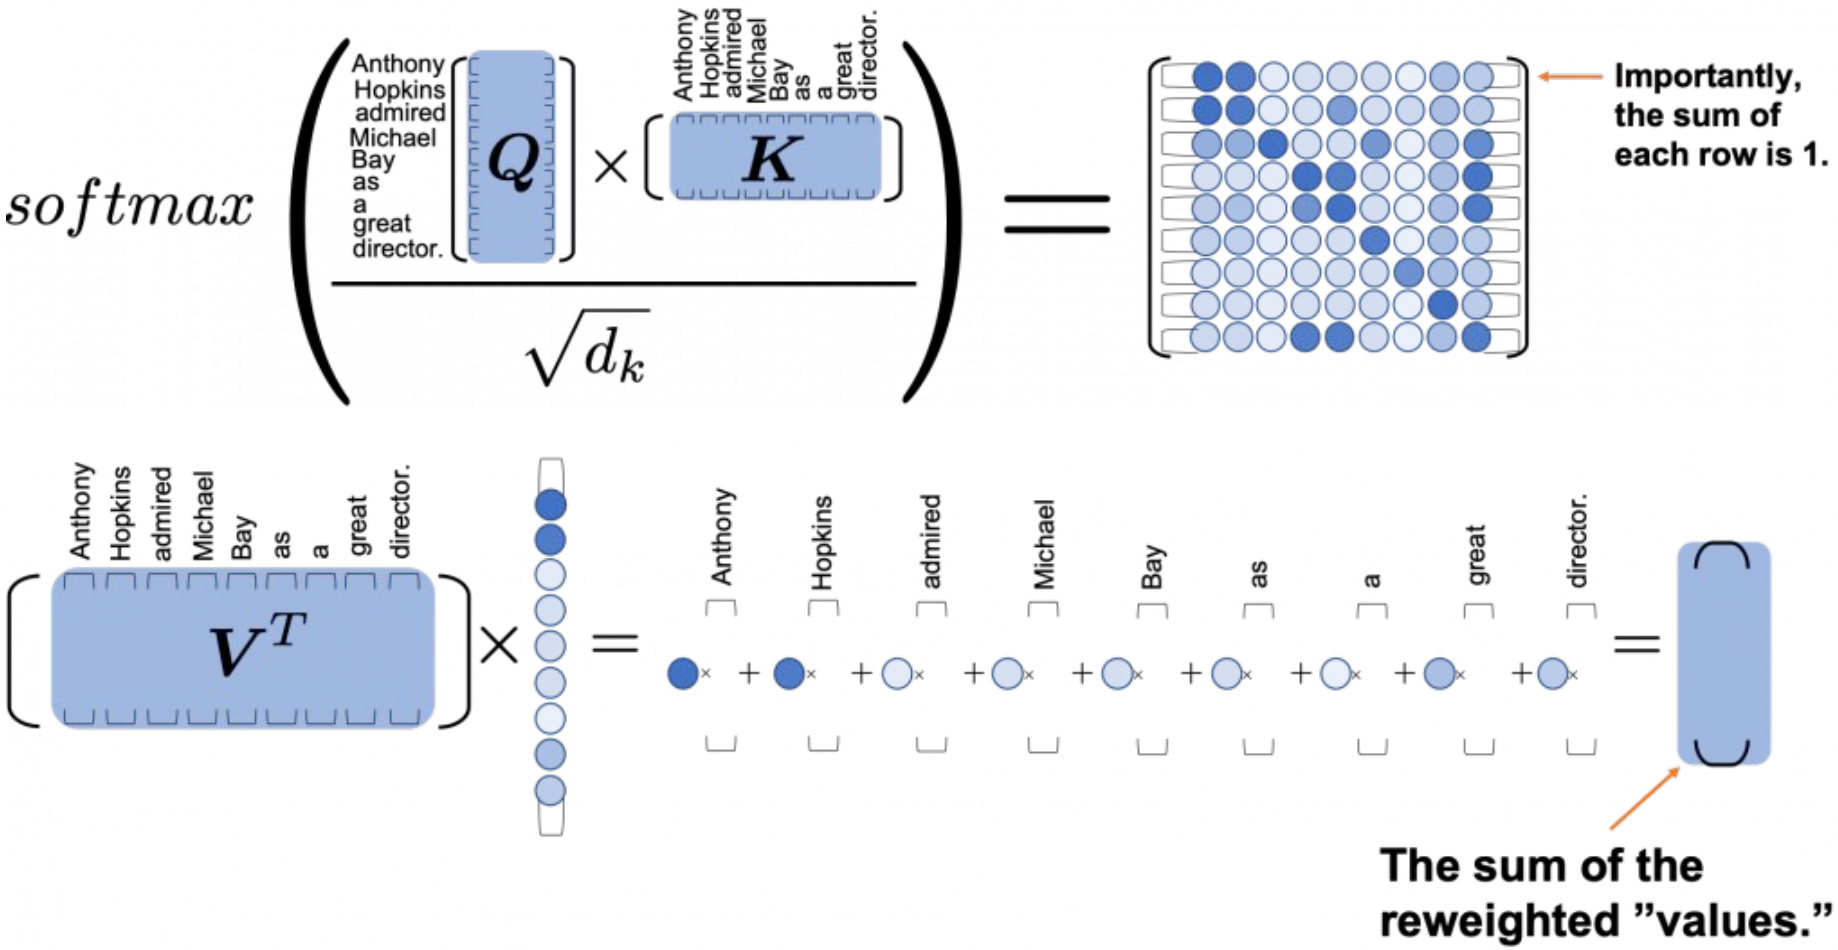
softmax
Anthony
Hopkins
admired
Michael
Bay
as
a
great
director.
Q
K
$\sqrt{d_k}$
Importantly, the sum of each row is 1.
V^T
The sum of the reweighted "values."

$$softmax\left(\frac{Q \times K}{\sqrt{d_k}}\right) =$$

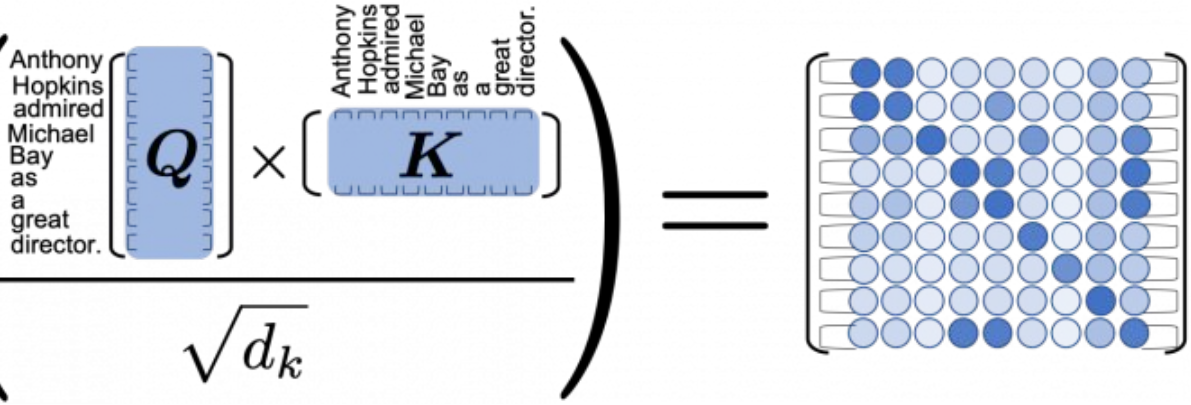

Importantly, the sum of each row is 1.

$$V^T \cdot softmax\left(\frac{QK^T}{\sqrt{d_k}}\right)^T =$$

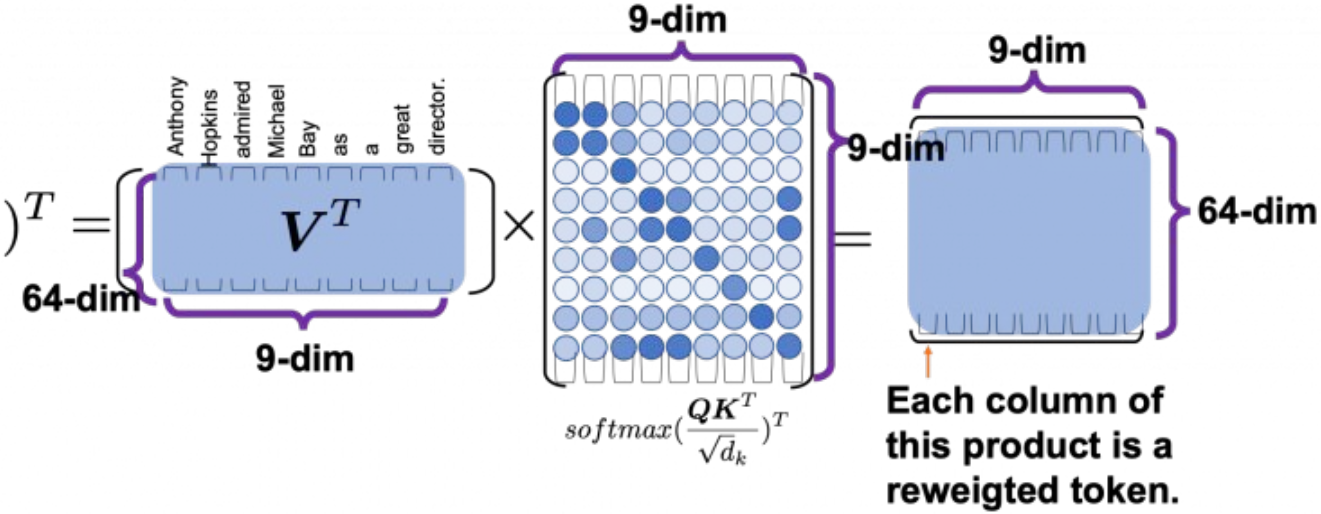

Transformer

Transformer

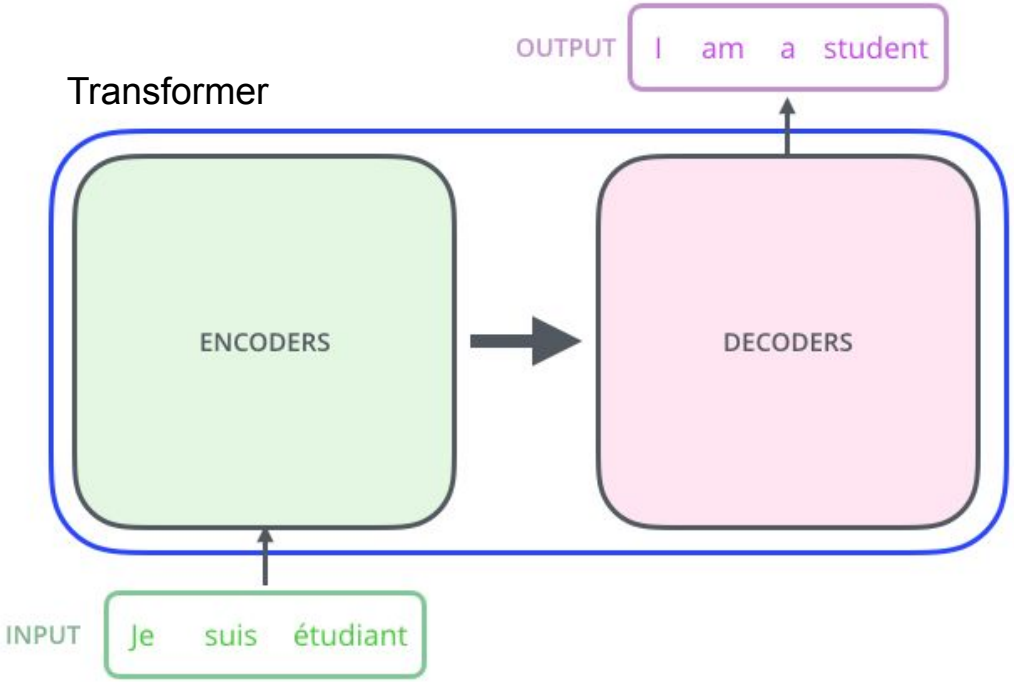

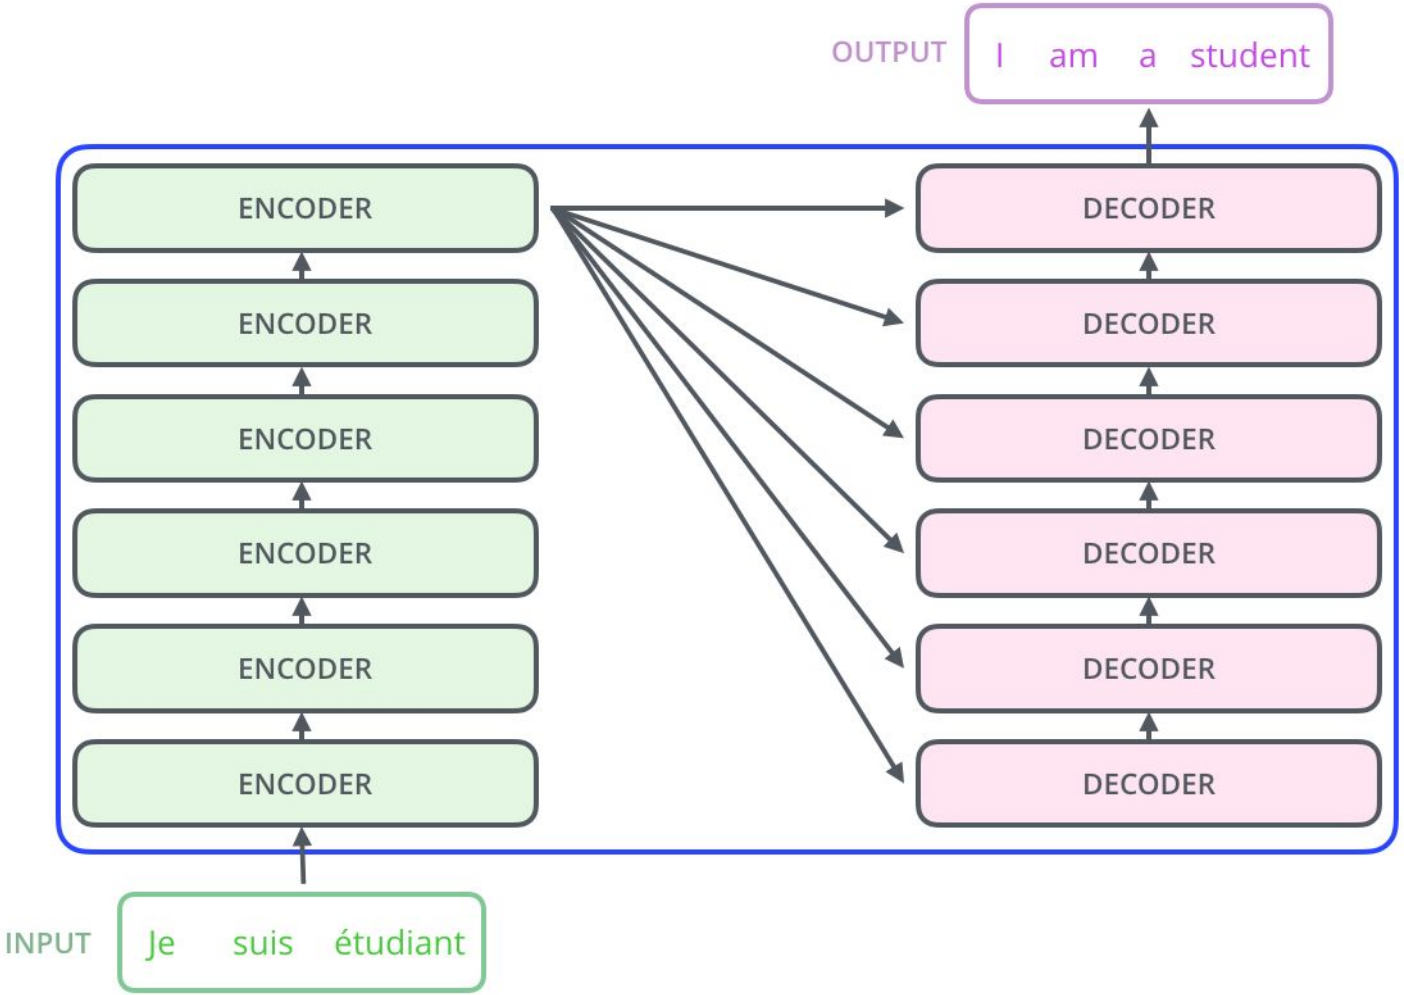
OUTPUT
I am a student
ENCODER
ENCODER
ENCODER
ENCODER
ENCODER
ENCODER
DECODER
DECODER
DECODER
DECODER
DECODER
DECODER
INPUT
Je suis étudiant

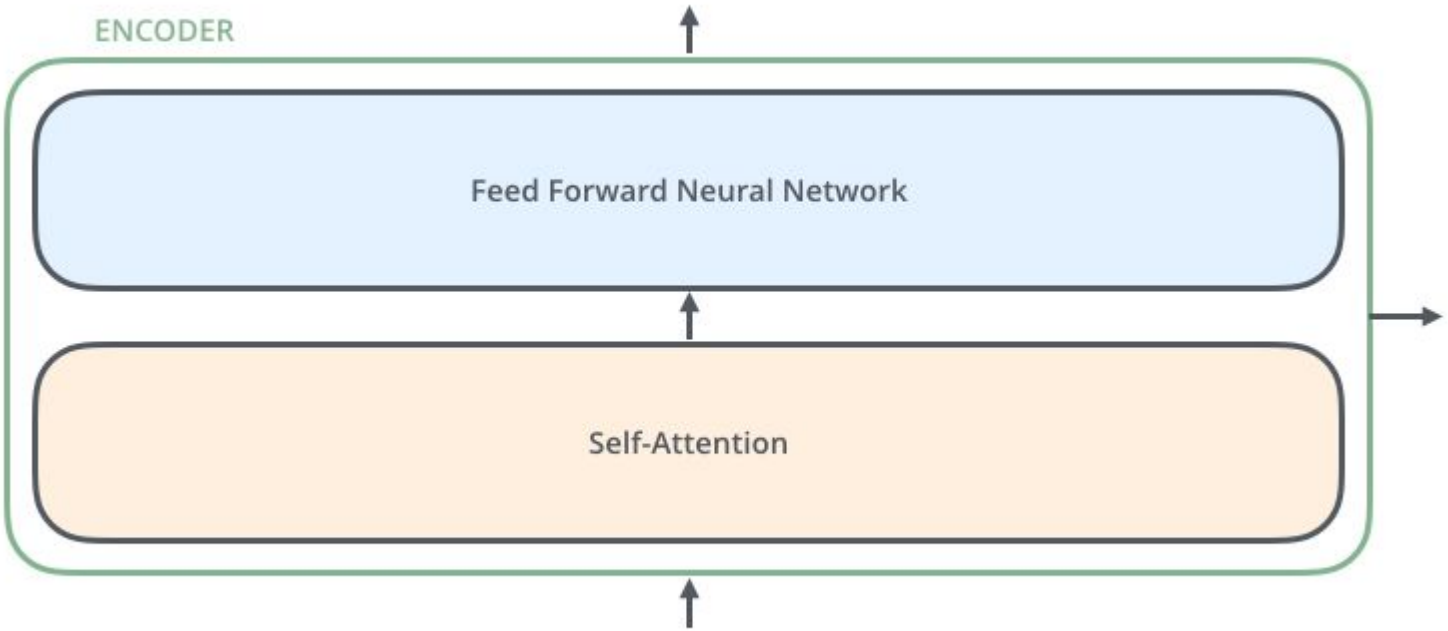
ENCODER
Feed Forward Neural Network
Self-Attention

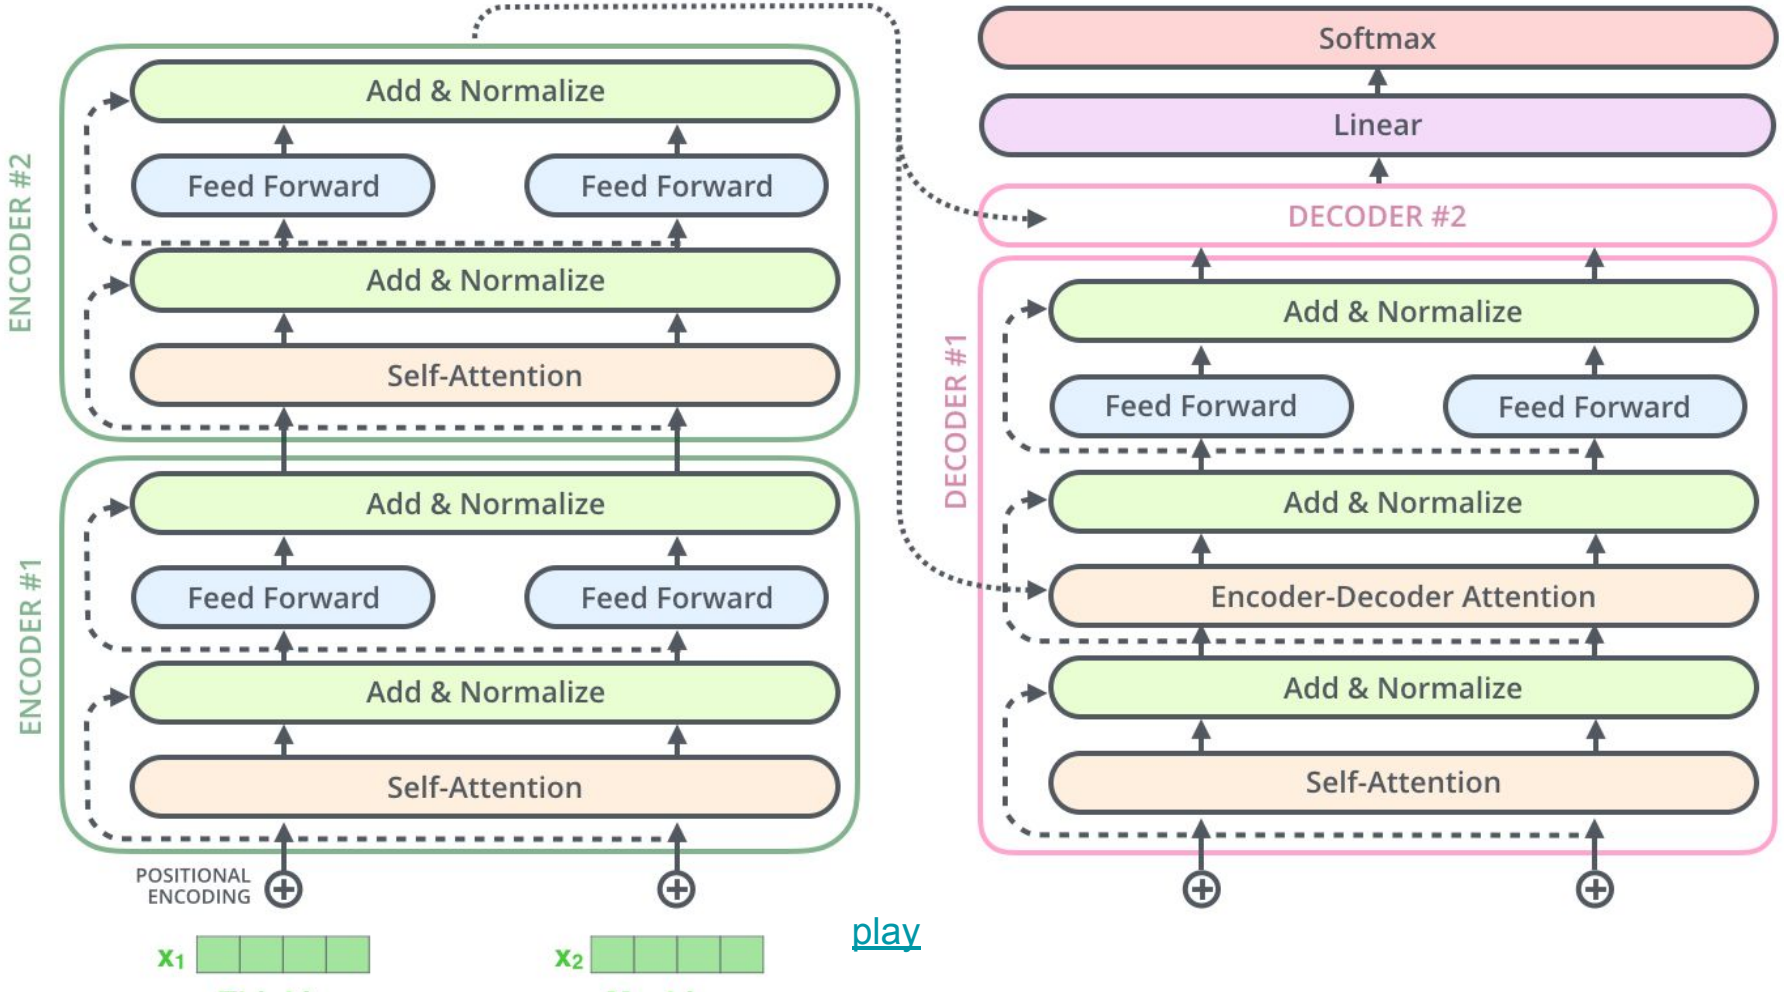
Softmax
Linear
DECODER #2
DECODER #1
Add & Normalize
Feed Forward
Feed Forward
Add & Normalize
Encoder-Decoder Attention
Add & Normalize
Self-Attention
ENCODER #2
Add & Normalize
Feed Forward
Feed Forward
Add & Normalize
Self-Attention
ENCODER #1
Add & Normalize
Feed Forward
Feed Forward
Add & Normalize
Self-Attention
POSITIONAL ENCODING
x_1
x_2

play

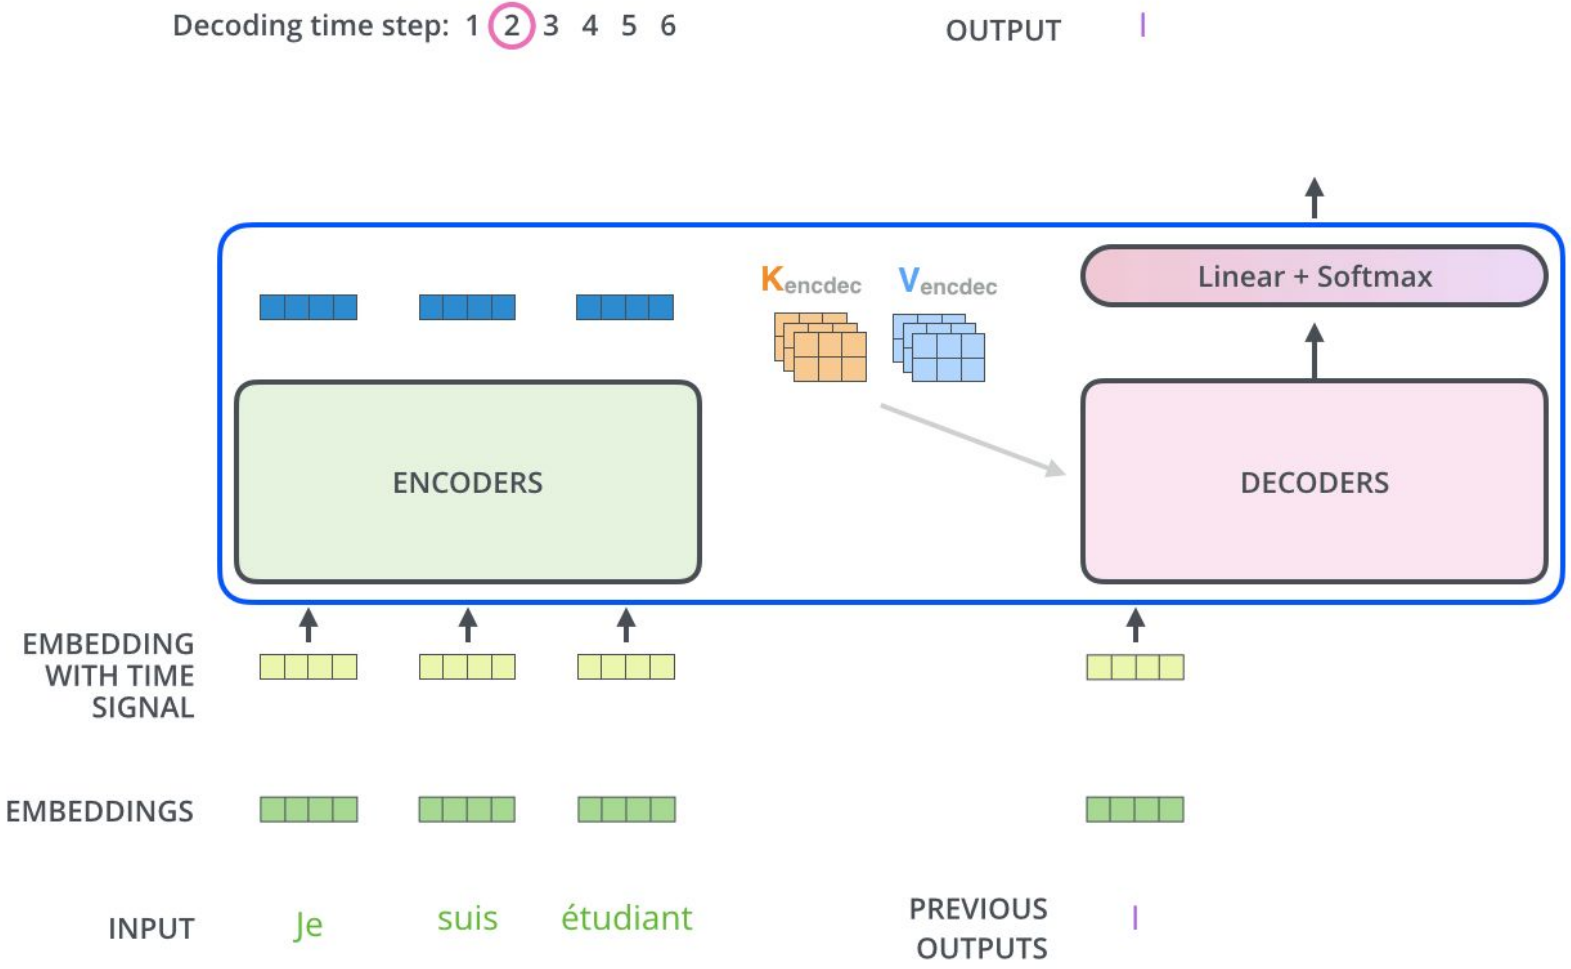
Decoding time step: 1 2 3 4 5 6
OUTPUT
I
Linear + Softmax
Kencdec
Vencdec
ENCODERS
DECODERS
EMBEDDING WITH TIME SIGNAL
EMBEDDINGS
INPUT
Je
suis
étudiant
PREVIOUS OUTPUTS
I

Autoencoder: Un-supervised Speech representations

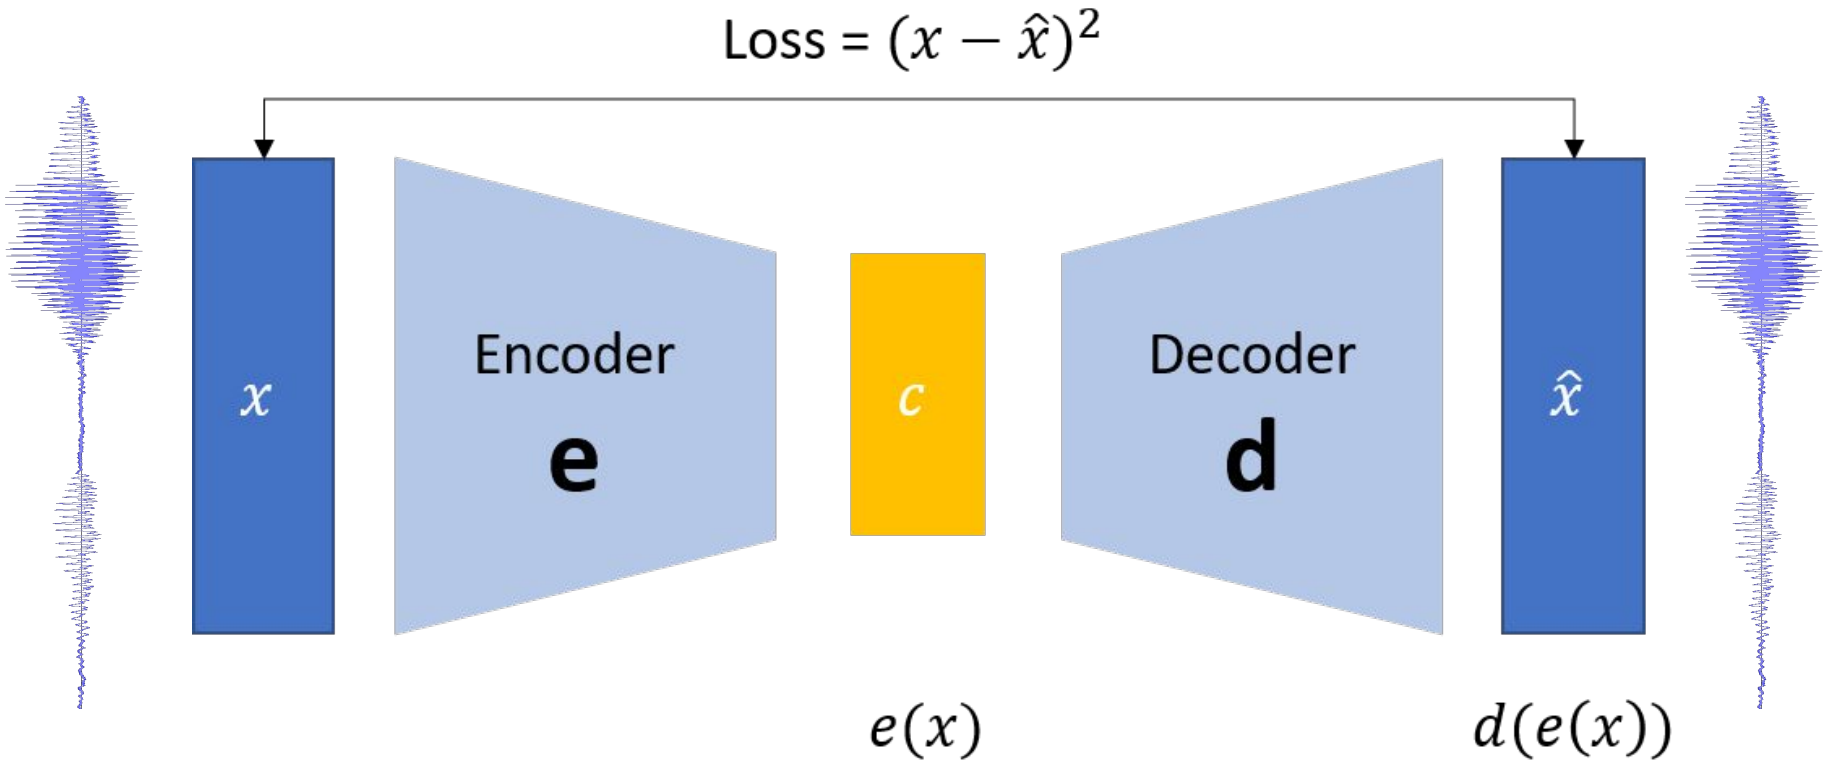

Wav2Vec: self-supervised Speech representations

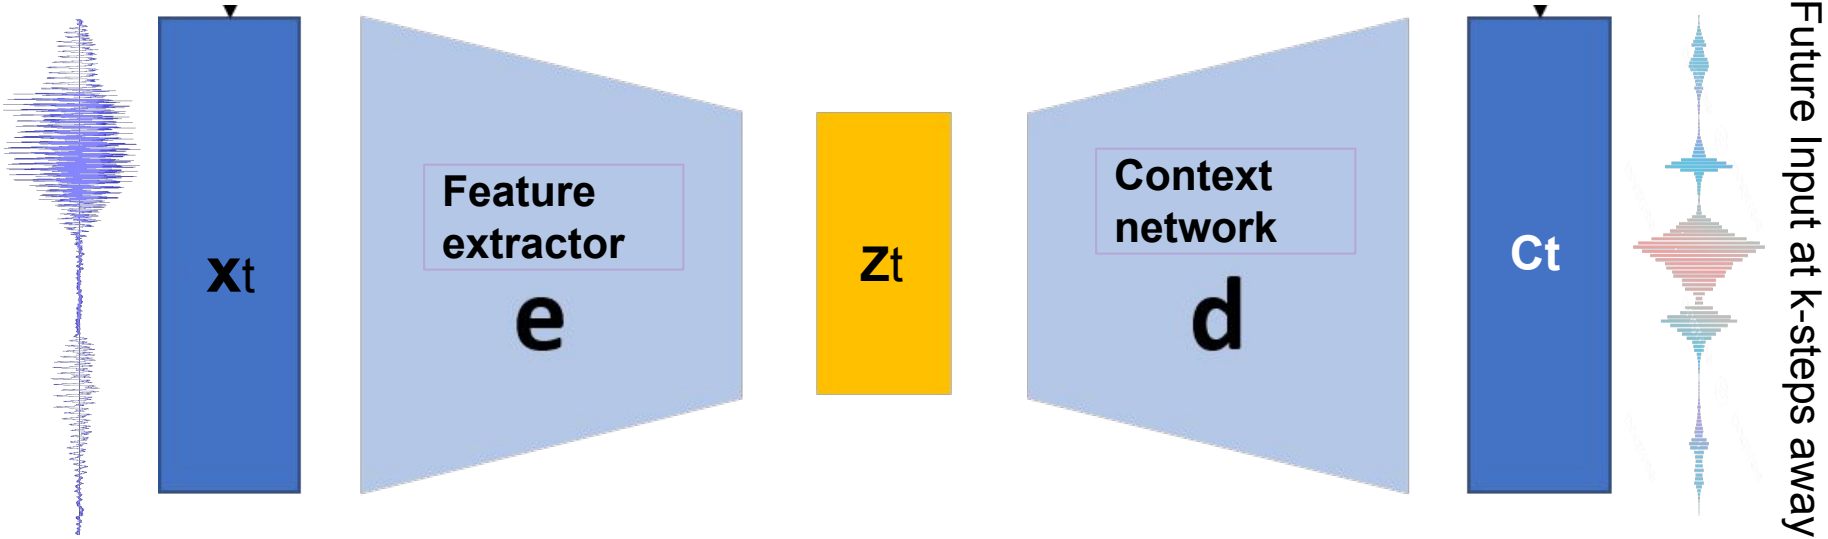

Objective: Maximize mutual information between C_t and Z_{t+k}

$$\mathcal{L}_k = -\sum_{i=1}^{T-k}\left(\log\sigma(\mathbf{z}_{i+k}^{\top}h_k(\mathbf{c}_i)) + \lambda\mathbb{E}_{\tilde{\mathbf{z}}\sim p_n}\left[\log\sigma(-\tilde{\mathbf{z}}^{\top}h_k(\mathbf{c}_i))\right]\right)$$

Encoder and decoder; 1DCNN layers

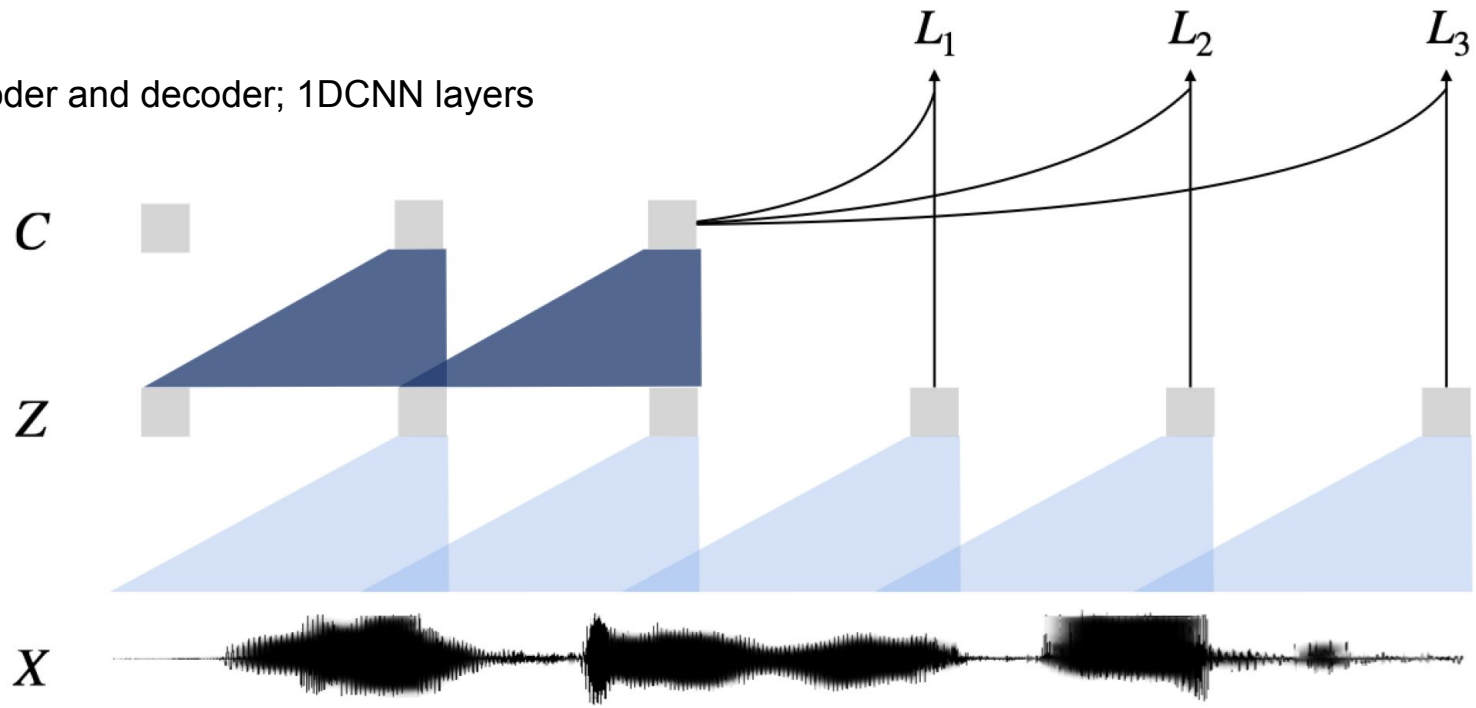

Few Popular Architectures
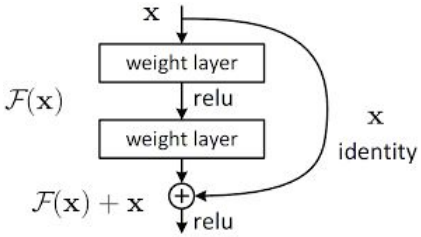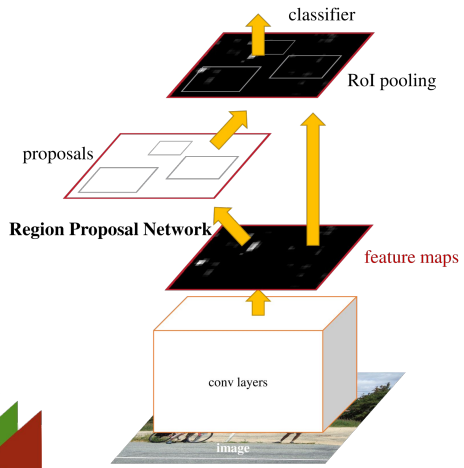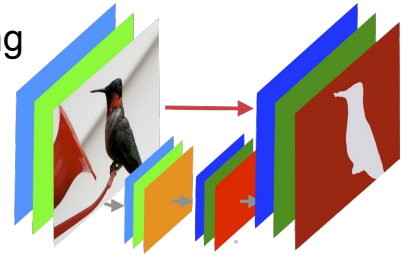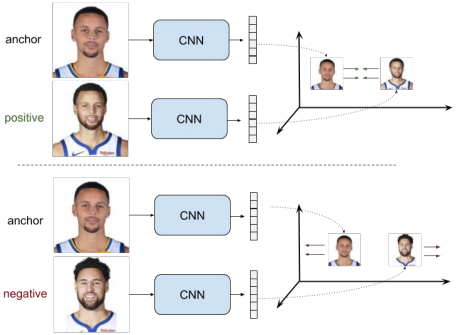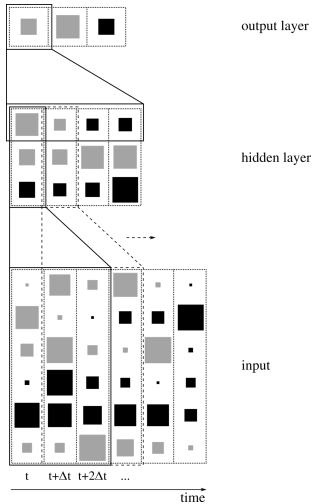
- **ResNet:**
  - CNNs with skip Connections
  - Object classification
- **RCNNs:**
  - Region based CNNs
  - Face detection, Object tracking, Image Captioning
- **U-Net:**
  - CNNs as AutoEncoder
  - Image Segmentation, Remote sensing
- **Time Delay Neural Networks:**
  - 1D CNNs with time dilations
  - Speech Recognition, speaker ID
- **Siamese Network:**
  - RNNs/CNNs with Contrastive learning
  - Signature Verification