
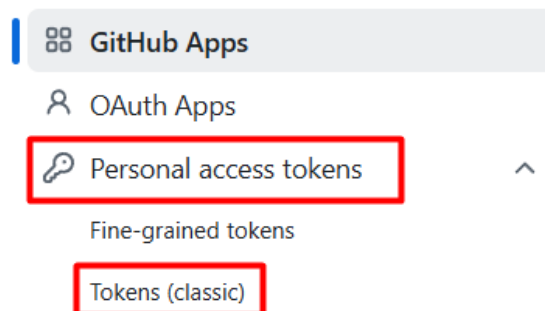
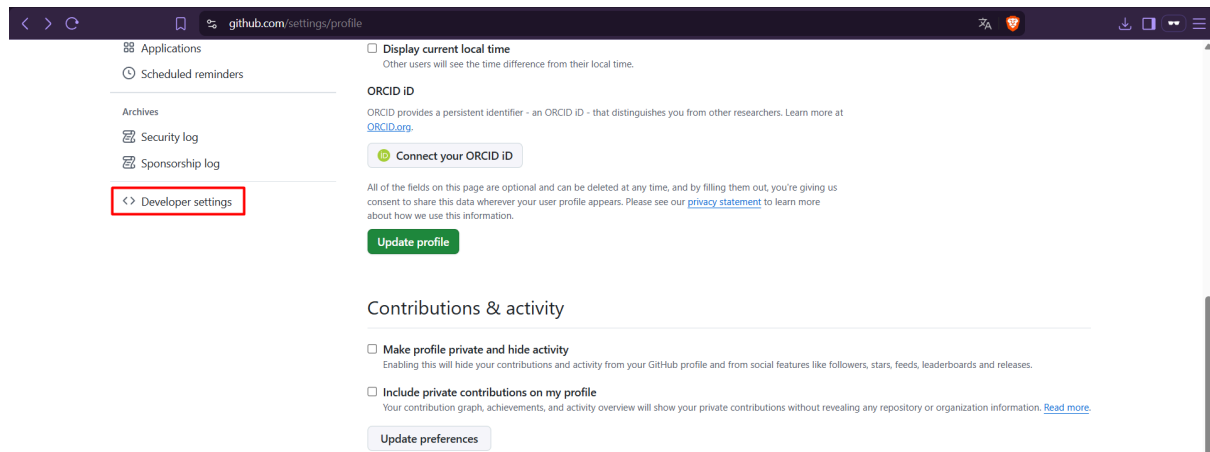


Vinculación con GitHub y Tareas varias con repositorios

Configurar un Token de Acceso Personal (PAT) en GitHub

1. Entra a [GitHub](#) e inicia sesión.
2. Ve a Settings > Developer Settings > Credentials > Personal Access Tokens > Tokens (classic).

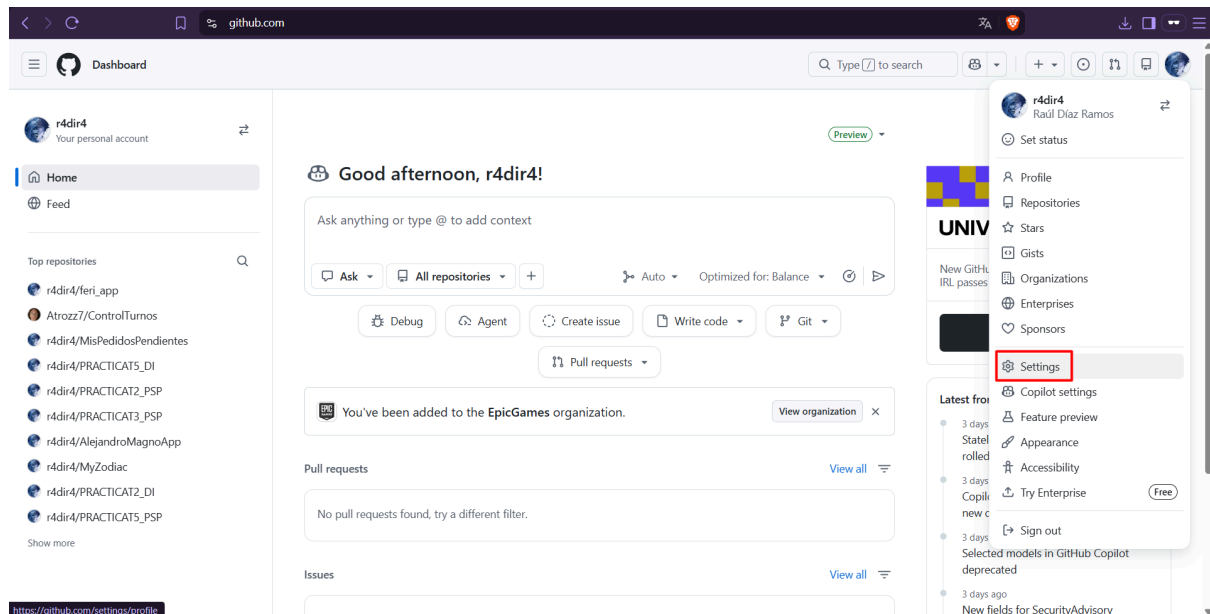

Personal access tokens (classic)

Generate new token ▼

Tokens you have generated that can be used to access the [GitHub API](#).

curso2024/2025 — admin:repo_hook, delete_repo, repo

⚠ This token has no expiration date.

Generate new token

Fine-grained, repo-scoped

Generate new token (classic)

For general use

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

3. Genera un nuevo token y asígnale una descripción (ej. Token Prácticas), selecciona el alcance repo y genera el token.

New personal access token (classic)

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

Note

curso2026/2027

What's this token for?

Expiration

 No expiration ▼

⚠ GitHub strongly recommends that you set an expiration date for your token to help keep your information secure. [Learn more](#)

Select scopes

Scopes define the access for personal tokens. [Read more about OAuth scopes](#).

☒ repo	Full control of private repositories
☒ repo:status	Access commit status
☒ repo_deployment	Access deployment status
☒ public_repo	Access public repositories
☒ repo:invite	Access repository invitations
☒ security_events	Read and write security events

Generate token

Cancel

4. Copia y guarda el token para usarlo como contraseña cuando Git te pida credenciales.

Personal access tokens (classic)

Generate new token ▼

Tokens you have generated that can be used to access the [GitHub API](#).

 Make sure to copy your personal access token now. You won't be able to see it again!

✓ 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 

Delete

curso2024/2025 — admin:repo_hook, delete_repo, repo

Last used within the last 11 months

Delete


 This token has no expiration date.

Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to [authenticate to the API over Basic Authentication](#).

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

Crear el repositorio remoto y conectar con local

1. Crea un nuevo repositorio GitHub llamado **UD01_Actividades** (déjalo vacío: sin README, sin .gitignore ni Licencia).

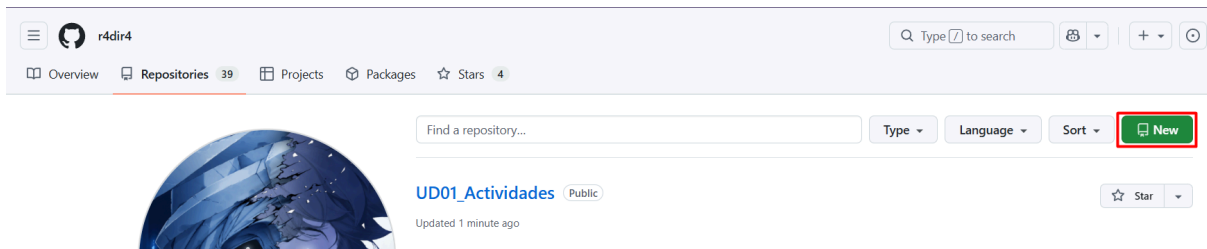

1 General

Owner * r4dir4 / **Repository name ***

✔ UD01_Actividades is available.

Great repository names are short and memorable. How about [ideal-memory?](#)

Description

0 / 350 characters

2 Configuration

Choose visibility *
Choose who can see and commit to this repository Public

Add README
READMEs can be used as longer descriptions. [About READMEs](#) Off

Add .gitignore
.gitignore tells git which files not to track. [About ignoring files](#) No .gitignore


Add license
Licenses explain how others can use your code. [About licenses](#) No license

2. En tu repositorio local renombra la rama master a main manteniendo el historial y comprueba que la rama local se ha renombrado a main correctamente.

```
usuario@CIBER1 UCRT64 ~/unidad1-git (master)
$ git branch -m master main

usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ git branch
* main
```

3. Asocia el repositorio remoto con tu proyecto local:

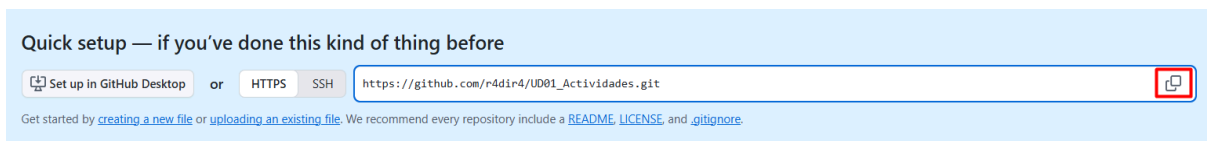

```
UCRT64:/c/Users/usuario/unidad1-git

usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ git remote add https://github.com/r4dir4/UD01_Actividades.git
```


Subir cambios y verificar en GitHub

1. Sube la rama main al repositorio remoto (Si te solicita credenciales, introduce tu usuario de GitHub y pega el Token como contraseña).

```
usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ git remote -v
origin https://github.com/r4dir4/UD01_Actividades.git (fetch)
origin https://github.com/r4dir4/UD01_Actividades.git (push)

usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ git push -u origin main
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 20 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (6/6), 572 bytes | 572.00 KiB/s, done.
Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/r4dir4/UD01_Actividades.git
* [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
```

2. Entra en GitHub y comprueba que se han subido los archivos a la rama main.

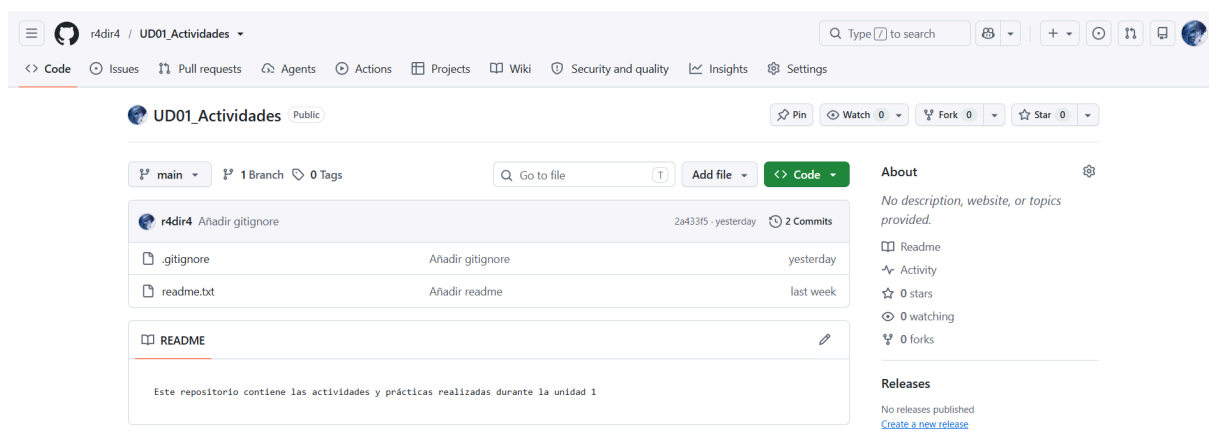

Crear y clonar un segundo repositorio

1. En GitHub, crea un nuevo repositorio llamado **actividad_clon** y marca la casilla para incluir un README inicial.

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1 General

Owner *  r4dir4 / Repository name *

✓ actividad_clon is available.

Great repository names are short and memorable. How about [automatic-octo-pancake?](#)

Description

0 / 350 characters

2 Configuration

Choose visibility * Public

Choose who can see and commit to this repository

Add README On

READMEs can be used as longer descriptions. [About READMEs](#)

Add .gitignore No .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

Add license No license

Licenses explain how others can use your code. [About licenses](#)

 [Create repository](#)

2. Copia la URL del repositorio remoto.

Clone

HTTPS SSH GitHub CLI



Clone using the web URL.

 Open in GitHub Copilot app

 Open with GitHub Desktop

 Download ZIP

3. En tu terminal local (fuera del proyecto anterior), clona el repositorio:

```
UCRT64:/c/Users/usuario

usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ cd ..

usuario@CIBER1 UCRT64 ~
$ git clone https://github.com/r4dir4/actividad_clon.git
Cloning into 'actividad_clon'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.

usuario@CIBER1 UCRT64 ~
$ |
```

4. Comprueba el contenido y la configuración del repositorio:

```
usuario@CIBER1 UCRT64 ~
$ cd actividad_clon/

usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ ls
README.md
```

5. Comprueba que estás en la rama main y la URL remota

```
usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ git branch
* main



usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ git remote -v
origin https://github.com/r4dir4/actividad_clon.git (fetch)
origin https://github.com/r4dir4/actividad_clon.git (push)
```

Eliminación de un fichero en remoto


1. En el proyecto **actividad_clon** en GitHub, crea dos archivos prueba1.txt y prueba2.txt y haz commit.

The screenshot shows the GitHub interface for the repository 'actividad_clon'. At the top, there's a header with the repository name, a 'Public' badge, and buttons for 'Pin' and 'Watch'. Below this, a navigation bar shows 'main' as the selected branch, '1 Branch', and '0 Tags'. A search bar 'Go to file' is present. On the right, there are buttons for 'Add file' and 'Code'. A dropdown menu is open under 'Add file', showing options 'Create new file' (highlighted with a red box) and 'Upload files'. Below the navigation bar, a commit history section shows an 'Initial commit' by user 'r4dir4' with a file 'README.md'. The main content area shows the file 'prueba1.txt' in the 'main' branch. The file content is 'Archivo de prueba 1', which is also highlighted with a red box. At the top right of the file editor, there are buttons 'Cancel changes' and 'Commit changes...' (highlighted with a red box). The bottom of the editor shows 'Spaces: 2' and 'No wrap'.

The screenshot shows the 'Commit changes' dialog box. It has a title bar 'Commit changes' with a close button. Inside, there's a section 'Commit message' with a text input field containing 'Add prueba1.txt'. Below this is an 'Extended description' section with a large text area containing the placeholder 'Add an optional extended description...'. At the bottom, there are two radio button options: 'Commit directly to the main branch' (which is selected) and 'Create a new branch for this commit and start a pull request'. Below these options, there's a link 'Learn more about pull requests'. At the bottom right, there are two buttons: 'Cancel' and 'Commit changes' (highlighted with a red arrow).

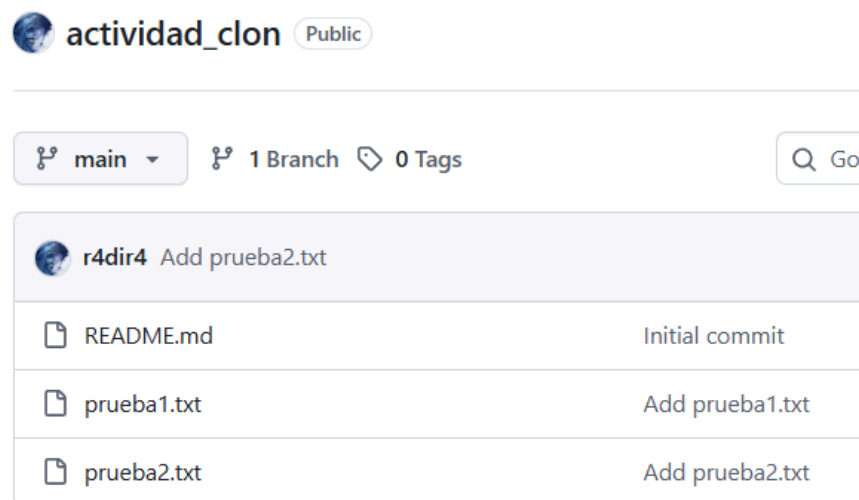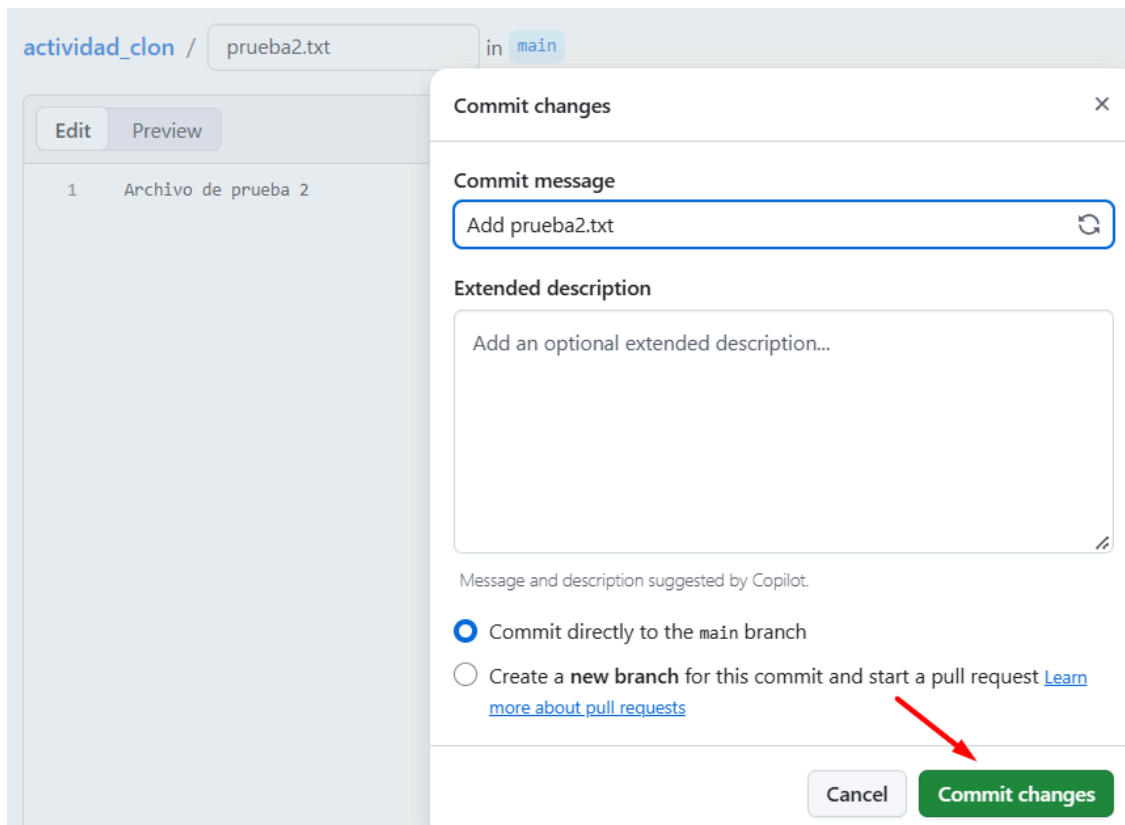

2. A continuación, elimina el archivo prueba1.txt de GitHub y confirma el commit.

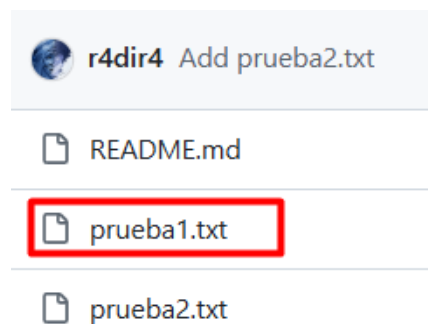

actividad_clon / prueba1.txt

r4dir4 Add prueba1.txt

Code Blame 1 lines (1 loc) · 20 Bytes

1 Archivo de prueba 1

- Raw file content
- Download
- Jump to line
- Copy path
- Copy permalink
- Copilot
- Ask about this file
- View options
 - ✓ Show code folding buttons
 - Wrap lines
 - Center content
 - ✓ Open symbols on click
- Delete file

actividad_clon / prueba1.txt

Cancel changes Commit changes...

1 prueba1.txt

[Load diff](#)

This file was deleted.

Commit changes

Commit message

Delete prueba1.txt

Extended description

Add an optional extended description...

- ☒ Commit directly to the main branch
- ☐ Create a new branch for this commit and start a pull request [Learn more about pull requests](#)

Cancel

Commit changes

r4dir4 Delete prueba1.txt

README.md

prueba2.txt

Sincronizar los cambios con el repositorio local

1. En tu terminal local, descarga la versión más reciente del repositorio remoto del proyecto **actividad_clon**

```
usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ git pull
remote: Enumerating objects: 9, done.
remote: Counting objects: 100% (9/9), done.
remote: Compressing objects: 100% (6/6), done.
remote: Total 8 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (8/8), 2.66 KiB | 136.00 KiB/s, done.
From https://github.com/r4dir4/actividad_clon
   adfb416..2c098fa  main       -> origin/main
Updating adfb416..2c098fa
Fast-forward
 prueba2.txt | 1 +
 1 file changed, 1 insertion(+)
 create mode 100644 prueba2.txt

usuario@CIBER1 UCRT64 ~/actividad_clon (main)
```

2. Comprueba cómo se ha actualizado la carpeta local y que el archivo prueba1.txt no está.

```
usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ ls
README.md  prueba2.txt
```

3. Compruebas tu historial local ¿Qué aparece registrado sobre el archivo prueba1.txt?

Git registra en el historial el commit en el que se eliminó el archivo prueba1.txt, aunque actualmente ya no se encuentre en la carpeta local.

```
usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ git log --oneline
2c098fa (HEAD -> main, origin/main, origin/HEAD) Delete prueba1.txt
4f8b359 Add prueba2.txt
321258b Add prueba1.txt
adfb416 Initial commit
```

```
usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ git log --all --stat -- prueba1.txt
commit 2c098fae1a257ea6a0e2b5ca6eb5892a7a65d0ec (HEAD -> main, origin/main, origin/HEAD)
Author: Raúl Díaz Ramos <33228770+r4dir4@users.noreply.github.com>
Date:   Tue Oct 6 17:22:45 2026 +0200

    Delete prueba1.txt

 prueba1.txt | 1 -
 1 file changed, 1 deletion(-)

commit 321258bc440c85c181cfc18fdab95e6c26ccbd6
Author: Raúl Díaz Ramos <33228770+r4dir4@users.noreply.github.com>
Date:   Tue Oct 6 17:14:57 2026 +0200

    Add prueba1.txt

 prueba1.txt | 1 +
 1 file changed, 1 insertion(+)
```

Crear una rama de trabajo y colaborar

1. Vuelve al directorio del primer proyecto **UD01_Actividades**

```
usuario@CIBER1 UCRT64 ~/actividad_clon (main)
$ cd ..

usuario@CIBER1 UCRT64 ~
$ cd unidad1-git

usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ pwd
/c/Users/usuario/unidad1-git


usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ git branch
* main
```


2. Crea y cámbiate a una nueva rama con el nombre del *rama01_XXX* (Dónde XXX son tus iniciales)

```
usuario@CIBER1 UCRT64 ~/unidad1-git (main)
$ git switch -c rama01_RDR
Switched to a new branch 'rama01_RDR'

usuario@CIBER1 UCRT64 ~/unidad1-git (rama01_RDR)
$ git branch
main
* rama01_RDR
```

3. Añade a esta rama el documento con las capturas que has ido haciendo durante la actividad.
4. Ve a Settings > Collaborators > Add people e invita a la profesora **pilarpr**

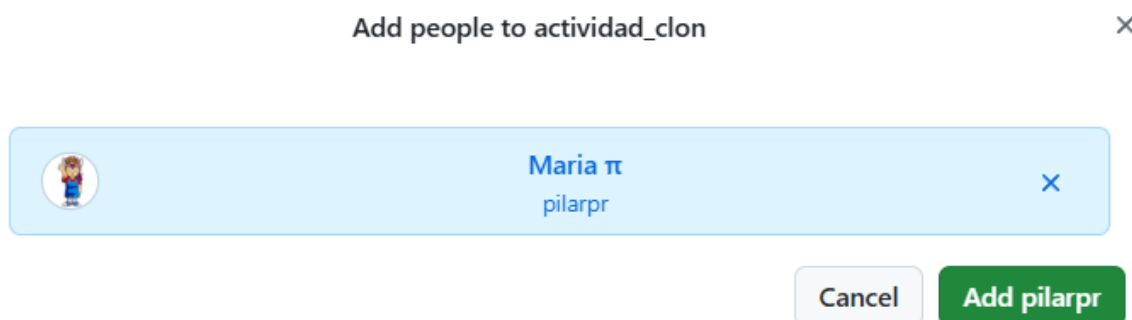

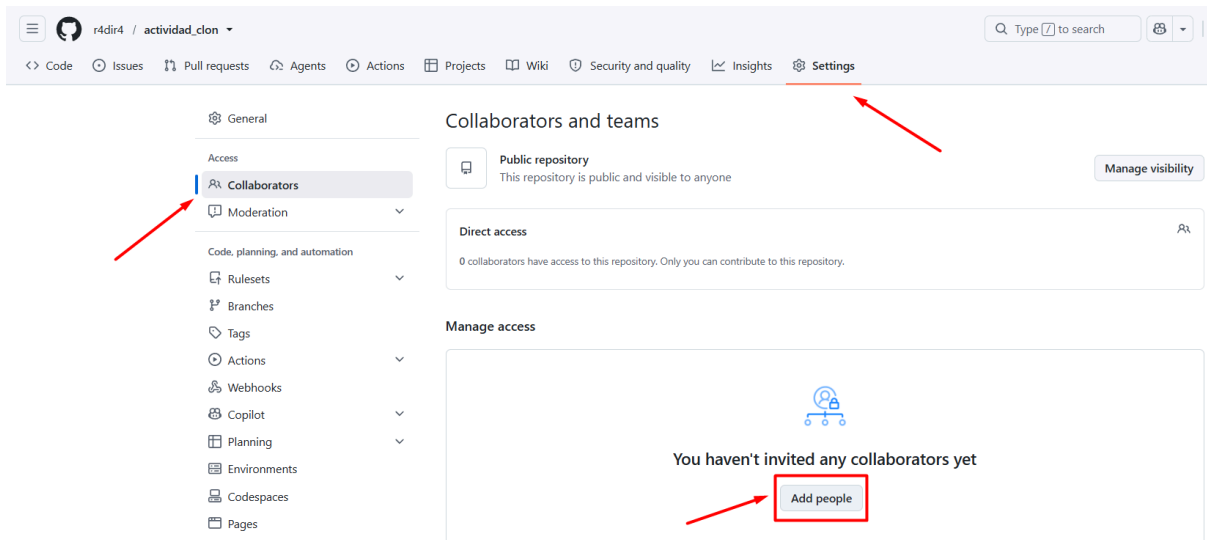

Fusionar la rama con la principal

1. Cámbiate a la rama main
2. Fusiona tu rama de trabajo en main
3. Sube los cambios actualizados al repositorio remoto

Generar y resolver conflictos de fusión (Merge Conflicts)

1. Crea y cámbiate a una nueva rama llamada **archivo_conflictos**
2. Modifica la primera línea del archivo readme.txt en esta rama, guarda los cambios y realiza el commit
3. Vuelve a la rama main
4. Modifica la misma primera línea del archivo readme.txt de forma distinta, guarda y realiza el commit
5. Intenta fusionar la rama archivo_conflictos en main. ¿Qué ocurre?
6. Resolver el conflicto:
 - Abre readme.txt en tu editor de código. Verás marcas como estas:
Plaintext
<<<<<<< HEAD
Texto modificado en main
=====
Texto modificado en archivo_conflictos
>>>>>>> archivo_conflictos
 - Borra las marcas (<<<<<<<, =====, >>>>>>>) y deja únicamente el texto correcto final.
 - Guarda el archivo y completa la fusión en Git

Revisar el historial de commits

1. Desde Git revisa el historial de tus repositorios
2. Desde GitHub, revisa los commits de tus repositorios

Revisa la lista cronológica de commits, comprueba cómo se reflejan las ramas creadas, la resolución del conflicto y las aportaciones de los colaboradores.