PUBLIC

ASITE™

API Services Overview

REV	REASON FOR ISSUE	CC	DATE
1-55	Various updates and additions to multiple APIs	Clients	
56	Add API rate limit details	Clients	11th Aug 2023
57	Create POI API	Clients	18th Jan 2024
58	User Profile Details API	Clients	19th Jan 2024
59	Removed record start option from document search API & added file extension criteria details. Updated response details for getUserListForOrg API	Clients	13th Mar 2024
60	Updated Manage Custom Attribute Value API document with details to perform Add, Update and Delete operation	Clients	28th May 2024
61	Updated Form Search API document with all app-type that are supported	Clients	28th May 2024
62	Updated the CURL example of document search and save custom attribute set API	Clients	19th June 2024
63	Updated Asite API Service (Section-4)	Clients	8th July 2024
64	Removed certification path from APIs Updated few of the API cURLs and their details Added a generic NOTE under Section 8 for apiClient	Clients	3rd March 2025
65	Update Document MetaData API	Clients	11th April 2025

Summary: Guide presenting an overview of Asite API Services

Prepared by: Asite Product Management Team

Confidentiality

This document has been prepared for the use of Asite Clients. This document is not intended for and should not be used by any third party. Distribution or reproduction of this document to such parties must not take place without written consent from Asite.

CONTENTS

1. Executive Summary 7
1.1. Asite Introduction 7
1.2. Asite Support 7
2. Introduction 8
2.1. Definition of API 8
2.2. About Asite API 8
3. Architectural Overview 10
4. Asite API Services 11
5. Asite API Library 11
5.1. REST Based API Functions 11
6. Using REST based API Functions 19
6.1. Login API Service 19
6.2. Workspace List API Service 25
6.3. Workspace Team Directory API Service 34
6.4. Workspace Folder List API Service 38
6.5. Document List API Service 44
6.6. Document List Next Page API Service 52
6.7. Form Type List API Service 59
6.8. Forms List API Service 65
6.9. Incomplete Form actions API Service 70
6.10. Publish Document to Workspace Folder 75
6.11. Folder Details API Service 78
6.12. Create Folder API Service 80
6.13. Update Folder API Service 86
6.14. DocAccessDetail List API Service 92
6.15. Create Workspace API Service 94
6.16. Create Workspace Template API Service 96
6.17. Save Additional Details API Service 100
6.18. Assign Companies to workspace API Service 103

6.19. Assign Administrators to Workspace API Service 106
6.20. Save Workspace Settings API service 108
6.21. Create Asite Organisation API Service 113
6.22. Create Asite User API Service 115
6.23. Get Country List for Portal API Service 120
6.24. Link Document API Service 122
6.25. Import Document Access History API Service 124
6.26. Workspace Users List API Service 126
6.27. Workspace Roles API Service 129
6.28. Workspace POI(Purpose Of Issue) List API Service 131
6.29. Workspace DocStatus List API Service 133
6.30. Workspace DrawingSeries List API Service 135
6.31. Organisation List API Service 137
6.32. Organisation User List API Service 139
6.33. ApplicationType List API Service 141
6.34. DataCenter List API Service 143
6.35. Workspace Status Type API Service 145
6.36. Workspace Subscription Type API Service 147
6.37. Workspace Branding List API Service 149
6.38. PaperSize List API Service 150
6.39. Available Attributes for Workspace API Service 152
6.40. Project Phases API Service 154
6.41. Country List API Service 156
6.42. Region List for Country API Service 158
6.43. Workspace Setting Sort Options API Service 160
6.44. Workspace UserGroup List API 162
6.45. Create Workspace Role API 164
6.46. User Role Management API 165
6.47. Action list for Audit trail API service 167
6.48. Get User By Email Address API Service 169
6.49. Forms Data Object List API Service 170
6.50. Document Search API 178
6.51. Document Download API 199
6.52. Document Status Change API 200

6.53. Update Asite User API Service 204
6.55. Get User Projects and Roles Details API Service 222
6.56. Form Search API 224
6.57. Task Search API 236
6.58. Link Type Update API 242
6.59. Manage Custom Attribute Values API 245
6.60. Custom Attribute Details API 249
6.61. Create Placeholder with Custom Attributes API 252
6.62. Upload File with Custom Attributes API 255
6.63. File History API 260
6.64. Create/Edit Custom Attributes 263
6.65. Create/Edit Custom Attribute Set 271
6.66. Create comment API service 284
6.67. Get Form template API Service 290
6.68. Create form message API 303
6.69. Project Custom Attribute details API 323
6.70. Project Custom Attribute Set details API 327
6.71. Form status change history API 329
6.72. Form distribution history API 333
7.73 Get Form Permissions with Roles 336
7.74 Get Form Attachment and Associations 342
7.75 Logout API Service 351
7.76 Quality Plan Listing API 352
7.77 Quality Plan Association API 357
7.77 Quality Plan Location API 360
7.78 Quality Plan Activity API 361
7.79 Attachment Download API 363
7.80 Marketplace - Update Universal Org. profile 364
7.81 Quality Plan Details API 373
7.82 Document Status History API 383
7.83 Get Document Comments API 386

7.84 Edit Form Message API 391
7.85 Get Users API 396
7.86 Custom Attribute Set Details API 398
7.87 Team Directory API new version 406
7.88 Quality Plan Location-wise Details from Template 409
7.89 Quality Plan Activities Details from Template 422
7.90 Create POI API 427
7.91 User Profile Details API 430
7.92 Create Review Comment API 430
7.93 Create Review Comment Reply API 435
7.94 Get Review Comment Listing API 437
7.95 Get Review Comment Details API 439
7.96 Get Folder Attributes API 441
7.97 Update Document MetaData API 444
8 Accessing the Asite API Service 450
8.1 Accessing API Functions using cURL commands 450
8.2 File downloads 451

1. Executive Summary

Headquartered in London's Tech city Asite provides an open construction platform allowing organizations working on capital projects to come together, plan, design, and build with seamless information sharing across entire supply chain.

Asite's comprehensive range of solutions connect dispersed teams across the lifecycle of capital assets, enabling them to build better and build resilience. With Asite, capital project owners stay at the forefront of innovation, maintaining a golden thread of information throughout a project to facilitate the creation of digital twins.

1.1. Asite Introduction

1.2. Asite Support

24/7/365 Support is provided for all Asite products listed and included in platform licences. Please contact our helpdesk via email or by filling in the contact form or call at the numbers provided.

2. Introduction

2.1. Definition of API

Application Programming Interface (API) is an interface that a software program implements to allow other software's to interact with it. Similarly, software might also implement a user interface for users.

APIs are implemented by applications, libraries and operating systems to define how other software can make calls to or request services from them. An API determines the vocabulary and calling conventions a programmer should employ to use such services. It may include specifications for routines, data structures, object classes, and protocols used to communicate between the consumer and implementer of the API.

2.2. About Asite API

Asite API is an interface that allows other software applications to interact with the services and data stored within the Asite Platform. Asite API supports REST based interface.

REST Based API: REST (representational state transfer) is an approach for getting information content from a Web site by reading a designated Web page that contains an XML (Extensible Markup Language) file that describes and includes the desired content.

This essentially means that you can send an HTTP GET to call exposed methods, and you'll get back an XML document in return.

The Asite API defines the vocabulary and calling conventions the programmer should employ to use the services. The Asite API consists of a set of callable methods, and API endpoints and expects all data to be UTF-8 encoded. The Asite API thus enables the combination of multiple services into new applications or mashups.

The REST Based API uses the RESTEasy framework. RESTEasy is a JBoss project that provides a framework to build RESTful Web Services and RESTful Java applications. It is a fully certified and portable implementation of the JAX-RS (Java API for RESTful Web Services) specification.

The Asite Portlet container is based on portlet specification which is an open standard. The Asite Platform is open for our users and partners to develop their own mashups and incorporate them into their personalised views or even share them with colleagues, the supply-chain and beyond. The Asite Portlet enables you to bring the content from your SharePoint web-part into the Asite portal homepage in real-time. You can pull supply chain data from the Asite platform straight into your SharePoint web-parts. Asite Portlet container runs on top of LifeRay Portal which is JSR-168 and JSR- 286 (both are portlet specification complaint).

Asite API Services are designed to support the requirements of multiple entities, namely:

- *Individual users,*
- *Customer Organisations,*
- *Third Party systems, and*

- *Public data access*

API framework:

- is independent of Client Languages used in their applications;
- *is independent of Client Web Browser and is scalable for Component interactions;*
- *supports independent deployment of components and field selectors;*
- *immediately integrates with any applications that uses Asite API;*
- *manage and respect data validations, workflow and security of information;*
- *requires authentication for user credentials. This is a must for any request being received in Asite Platform or sent from Asite Platform.*
- *can receive HTTP requests and sending back XML data to Client Applications accessing data from internal and external applications;*
- *is flexible for users to specify a list of fields that can be sent with the request.*

API Rate Limit

- We have applied default API rate limit at org level; an organization can make maximum of 50000 API calls in a day (i.e. last 24 hours). These API calls may include multiple calls to same API or different APIs. The total of these calls should not exceed daily rate limit of 50000.
- If the rate limit is exceeded, it will throw an error “Api rate limit exceeded for orgId: <orgId>” with response status code 429.

3. Architectural Overview

The following diagrams present an Architectural overview of the Asite API

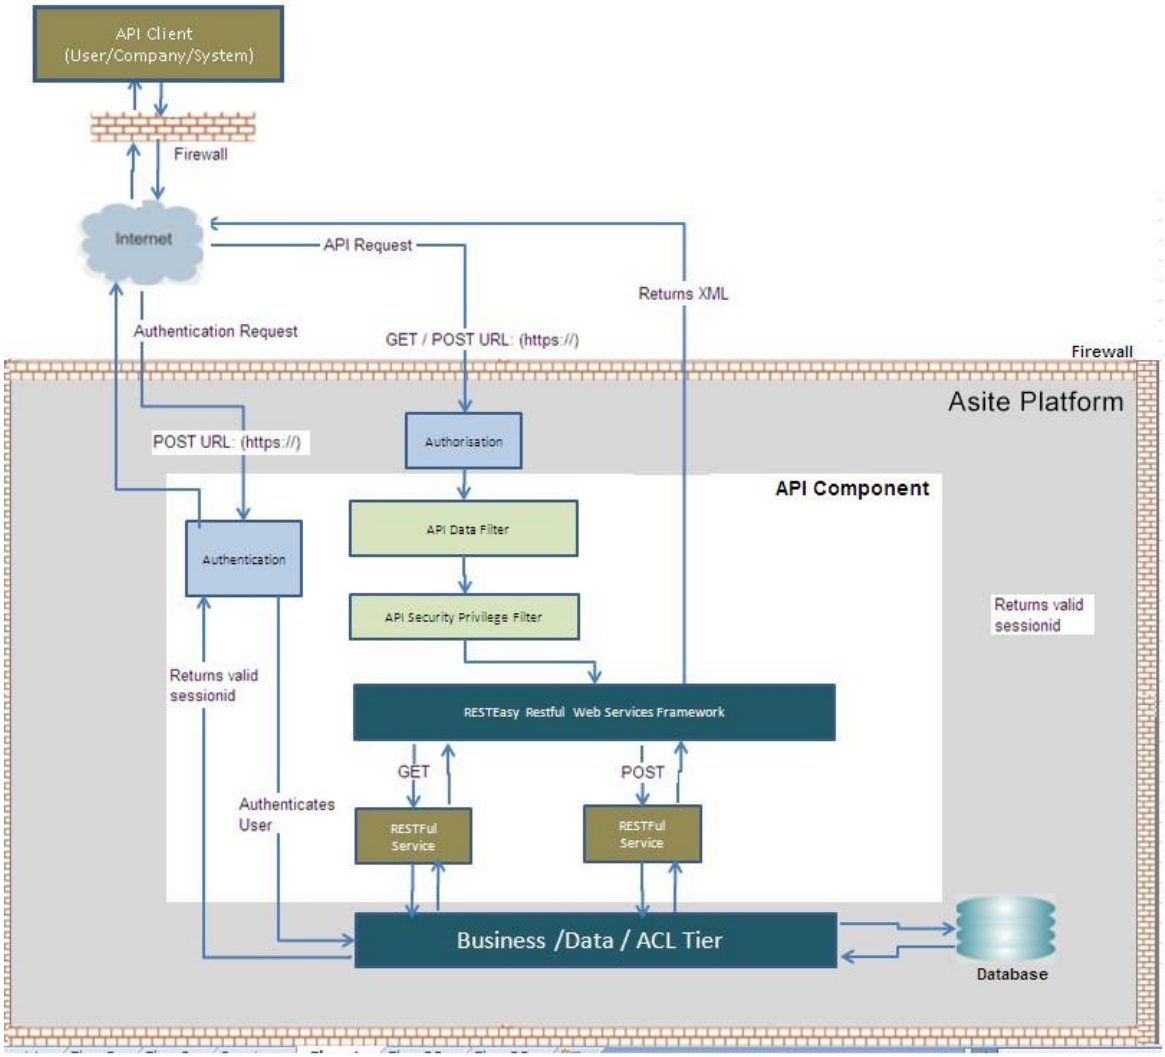

Figure 1: Asite Platform API Component

4. Asite API Services

The Asite platform's API ecosystem is a robust interface that allows seamless integration with other systems, enabling a two-way flow of data. This functionality is crucial for businesses that rely on up-to-date information across various software applications. The Asite API facilitates the creation of custom solutions, allowing developers to tailor the platform to their specific needs. By leveraging these APIs, organizations can enhance their operational efficiency, automate workflows, and foster collaboration across different platforms. With the Asite API, developers have the tools they need to build powerful integrations that can transform the way businesses operate, making data more accessible and actionable. This aligns with the broader trend in technology towards interconnected systems, where data can flow freely and securely, providing a foundation for innovation and growth. The Asite platform, with its comprehensive API suite, stands as a testament to the potential of open, collaborative development in driving business success in the digital age.

5. Asite API Library

Asite API library lists all API Business Objects and Services which are currently available. Asite API library is constantly being extended for new Business Objects and Services on a regular basis enabling users to obtain information from the Asite Platform with ease.

5.1. REST Based API Functions

The table below lists the REST Based API functions with a brief description:

Sr. No.	API Function Name	Details
1.	Login API Service	User will need to login to Asite platform before making any API call to retrieve data.
2.	Workspace List API Service	Returns an XML with a list of Workspaces the logged in user has access to along with URIs to retrieve team directory, list of folders for individual workspaces and the list of Form Types assigned to the workspace (to which the logged user has access to).
3.	Workspace Team Directory API	Returns an XML with a list of users having access with roles to the workspace.

4.	Workspace Folder List API	Returns an XML with a list of folders within a Workspace with a URI to retrieve documents list and list of incomplete doc items within the workspace.
5.	Document List API	Returns an XML with a list of documents (first 250 documents) within a folder along with document Attribute.

	Service	Function also returns a URI for retrieving next set of 250 documents within the folder.
6.	Document List Next Page API	Returns an XML with next set of 250 documents within the folder along with document Attribute. Function also returns a URI for retrieving next set of 250 documents within the folder.
7.	Form Type List API	Returns the detailed list of Form types assigned to the workspace with URI for retrieving form details for
8.	Forms List API	Returns a detailed list of Forms for a Form type within a specified workspace that the logged in user has access to.
9.	Incomplete Form actions API	Returns XML with details of the logged in user's incomplete actions on the forms for a Form Type
10.	Publish Document	Publishes a document to a given Workspace Folder and returns the Document Revision access link
11.	Folder Details	Returns an XML that contains the details of the workspace folders that the user has access to.
12.	Create Folder	Allows creation of a folder within a Workspace and assign permissions on the folder.
13.	Update Folder	Allow to update folders name and permission of a specified Workspace folder
14.	Doc Access Details List	Return an XML with list of Access Detail of user selected Document
15.	Create Workspace	Creates a workspace with user specified details and returns XML string which contains the newly created workspace id and its success/failure status message.

16.	Create Workspace Template	Creates a workspace template with user specified details and returns XML string which contains the newly created workspace template_id and its success/failure status message.
17.	Save Additional Details API Service	Saves the Additional details of Workspace
18.	Assign Companies to workspace API Service	Assigns Companies to Workspace
19.	Assign Administrators to Workspace API	Assigns Administrators to Workspace

	Service	
20.	Save Workspace Settings API service	Save All Workspace Settings
21.	Create Asite Organisation	Creates an organisation with user specified details and returns XML string which contains the newly created organisation_id and its success/failure status message.
22.	Create Asite User	Creates a user with user specified details and returns XML string which contains the newly created user_id and its success/failure status message.
23.	Get Country List for Portal API Service	Returns the Country list
24.	Link Document	Creates a link document with user specified details and returns XML string which contains the newly created link document_id and its success/failure status message.
25.	Import Document Access History	Creates a document access action record with user specified details and returns XML string which contains the newly created document access_id and its success/failure status message.
26.	Workspace Users List API Service	Returns list of active Users assigned to Workspace

27.	Workspace Roles API Service	Returns list of User Roles active in a Workspace
28.	Workspace POI (Purpose of Issue) List API Service	Returns list of Purpose of Issue values available in a Workspace
29.	Workspace DocStatus List API Service	Returns list of Document Status values available in a Workspace
30.	Workspace DrawingSeries List API Service	Returns list of Drawing Series assigned In a Workspace
31.	Organisation List API Service	Returns list of active Organisations registered in Asite
32.	Organisation User List API Service	Returns list of Active/All Users registered in Asite and associated to an Organisation
33.	ApplicationType List	Returns list of available Application Types

	API Service	
34.	DataCenter List API Service	Returns list of available Data Centres for Workspace creation
35.	Workspace Status Type API Service	Returns Types of Workspace Statuses used in Workspace update.
36.	Workspace Subscription Type API Service	Returns list of Subscription Types available for Workspace creation / editing
37.	Workspace Branding List API Service	Returns list of available Branding IDs for assigning to a Workspace
38.	PaperSize List API Service	Returns list of Paper Size values for assignment during Document publish.
39.	Available Attributes for Workspace API Service	Returns list of active attributes available in Workspace

40.	Project Phases API Service	Returns list of Project Phases for definition while creating / editing a Workspace
41.	Country List API Service	Returns list of Country names for definition while creating / editing a Workspace
42.	Region List for Country API Service	Returns list of regions for definition while creating / editing a Workspace
43.	Workspace Setting Sort Options API Service	Returns list of active Document List Sort Options, Document Basket Sort Options, Document Distribution Report Sort Options, Form List Sort Options, Form Basket Sort Options, Form Distribution Report Sort Options, Comment Register Sort Options.
44.	Workspace UserGroup List API	Returns list of active User Groups accessible to User
45.	Create Workspace Role API	Allows to create a new Workspace Role
46.	Assign/Remove Users Workspace Role API	Allows to Assign/Remove users from Workspace Role
47.	Action list for Audit trail	Returns list of Audit Trail action names

	API service	
48.	Get User by Email Address API Service	Returns list of users matching the Email address
49.	Logout API	Used for logging out and returns the status of logout – whether the user was able to successfully logout of the application
50.	Forms Data Object List API	Returns the data object List of forms for the given user.

51.	Document Search API	It returns a list of documents based on specified criteria provided in JSON format.
52.	Document Download API	Download specific document
53.	Document Status change API	Allow to change the status of a document within a Workspace
54.	Update Asite User API	Allow to update details of Asite user.
55.	Workspace clone API	Allow to clone the workspace from workspace template
56.	User projects and role details API	Returns provided User's projects along with roles details.
57.	Form Search API	Returns a list of forms based on specified criteria provided in JSON format.
58.	Task Search API	Returns a list of tasks (Documents/Forms) based on specified criteria in JSON.
59.	Link Type Update API	Allow to update link type of Linked Files.
60.	Manage Custom Attribute Values	This API can be used to Add/Edit/Delete attribute values Dropdown/multi-select custom attributes.
61.	Custom Attribute details	This API can be used to retrieve details of Dropdown and Multi selection check box type Custom attribute values.
62.	Create Placeholder with Custom Attributes API	This API can be used to Create new Placeholder with Custom Attributes.
63.	Upload File with Custom Attributes API.	This API can be used to Upload File with Custom Attributes.
64.	Get File History API	This API can be used to get File History.
65.	Get Quality Plan Listing	This API is used to get Quality Plan Listing based on projectId

66.	Get Quality Plan Association	This API can be used to get Quality plan Association
67.	Get Quality Plan Location	This API can be used to get Quality plan Location
68.	Get Quality Plan Activity	This API can be used to get Quality plan Activity
69.	Attachment Download API	Download specific attachment
70.	Quality Plan Details API	Returns Activity configurations and Location details along with its associations for a specific plan.
71.	Document Status History API	This API is used to get document status history.
72.	Document Comments API	This API is used to get document comments.
73.	Edit Form Message API	Update the existing ORI forms for the given formId and messageId.
74.	Get Users API	The Get Users API returns list of users for a particular organisation.
75.	Custom Attribute Set Details API	This API is used to get custom attribute set details, hierarchical attribute set details and folder details.
76.	Team Directory API	The Team Directory API returns a list of users having access with roles to the workspace.
77.	Quality Plan Location Details from Template	Returns Locations details along with associations for a specific plan based on cloned project from template
78.	Quality Plan Activities Details from Template	Returns Activities details for a specific plan based on cloned project from template

79.	User Profile Details API	This API returns basic details of the user profile.

6. Using REST based API Functions

Please refer section 8 around usage rules before attempting to use these APIs

6.1. Login API Service

Objective
This API is used to login and create a session on Asite

Usage Rules

- Use the following cURL command to Login to API application:

```
curl --location 'https://dmsqaak.asite.com/apilogin/' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'emailId=<EmailID>' \
--data-urlencode 'password=<Password>'
```

Input Parameters

Parameter Name	Description
emailId	Email ID used for logging on to Asite Platform
password	Password for login
https://dms.asite.com/apilogin/	URI to login
Accept	Set request header

- Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml.
- By default, API is returning XML in response - to get JSON in response specify Accept header in request.

  For XML - Accept : application/xml

For JSON - Accept : application/json.

Sample Return Json:

This will return the login details and the URI for the workspace list that the logged in user has access to, in JSON format as follows:

{
"UserProfile": {
"User_Name": "Vishal Vadgama (5306)",
"User_FName": "Vishal",
"Organisation": "Asite Solutions",
"subscriptionPlanId": 5,
"OrganisationId": "3$$99035I",
"language": "en_GB",
"eGRNTimeoutDuration": 0,
"URI": [
"https://dmsqaak.asite.com/api/workspace/workspacelist",
"https://dmsqaak.asite.com/api/workspace/bimworkspacelist",
"https://dmsqaak.asite.com/api/model/modellist",
"https://dmsqaak.asite.com/api/model/createmodel",
"https://dmsqaak.asite.com/api/model/uomlist",
"https://dmsqaak.asite.com/api/model/bimschemalist",
"https://dmsqaak.asite.com/api/model/properties",
"https://dmsqaak.asite.com/api/workspace/logout",
"https://dmsqaak.asite.com/api/create/createWorkspace",
"https://dmsqaak.asite.com/api/workspace/workspacebrandinglist",
"https://dmsqaak.asite.com/api/view/getAllViewDetail",
"https://dmsqaak.asite.com/api/view/getAllViewThumbnail",
"https://dmsqaak.asite.com/api/view/getHSFForView",

"https://dmsqaak.asite.com/api/view/getAllTileImagesOfModel",

"https://dmsqaak.asite.com/api/collateral/getorglist",

"https://dmsqaak.asite.com/api/collateral/getUserListForOrg",

"https://dmsqaak.asite.com/api/collateral/getApplicationTypes",

"https://dmsqaak.asite.com/api/collateral/getDataCenterList",
"https://dmsqaak.asite.com/api/collateral/getWorkspaceStatusList",

"https://dmsqaak.asite.com/api/collateral/getWorkspaceSubscriptionType",

"https://dmsqaak.asite.com/api/collateral/getWorkspaceSettingSortOption",

"https://dmsqaak.asite.com/api/collateral/getProjectPhaseTypes",

"https://dmsqaak.asite.com/api/collateral/getCountryList",

"https://dmsqaak.asite.com/api/collateral/getRegionListforCountry",

"https://dmsqaak.asite.com/api/collateral/getActionListForAuditTrail",

"https://dmsqaak.asite.com/api/portal/createUser",

"https://dmsqaak.asite.com/api/portal/updateUser",

"https://dmsqaak.asite.com/api/portal/createOrganization",

"https://dmsqaak.asite.com/api/portal/getCountryListForPortal",

"https://dmsqaak.asite.com/api/collateral/getUserProfileByEmailId",

"https://adoddleqaak.asite.com/commonapi/workspace/saveClonedWorkspace",

"https://adoddleqaak.asite.com/commonapi/user/getUserWorkspaceAndRoleByUserId",

"https://dmsqaak.asite.com/api/collateral/getOrgsWithDomain",

"https://adoddleqaak.asite.com/commonapi/documentsearchapi/search",

"https://adoddleqaak.asite.com/commonapi/formsearchapi/search",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/updateAttributeValues",

"https://adoddleqaak.asite.com/commonapi/tasksearchapi/search",

"https://adoddleqaak.asite.com/commonapi/document/updateLinkType",

"https://adoddleqaak.asite.com/commonapi/form/getFormStatusHistory",

"https://adoddleqaak.asite.com/commonapi/form/getFormDistributionHistory",

"https://adoddleqaak.asite.com/commonapi/organization/addressTypes"

],

"User_Screenname": 28003,

"UserSubscriptionId": 1,

"UserImageName": "",
"SessionTimeoutDuration": 150,

"UserID": "28003$$TSMlRx",

"User_emailid": "vvadgama@asite.com",

"Sessionid": "GTCgk1njYdLaSrY1ph2iKUlj2S7UmK6M8iz64UgnZFA="

}

}

Sample Return Xml:

This will return the login details and the URI for the workspace list that the logged in user has access to, in XML format as follows:

https://adoddleak.asite.com/commonapi/workspace/saveClonedWorkspace</URIhttps://adoddleak.asite.com/commonapi/user/getUserWorkspaceAndRoleByUserId</URI<?xml

version="1.0" encoding="UTF-8"?>
<UserProfile>
<UserID>28003$$JybeBU</UserID>
<User_emailid>vvadgama@asite.com</User_emailid>
<User_FName>Vishal</User_FName>
<User_Name>Vishal Vadgama (5306)</User_Name>
<User_Screenname>28003</User_Screenname>
<Organisation>Asite Solutions</Organisation>
<OrganisationId>3$$7l4MhH</OrganisationId>
<Sessionid>743FdAuJOpemR0ZQjz4cRNMZZVXtZZ2vLnM0Qugnfro=</Sessionid>
<SessionTimeoutDuration>150</SessionTimeoutDuration>
<UserSubscriptionId>1</UserSubscriptionId>
<subscriptionPlanId>5</subscriptionPlanId>
<eGRNTimeoutDuration>0</eGRNTimeoutDuration>
<language>en_GB</language>

<URI>https://dmsqaak.asite.com/api/workspace/workspacelist</URI>
<URI>https://dmsqaak.asite.com/api/workspace/bimworkspacelist</URI>
<URI>https://dmsqaak.asite.com/api/model/modellist</URI>
<URI>https://dmsqaak.asite.com/api/model/createmodel</URI>
<URI>https://dmsqaak.asite.com/api/model/uomlist</URI>
<URI>https://dmsqaak.asite.com/api/model/bimschemalist</URI>
<URI>https://dmsqaak.asite.com/api/model/properties</URI>
<URI>https://dmsqaak.asite.com/api/workspace/logout</URI>
<URI>https://dmsqaak.asite.com/api/create/createWorkspace</URI>
<URI>https://dmsqaak.asite.com/api/workspace/workspacebrandinglist</URI>
<URI>https://dmsqaak.asite.com/api/view/getAllViewDetail</URI>
<URI>https://dmsqaak.asite.com/api/view/getAllViewThumbnail</URI>
<URI>https://dmsqaak.asite.com/api/view/getHSFForView</URI>
<URI>https://dmsqaak.asite.com/api/view/getAllTileImagesOfModel</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getorglist</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getUserListForOrg</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getApplicationTypes</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getDataCenterList</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getWorkspaceStatusList</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getWorkspaceSubscriptionType</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getWorkspaceSettingSortOption</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getProjectPhaseTypes</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getCountryList</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getRegionListforCountry</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getActionListForAuditTrail</URI>
<URI>https://dmsqaak.asite.com/api/portal/createUser</URI>
<URI>https://dmsqaak.asite.com/api/portal/updateUser</URI>
<URI>https://dmsqaak.asite.com/api/portal/createOrganization</URI>
<URI>https://dmsqaak.asite.com/api/portal/getCountryListForPortal</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getUserProfileByEmailId</URI>
<URI>https://adoddleqaak.asite.com/commonapi/workspace/saveClonedWorkspace</URI>
<URI>https://adoddleqaak.asite.com/commonapi/user/getUserWorkspaceAndRoleByUserId</URI>
<URI>https://dmsqaak.asite.com/api/collateral/getOrgsWithDomain</URI>
<URI>https://adoddleqaak.asite.com/commonapi/documentsearchapi/search</URI>
<URI>https://adoddleqaak.asite.com/commonapi/formsearchapi/search</URI>
<URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/updateAttributeValues</URI>
<URI>https://adoddleqaak.asite.com/commonapi/tasksearchapi/search</URI>
<URI>https://adoddleqaak.asite.com/commonapi/document/updateLinkType</URI>
<URI>https://adoddleqaak.asite.com/commonapi/form/getFormStatusHistory</URI>
<URI>https://adoddleqaak.asite.com/commonapi/form/getFormDistributionHistory</URI>
<URI>https://adoddleqaak.asite.com/commonapi/organization/addressTypes</URI>

<UserImageName>https://www.asite.com/profilefiles/member_photos/photo_844264.jpg?v=201506-09 06:55:35.62</UserImageName>

```
</UserProfile>

Schema (XSD) of the Return XML
 <?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
  <xs:element name="UserProfile">
            <xs:complexType>
    <xs:sequence>
      <xs:element ref="UserID"/>
      <xs:element ref="User_emailid"/>
      <xs:element ref="User_FName"/>
      <xs:element ref="User_Screenname"/>
      <xs:element ref="Organisation"/>
      <xs:element ref="OrganisationId"/>
      <xs:element ref="Sessionid"/>
      <xs:element maxOccurs="2" ref="URI"/>
    </xs:sequence>
  </xs:complexType>
  </xs:element>
  <xs:element name="UserID" type="xs:string"/>
  <xs:element name="User_emailid" type="xs:string"/>
  <xs:element name="User_FName" type="xs:NCName"/>
  <xs:element name="User_Screenname" type="xs:NCName"/>
  <xs:element name="Organisation" type="xs:string"/>
<xs:element name="OrganisationId" type="xs:string"/>
  <xs:element name="Sessionid" type="xs:string"/>
  <xs:element name="URI" type="xs:anyURI"/>
</xs:schema>
```

- Copy the session id from the data returned for further API calls.
- The URI tags carry the URL for the API call that can be made after login

Returned Member URL Resources

- <URI>https://dms.asite.com/api/workspace/workspacelist</URI> is the URL you use to return list of workspaces
- <URI>https://dms.asite.com/api/workspace/logout</URI> is the URL you use to logout

Default Fields Returned

The above XML returns the following values using the login API function call:

Field Name	Description

UserID	Returns the database id of the user
User_emailid	Returns the email id of the user
User_FName	Returns the first name of the User
User_Screenname	Returns the screen name as specified by user in My Account
Organisation	Returns the Organisation name associated with the user
OrganisationId	Returns the OrganisationId associated with the user
sessionID	Returns the dynamic sessionID generated by Asite

Note: The steps listed here are outline of general logic that needs to be used in conjunction with the business logic of each application being developed.

6.2. Workspace List API Service

Objective
The Workspace API returns a list of projects a logged in user has access to. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml to execute the Workspace List API Service.

By default, API is returning XML in response - to get JSON in response specify Accept header in request.

For XML - Accept : application/xml

For JSON - Accept : application/json

Usage Rules

- User must be logged in to Asite Platform using Login API Function
- Use the following cURL command to list Workspaces of the specified user:

**curl --location 'https://dmsqaak.asite.com/api/workspace/workspacelist' **

--header 'Cookie: ASessionID= <ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for workspacelist API call from the resultant XML of Login API call
Accept	Set request header

Note: Replace the text in BLUE including"<>" with the data required as follows

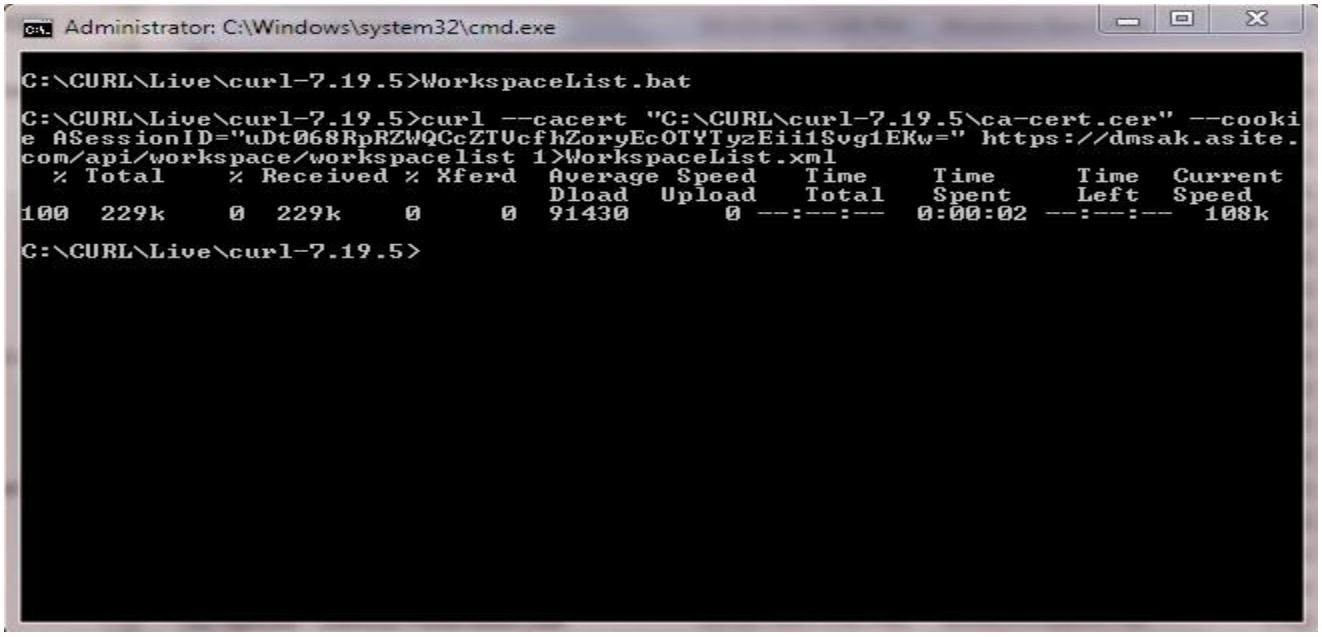

Sample Return JSON:

This will return the workspace list that the logged in user has access to and the URIs for the API calls that can be made after workspace list API call has been made in URI array in the resultant json as follows:

{

"asiteDataList": {

"workspaceVO": [

{

"Workspace_Status": "Open",

"Workspace_Subscription": "Subscription based",

"IsSubscriptionBased": true,

"workspaceTypeId": "0$$t8W88Q",

"URI": [

"https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/folders",

"https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/teamdirectory/-1/1$$gOYkUs",

"https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/form/formtypelist",

"https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/createWorkspaceRole",
"https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/getFolderPermissionList",

"https://adoddleqaak.asite.com/commonapi/role/54784$$8YjxDf/AssignWorkspaceRole",

"https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/getWorkspaceUserGroup",

"https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getWorkspaceUsers",

"https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getWorkspaceroles",

"https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getpoiForWorkspace",

"https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getDocStatusForWorkspace",

"https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getDrawingSeriesForWorkspace",

"https://adoddleqaak.asite.com/commonapi/batchPrint/54784$$8YjxDf/batchPrintProcess",

"https://adoddleqaak.asite.com/commonapi/document/updateLinkType",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/getAttributeValue",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/saveCustomAttributeSet",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/saveCustomAttributes",

"https://adoddleqaak.asite.com/commonapi/distributeDocument/distributeDocument",

"https://adoddleqaak.asite.com/commonapi/distributeApp/distributeApp",

"https://adoddleqaak.asite.com/commonapi/form/createFormMsg",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/getProjectCustomAttributes",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/getProjectCustomAttributeSet",

"https://adoddleqaak.asite.com/commonapi/manageAttribute/getAttributeSetDetails",

"https://adoddleqaak.asite.com/commonapi/qaplan/getPlanAssociation",
"https://adoddleqaak.asite.com/commonapi/qaplan/getPlanLocation",

"https://adoddleqaak.asite.com/commonapi/qaplan/getPlanActivities",

"https://adoddleqaak.asite.com/commonapi/qaplan/getQualityPlanList",

"https://adoddleqaak.asite.com/commonapi/workspace/teamdirectory"

],

"canAccessWithoutSubscription": false,

"Workspace_Name": "! 00_Denis Mobile Test Site_UK",

"projFinishSQLDate": 0,

"numUnreadForms": 0,

"isAkamaiAccelerationON": false,

"dataCenterId": 1,

"userSubscriptionType": "Subscribed",

"numUnreadDocs": 0,

"IsUserSubscribed": true,

"Client": "Asite Solutions",

"p_space_type_id": 1,

"logo_notes": "project54784_projects_photo_4.jpg",

"space_type_id": "1$$EOf1G6",

"projectFavFlag": true,

"Workspace_Id": "54784$$8YjxDf",

"cdnType": 1,

"Installed_Application": "Document, Workflow & Forms Manager",

"BIM": false,

"shortSpaceTypeName": "PWF",

"collabUrl": "https://dmsqaak.asite.com/api",

"numOverdueActionForms": 0,

"defaultViewerID": 7,

"demoOrganization": false,
"adoddleUrl": "https://adoddleqaak.asite.com/",

"defaultViewerName": "Universal Web Viewer",

"numUnreadComments": 0,

"clientOrgID": 3,

"apdFolderId": 0,

"projStartSQLDate": 0,

"templateProjectId": "0$$xSsYe7",

"enableCommentReview": false

}

```
        ]
    }
}
```

Sample Return XML:

This will return the workspace list that the logged in user has access to and the URIs for the API calls that can be made after workspace list API call has been made in <URI> tag in the resultant xml as follows:

https://adoddleak.asite.com/commonapi/document/updateLinkType</URIhttps://adoddleak.asite.com/commonapi/manageAttribute/getAttributeValue</URI*<?xml version="1.0" encoding="UTF-8"?>*
<asiteDataList>
<workspaceVO BIM="false">
<Workspace_Id>54784$$8YjxDf</Workspace_Id>
<Workspace_Name>! 00_Denis Mobile Test Site_UK</Workspace_Name>
<Installed_Application>Document, Workflow & Forms Manager</Installed_Application>
<Client>Asite Solutions</Client>
<Workspace_Status>Open</Workspace_Status>
<Workspace_Subscription>Subscription based</Workspace_Subscription>
<IsUserSubscribed>true</IsUserSubscribed>
<IsSubscriptionBased>true</IsSubscriptionBased>
<userSubscriptionType>Subscribed</userSubscriptionType>
<URI>https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/folders</URI>
<URI>https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/teamdirectory/-1/1$$gOYkUs</URI>
<URI>https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/form/formtypelist</URI>
<URI>https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/createWorkspaceRole</URI>
<URI>https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/getFolderPermissionList</URI>

<URI>https://adoddleqaak.asite.com/commonapi/role/54784$$8YjxDf/AssignWorkspaceRole</URI>
<URI>https://dmsqaak.asite.com/api/workspace/54784$$8YjxDf/getWorkspaceUserGroup</URI>
<URI>https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getWorkspaceUsers</URI>
<URI>https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getWorkspaceroles</URI>
<URI>https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getpoiForWorkspace</URI>

<URI>https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getDocStatusForWorkspace</URI>

<URI>https://dmsqaak.asite.com/api/collateral/54784$$8YjxDf/getDrawingSeriesForWorkspace</URI>

<URI>https://adoddleqaak.asite.com/commonapi/batchPrint/54784$$8YjxDf/batchPrintProcess</URI>
<URI>https://adoddleqaak.asite.com/commonapi/document/updateLinkType</URI>
<URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/getAttributeValue</URI>

<URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/saveCustomAttributeSet</URI>
<URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/saveCustomAttributes</URI>

```
    <URI>https://adoddleqaak.asite.com/commonapi/distributeDocument/distributeDocument</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/distributeApp/distributeApp</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/form/createFormMsg</URI>

<URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/getProjectCustomAttributes</URI>

<URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/getProjectCustomAttributeSet</UR
I>
    <URI>https://adoddleqaak.asite.com/commonapi/manageAttribute/getAttributeSetDetails</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/qaplan/getPlanAssociation</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/qaplan/getPlanLocation</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/qaplan/getPlanActivities</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/qaplan/getQualityPlanList</URI>
    <URI>https://adoddleqaak.asite.com/commonapi/workspace/teamdirectory</URI>
    <clientOrgID>3</clientOrgID>
    <projStartSQLDate>0</projStartSQLDate>
    <projFinishSQLDate>0</projFinishSQLDate>
    <numUnreadDocs>0</numUnreadDocs>
    <numUnreadForms>0</numUnreadForms>
    <numUnreadComments>0</numUnreadComments>
    <logo_notes>project54784_projects_photo_4.jpg</logo_notes>
    <space_type_id>1$$EOf1G6</space_type_id>
    <p_space_type_id>1</p_space_type_id>
    <defaultViewerID>7</defaultViewerID>
    <defaultViewerName>Universal Web Viewer</defaultViewerName>
    <shortSpaceTypeName>PWF</shortSpaceTypeName>
    <projectFavFlag>true</projectFavFlag>
    <canAccessWithoutSubscription>false</canAccessWithoutSubscription>
    <demoOrganization>false</demoOrganization>
    <apdFolderId>0</apdFolderId>
    <dataCenterId>1</dataCenterId>
    <isAkamaiAccelerationON>false</isAkamaiAccelerationON>
    <workspaceTypeId>0$$t8W88Q</workspaceTypeId>
<templateProjectId>0$$xSsYe7</templateProjectId>
    <collabUrl>https://dmsqaak.asite.com/api</collabUrl>
    <adoddleUrl>https://adoddleqaak.asite.com/</adoddleUrl>
    <numOverdueActionForms>0</numOverdueActionForms>
<cdnType>1</cdnType>
    <enableCommentReview>false</enableCommentReview>
  </workspaceVO>
</asiteDataList>
```


Schema (XSD) of the Return XML


```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
	<xs:element name="asiteDataList">
		<xs:complexType>
			<xs:sequence>
				<xs:element maxOccurs="unbounded" ref="workspaceVO"/>
			</xs:sequence>
		</xs:complexType></xs:element>
	<xs:element name="workspaceVO">
		<xs:complexType>
			<xs:sequence>
				<xs:element ref="Workspace_Id"/>
				<xs:element ref="Workspace_Name"/>
				<xs:element ref="Installed_Application"/>
				<xs:element ref="Client"/>
				<xs:element ref="Workspace_Status"/>
				<xs:element ref="Workspace_Subscription"/>
				<xs:sequence minOccurs="0">
					<xs:element ref="Start_Date"/>
					<xs:element ref="End_Date"/>
				</xs:sequence>
				<xs:element ref="PostCode"/>
				<xs:element minOccurs="0" ref="Tags"/>
				<xs:element maxOccurs="unbounded" ref="URI"/>
			</xs:sequence>
			<xs:attribute name="BIM" use="required" type="xs:boolean"/>
		</xs:complexType>
	</xs:element>
	<xs:element name="Workspace_Id" type="xs:int"/>
	<xs:element name="Workspace_Name" type="xs:string"/>
	<xs:element name="Installed_Application" type="xs:string"/>
	<xs:element name="Client" type="xs:string"/>
	<xs:element name="Workspace_Status" type="xs:NCName"/>
	<xs:element name="Workspace_Subscription" type="xs:string"/>
	<xs:element name="Start_Date" type="xs:NMTOKEN"/>
	<xs:element name="End_Date" type="xs:NMTOKEN"/>
	<xs:element name="PostCode" type="xs:string"/>
	<xs:element name="Tags">
	<xs:complexType/>
	</xs:element>
	<xs:element name="URI" type="xs:anyURI"/>
</xs:schema>
```

Returned Member URL Resources:

- <URI> https://dms.asite.com/api/workspace/3$$mHqrFB/folders</URI> is the URL you use to return list of Folders within the Workspace
- <URI>https://dms.asite.com/api/workspace/3$$mHqrFB/teamdirectory//-1/-

1$$5triv9</URI> is the URL you use to return team Directory of the Workspace

- <URI>https://dms.asite.com/api/workspace/308$$mHqrFB/form/formtypelist</URI> is the URL you use to return list of form types within the workspace
- <URI>https://dmsak.asite.com/api/workspace/74694$$GgGwwk/createWorkspaceRole</URI> is the URL you use to create Workspace Role
- <URI>https://adoddleak.asite.com/commonapi/role/74694$$GgGwwk/AssignWorkspaceRole</URI> is the URL you use to assign Workspace Role.
- <URI>https://dmsak.asite.com/api/workspace/74694$$GgGwwk/getWorkspaceUserGroup</URI> is the URL you use to return User Group of Workspace.
- <URI>https://dmsak.asite.com/api/collateral/74694$$GgGwwk/getWorkspaceUsers</URI> is the URL you use to return Users of Workspace.
- <URI>https://dmsak.asite.com/api/collateral/74694$$GgGwwk/getWorkspaceroles</URI> is the URL you use to return Roles of Workspace.
- <URI>https://dmsak.asite.com/api/collateral/74694$$GgGwwk/getpoiForWorkspace</URI> is the URL you use to return POI of Workspace.
- <URI>https://dmsak.asite.com/api/collateral/74694$$GgGwwk/getDocStatusForWorkspace</URI> is the URL you use to return Document Status of Workspace.
- <URI>https://dmsak.asite.com/api/collateral/74694$$GgGwwk/getDrawingSeriesForWorkspace</URI> is the URL you use to return Drawing Series of Workspace.
- <URI>https://adoddleak.asite.com/commonapi/document/updateLinkType</URI> is the URL you use to update Link type of Linked documents.
- <URI>https://adoddleak.asite.com/commonapi/manageAttribute/getAttributeValue</URI> is the URL you use to get details of Custom Attribute type of Dropdown and Multiselection checkbox.
- <URI>https://adoddleqaak.asite.com/commonapi/workspace/teamdirectory</URI> is the URL of Team Directory API new version where we can filter by workspace name also.

Default Fields Returned

- The above XML returns following values using Workspace List API function call (as per sessionID information sent):

Field Name	Description

Workspace_Id	Returns the hashed Id of the Workspace
Workspace_Name	Returns the name of the Workspace
Installed _Application	Returns the name of the Installed Application
Client	Returns the name of the Workspace Client
Workspace_Status	Returns the status of the Workspace
Workspace_Subscription	Returns the value of Workspace Subscription
PostCode	Returns the Post Code specified in Address of the Workspace
Tags	Returns the tags specified in the Workspace
Start-Date	Returns the Workspace start date
End-Date	Returns the workspace end date

6.3. Workspace Team Directory API Service

Objective

Workspace Team Directory API returns a Workspace Team Directory (List of users having access with roles to the workspace). Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml to execute Workspace Team Directory API Service

Usage Rules

- User must have been logged in to Asite Platform using Login API
- User must have executed Workspace list API to get the URI for team directory
- Use the following cURL command to view the Workspace Team Directory:

**curl --location 'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/teamdirectory/{orgId}/{roleId}' **

--header 'Cookie: ASessionID= <ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for teamdirectory API call from the resultant XML of workspacelist API call

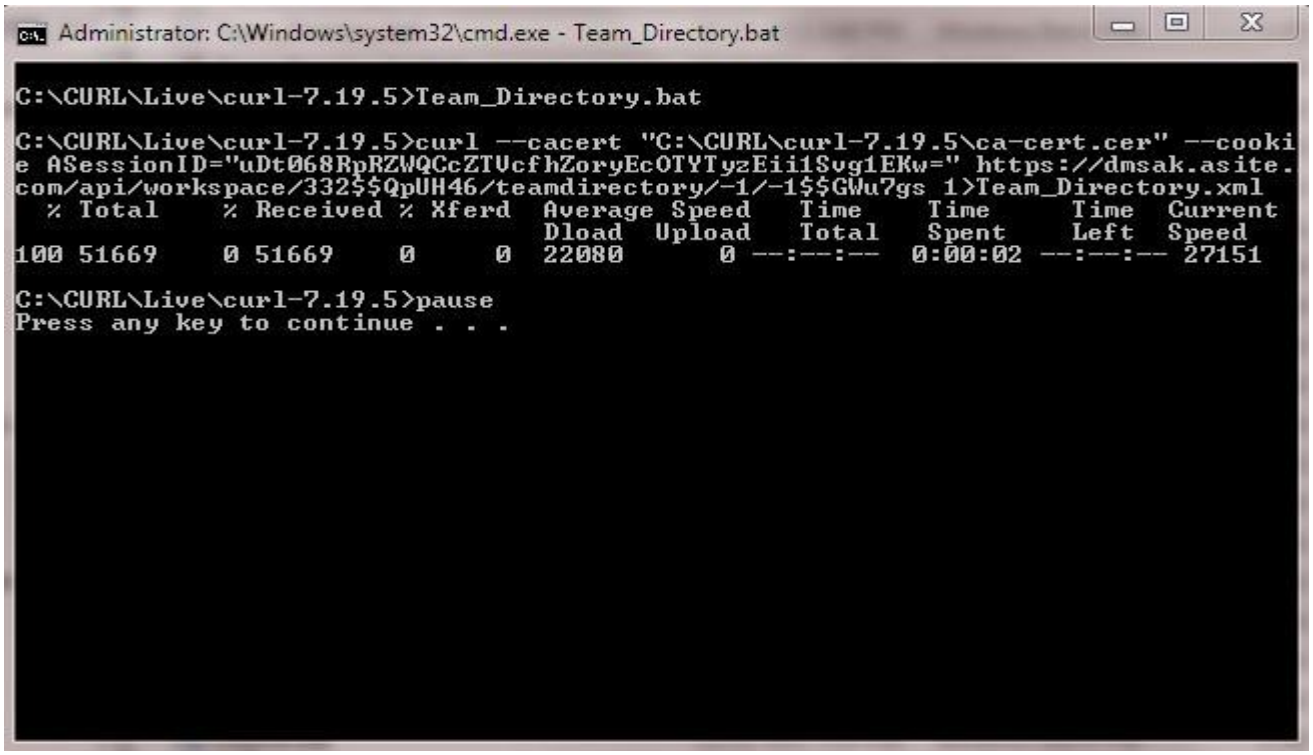

Sample Return Xml:

This will return Team Directory of the specified workspace. The resultant data would be similar to the text as follows:

<?xml version="1.0" encoding="ISO-8859-1"?>
<teamDirTO>
<Workspace_Name> EA CA </Workspace_Name>
<teamDirVO>

```
            <User_Name>Sharmista Jain</User_Name>
            <User_FName>Sharmista</User_FName>
            <User_LName>Jain</User_LName>
            <Organisation>Asite Solutions Ltd.</Organisation>
            <WorkspaceRole>Workspace - Administrator</WorkspaceRole>
            <Telephone></Telephone>
            <Emailid>sjain@asite.com</Emailid>
        </teamDirVO>
        <teamDirVO>
            <User_Name>SR</User_Name>
            <User_FName>SR</User_FName>
            <User_LName>Gore</User_LName>
            <Organisation>Asite Solutions Ltd.</Organisation>
            <WorkspaceRole>Workspace - Administrator, Consultant</WorkspaceRole>
            <Telephone></Telephone>
            <Emailid>sgore@asite.com</Emailid>
        </teamDirVO>
        <teamDirVO>
            <User_Name>TC Bloggs</User_Name>
            <User_FName>TC</User_FName>
            <User_LName>Bloggs</User_LName>
            <Organisation>TC Test Company Ltd</Organisation>
            <WorkspaceRole>Consultant</WorkspaceRole>
            <Telephone></Telephone>
            <Emailid>tc_tctestorg1@tc_testorg1.com</Emailid>
        </teamDirVO>
    </teamDirTO>
```


Schema (XSD) of the Return XML


```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
    <xs:element name="teamDirTO">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="Workspace_Name"/>
                <xs:element maxOccurs="unbounded" ref="teamDirVO"/>
            </xs:sequence>
        </xs:complexType></xs:element>
    <xs:element name="Workspace_Name" type="xs:string"/>
    <xs:element name="teamDirVO">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="User_Name"/>
                <xs:element ref="User_FName"/>
                <xs:element ref="User_LName"/>
                <xs:element ref="Organisation"/>
                <xs:element ref="WorkspaceRole"/>
                <xs:element ref="Telephone"/>
```

```
                    <xs:element ref="Emailid"/>
                </xs:sequence>
            </xs:complexType></xs:element>
        <xs:element name="User_Name" type="xs:string"/>
        <xs:element name="User_FName" type="xs:NCName"/>
        <xs:element name="User_LName" type="xs:NCName"/>
        <xs:element name="Organisation" type="xs:string"/>
        <xs:element name="WorkspaceRole" type="xs:string"/>
        <xs:element name="Telephone" type="xs:string"/>
        <xs:element name="Emailid" type="xs:string"/>
</xs:schema>
```

Default Fields Returned

- The above XML returns the following values using the Team Directory API function call (as per sessionID information sent):

Field Name	Description
Workspace_Name	Returns the name of the Workspace
User_Name	Returns the name of the user assigned to workspace
User_FName	Returns the first name of the User
User_LName	Returns the last name of the User
Organisation	Returns the organisation of the user
WorkspaceRole	Returns the workspace roles of the user assigned. Returns multiple roles as comma separated
Telephone	Returns the Telephone number of the user assigned to workspace
Emailid	Returns the Email address of the user assigned to workspace.

6.4. Workspace Folder List API Service

Objective

Workspace Folder List API returns a list of folders within a Workspace. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Workspace Folders from Workspace List API to execute Workspace Folder List API Service.

Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have executed Workspace list API to get the URI for Folder List
- Use the following cURL command to list the Workspace Folders:

**curl --location 'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folders' **

--header 'Cookie: ASessionID= <ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for folders API call from the resultant XML of workspacelist API call
includeDeactivatedFolders	true - for include deactivated folders in List. false return only active folders list.

```
C:\WINDOWS\system32\cmd.exe

D:\api>curl --data "includeDeactivatedFolders=false" --insecure --cacert ".\ak_api.cer" --cookie ASessionID="osYX8ZHWNUs
fQQGm8WKl2qg8uD2R8SnYDoUY0dNjw6I=" https://dmsak.qa.asite.com/api/workspace/2061092$$k0Ni06/folders  1>WorkspaceFolderLi
st.xml
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100 38821    0 38790  100    31  26138     20  0:00:01  0:00:01 --:--:-- 26138

D:\api>pause
Press any key to continue . . .
```

Sample Return Xml:

This will return details of active folders within a specific project a logged in user has access to and the URIs for the API calls that can be made after workspace folder list API call has been made in <URI> tag in the resultant xml as follows:

<?xml version="1.0" encoding="UTF-8"?>
<asiteDataList>
<folderVO>
<FolderName>All Workspace Documents</FolderName>
<FolderID>5157596$$t36agC</FolderID>
<ParentFolderID>0$$asokdX</ParentFolderID>
<IsMappedWithWorkset>false</IsMappedWithWorkset>
<permissionId>2</permissionId>
<IsActive>true</IsActive>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5157596$$t36agC/firstpage_doclist</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5157596$$t36agC/firstpage/incompleteactiondoclist</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5157596$$t36agC/createnewfolder</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5157596$$t36agC/papersizelist</URI>

```
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5157596$$t36agC/get
AvailableAttributes</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5157596$$t36agC/get
FolderListForLinking</URI>
<folderVO>
<FolderName>250 upload</FolderName>
<FolderID>5729574$$lQcVf6</FolderID>
<ParentFolderID>5157596$$t36agC</ParentFolderID>
<IsMappedWithWorkset>false</IsMappedWithWorkset>
<permissionId>4</permissionId>
<IsActive>true</IsActive>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/first
page_doclist</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/first
page/incompleteactiondoclist</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/upl
oad</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/fold
erdetails</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/cre
atenewfolder</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/upd
atefolder</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/vie
wpermissionhistory</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/get
FolderListForLinking</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/Lin
kDocument</URI>
<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$lQcVf6/doc
statuschange</URI>
<URI>https://portal.asite.com/da/notification?action_id=413&amp;nlid=1_10_2061092_57295
74$$w0YaVJ</URI>
<URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729574$
$lQcVf6/createPlaceholder</URI>
<URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729574$
$lQcVf6/ uploadFileWithCustomAttributes</URI>
<URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729574$
$lQcVf6/ documentHistory</URI>
<folderVO>
<FolderName>250 Upload - 2</FolderName>
<FolderID>5729594$$oFmI8F</FolderID>
<ParentFolderID>5729574$$lQcVf6</ParentFolderID>
<IsMappedWithWorkset>false</IsMappedWithWorkset>
<permissionId>4</permissionId>
<IsActive>true</IsActive>

<URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/fir
stpage_doclist</URI>
```

```
        <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/fir
stpage/incompleteactiondoclist</URI>
 <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/up
load</URI>
 <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/fol
derdetails</URI>
 <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/cr
eatenewfolder</URI>
 <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/up   datefolder</URI>
        <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/vie
wpermissionhistory</URI>
        <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/ge
tFolderListForLinking</URI>
 <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/Li
nkDocument</URI>
 <URI>https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/do
cstatuschange</URI>
 <URI>https://portal.asite.com/da/notification?action_id=413&amp;nlid=1_10_2061092_57295
94$$oJZGxU</URI>
        <URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729594$
$oFmI8F /createPlaceholder</URI>
        <URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729594$
$oFmI8F /uploadFileWithCustomAttributes</URI>
        <URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729594$
$oFmI8F /documentHistory</URI>
        </folderVO>
    </folderVO>
</asiteDataList>
```


Schema (XSD) of the Return XML

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
        <xs:element name="asiteDataList">
                <xs:complexType>
                        <xs:sequence>
                                <xs:element ref="folderVO"/>
                        </xs:sequence>
                </xs:complexType></xs:element>
        <xs:element name="folderVO">
                <xs:complexType>
                        <xs:choice minOccurs="0" maxOccurs="unbounded">
                                <xs:element ref="folderVO"/>
                                <xs:element ref="FolderID"/>
                                <xs:element ref="FolderName"/>
```

```
                                <xs:element ref="ParentFolderID"/>
                                <xs:element ref="URI"/>
                        </xs:choice>
                </xs:complexType></xs:element>
        <xs:element name="FolderID" type="xs:string"/>
        <xs:element name="FolderName" type="xs:string"/>
        <xs:element name="ParentFolderID" type="xs:string"/>
        <xs:element name="URI" type="xs:anyURI"/>
</xs:schema>
```

Returned Member URL Resources:

- <URI>https://dms.asite.com/api/workspace/7$$9JzEGx/folder/127749$$oF6/firstpage_doclist </URI> is the URL you use to return First page of doc List within the Workspace
- <URI>https://dms.asite.com/api/workspace/7$$9JzEGx/folder/127749$$oF6/firstpage/inc ompleteactiondoclist </URI> is the URL you use to return First page of incomplete actions (doc list) for the logged in user for the Workspace
- <URI>https://dms.asite.com/api/workspace/7$$9J/folder/17991$$5z/upload </URI> is the URL you use to publish document (similar to Simple Upload module) to given Workspace Folder.
- <URI>https://dmsak.asite.com/api/workspace/2080042$$r17d0R/folder/6460507$$yBQnaQ/createnewfolder</URI> is the URL you use to create new folder to given Workspace Folder. Use createnewfolder URI of {All Workspace Documents} FolderName to create new folder at workspace level.
- <URI>https://dmsak.asite.com/api/workspace/2080042$$r17d0R/folder/6460507$$yBQnaQ/updatefolder</URI> is the URL you use to update folder metadata, User/Role permissions and settings of given Workspace folder.
- <URI>https://dmsak.asite.com/api/workspace/2080042$$r17d0R/folder/6460507$$yBQnaQ/docstatuschange</URI> is the URL to you use to change the status of documents of given Workspace folder.
- <URI>https://portal.asite.com/da/notification?action_id=413&nlid=1_10_2080042_6460507$$2QH0gn</URI> is the URL you use to access folder directly.
- <URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/createPlaceholder</URI> is the URL you use to create placeholder with custom attributes of a given Workspace folder.
- <URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/uploadFileWithCustomAttributes</URI> is the URL you use to upload file with custom attributes of a given Workspace folder.
- <URI>https://adoddleak.asite.com/commonapi/workspace/2061092$$k0Ni06/folder/5729594$$oFmI8F/documentHistory</URI> is the URL you use to get file history of a given Workspace folder.

Default Fields Returned

- The above XML returns the following values using Workspace Folder List API function call (as per sessionID information sent):

Field Name	Description
FolderName	Returns the name of the Document Folder
ParentFolderID	Returns the database id of the parent folder
FolderID	Return folder Id
IsMappedWithWorkset	Return is folder mapped with workset
permissionId	Returns permission Id on folder
IsActive	Returns status of folder (Active/Inactive)

6.5. Document List API Service

Objective

The Document List API returns a list of documents in a project folder. Extract session id from the xml of login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Document List from Workspace List API to execute Folder List API Service.

Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml

Usage Rules

- User must be logged in to Asite Platform using Login API Function
- User must have executed Workspace Folder List API to get the URI for Documents List
- Use the following cURL command to list the Documents:

**curl --location 'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/firstpage_doclist' **

--header 'Cookie: ASessionID= <ASessionID>'

- Pick up the URI Tag value for the specific folder name for which the document listing is required.
- Pick up the URI Tag value for the specific folder name for which the incomplete actions document listing is required

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for First page doc list API call from the resultant XML of folders API call
generateShareLink	Optional parameter to specify whether to generate document link or not value can be: **true** : public link **false** : direct/private link(require login)

showLatestRevision	Optional parameter to specify whether to access latest revision or not for link value can be :
	true : access latest revision of document **false** : access revision on which link was created ACCESS can be view/download based on openAndView option
notifiyOnDownload	Optional parameter to specify whether to send mail to link creator, when document download using shared link(only receive mail for public link)
openAndView	Optional parameter to specify whether to open document for view or download document when access document using link
expiryAfterDuration	Shared link param which specify unit after that link will expire after specified unit Unit can be h : hours or d : days [1-24] h : after specific hours link will expiry [1-n]d : after specific day link will expiry Example : 9d , 10h
expiryAfterViewCnt	Shared link param which specify ACCESS count after that link will expiry Value can be any number greater than 0

Note: expiryAfterDuration and expiryAfterViewCnt only applied if generateShareLink:true and folder level setting **Enable Public Links** sets to true

In case of generateShareLink:true and (expiryAfterDuration or expiryAfterViewCnt) is not specify then it will generate link which never expiry respect to folder level **Enable Public Links** option.

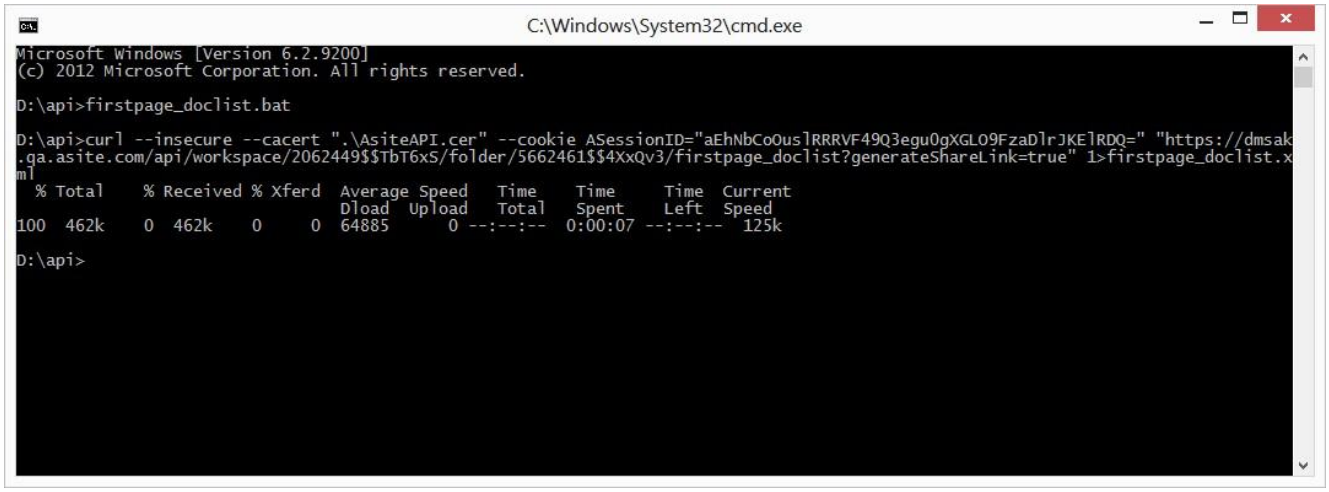

- **Sample Return Xml(one document):**

This will return the details of active documents with latest revisions within a project logged in user has access to and the URIs for the API calls that can be made after workspace folder list API call has been made in <URI> tag in the resultant xml as follows:

<?xml version="1.0" encoding="UTF-8"?>

<asiteDataList>

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/nextpage_doclist/2481/2</URI>

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/nextpage_doclist/2481/3</URI>

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/nextpage_doclist/2481/4</URI>

<documentVO CheckoutStatus="No" isPrivate="No" DocActive="Yes">

<DocumentTypeId>1</DocumentTypeId>

<IsLink>false</IsLink>

<FolderPath>AJ Actions Test Project 10614\! !! ! ASR_001\A0009Test.xls</FolderPath>

<FileType>xls</FileType>

<FileName>A0009Test.xls</FileName>

<HasZipfile>false</HasZipfile>

<isRevCheckOut>false</isRevCheckOut>

<isLatestRevCheckOut>false</isLatestRevCheckOut>
<DocumentId>4190155$$e6ombZ</DocumentId>

<FolderId>5662461$$4XxQv3</FolderId>

<DocRef>A0009Test</DocRef>

<DocTitle>A0009Test</DocTitle>

<IssNo>2</IssNo>

<RevNo>2.0</RevNo>

<RevisionId>5486446$$75WQZm</RevisionId>

<PublisherName>Ajay Parmar</PublisherName>

<PublisherOrg>Asite Solutions Ltd.</PublisherOrg>

<PublishedDate>17-Aug-2015 11:20 IST</PublishedDate>

<PurposeOfIssue>For Change</PurposeOfIssue>

<DocStatus>STATUS_temp</DocStatus>

<FileSize>40KB</FileSize>

<IsLocked>false</IsLocked>

<FileNameDisplay>A0009Test</FileNameDisplay>

<FileSize>40448</FileSize>

<FolderPermissionValue>0</FolderPermissionValue>

<UserId>0</UserId>

<IsFolderPublic>false</IsFolderPublic>

<publisherUserId>547745$$RjflZH</publisherUserId>

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/commentinfo/4190155$$e6ombZ</URI>

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/docaccessdetail/4190155$$e6ombZ</URI>

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/importDocumentAccessHistory/4190155$$e6ombZ</URI>

*<URI>*https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/downloadDocument/5486446$$75WQZm</URI>

```
        <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/d
ownloadDocument/5486446$$75WQZm/5486446</URI>
        <URI>https://adoddle.asite.com/adoddlepublic/dpd/4GR8SK6KXohexpaA</URI>

                <DmCheckOutVO>
                        <checkoutUserId>0$$MYI1MS</checkoutUserId>

                        <checkoutUserName>null null</checkoutUserName>

                        <checkoutOrgname/>

                        <dateCheckedOut/>

                        <checkoutSuccess>false</checkoutSuccess>

                </DmCheckOutVO>

        </documentVO>

</asiteDataList>
```


Schema (XSD) of the Return XML


```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
        <xs:element name="asiteDataList">
                <xs:complexType>
                        <xs:sequence>
                                <xs:element maxOccurs="unbounded" ref="documentVO"/>
                        </xs:sequence>
                </xs:complexType></xs:element>
        <xs:element name="documentVO">
                <xs:complexType>
                        <xs:sequence>
                                <xs:element ref="FolderPath"/>
                                <xs:element ref="FileName"/>
                                <xs:element ref="DocRef"/>
                                <xs:element ref="DocTitle"/>
                                <xs:element ref="RevNo"/>
                                <xs:element ref="PublisherName"/>
                                <xs:element ref="PublisherOrg"/>
                                <xs:element ref="PublishedDate"/>
                                <xs:element ref="PurposeOfIssue"/>
                                <xs:element ref="DocStatus"/>
                        </xs:sequence>
                        <xs:attribute name="CheckoutStatus" use="required" type="xs:NCName"/>
                        <xs:attribute name="DocActive" use="required" type="xs:NCName"/>
                        <xs:attribute name="FileSize" use="required" type="xs:NMTOKEN"/>
                        <xs:attribute name="IssNo" use="required" type="xs:integer"/>
                        <xs:attribute name="isPrivate" use="required" type="xs:NCName"/>
                </xs:complexType>
```

```
        </xs:element>
        <xs:element name="FolderPath" type="xs:string"/>
        <xs:element name="FileName" type="xs:string"/>
        <xs:element name="DocRef" type="xs:NCName"/>
        <xs:element name="DocTitle" type="xs:string"/>
        <xs:element name="RevNo" type="xs:NMTOKEN"/>
        <xs:element name="PublisherName" type="xs:string"/>
        <xs:element name="PublisherOrg" type="xs:string"/>
        <xs:element name="PublishedDate" type="xs:NMTOKEN"/>
        <xs:element name="PurposeOfIssue" type="xs:string"/>
        <xs:element name="DocStatus" type="xs:NMTOKEN"/>
</xs:schema>
```

The XML shown above is the list of 2 documents in the specified folder and URI for displaying next page of documents list in the folder.

List of First 250 documents will be retrieved as 1 page of doc listing.

Returned Member URL Resources:

- <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/nextpage_doclist/2481/2</URI> is the URL you use to return Next page of doc List within the Workspace
- <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/commentinfo/4190155$$e6ombZ</URI> is the URL to get comment details
- <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/docaccessdetail/4190155$$e6ombZ</URI> is the URL to get document access details
- <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/importDocumentAccessHistory/4190155$$e6ombZ</URI> is the URL to import document access details
- <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/downloadDocument/5486446$$75WQZm</URI> is the URL you use to download specific document in return by document listing API.
- <URI>https://adoddle.asite.com/adoddlepublic/dpd/4GR8SK6KXohexpaA</URI> document direct link
- If user has viewOnly permission on folder, download and document direct URLs will not come in response.

Default Fields Returned:

- The above XML returns the following values using the Document List API function call

Field Name	Description
FolderPath	Returns the folder path of the parent folder (starting from APD)
FileName	Returns the filename in the Document Folder
DocRef	Returns the Document Ref value specified in the Document Folder
DocTitle	Returns the Document Title value specified in the Document

	Folder
CheckoutStatus	Returns the Check Out Status value specified in the Document Folder
isPrivate	Returns the Publish Documents as Private setting specified in the Document Folder
IssNo	Returns the Issue No value of the Document in the Document Folder
RevNo	Returns the Rev No value of the Document in the Document Folder
PublisherName	Returns the Publisher Name of the Document in the Document Folder
PublisherOrg	Returns the Publisher Org value of the Document in the Document Folder
PublishedDate	Returns the Published Date of the Document in the Document Folder
DocActive	Returns the status of the document revision in the Document Folder
PurposeOfIssue	Returns the POI value of the document revision in the Document Folder
DocStatus	Returns the Document status of the document revision in the Document Folder

FileSize	Returns the Filesize of the document revision in the Document Folder
MyAction	Returns the list of actions for the logged in user on the document revisions in the Document Folder
ActionTime	Returns the status of the actions (in case of incomplete list the pending days) on the document revisions in the Document Folder
DocumentTypeId	Returns the Document Type ID
IsLink	Returns the document revision is link or not in the Document Folder
FileType	Returns the File Type of the document revision in the Document Folder
HasZipfile	Returns the document revision has zip file or not in the Document
	Folder
isRevCheckOut	Returns the document checkout status
isLatestRevCheckOut	Returns the document checkout status for latest revision for Document
DocumentId	Returns the documentId for Document
FolderId	Returns the FolderId for Document
RevisionId	Returns the RevisionId for Document
IsLocked	Returns the document lock status for Document
FileNameDisplay	Returns the File Display Name of the document revision in the Document Folder
IsFolderPublic	Returns the folder public status for specific document
publisherUserId	Returns the publisherUserId for Document
checkoutUserId	Returns the checkoutUserId for Document

checkoutUserName	Returns the username of the user that checked out the Document
checkoutOrgname	Returns the Checkout User's organization name
checkoutSuccess	Returns the document checkout status for Document
dateCheckedOut	Returns the Checkout date for Document

6.6. Document List Next Page API Service

Objective

Document List Next Page API returns the next page of list of documents within a project folder. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Document List Next Page API from resultant XML of Document List API to execute Folder List API Service.

Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have executed Doc list API to get the URI for Next Page of Doc List
- Use the following cURL command to navigate to next page of the Document List

curl --location '

https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/nextpage_doclist/

**<searchIndex>/<pageno> ' **

--header 'Cookie: ASessionID= <ASessionID> '

- Pick up the URI Tag value for the next page listing

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Next page doc list from the resultant XML of first page listing API call

generateShareLink	Optional parameter to specify whether to generate document link or not value can be : **true** : public link **false** : direct/private link(require login)
showLatestRevision	Optional parameter to specify whether to access latest revision or not for link value can be : **true** : access latest revision of document **false** : access revision on which link was created
	ACCESS can be view/download based on openAndView option
notifiyOnDownload	Optional parameter to specify whether to send mail to link creator, when document download using shared link(only receive mail for public link)
openAndView	Optional parameter to specify whether to open document for view or download document when access document using link
expiryAfterDuration	Shared link param which specify unit after that link will expire after specified unit Unit can be h : hours or d : days [1-24] h : after specific hours link will expiry [1-n]d : after specific day link will expiry Example : 9d , 10h
expiryAfterViewCnt	Shared link param which specify ACCESS count after that link will expiry Value can be any number greater than 0

Note : expiryAfterDuration and expiryAfterViewCnt only applied if generateShareLink:true and folder level setting **Enable Public Links** sets to true

In case of generateShareLink:true and (expiryAfterDuration or expiryAfterViewCnt) is not specify then it will generate link which never expiry respect to folder level **Enable Public Links** option.

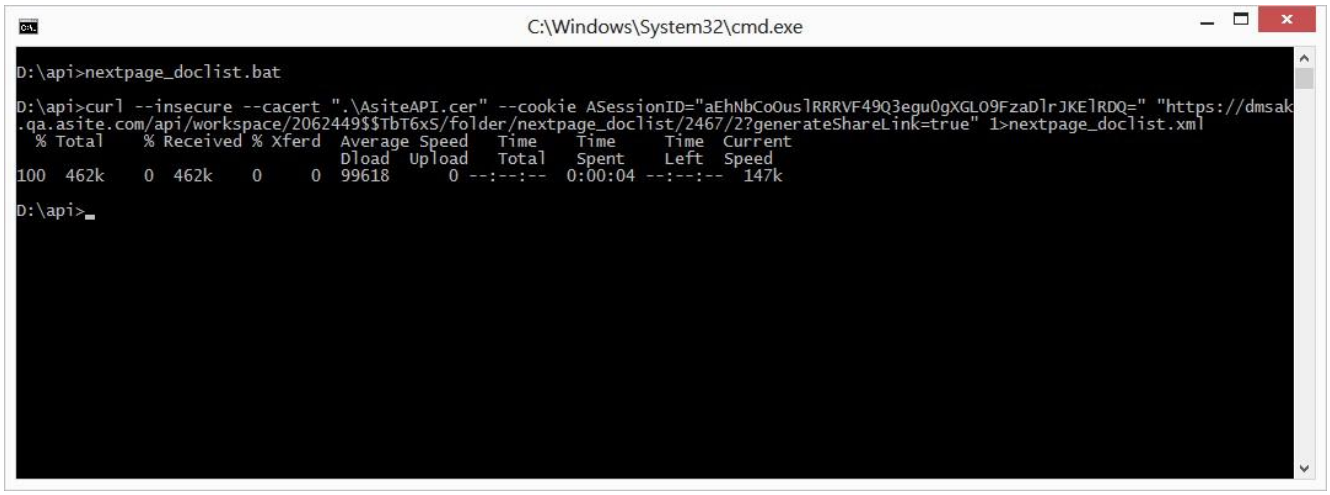

- **Sample Return Xml(one document):**

This will return the details of the active documents with latest revisions within the specified workspace that the logged in user has access to and the URIs for the API calls that can be made after workspace folder list API call has been made in <URI> tag in the resultant xml as follows:

<?xml version="1.0" encoding="UTF-8"?>
<asiteDataList>
<documentVO CheckoutStatus="No" isPrivate="No" DocActive="Yes">
<DocumentTypeId>1</DocumentTypeId>
<IsLink>false</IsLink>
<FolderPath>AJ Actions Test Project 10614\! !! ! ASR_001 \A000775Test.xls</FolderPath>
<FileType>xls</FileType>
<FileName>A000775Test.xls</FileName>
<HasZipfile>false</HasZipfile>
<isRevCheckOut>false</isRevCheckOut>
<isLatestRevCheckOut>false</isLatestRevCheckOut>
<DocumentId>4189905$$vaJO6b</DocumentId>
<FolderId>5662461$$4XxQv3</FolderId>
<DocRef>A000775Test</DocRef>
<DocTitle>A000775Test</DocTitle>
<IssNo>2</IssNo>
<RevNo>2.0</RevNo>
<RevisionId>5486196$$MgXCiE</RevisionId>
<PublisherName>Ajay Parmar</PublisherName>
<PublisherOrg>Asite Solutions Ltd.</PublisherOrg>

```
            <PublishedDate>17-Aug-2015 11:19 IST</PublishedDate>
            <PurposeOfIssue>For Change</PurposeOfIssue>
            <DocStatus>STATUS_temp</DocStatus>
            <FileSize>40KB</FileSize>
            <IsLocked>false</IsLocked>
            <FileNameDisplay>A000775Test</FileNameDisplay>
            <FileSize>40448</FileSize>
            <FolderPermissionValue>0</FolderPermissionValue>
            <UserId>0</UserId>
            <IsFolderPublic>false</IsFolderPublic>
            <publisherUserId>547745$$RjfIZH</publisherUserId>
        <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4
XxQv3/commentinfo/4189905$$vaJO6b</URI>
        <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4
XxQv3/docaccessdetail/4189905$$vaJO6b</URI>
        <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4
XxQv3/importDocumentAccessHistory/4189905$$vaJO6b</URI>
        <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4
XxQv3/downloadDocument/5486196$$MgXCiE</URI>
        <URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4
XxQv3/downloadDocument/5486196$$MgXCiE/5486196</URI>
        <URI>https://adoddle.asite.com/adoddlepublic/dpd/xG4yHbEzEbuznjRa</URI>
            <DmCheckOutVO>
                <checkoutUserId>0$$MYI1MS</checkoutUserId>
                <checkoutUserName>null null</checkoutUserName>
                <checkoutOrgname/>
                <dateCheckedOut/>
                <checkoutSuccess>false</checkoutSuccess>
            </DmCheckOutVO>
        </documentVO>
</asiteDataList>
```


Schema (XSD) of the Return XML


```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
        <xs:element name="asiteDataList">
            <xs:complexType>
                <xs:sequence>
                    <xs:element maxOccurs="unbounded" ref="documentVO"/>
                </xs:sequence>
            </xs:complexType></xs:element>
        <xs:element name="documentVO">
```

```
                <xs:complexType>
                        <xs:sequence>
                                <xs:element ref="FolderPath"/>
                                <xs:element ref="FileName"/>
                                <xs:element ref="DocRef"/>
                                <xs:element ref="DocTitle"/>
                                <xs:element ref="RevNo"/>
                                <xs:element ref="PublisherName"/>
                                <xs:element ref="PublisherOrg"/>
                                <xs:element ref="PublishedDate"/>
                                <xs:element ref="PurposeOfIssue"/>
                                <xs:element ref="DocStatus"/>
                        </xs:sequence>
                        <xs:attribute name="CheckoutStatus" use="required" type="xs:NCName"/>
                        <xs:attribute name="DocActive" use="required" type="xs:NCName"/>
                        <xs:attribute name="FileSize" use="required" type="xs:NMTOKEN"/>
                        <xs:attribute name="IssNo" use="required" type="xs:integer"/>
                        <xs:attribute name="isPrivate" use="required" type="xs:NCName"/>
                </xs:complexType>
        </xs:element>
        <xs:element name="FolderPath" type="xs:string"/>
        <xs:element name="FileName" type="xs:string"/>
        <xs:element name="DocRef" type="xs:NCName"/>
        <xs:element name="DocTitle" type="xs:string"/>
        <xs:element name="RevNo" type="xs:NMTOKEN"/>
        <xs:element name="PublisherName" type="xs:string"/>
        <xs:element name="PublisherOrg" type="xs:string"/>
        <xs:element name="PublishedDate" type="xs:NMTOKEN"/>
        <xs:element name="PurposeOfIssue" type="xs:string"/>
        <xs:element name="DocStatus" type="xs:NMTOKEN"/>
</xs:schema>
```


Above is the list of 2 documents in the specified folder and URI for displaying next page of documents list in the folder.

List of First 250 documents will be retrieved as a list on this page

Returned Member URL Resources:

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/commentinfo/4189905$$vaJO6b</URI> is the URL to get comment details

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/docaccessdetail/4189905$$vaJO6b</URI> is the URL to get document access details

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/importDocumentAccessHistory/4189905$$vaJO6b</URI> is the URL to import document access details

<URI>https://dmsak.asite.com/api/workspace/2062449$$TbT6xS/folder/5662461$$4XxQv3/downloadDocument/5486196$$MgXCiE</URI> is the URL you use to download specific document in return by document listing API.

<URI>https://adoddle.asite.com/adoddlepublic/dpd/xG4yHbEzEbuznjRa</URI> document direct link

- If user has viewOnly permission on folder, download and document direct URLs will not come in response.

Default Fields Returned:

- The above XML returns the following values using the Document List API function call

Field Name	Description
FolderPath	Returns the folder path of the parent folder (starting from APD)
FileName	Returns the filename in the Document Folder
DocRef	Returns the Document Ref value specified in the Document Folder
DocTitle	Returns the Document Title value specified in the Document Folder
CheckoutStatus	Returns the Check Out Status value specified in the Document Folder
isPrivate	Returns the Publish Documents as Private setting specified in the Document Folder
IssNo	Returns the Issue No value of the Document in the Document Folder
RevNo	Returns the Rev No value of the Document in the Document Folder
PublisherName	Returns the Publisher Name of the Document in the Document Folder

PublisherOrg	Returns the Publisher Org value of the Document in the Document Folder
PublishedDate	Returns the Published Date of the Document in the Document Folder
DocActive	Returns the status of the document revision in the Document Folder
PurposeOfIssue	Returns the POI value of the document revision in the Document Folder
DocStatus	Returns the Document status of the document revision in the Document Folder
FileSize	Returns the Filesize of the document revision in the Document Folder
MyAction	Returns the list of actions for the logged in user on the document

	revisions in the Document Folder
ActionTime	Returns the status of the actions (in case of incomplete list the pending days) on the document revisions in the Document Folder
DocumentTypeId	Returns the Document Type ID
IsLink	Returns the document revision is link or not in the Document Folder
FileType	Returns the File Type of the document revision in the Document Folder
HasZipfile	Returns the document revision has zip file or not in the Document Folder
isRevCheckOut	Returns the document checkout status
isLatestRevCheckOut	Returns the document checkout status for latest revision for Document
DocumentId	Returns the documentId for Document
FolderId	Returns the FolderId for Document
RevisionId	Returns the RevisionId for Document

IsLocked	Returns the document lock status for Document
FileNameDisplay	Returns the File Display Name of the document revision in the Document Folder
IsFolderPublic	Returns the folder public status for specific document
publisherUserId	Returns the publisherUserId for Document
checkoutUserId	Returns the checkoutUserId for Document
checkoutUserName	Returns the username of the user that checked out the Document
checkoutOrgname	Returns the Checkout User's organization name
checkoutSuccess	Returns the document checkout status for Document
dateCheckedOut	Returns the Checkout date for Document

6.7. Form Type List API Service

Objective

The Form Type List API returns the list of Form Types assigned to a Workspace. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Form Type List from Workspace List API to execute Form Type List API Service.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command to list the Form Types within the Workspace:

curl --location

**'https://dmsqab.asite.com/api/workspace/<WorkspaceID>/form/formtypelist' **

--header 'Cookie: ASessionID=<ASessionID>'

Input Parameters:

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Form list API call from the resultant XML of Form Type API call

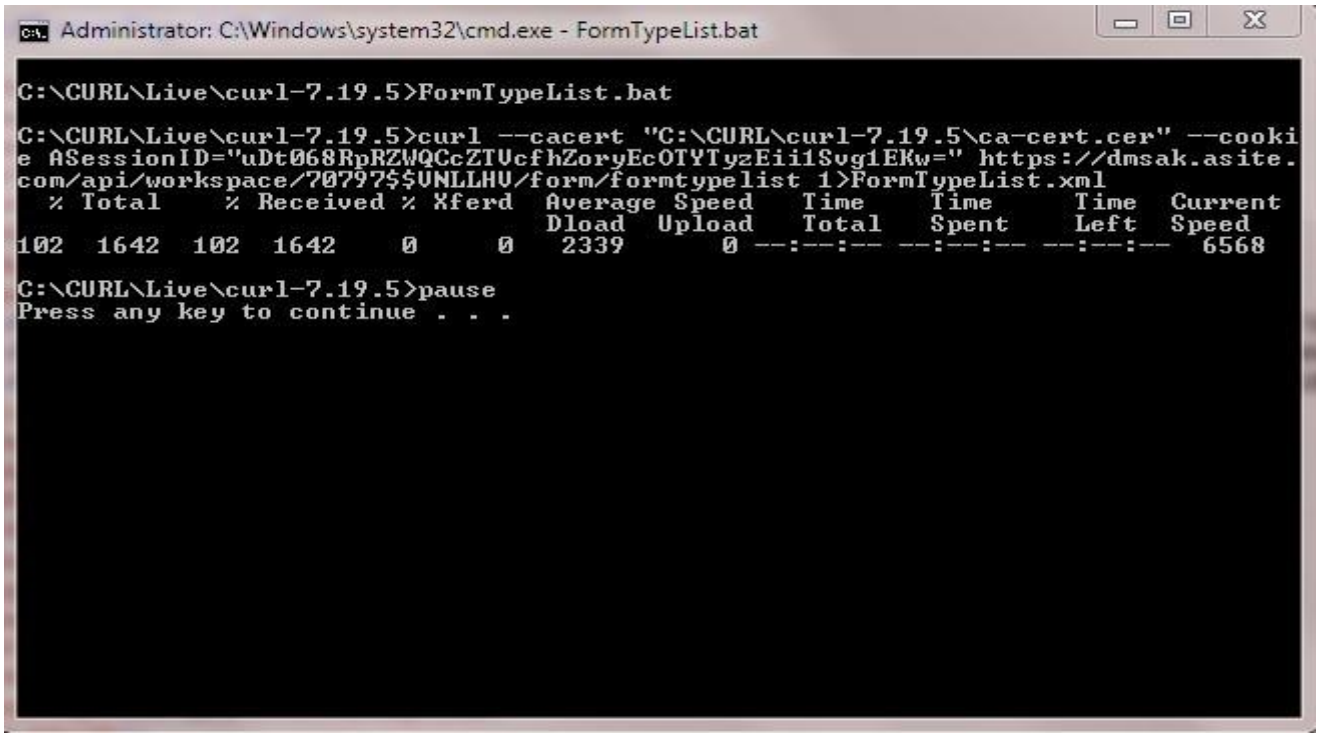

Sample Return Xml:

This will return the detailed list of Forms for Form type within a specified workspace that the logged in user has access to and the URIs for the API calls that can be made after workspace folder list API call has been made in <URI> tag in the resultant xml as follows:

<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
<FormList_TO>
<URI>https://dms.asite.com/api/workspace/737$$9JzEGx/form/258128$$0HLVxc/formdetails</URI>
<FormVO>
<FormMSGVO Has_Attachments="Yes">
<Msg_Type>ORI</Msg_Type>

```
                    <Msg_ID>ORI001</Msg_ID>
                    <Originator_User>Gary Glazer</Originator_User>
                    <Orginator_Company>SW Developments</Orginator_Company>
                    <Msg_Creation_Date>13-07-2010</Msg_Creation_Date>
                    <Status>Sent</Status>
</FormMSGVO>
</FormList_TO> <FormList_TO>
<URI>https://dms.asite.com/api/workspace/737$$9JzEGx/form/236628$$mWcebV/formdetails</URI>
<FormVO>
        <FormName>Request For Information NC</FormName>
        <Form_ID>RFI017</Form_ID>
        <Form_Title>Roofing slabs</Form_Title>
<User_Ref>1234</User_Ref>
        <Close_Due>14-05-2010</Close_Due>
        <Form_Status>Open</Form_Status>
</FormVO>
        <FormMSGVO Has_Attachments="Yes">
                <Msg_Type>ORI</Msg_Type>
                <Msg_ID>ORI001</Msg_ID>
                <Originator_User>Elaine Magill</Originator_User>
                <Orginator_Company>Asite Solutions Ltd</Orginator_Company>
                <Msg_Creation_Date>04-05-2010</Msg_Creation_Date>
                <Status>Sent</Status>
        </FormMSGVO>
        <FormMSGTreeVO Has_Attachments="No">
                <Msg_Type>RES</Msg_Type>
                <Msg_ID>RES001</Msg_ID>
                <Originator_User>Gary Glazer</Originator_User>
                <Orginator_Company>SW Developments</Orginator_Company>
                <Msg_Creation_Date>22-06-2010</Msg_Creation_Date>
                <Status>Sent</Status>
        </FormMSGTreeVO>
        <FormMSGTreeVO Has_Attachments="Yes">
                <Msg_Type>RES</Msg_Type>
                <Msg_ID>RES002</Msg_ID>
                <Originator_User>Gary Glazer</Originator_User>
                <Orginator_Company>SW Developments</Orginator_Company>
                <Msg_Creation_Date>22-06-2010</Msg_Creation_Date>
                <Status>Sent</Status>
        </FormMSGTreeVO>
</FormList_TO>
</asiteDataList>
```

Schema (XSD) of the Return XML

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
	<xs:element name="asiteDataList">
		<xs:complexType>
			<xs:sequence>
				<xs:element maxOccurs="unbounded" ref="FormList_TO"/>
			</xs:sequence>
		</xs:complexType></xs:element>
	<xs:element name="FormList_TO">
		<xs:complexType>
			<xs:sequence>
				<xs:element ref="URI"/>
				<xs:element ref="FormVO"/>
				<xs:element ref="FormMSGVO"/>
  <xs:element minOccurs="0" maxOccurs="unbounded" ref="FormMSGTreeVO"/>
			</xs:sequence>
		</xs:complexType></xs:element>
	<xs:element name="URI" type="xs:anyURI"/>
	<xs:element name="FormVO">
		<xs:complexType>
			<xs:sequence>
				<xs:element ref="FormName"/>
				<xs:element ref="Form_ID"/>
				<xs:element ref="Form_Title"/>
				<xs:element ref="User_Ref"/>
				<xs:element ref="Close_Due"/>
				<xs:element ref="Form_Status"/>
			</xs:sequence>
		</xs:complexType></xs:element>
	<xs:element name="FormName" type="xs:string"/>
	<xs:element name="Form_ID" type="xs:NCName"/>
	<xs:element name="Form_Title" type="xs:string"/>
	<xs:element name="User_Ref" type="xs:string"/>
	<xs:element name="Close_Due" type="xs:NMTOKEN"/>
	<xs:element name="Form_Status" type="xs:NCName"/>
	<xs:element name="FormMSGVO">
	<xs:complexType>
		<xs:sequence>
			<xs:element ref="Msg_Type"/>
			<xs:element ref="Msg_ID"/>
			<xs:element ref="Originator_User"/>
			<xs:element ref="Orginator_Company"/>
			<xs:element ref="Msg_Creation_Date"/>
			<xs:element ref="Status"/>
		</xs:sequence>
		<xs:attribute name="Has_Attachments" use="required" type="xs:NCName"/>
	</xs:complexType>
```

```
        </xs:element>
        <xs:element name="FormMSGTreeVO">
            <xs:complexType>
                <xs:sequence>
                    <xs:element ref="Msg_Type"/>
                    <xs:element ref="Msg_ID"/>
                    <xs:element ref="Originator_User"/>
                    <xs:element ref="Orginator_Company"/>
                    <xs:element ref="Msg_Creation_Date"/>
                    <xs:element ref="Status"/>
                </xs:sequence>
                <xs:attribute name="Has_Attachments" use="required" type="xs:NCName"/>
            </xs:complexType>
        </xs:element>
        <xs:element name="Msg_Type" type="xs:NCName"/>
        <xs:element name="Msg_ID" type="xs:NCName"/>
        <xs:element name="Originator_User" type="xs:string"/>
        <xs:element name="Orginator_Company" type="xs:string"/>
        <xs:element name="Msg_Creation_Date" type="xs:NMTOKEN"/>
        <xs:element name="Status" type="xs:NCName"/>
</xs:schema>
```

Returned Member URL Resources:

- <URI>https://dms.asite.com/api/workspace/737$$9JzEGx/form/258128$$0HLVxc/formdetails </URI> is the URL you use to return form details

Default Fields Returned:

- The above XML returns the following values using the Document List API function call

Field Name	Description
FormName	Returns the Name of the Form (as specified in Form Settings)
Form_ID	Returns the Form ID as Returned in listing, e.g. RFI001, RF002 instead of two split values
Form_Title	Returns the Title of the Form ORI Message

User_Ref	Returns the User Ref values
Close_Due	Returns the date on which Form is close Due
Form_Status	Returns the name of the Form Status, egg. Closed
Form_Close_Date	Returns the date on which the Form Status is due
Msg_Type	Returns the Message Name, E.g. ORI, RES, FWD
Msg_ID	Returns the sequential numeric value of Form Message, e.g. RES001, RES002.
Originator_User	Returns the name of the Originator
Msg_Creation_Date	Returns the date on which Form Message was created
Status	Returns the status of individual Messages, e.g. Sent.
Has_Attachments	Returns indication if Form has attachments
Action_Name	Returns action name
Action_Completion_date	Returns action completion date
Action Due by Date	Returns action due date
Overdue	Returns Overdue flag
Action_Complete	Returns action complete flag
Action_Cleared	Returns action cleared flag
Completed ON or After Close Due date	Returns flag that specifies if the action was completed on or after the close due date

6.8. Forms List API Service

Objective

The Form List API returns the list of Form Types assigned to a Workspace. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Form List from Form Type List API to execute Form List API Service.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Form Type API Function
- Use the following cURL command to list the Forms against the Form Types:

curl --location '
**https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/form/firstpage/formlist/<FormTypeID> ' **

- --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters:

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Form list API call from the resultant XML of Form Type API call

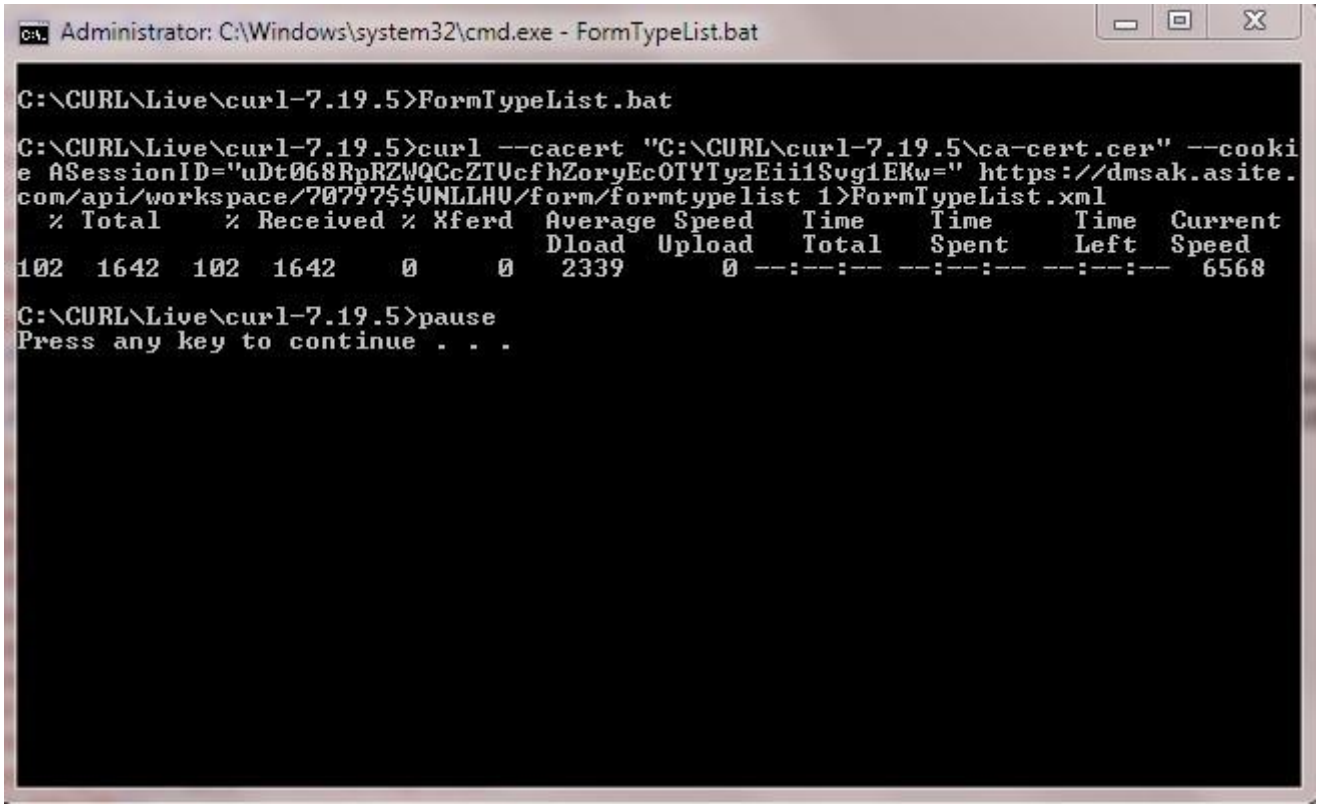

Sample Return Xml:

This will return the detailed list of Forms for Form type within a specified workspace that the logged in user has access to and the URIs for the API calls that can be made after workspace folder list API call has been made in <URI> tag in the resultant xml as follows:

<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
<FormType>
<FormTypeID>6692$$voW8o9</FormTypeID>
<FormName>Change Request Form</FormName>
<FormGroupCode>CRF</FormGroupCode>
<URI>https://dms.asite.com/api/workspace/7$$9Jzx/form/firstpage/formlist/9$$voWo9</URI>
<URI>https://dms.asite.com/api/workspace/7$$9Jzx/form/firstpage/incompleteactionformlist/9$$voWo9URI>
<URI>https://dms.asite.com/api/workspace/7$$9Jzx/form/reportformlist/9$$voWo9</URI>
</FormType>
<FormType>
<FormTypeID>6700$$dq4GpU</FormTypeID>
<FormName>Early Warning Notice</FormName>
<FormGroupCode>EWN</FormGroupCode>

<URI>https://dms.asite.com/api/workspace/7$$9JzGx/form/firstpage/formlist/67$$dq4</URI>
<URI>https://dms.asite.com/api/workspace/7$$9JzGx/form/firstpage/incompleteactionformlist/67$$dq4</URI>

```
        <URI>https://dms.asite.com/api/workspace/7$$9JzGx/form/reportformlist/67$$dq4</URI>
        </FormType>
</FormList_TO>
</asiteDataList>
```


Schema (XSD) of the Return XML


```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
        <xs:element name="asiteDataList">
                <xs:complexType>
                        <xs:sequence>
                                <xs:element maxOccurs="unbounded" ref="FormList_TO"/>
                        </xs:sequence>
                </xs:complexType></xs:element>
        <xs:element name="FormList_TO">
                <xs:complexType>
                        <xs:sequence>
                                <xs:element ref="URI"/>
                                <xs:element ref="FormVO"/>
                                <xs:element ref="FormMSGVO"/>
  <xs:element minOccurs="0" maxOccurs="unbounded" ref="FormMSGTreeVO"/>
                        </xs:sequence>
                </xs:complexType></xs:element>
        <xs:element name="URI" type="xs:anyURI"/>
        <xs:element name="FormVO">
                <xs:complexType>
                        <xs:sequence>
                                <xs:element ref="FormName"/>
                                <xs:element ref="Form_ID"/>
                                <xs:element ref="Form_Title"/>
                                <xs:element ref="User_Ref"/>
                                <xs:element ref="Close_Due"/>
                                <xs:element ref="Form_Status"/>
                        </xs:sequence>
                </xs:complexType></xs:element>
        <xs:element name="FormName" type="xs:string"/>
        <xs:element name="Form_ID" type="xs:NCName"/>
        <xs:element name="Form_Title" type="xs:string"/>
        <xs:element name="User_Ref" type="xs:string"/>
        <xs:element name="Close_Due" type="xs:NMTOKEN"/>
        <xs:element name="Form_Status" type="xs:NCName"/>
        <xs:element name="FormMSGVO">
                <xs:complexType>
```

```
                <xs:sequence>
                        <xs:element ref="Msg_Type"/>
                        <xs:element ref="Msg_ID"/>
                        <xs:element ref="Originator_User"/>
                        <xs:element ref="Orginator_Company"/>
                        <xs:element ref="Msg_Creation_Date"/>
                        <xs:element ref="Status"/>
                </xs:sequence>
                <xs:attribute name="Has_Attachments" use="required" type="xs:NCName"/>
            </xs:complexType>
        </xs:element>
        <xs:element name="FormMSGTreeVO">
            <xs:complexType>
                <xs:sequence>
                        <xs:element ref="Msg_Type"/>
                        <xs:element ref="Msg_ID"/>
                        <xs:element ref="Originator_User"/>
                        <xs:element ref="Orginator_Company"/>
                        <xs:element ref="Msg_Creation_Date"/>
                        <xs:element ref="Status"/>
                </xs:sequence>
                <xs:attribute name="Has_Attachments" use="required" type="xs:NCName"/>
            </xs:complexType>
        </xs:element>
        <xs:element name="Msg_Type" type="xs:NCName"/>
        <xs:element name="Msg_ID" type="xs:NCName"/>
        <xs:element name="Originator_User" type="xs:string"/>
        <xs:element name="Orginator_Company" type="xs:string"/>
        <xs:element name="Msg_Creation_Date" type="xs:NMTOKEN"/>
        <xs:element name="Status" type="xs:NCName"/>
</xs:schema>
```

Returned Member URL Resources:

- <URI>https://dms.asite.com/api/workspace/7$$9Jzx/form/firstpage/formlist/9$$voWo9</URI> is the URL you use to return Forms List of a specific form type within the Workspace
- <URI>https://dms.asite.com/api/workspace/7$$9Jzx/form/firstpage/incompleteactionformlist/9$$voWo9URI> is the URL you use to return incomplete Forms Actions for the user
- <URI>https://dms.asite.com/api/workspace/7$$9Jzx/form/reportformlist/9$$voWo9</URI> is the URL you use to return report of the forms list

Default Fields Returned:

- The above XML returns the following values using the Document List API function call

Field Name	Description
FormName	Returns the Name of the Form (as specified in Form Settings)
Form_ID	Returns the Form ID as Returned in listing, e.g. RFI001, RF002 instead of two split values
Form_Title	Returns the Title of the Form ORI Message
User_Ref	Returns the User Ref values
Close_Due	Returns the date on which Form is close Due
Form_Status	Returns the name of the Form Status, e.g. Closed
Form_Close_Date	Returns the date on which the Form Status is due
Msg_Type	Returns the Message Name, E.g. ORI, RES, FWD
Msg_ID	Returns the sequential numeric value of Form Message, e.g. RES001, RES002.
Originator_User	Returns the name of the Originator
Msg_Creation_Date	Returns the date on which Form Message was created
Status	Returns the status of individual Messages, e.g. Sent.
Has_Attachments	Returns indication if Form has attachments
Action_Name	Returns action name
Action_Completion_date	Returns action completion date
Action Due by Date	Returns action due date
Overdue	Returns Overdue flag

Action_Complete	Returns action complete flag
Action_Cleared	Returns action cleared flag
Completed ON or After Close Due date	Returns flag that specifies if the action was completed on or after the close due date

6.9. Incomplete Form actions API Service

Objective

The Form Actions API returns the list of incomplete Form Actions for a form type in a Workspace for the logged in user. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Incomplete Form Actions from Form List API to execute Incomplete Form Actions API Service.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Form Type API Function
- Use the following cURL command to list incomplete Form Actions:

**curl --location 'https://dmsqab.asite.com/api/workspace/<WorkspaceID>/form/firstpage/incompleteactionformlist/<FormTypeID>' **

--header 'Cookie: ASessionID=<ASessionID>'

Input Parameters:

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for list of incomplete Form Actions from the resultant XML of Form Type API call

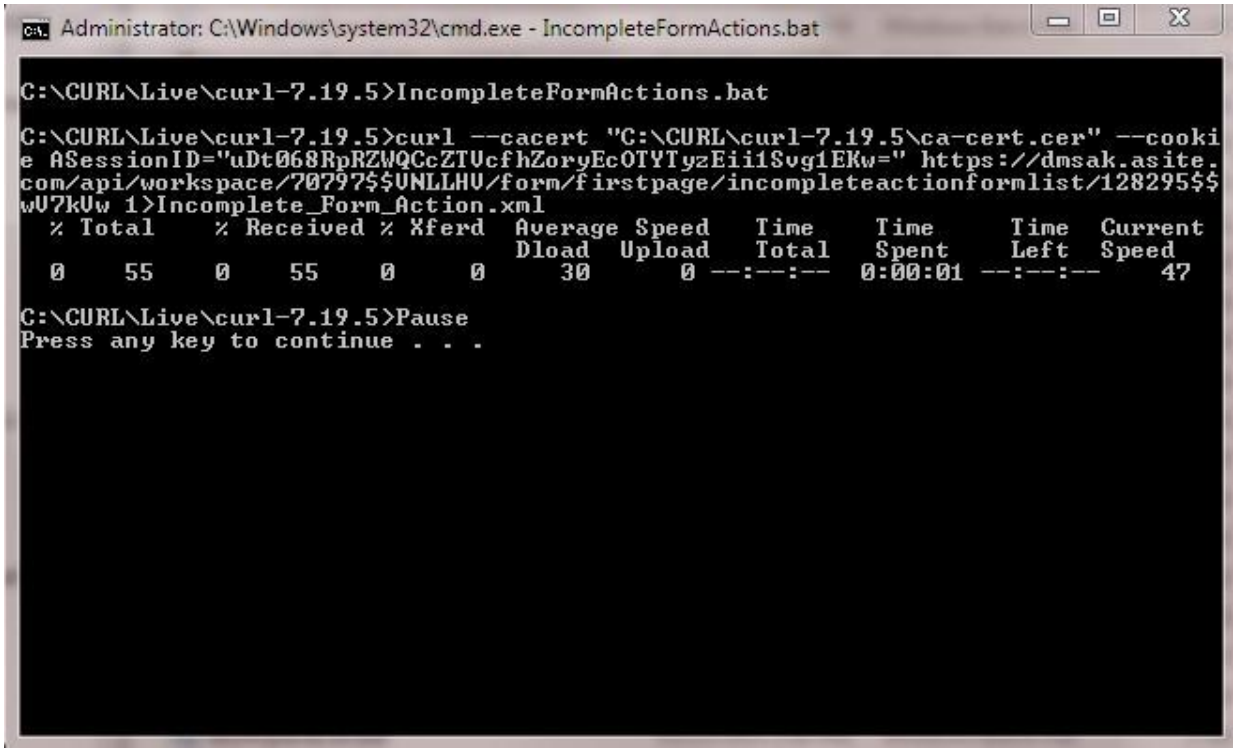

Sample Return Xml:

This will return the detailed shows details of the logged in user's incomplete actions on the forms for a Form Type and the resultant XML as follows:

<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
<FormList_TO>

<URI>https://dms.asite.com/api/workspace/54844$$KQ65aP/form/191847$$uoMTbj/formdetails</URI>
<FormVO>
<FormName>2.2 Purchase Orders</FormName>
<Form_ID>PORD022</Form_ID>
<Form_Title>PO for :: LD Supplier Co</Form_Title>
<User_Ref>DPO-TestCon30032010 - 001-0017</User_Ref>
<Close_Due>08-04-2010</Close_Due>
<Form_Status>Open</Form_Status>
</FormVO>
<FormMSGVO Has_Attachments="No">
<Msg_Type>ORI</Msg_Type>

```
                <Msg_ID>ORI001</Msg_ID>
                <Originator_User>V K Antony</Originator_User>
                <Orginator_Company>VK Buyer Co</Orginator_Company>
                <Msg_Creation_Date>05-04-2010</Msg_Creation_Date>
                <Status>Sent</Status>
            </FormMSGVO>
        </FormList_TO>
</asiteDataList>
```


Schema (XSD) of the Return XML


```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
    <xs:element name="asiteDataList">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="FormList_TO"/>
            </xs:sequence>
        </xs:complexType></xs:element>
    <xs:element name="FormList_TO">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="URI"/>
                <xs:element ref="FormVO"/>
                <xs:element ref="FormMSGVO"/>
            </xs:sequence>
        </xs:complexType></xs:element>
    <xs:element name="URI" type="xs:anyURI"/>
    <xs:element name="FormVO">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="FormName"/>
                <xs:element ref="Form_ID"/>
                <xs:element ref="Form_Title"/>
                <xs:element ref="User_Ref"/>
                <xs:element ref="Close_Due"/>
                <xs:element ref="Form_Status"/>
            </xs:sequence>
        </xs:complexType></xs:element>
    <xs:element name="FormName" type="xs:string"/>
    <xs:element name="Form_ID" type="xs:NCName"/>
    <xs:element name="Form_Title" type="xs:string"/>
    <xs:element name="User_Ref" type="xs:NCName"/>
    <xs:element name="Close_Due" type="xs:NMTOKEN"/>
    <xs:element name="Form_Status" type="xs:NCName"/>
    <xs:element name="FormMSGVO">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="Msg_Type"/>
```

```
                <xs:element ref="Msg_ID"/>
                <xs:element ref="Originator_User"/>
                <xs:element ref="Orginator_Company"/>
                <xs:element ref="Msg_Creation_Date"/>
                <xs:element ref="Status"/>
                <xs:element ref="FormActions"/>
            </xs:sequence>
            <xs:attribute name="Has_Attachments" use="required" type="xs:NCName"/>
        </xs:complexType>
    </xs:element>
    <xs:element name="Msg_Type" type="xs:NCName"/>
    <xs:element name="Msg_ID" type="xs:NCName"/>
    <xs:element name="Originator_User" type="xs:string"/>
    <xs:element name="Orginator_Company" type="xs:string"/>
    <xs:element name="Msg_Creation_Date" type="xs:NMTOKEN"/>
    <xs:element name="Status" type="xs:NCName"/>
    <xs:element name="FormActions">
        <xs:complexType>
            <xs:sequence>
                <xs:element ref="Action_ID"/>
                <xs:element ref="Action_Display_Name"/>
                <xs:element ref="Action_Completion_Date"/>
                <xs:element ref="Action_Due_By_Date"/>
                <xs:element ref="Overdue"/>
                <xs:element ref="Action_Complete"/>
                <xs:element ref="Action_Cleared"/>
                <xs:element ref="Completed_On_Or_After_Form_Close_Date"/>
            </xs:sequence>
        </xs:complexType></xs:element>
    <xs:element name="Action_ID" type="xs:string"/>
    <xs:element name="Action_Display_Name" type="xs:NCName"/>
    <xs:element name="Action_Completion_Date">
        <xs:complexType/>
    </xs:element>
    <xs:element name="Action_Due_By_Date" type="xs:NMTOKEN"/>
    <xs:element name="Overdue" type="xs:NCName"/>
    <xs:element name="Action_Complete" type="xs:NCName"/>
    <xs:element name="Action_Cleared" type="xs:NCName"/>
 <xs:element name="Completed_On_Or_After_Form_Close_Date" type="xs:NCName"/>
</xs:schema>
```


Returned Member URL Resources:

- <URI>https://dms.asite.com/api/workspace/54844$$KQ65aP/form/191847$$uoMTbj/formdetails </URI> is the URL you use to return form details for the selected form message

Default Fields Returned:

- The above XML returns the following values using the Incomplete Form Actions API function call

Field Name	Description
FormName	Returns Name of the form
Form_ID	Returns Form ID
Form_Title	Returns FORM Title
User_Ref	Returns user ref
Close_Due	Returns form close due
Form_Status	Returns form status
Msg Details	
Msg_Type	Returns message type
Msg_ID	Returns message ID
Originator_User	Returns originator user
Orginator_Company	Returns originator company
Msg_Creation_Date	Returns Msg creation date
Status	Returns msg status
FormActions	
Action_ID	Returns action id
Action_Display_Name	Returns action name
Action_Completion_Date	Returns action completion date
Action_Due_By_Date	Returns action due date

Overdue	Returns actionoverdue flag
Action_Complete	Returns action completion flag
Action_Cleared	Returns action cleared flag
Completed_On_Or_After_Form_Close_Date	Returns flag that specifies if the action was completed on or after the close due date

6.10. Publish Document to Workspace Folder

Objective

The Publish Document to Workspace folder API returns the link of the document successfully published to the Workspace folder.

This API supports publishing of single document with default attributes (similar to the Simple Upload mechanism available within the Platform)

This API supports for specify system attributes i.e. DocRef, DocTitle, POI etc. along with it. Details of input parameters and its example is mentioned below. If user don't specify values of these attributes default values will assign.

The API requires the following values:

- Session ID
- Folder URI
- Steps to execute the Publish Document to Workspace folder API Service:
- Execute the login API Call
- Extract the session id from the resultant xml of the login API Call
- Execute the Workspace List API Call
- Extract the URI tag for Workspace from resultant xml of the Workspace List API
- Execute the Workspace Folder List API Call
- Extract the Workspace Folder upload URI tag from the resultant xml of the Workspace Folder List API Call

- Execute the Publish Document to Workspace Folder API Call

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have executed Workspace list API to get the URI for Folder List
- User must have executed Workspace Folder List API to get the URI for publish path
- Sample to call upload API with attributes:

```
curl --location
    'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/uploa
    d' \
--header 'Cookie: ASessionID=<ASessionID>' \
--form 'txtDocRef="<txtDocRef>"' \
--form 'revision="<revisionNo>"' \
--form 'documentTitle="<documentTitle>"' \
--form 'purposeOfIssue="<purposeOfIssue>"' \
--form 'Status="Active"' \
--form 'publish_as_private="false"' \
--form 'formData=@"/path/to/file"'
```

Input Parameters:

Parameter Name	Description
Form Data*	upload=@sample.txt;type=application/octet-stream
txtDocRef	Document Reference of the file being uploaded.
revision	Revision Nr. as string
documentTitle	Title as string
purposeOfIssue	Purpose of Issue as string
Status	Status as string.
publish_as_private	false if not private (i.e. Folder access will control file access)
revisionNotes	Revision Notes as string

Sample Return Xml:

This will return the Notification URL of the successfully published revision:

SUCCESS CASE –Document published successfully
<?xml version="1.0" encoding="ISO-8859-1"?>
<upload_info>
<upload_status>Successful</upload_status>
<RevisionId>2480263$$aa7c5C</RevisionId>
<DocumentId>1649418$$uKaXBz</DocumentId>
<document_link>https://portal.asite.com/da/notification?action_id=413&nlid=1_8_332_3043041_3618299_5288895$$YdPwou</document_link>
</upload_info>
FAILURE CASE –Document publish has failed
<?xml version="1.0" encoding="ISO-8859-1"?>
<upload_info>
<upload_status>Failed</upload_status>
<error_message>Problem with publishing document</error_message> </upload_info>

Returned Member URL Resources

- None

Default Fields Returned

- The above XML returns the following values using the Publish Document to Workspace Folder API function call (as per sessionID information sent):

Field Name	Description
Publish Success Scenario:	
Upload Status	Returns the Upload Status i.e. Successful
RevisionId	Returns Revision Id of newly uploaded Document
DocumentId	Returns Document Id of newly uploaded Document
Notification URL	Returns the Notification URL of the document revision that was published.
Publish Fail Scenario:	
Upload Status	Returns the Upload Status i.e. Failed

Error Message	Returns the reason for failure of the Upload

6.11. Folder Details API Service

Objective

The Folder Details API returns details of Workspace folder. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Folder detail from Workspace List API to execute Folder details API Service.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- Use the following cURL command to view the Folder Details:

```
curl --location 'https://adoddleqaak.asite.com/commonapi/folder/getFolderDetails' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'folderId=<FolderID>' \
--data-urlencode 'projectId=<WorkspaceID>'
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for folderdetails API call from the resultant XML of Workspace Folder List API call

Default Fields Returned

This will return folder details of the specified workspace. The resultant data would be similar to the text as follows:

Field Name	Description

FolderName	Returns the name of folder
DefaultPermissionId	Returns the default permission id of folder
IsActive	Returns the status of folder
Role Detail	
RoleID	Returns the role id of RoleVO in folder
RoleName	Returns the role name of the RoleVO in folder
PermissionId	Returns the Permission id of RoleVO in folder
User Detail	
UserID	Returns the user id of UserVO in folder
Username	Returns the username of UserVO in folder
PermissionId	Returns permission id of UserVO in folder

- Returns the following fields when access to Folder fails

Field Name	Description
ERROR_CODE	Returns error status
ERROR_MESSAGE	Returns error message
ERROR_DESCRIPTION	Returns error description

6.12. Create Folder API Service

Objective

The Create Folder API is used to create folder with user defined permissions within a Workspace.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- User must have executed Workspace User and Roles list API to get the Workspace User and Roles list
- Use the following cURL command to Create Folder:

```
curl --location
'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/createne
    wfolder' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'folderdetails={
   "folderName": "CREATE_FOLDER",
   "security": {
      "defaults": [
         {
            "name": "default",
            "acessId": 1
         }
      ],
      "users": [
         {
```

```
            "hashedUserId": <hashedUserId>,
            "userName": "user",
            "acessId": 4
        },
        {
            "hashedUserId": <hashedUserId>,
            "userName": "user 2",
            "acessId": 2
        }
    ],
    "roles": [
        {
            "roleId": <hashedRoleId>,
            "roleName": "Workspace - Administrator",
            "acessId": 4
        },
        {
            "roleId": <hashedRoleId>,
            "roleName": "Field Administrator",
            "acessId": 2
        }
    ]
},
```

```
    "settings": {
      "isPrivateOnUpload": false,
      "isEditOnUpload": true,
      "isApplayToAllSecurity": false,
      "isApplayToAllSetting": false,
      "isMerge": false,
      "enableSimpleUpload": false,
      "enableQRCode": false,
      "isDeactivate": 2,
      "isShareLinkAllow": false,
      "isPublic": true,
      "includePublicSubFolder": false
    }
  }'
```

Sample JSON:

```
{
      'folderName' : 'create_folder',

      'security': {
            'defaults': [{
                  'acessId':1
            }],
            'roles': [{
                  'roleId': 161078$$S6cspT,
                  'acessId': 1
            }],
            'users': [{
                  'hashedUserId': 1544944$$JgetAV,
                  'acessId': 1
                  },{
```

```
                'hashedUserId': 4042$$UdHZ5y,
                'acessId': 1
            }]
        },

        'settings' : {
            'isPrivateOnUpload': false,
            'isEditOnUpload': false,
            'enableSimpleUpload': false,
            'enableQRCode': false,
            'isShareLinkAllow': false,
            'isPublic': false,
            'includePublicSubFolder': false
        }
    }
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for createfolder API call from the resultant XML of Workspace Folder List API call
folderdetails	Json of folder details

JSON input fields

No	JSON Field	Description	Mandatory
1	folderdetails	Details of folder to be create	Yes
2	folderName	Name of folder	Yes
3	defaults	Define default permission of folder	No
4	accessId	Default PermissionId to be assign	No

5	users	List of workspace users that need to be added to the folder	No
6	hashedUserId	UserId of each user	No
7	acessId	PermissionId assign to user	Yes (only If set
			hashedUserId value)
8	roles	List of workspace roles that need to be added to the folder	No
9	roleId	RoleId of each user	No
10	acessId	PermissionId assign to role	Yes (only If set roleId value)
11	settings	define values for different option to be set	No
12	isPrivateOnUpload	To make “Publish as Private” option TRUE while upload document	No
13	isEditOnUpload	Allow user to modify selection of “Publish as Private” option while upload document	No
14	enableSimpleUpload	Allow user to upload document without fill metadata	No
15	enableQRCode	To generate QR code on supported files while upload i.e. pdf	No
16	isShareLinkAllow	Allow to generate share link	No
17	isPublic	Make folder public	No
18	includePublicSubFolder	To make subfolders public too while set isPublic TRUE.	No

Note : To enable following setting project level setting must be true. If it is not specified, default value will be as per project level setting.

1. enableQRCode
2. isShareLinkAllow

List of permissions that can be assigned:

- PERMISSION_ID_FOR_NO_ACCESS = 1
- PERMISSION_ID_FOR_VIEW_AND_DOWNLOAD = 2
- PERMISSION_ID_FOR_PUBLISH = 3
- PERMISSION_ID_FOR_ADMIN = 4
- PERMISSION_ID_FOR_VIEW_AND_LINK = 5
- PERMISSION_ID_FOR_PUBLISH_AND_LINK= 6
- PERMISSION_ID_FOR_VIEW_ONLY = 7

Default Fields Returned

This will return folder details of the newly created Folder of Workspace The resultant data would be similar to the text as follows:

Field Name	Description
FolderName	Return name of folder that is created
FolderID	Return id of folder
ParentFolderID	Return id of parent folder
URI	Return URI tag value to create child folder on it
URI	Return URI tag value to upload document on folder

6.13. Update Folder API Service

Objective

The Update Folder API allow to update details of folder. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI tag for Folder detail from Workspace List API to execute Update Folder API Service.

Usage Rule

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- User must have executed Workspace User and Roles list API to get the Workspace User and Roles list
- Use the following cURL command to Update Folder:

```
curl --location
'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/updatefolder' \
--header 'ASessionID: <ASessionID> \
--data-urlencode 'folderdetails={
  "folderName": <Folder Name>,
  "isFolderPermissionChanged": true,
  "settings": {
    "isPrivateOnUpload": false,
    "isEditOnUpload": true,
    "isApplayToAllSecurity": false,
    "isApplayToAllSetting": false,
    "isMerge": true,
    "enableSimpleUpload": false,
    "enableQRCode": false,
    "isShareLinkAllow": false,
    "isDeactivate": 2,
```

```
        "isPublic": false,
        "includePublicSubFolder": false
    },
    "security": {
        "defaults": [
            {
                "name": "Default",
                "acessId": 1
            }
        ],
        "users": [
            {
                "hashedUserId": <hashedUserId>,
                "userName": "User 1",
                "acessId": 4
            },
            {
                "hashedUserId": <hashedUserId>,
                "userName": "User 2",
                "acessId": 2
            },
            {
                "hashedUserId": <hashedUserId>,
                "userName": "User 3",
```

```
            "acessId": 2
          }
        ],
        "roles": [
          {
            "roleId": <hashedRoleId>,
            "roleName": "Workspace - Administrator",
            "acessId": 4
          }
        ]
      },
      "folderMetadataAttributeTO": {}
    }'
```

Sample JSON:

```
{
      "folderName" : "update_folder",
      "security": {
            "defaults": [{
                  "acessId":1
            }],
            "roles": [{
                  "roleId": "161078$$S6cspT",
                  "acessId": 1
            }],
            "users": [{
                  "hashedUserId": "1544944$$JgetAV",
                  "acessId": 1
            },{
                  "hashedUserId": "4042$$UdHZ5y",
                  "acessId": 1
            }]
```

```
        },

        "settings" : {
              "isPrivateOnUpload": false,
              "isEditOnUpload": false,
              "enableSimpleUpload": false,
              "enableQRCode": false,
              "isShareLinkAllow": false,
              "isPublic": false,
              "includePublicSubFolder": false
          }
}
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for update folder API call from the resultant XML of Workspace Folder List API call
folderdetails	Json of folder details

JSON input fields

No	JSON Field	Description	Mandatory
1	folderdetails	Details of folder to be create	Yes
2	folderName	Name of folder	Yes
3	defaults	Define default permission of folder	No
4	accessId	Default PermissionId to be assign	No
5	users	List of workspace users that need to be added to the folder	No
6	hashedUserId	UserId of each user	No

7	acessId	PermissionId assign to user	Yes (only If set hashedUserId value)
8	roles	List of workspace roles that need to be added to the folder	No
9	roleId	RoleId of each user	No
10	acessId	PermissionId assign to role	Yes (only If set roleId value)
11	settings	define values for different option to be set	No
12	isPrivateOnUpload	To make “Publish as Private” option TRUE while upload document	No
13	isEditOnUpload	Allow user to modify selection of “Publish as Private” option while upload document	No
14	enableSimpleUpload	Allow user to upload document without fill metadata	No
15	enableQRCode	To generate QR code on supported files while upload i.e. pdf	No
16	isDeactivate	To deactivate folder	No
17	isShareLinkAllow	Allow to generate share link	No
18	isPublic	Make folder public	No
19	includePublicSubFolder	To make subfolders public too while set isPublic TRUE.	No

Note : To enable following setting project level setting must be true. If it is not specified, default value will be set as per the project level setting.

1. enableQRCode
2. isShareLinkAllow

List of permissions that can be assigned:

- PERMISSION_ID_FOR_NO_ACCESS = 1
- PERMISSION_ID_FOR_VIEW_AND_DOWNLOAD = 2
- PERMISSION_ID_FOR_PUBLISH = 3
- PERMISSION_ID_FOR_ADMIN = 4
- PERMISSION_ID_FOR_VIEW_AND_LINK = 5
- PERMISSION_ID_FOR_PUBLISH_AND_LINK= 6
- PERMISSION_ID_FOR_VIEW_ONLY = 7

Default Fields Returned

This will return folder details of the updated Folder of Workspace The resultant data would be similar to the text as follows:

Field Name	Description
FolderName	Return name of folder that is created
FolderID	Return id of folder
ParentFolderID	Return id of parent folder

6.14. DocAccessDetail List API Service

Objective

The DocAccessDetail List API returns the access history details of all the revisions of a specific document.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- User must have executed Document list API to get the document list • Use the

  following cURL command to View DocAccessDetails:

curl --location

**'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/docaccessdetail/<DocumentID>' **

--header 'Cookie: ASessionID=<ASessionID>;'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for DocAccessDetail API call from the resultant XML of Document List API call

Default Fields Returned

This will return audit history details of the document revisions. The resultant data would be similar to the text as follows:

Field Name	Description
UserName	Returns username of the user that accessed the document
OrgName	Returns organisation name of user that accessed the document
AccessDate	Returns access date of the document

AccessId	Returns access id of the document
IssueNo	Returns issue no of document
RevisionName	Returns revision id of document
AccessType	Returns type of access of document
Remarks	Returns remarks made on document

6.15. Create Workspace API Service

Objective

The Create Workspace API Service creates a workspace within Asite. Extract the session id from the xml of the login API Call i.e. <Sessionid> tag from the resultant xml of Login API to execute Create Workspace API Service.

Usage Rules

- User must have been logged in to the Asite Platform using Login API Function
- Use the following cURL command to Create Asite workspace:

```
curl --location 'https://dmsqaak.asite.com/api/create/createWorkspace' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'name=<workspaceName>' \
--data-urlencode 'ownerOrgId=<ownerOrgID>' \
--data-urlencode 'ownerOrgName=<ownerOrgName>' \
--data-urlencode 'spaceTypeId=<spaceTypeId>' \
--data-urlencode 'spaceTypeName=<spaceTypeName>' \
--data-urlencode 'datacenterId=<datacenterId>' \
--data-urlencode 'bimEnabled=true' \
--data-urlencode 'workspaceSubscriptionType=<workspaceSubscriptionType>' \
--data-urlencode 'workspaceTypeId=<workspaceTypeId>'
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for createWorkspace API call from the resultant XML of Login API call
name	Name of the Workspace
ownerOrgId	Hashed organisation Id from resultant XML of Organisation List API service.
ownerOrgName	Name of the organisation from resultant XML of Organisation List API service.

spaceTypeId	Hashed Space type id of the workspace to be created from resultant XML of Application Type List API Service. PROJECT_WORKFLOW_TYPE_ID=1 PROJECT_WORKSPACE_TYPE_ID=2 ENTERPRISE_WORKSPACE_TYPE_ID=4
	PERSONALISED_WORKSPACE_TYPE_ID=5 TENDER_WORKSPACE_TYPE_ID=6 BUYER_WORKSPACE_TYPE_ID=7
spaceTypeName	Space type name of the workspace to be created from resultant XML of Application Type List API Service.
datacenterId	Data center id of the workspace from resultant XML of DataCenter List API Service. UK_DATA_CENTER=1 US_DATA_CENTER=2
bimEnabled	Create project is BIM enabled or not true or false [case sensitive must be in small letters]
workspaceSubscriptionType	Workspace subscription type Id from resultant XML of Workspace Subscription Type List API Service. PROJECT_FLAT_FEE_BASED=1 PROJECT_SUBSCRIPTION_BASED=2

workspaceTypeId	Workspace type id (i.e. workspace or workspace template) WORKSPACE_TYPE_SIMPLE_ID = 0; WORKSPACE_TYPE_TEMPLATE_ID = 1;

Default Fields Returned

Field Name	Description
Status	Returns status of the create workspace process
Entity id	Returns project ID of the newly created workspace
Entity type	Returns type of the create operation done
URI	Returns URI tag value for Save Additional Details, Assign Companies , Assign Administrators and Set Workspace Settings API calls

WebServiceURL:

https://dms.asite.com/api/create/createWorkspace > createworkspace.xml Sample

Return Xml:

```
<? xml version="1.0" encoding="ISO-8859-1”?>
<create-entity-vO generate-uRI="true">
        <status>Successful</status>
        <entity-id>{#projectId}</id>
        <entity-type>Create Workspace</type>
          <error-message>{#Failure cause message}</ error-message >
        <uri>https://dms.asite.com/api /create/{#projectId}/saveAdditionalDetails</uri>
        <uri> https://dms.asite.com/api /create/{#projectId}/assignCompanies</uri>
        <uri> https://dms.asite.com/api /create/{#projectId}/assignAdmins</uri>
        <uri> https://dms.asite.com/api /create/{#projectId}/setWorkspaceSettings</uri </
create-entity-vO>
```

6.16. Create Workspace Template API Service

Objective

The Create Workspace Template API Service creates a workspace template on Asite. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API to execute Create Workspace Template API Service.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command to Create Asite workspace template:

```
curl --location 'https://dmsqaak.asite.com/api/create/createWorkspace' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'name=<workspaceName>' \
--data-urlencode 'ownerOrgId=<ownerOrgID>' \
--data-urlencode 'ownerOrgName=<ownerOrgName>' \
--data-urlencode 'spaceTypeId=<spaceTypeId>' \
--data-urlencode 'spaceTypeName=<spaceTypeName>' \
--data-urlencode 'datacenterId=<datacenterId>' \
--data-urlencode 'bimEnabled=true' \
--data-urlencode 'workspaceSubscriptionType=<workspaceSubscriptionType>' \
--data-urlencode 'workspaceTypeId=<workspaceTypeId>'
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for createWorkspace API call from the resultant XML of Login API call
name	Name of the Workspace
ownerOrgId	Hashed organisation Id from resultant XML of Organisation List API service.
ownerOrgName	Name of the organisation from resultant XML of Organisation List API service.

spaceTypeId	Hashed Space type id of the workspace to be created from resultant XML of Application Type List API Service. PROJECT_WORKFLOW_TYPE_ID=1 PROJECT_WORKSPACE_TYPE_ID=2 ENTERPRISE_WORKSPACE_TYPE_ID=4
	PERSONALISED_WORKSPACE_TYPE_ID=5 TENDER_WORKSPACE_TYPE_ID=6 BUYER_WORKSPACE_TYPE_ID=7
spaceTypeName	Space type name of the workspace to be created from resultant XML of Application Type List API Service.
datacenterId	Data centre id of the workspace from resultant XML of Datacentre List API Service. UK_DATA_CENTER=1 US_DATA_CENTER=2
bimEnabled	Specify save this workspace as BIM enabled or not [true / false] [case sensitive and it must be in small letters]
workspaceSubscriptionType	Workspace subscription type Id from resultant XML of Workspace Subscription Type List API Service. PROJECT_FLAT_FEE_BASED=1 PROJECT_SUBSCRIPTION_BASED=2

workspaceTypeId	Workspace type id (i.e. workspace or workspace template) WORKSPACE_TYPE_SIMPLE_ID = 0; WORKSPACE_TYPE_TEMPLATE_ID = 1;

Default Fields Returned

Field Name	Description
Status	Returns status of the create workspace template process
Entity id	Returns project ID of the newly created workspace
	template
Entity type	Returns type of the create operation done
URI	Returns URI tag value for Save Additional Details, Assign Companies , Assign Administrators and Set Workspace Settings API calls

WebServiceURL:

https://dms.asite.com/api/create/createWorkspace > createworkspaceTemplate.xml

Sample Return Xml:

```
<? xml version="1.0" encoding="ISO-8859-1”?>
<create-entity-vO generate-uRI="true">
        <status>Successful</status>
        <entity-id>{#projectId}</id>
        <entity-type>Create Workspace Template</type>
          <error-message>{#Failure cause message}</ error-message >
        <uri>https://dms.asite.com/api /create/{#projectId}/saveAdditionalDetails</uri>
        <uri> https://dms.asite.com/api /create/{#projectId}/assignCompanies</uri>
        <uri> https://dms.asite.com/api /create/{#projectId}/assignAdmins</uri>
```

<uri> https://dms.asite.com/api /create/{#projectId}/setWorkspaceSettings</uri </ create-entity-vO>

6.17. Save Additional Details API Service

Objective

The Save Additional Details API Service saves additional details specified for an existed workspace. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI from resultant XML of create workspace API call to execute Save Additional Details API Service.

Usage Rules

- User must have been logged in and executed Workspace List API Function or Create Workspace API Function or Create Workspace Template API Function.
- Use the following cURL command to Save Additional Details:

```
curl --location
'https://dmsqaak.asite.com/api/create/<WorkspaceID>/saveAdditionalDetails' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'projectId=<projectId>' \
--data-urlencode 'description=<description>' \
--data-urlencode 'projectPhaseId=<projectPhaseId>' \
--data-urlencode 'addressLine1=<addressLine1>' \
--data-urlencode 'addressLine2=<addressLine2>' \
--data-urlencode 'addressLine3=<addressLine3>' \
--data-urlencode 'postCode=<postCode>' \
--data-urlencode 'countryID=<countryID>' \
--data-urlencode 'telNumber=<telNumber>' \
--data-urlencode 'faxNumber=<faxNumber>' \
--data-urlencode 'brandingId=<brandingId>' \
--data-urlencode 'appliedTags=<appliedTags>' \
--data-urlencode 'enableInNavigator=false' \
--data-urlencode 'contractNumber=<contractNumber>' \
--data-urlencode 'enableSimpleUpload=false' \
--data-urlencode 'regionId=<regionId>' \
--data-urlencode 'startDate=<startDate>' \
--data-urlencode 'estFinishDate=<estFinishDate>'
```

Input Parameters

Parameter Name	Description

ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for save additional details API call from the resultant XML of Create workspace or Create Workspace template API call
projectId	Hashed project id collected from resultant xml of Workspace list API or Create Workspace API or Create Workspace Template API call
description	Description to be saved for a workspace or workspace template
projectPhaseId	Numeric id of the project phase picked up from resultant XML of Project Phases API call
addressLine1	Address line 1 of the workspace location

addressLine2	Address line 2 of the workspace location
addressLine3	Address line 3 of the workspace location
postCode	Postcode of the workspace location
countryID	Numeric id of the country picked up from resultant XML of Get Country codes list API call
telNumber	Telephone number of the workspace location
faxNumber	Fax number of the workspace location
brandingId	Numeric id of the branding that needs to be applied to the workspace /workspace template
appliedTags	Comma separated strings that needs to be tagged to the workspace / workspace template

enableInNavigator	Specify enable this workspace in navigator or not[true / false]
contractNumber	Alpha numeric String Contract number to be appended to the workspace / workspace template
enableSimpleUpload	Specify simple upload needs to be enabled in this workspace or not [true / false]
regionId	Numeric id of a country region picked up from resultant XML of the Get Country Regions List API call
startDate	Start date of the workspace or workspace template. Here user needs to specify the date according to his/her locale. For example, UK user must specify date in dd-MMM-yyyy [14-Sep-2011] format And US user must specify date in MMM dd, yyyy [Sep 14, 2011] format
estFinishDate	Estimated finish date of the workspace. Here user needs to specify the date according to his locale. For example, UK user must specify date in dd-MMM-yyyy [14-Sep-2011] format And US user must specify date in MMM dd, yyyy [Sep 14, 2011] format

Default Fields Returned

Field Name	Description
Status	Returns status of the save additional details process
Entity type	Returns type of the create /save operation done

WebServiceURL:

https://dms.asite.com/api/create/{projectId}/saveAdditionalDetails> saveAdditionalDetails.xml Sample

Return Xml:

```
<? xml version="1.0" encoding="ISO-8859-1"?>
<create-entity-vO generate-uRI="true">
        <status>Successful</status>
        <entity-type>Save additional details</entity-type>
         <error-message>{#Failure cause message}</ error-message >  </
create-entity-vO>
```

6.18. Assign Companies to workspace API Service

Objective

The Assign companies to workspace API service assigns specified companies to specified workspace or workspace template. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI from resultant XML of create workspace API call to execute Assign companies to workspace API Service.

Usage Rules

- User must have been logged in and executed Workspace List API Function or Create Workspace API Function or Create Workspace Template API Function.
- Use the following cURL command to Assign companies to workspace or workspace template:

  curl --location
  **'https://dmsqaak.asite.com/api/create/<WorkspaceID>/assignCompanies' **
  **--header 'Cookie: ASessionID=<ASessionID>' **
  **--header 'Content-Type: application/x-www-form-urlencoded' **

**--data-urlencode 'projectId=<projectId>' **
--data-urlencode 'newAssignOrgIds=<newAssignOrgIds>'

Input Parameters

Parameter Name	**Description**
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Assign Companies to Workspace API call from the resultant XML of Create workspace or Create Workspace template API call
projectId	Hashed project id collected from resultant xml of Workspace list API or Create Workspace API or Create Workspace Template API call
newAssignOrgIds	Comma separated hashed org ids collected from resultant XML of Organisation List API call

Default Fields Returned

Field Name	Description
Status	Returns status of the Assign Companies to Workspace process
Entity type	Returns type of the assign operation done

WebServiceURL:

https://dms.asite.com/api/create/{projectId}/assignCompanies> assignCompanies.xml

Sample Return Xml:

```
<? xml version="1.0" encoding="ISO-8859-1”?>
<create-entity-vO generate-uRI="true">
        <status>Successful</status>
        <entity-type>Assign Companies to Workspace</entity-type>
         <error-message>{#Failure cause message}</ error-message >  </
create-entity-vO>
```

6.19. Assign Administrators to Workspace API Service

Objective

The Assign Administrators to workspace API service assigns specified users as administrators to specified workspace or workspace template. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI from resultant XML of create workspace API call to execute Assign Administrators to workspace API Service.

Usage Rules

- User must have been logged in and executed Workspace List API Function or Create Workspace API Function or Create Workspace Template API Function.
- Use the following cURL command to Assign companies to workspace or workspace template:

```
curl --location
'https://dmsqaak.asite.com/api/create/<WorkspaceID>/assignAdmins' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'projectId=<projectId>' \
--data-urlencode 'newAssignOrgIds=<newAssignOrgIds>'
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Assign Companies to Workspace API call from the resultant XML of Create workspace or Create Workspace template API call
projectId	Hashed project id collected from resultant xml of Workspace list API or Create Workspace API or Create Workspace Template API call
newAssignUserIds	Comma separated hashed User ids collected from resultant XML of Organisation User List API call

Default Fields Returned

Field Name	Description

Status	Returns status of the Assign Administrators to Workspace process
Entity type	Returns type of the assign operation done

WebServiceURL:

https://dms.asite.com/api/create/{projectId}/assignAdmins> assignAdmins.xml

Sample Return Xml:

```
<? xml version="1.0" encoding="ISO-8859-1”?>
<create-entity-vO generate-uRI="true">
        <status>Successful</status>
        <entity-type>Assign Administrators to Workspace</entity-type>
         <error-message>{#Failure cause message}</ error-message >
</ create-entity-vO>
```

6.20. Save Workspace Settings API service

Objective

The Save Workspace Settings API service assigns specified users as administrators to specified workspace or workspace template. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml of Login API and URI from resultant XML of create workspace API call to execute Save Workspace Settings API Service.

Usage Rules

- User must have been logged in and executed Workspace List API Function or Create Workspace API Function or Create Workspace Template API Function.
- Use the following cURL command to Save workspace Settings:

```
curl --location
    'https://dmsqaak.asite.com/api/create/<WorkspaceID>/setWorkspaceSettings' \

--header 'Cookie: ASessionID=<ASessionID>' \

--header 'Content-Type: application/x-www-form-urlencoded' \

--data-urlencode 'projectId=<projectId>' \

--data-urlencode 'docListSortFieldId=<docListSortFieldId>' \

--data-urlencode 'docListSortOrderValue=<docListSortOrderValue>' \

--data-urlencode 'docDistSortFieldId=<docDistSortFieldId>' \

--data-urlencode 'docDistSortOrderValue=<docDistSortOrderValue>' \

--data-urlencode 'docBasketSortFieldId=<docBasketSortFieldId>' \

--data-urlencode 'docBasketSortOrderValue=<docBasketSortOrderValue>' \

--data-urlencode 'comRegSortFieldId=<comRegSortFieldId>' \

--data-urlencode 'comRegSortOrderValue=<comRegSortOrderValue>' \

--data-urlencode 'formListSortFieldId=<formListSortFieldId>' \

--data-urlencode 'formListSortOrderValue=<formListSortOrderValue>' \

--data-urlencode 'formBasketSortFieldId=<formBasketSortFieldId>' \

--data-urlencode 'formBasketSortOrderValue=<formBasketSortOrderValue>' \

--data-urlencode 'formDistSortFieldId=<formBasketSortOrderValue>' \

--data-urlencode 'formDistSortOrderValue=<formDistSortOrderValue>' \
```

```
--data-urlencode 'docPerPage=<docPerPage>' \
--data-urlencode 'formPerPage=<formPerPage>' \
--data-urlencode 'checkOutPref=false' \
--data-urlencode 'checkComparePref=false' \
--data-urlencode 'checkCreateCommentPref=<checkCreateCommentPref>' \
--data-urlencode 'checkViewDocumentPoi=false' \
--data-urlencode 'checkPrintDocumentPoi=false' \
--data-urlencode 'checkViewDocumentStatus=false' \
--data-urlencode 'checkPrintDocumentStatus=true' \
--data-urlencode 'publishPrivateDocRevPref=false'
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Save Workspace Settings API call from the resultant XML of Create workspace or Create Workspace template API call
projectId	Hashed project id collected from resultant xml of Workspace list API or Create Workspace API or Create Workspace Template API call
docListSortFieldId	Numeric id of doc listing sort options collected from resultant XML of Get

	Workspace Setting Sort Options API call

docListSortOrderValue	Numeric value to specify doc listing sort order Ascending order =0 Descending order =1
docDistSortFieldId	Numeric id of doc dist. report sort options collected from resultant XML of Get Workspace Setting Sort Options API call
docDistSortOrderValue	Numeric value to specify doc dist. report sort order Ascending order =0 Descending order =1
docBasketSortFieldId	Numeric id of doc basket sort options collected from resultant XML of Get Workspace Setting Sort Options API call
docBasketSortOrderValue	Numeric value to specify doc basket sort order Ascending order =0 Descending order =1
comRegSortFieldId	Numeric id of comment register sort options collected from resultant XML of Get Workspace Setting Sort Options API call
comRegSortOrderValue	Numeric value to specify comment register sort order Ascending order =0 Descending order =1
formListSortFieldId	Numeric id of Form listing sort options collected from resultant XML of Get Workspace Setting Sort Options API call

formListSortOrderValue	Numeric value to specify Form Listing sort order Ascending order =0 Descending order =1

formBasketSortFieldId	Numeric id of Form basket sort options collected from resultant XML of Get Workspace Setting Sort Options API call
formBasketSortOrderValue	Numeric value to specify Form basket sort order Ascending order =0 Descending order =1
formDistSortFieldId	Numeric id of Form Dist. report sort options collected from resultant XML of Get Workspace Setting Sort Options API call
formDistSortOrderValue	Numeric value to specify Form dist. report sort order Ascending order =0 Descending order =1
docPerPage	Numeric value Docs per page to be displayed in all document listings of the workspace [25 or 50 or 100 or 250]
formPerPage	Numeric value forms per page to be displayed in all form listings of the workspace [25 or 50 or 100 or 250]
checkOutPref	Specify document check out needs to be enabled in this workspace or not [true / false]

checkComparePref	Specify document compare needs to be enabled in this workspace or not [true / false]
checkCreateCommentPref	Specify create comment preferences needs to be enabled in this workspace or not [true / false]
checkViewDocumentPoi	Specify view document POI preference needs to be enabled in this workspace or not [true / false]
checkPrintDocumentPoi	Specify Print document POI preference needs to be enabled in this workspace or not [true / false]
checkViewDocumentStatus	Specify View Document Status preference needs to be enabled in this workspace or not [true / false]
checkPrintDocumentStatus	Specify Print Document Status preference needs to be enabled in this workspace or not [true / false]
publishPrivateDocRevPref	Specify Publish private doc. revisions to folders preference needs to be enabled in this workspace or not [true / false]

Default Fields Returned

Field Name	Description
Status	Returns status of the Set Workspace Settings process
Entity type	Returns type of the save operation done

WebServiceURL:

https://dms.asite.com/api/create/{projectId}/setWorkspaceSettings> setWorkspaceSettings.xml

Sample Return Xml:

```
<? xml version="1.0" encoding="ISO-8859-1”?>
<create-entity-vO generate-uRI="true">
        <status>Successful</status>
```

<entity-type>Set Workspace Settings</entity-type>
<error-message>{#Failure cause message}</ error-message > </ create-entity-vO>

6.21. Create Asite Organisation API Service

Objective

The Create Asite Organisation API Service creates an organisation with user specified details

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command to Create Asite Organisation

**curl --location 'https://dmsqaak.asite.com/api/portal/createOrganization' **

**--header 'Cookie:ASessionID=<ASessionID>;GUEST_LANGUAGE_ID=en_US; **

**--header 'Content-Type: application/x-www-form-urlencoded' **

**--data-urlencode 'orgName=<orgName>' **

--data-urlencode 'countryId=<countryId>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for **createOrganisation** API call from the resultant XML of Login API call
--data orgName	Name of Organization

countryId	Country Id from result XML of GetCountryListForPortal API Service

WebServiceURL:

https://dms.asite.com/api/{servicePath}/createOrganization/{authorizationId}
>CreateOrganization.xml

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1"?>

<Organization>
<name>AsiteTest1</name>
<organizationId>430709</organizationId> </Organization>

Default Fields Returned:

Field Name	Description
Name	Returns Name of Created Organization.
OrganizationId	Returns Numeric Id of Created Organization.

6.22. Create Asite User API Service

Objective

The Create User API Service creates and add a user on Asite.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Create user access check applied.
- The required JSON format for create user is mentioned below.

```
{
     "userEmail" : <user Email address>,
      "org_id" : <organization Id of the user>,
     "prefixName" : <prefix name>,
     "fName" : <first name>,
     "mName" : <middle name>,
     "lName" : <last name>,
     "jobTitle" : <job title of user>,
     "language" : <language of user>,
     "userAccessView" : <access view of user>,
     "start_date" : <start date of subscription>,
      "end_date" : <end date of subscription>,
      "never_exp" : <Expiry of subscription>,
      "subscriptionPlanName" : <subscription plan name>,
      "billToOrgId" : <Biller organization id>,
      "contractNumber" : <Asite contract number>,
      "emailNotification" : <Send Subscription Email to User>,
      "comments" : <comments of user>,
      "sendLoginCredential":<Send welcome Email to User>
}
```

Input Parameters:

Parameter Name	Description	Mandatory

ASessionID	session ID from the resultant XML of Login API call>	Yes
<URI>	URI tag value for **createUser** API call from the resultant XML of Login API	Yes
userDetails	Create user details json	Yes

JSON input fields:

No	JSON Field	Description	Mandatory
1	userEmail	Email address of the user	Yes
2	org_id	Organization Id of the user. It can get from OrganisationId tag value of resultant XML of Login API.	Yes
3	prefixName	Prefix of the user's name	No
4	fName	First name of the user	Yes
5	mName	Middle name of the user	No
6	lName	Last name of the user	Yes
7	jobTitle	Job title of the user	No
8	language	Language of the user	Yes
9	userAccessView	It defines user access view	Yes
10	start_date	Start date of subscription plan	Yes
11	end_date	End date of subscription plan	Yes (No – if never expire is true)
12	never_exp	true - User subscription will never end. false – expire subscription on end_date.	No
13	subscriptionPlanName	Subscription plan that should be assigned to the user	Yes
14	billToOrgId	Billing organization for the user. OrganizationId value can get from OrganisationId tag value of resultant XML of Login API.	Yes (If not changed organization id value can assign)
15	contractNumber	Asite contract number of the user	No
16	emailNotification	Send User Subscription email to user.	No
		(true – send email. false – email not sent)	

17	comments	Comments of the user	No
18	sendLoginCredential	Send welcome email to User. (true - send email, false – email not sent)	No (Default Value: true)

Please refer below table for parameter values:

Parameter Name	**Values**
prefixName	Dr Mr Mrs Ms
subscriptionPlanName	Key Lite Key Professional Key Enterprise
userAccessView	Classic Adoddle Both

language	English(United Kingdom) English(United States) English(Canada) France(Français) Русский(Russia) Español(Spain) English(Australia) 中文(China) Deutsch(Germany) Gaeilge(Ireland)
	English(South Africa) العربية(Saudi Arabia) 日本語(Japan)

WebServiceURL:

https://dms.asite.com/api/{servicePath}/createUser >createUser.xml Sample

cURL command to call create user API:

```
curl --location 'https://dmsqaak.asite.com/api/portal/createUser' \
--header 'Cookie:ASessionID=<ASessionID>;
GUEST_LANGUAGE_ID=en_US' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'userDetail
"userEmail": <userEmail>,
"org_id": "<org_id>",
"prefixName": "<prefixName>",
```

"fName": "<fName>",

"mName": "<mName>",

"lName": "<lName>",

'\"jobTitle'\": '\"<jobTitle>'\",

"language": "<language>",

"userAccessView": "<userAccessView>",

"start_date": "<start_date>",

"end_date": "<end_date>",

'\"never_exp'\": <never_exp>,

"subscriptionPlanName": "<subscriptionPlanName>",

"billToOrgId": "<billToOrgId>",

'\"sendLoginCredential'\": <sendLoginCredential>

}'

Sample Return Xml:

```
<?xml version="1.0" encoding="UTF-8"?>
<User>
   <EmailId>jharkhani@asite.com</EmailId>
   <UserId>879712</UserId>
</User>
```

Default Fields Returned:

Field Name	Description
EmailId	Returns email address of the created user
UserId	Returns the numeric id of created user

6.23. Get Country List for Portal API Service

Objective

The Get CountryList for Portal API Service returns list of countries to be used for Portal

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command for Country List API Service

**curl --location 'https://dmsqaak.asite.com/api/portal/getCountryListForPortal' **

--header 'Cookie: ASessionID=<ASessionID>; GUEST_LANGUAGE_ID=en_US'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Get CountryList for Portal from the resultant XML of Login API call

WebServiceURL: https://dms.asite.com/api/{servicePath}/getCountryListForPortal

>CountryListforPortal.xml

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1"?>

<Countries>

<Country>

<countryId>20</countryId>

<name>Afghanistan</name>

```
        </Country>
        <Country>
            <countryId>21</countryId>
            <name>Albania</name>
        </Country>
    <Countries>
```


Default Fields Returned

Field Name	Description
countryId	Returns the numeric id of Country
name	Returns name of a Country

6.24. Link Document API Service

Objective

The Link Document API Service creates a link revision from a source to target folder within a workspace or different workspace (in the same Region).

Usage Rules:

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- User must have executed Document list API to get the document list and revisionIds
- User must have executed Workspace POI (Purpose of Issue) List API for the Target workspace to get POI available in Target Workspace.
- User must have executed Workspace DocStatus List API Service for the Target workspace to get document statuses available in Target Workspace.
- Use the following cURL command to Link Document:

```
curl --location
'https://dmsqa.asite.com/api/workspace/<workspaceID>/folder/<FolderID>/LinkDoc
ument' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'revisionId=<RevisionID>' \
--data-urlencode 'targetFolderId=<TargetFolderID>' \
--data-urlencode 'targetProjectId=<TargetProjectId>' \
--data-urlencode 'linkType=<linkType>' \
--data-urlencode 'purposeOfIssueId=<purposeOfIssueId>' \
--data-urlencode 'statusId=<StatusId>
```

Input Parameters:

Parameter Name	Description

--data revisionId targetFolderId targetProjectId linkType purposeOfIssueId statusId	 Comma separated list of document Rev. Ids to be linked Folder Id of the target folder Project Id of the target folder Type of link STATIC = 1 DYNAMIC=2 Purpose of Issue Id to be assigned to the link file. You can pass 0 which is default POI in any workspace. Doc Status Id to be assigned to the link file. You can pass 998 which is default Document status in any workspace.
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for **linkDocument** API call from the resultant XML of Document List API call

WebServiceURL:

https://dmsak.asite.com/api/workspace/2061092$$k0Ni06/folder/5729574$$IQcVf6/LinkDocument> linkDocument.xml

Sample Return Xml:

<?xml version="1.0" encoding="UTF-8"?>

<CreateEntityVO>

<Type>Link document</Type>

<ID>2090648$$AzHC4p</ID>

<Status>Document Link Successfully </Status>

</CreateEntityVO>

6.25. Import Document Access History API Service

Objective

The Import document access history API Service adds audit history against a specific document revision

Usage Rules:

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- User must have executed Document list API to get the document list
- Use the following cURL command to Import Document Access History:

```
curl --location
    'https://dmsqa.asite.com/api/workspace/<workspaceID>/folder/<FolderID>/importD
    ocumentAccessHistory/<DcoumentID>' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'revisionId=<RevisionID>' \
--data-urlencode 'userId=<UserID>' \
--data-urlencode 'actionId=<actionId>' \
--data-urlencode 'actionTypeId=<actionTypeId>' \
--data-urlencode 'actionDate=<actionDate>' \
--data-urlencode 'description=<Description>' \
--data-urlencode 'remarks=<Remarks>' \
--data-urlencode 'proxyUserId=<proxyUserId>' \
--data-urlencode 'userTypeId=<userTypeId>'
```

- ***Input Parameters:***

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for importDocumentHistory API call from the resultant XML of Document List API call (Appendix F)
*revisionId	Rev. Id of the document
*userId	User id

*actionId	Action id of the document access action ACTION_VIEWED=23 ACTION_DISTRIBUTED=25 ACTION_PRINTED=26 , ETC
*actionTypeId	Action type id of document access type ACCESS_TYPE_VIEWED=2 ACCESS_TYPE_DOWNLOAD=3
	ACCESS_TYPE_PRINTED=4 ,ETC
*description	Description about the document access action
*actionDate	Date of particular action (Based on language format of logged user)
remarks	Remarks related to document access action
proxyUserId	Proxy user id
userTypeId	User type id. ONLINE_USER=1 PAPER_USER=2

Note: Parameter with '*' in above table are mandatory.

Default Fields Returned

This will return on successful import of audit access history details of the document revisions. The resultant data would be similar to the text as follows:

Field Name	Description
Accessed_By	Returns access user name of document
Organisation	Returns organisation name of document

Access_Date	Returns access date of document
AccessId	Returns access id of document
IssueNo	Returns issue no of document
RevisionName	Returns revision id of document
Access_Type	Returns type of access of document
Remarks	Returns remarks made on document

6.26. Workspace Users List API Service

Objective

The Workspace users API service will return list of active users on a specified workspace.

Usage Rules

- User must have been logged in and executed Workspace List API

Function

- Use the following cURL command to Workspace Users List API Service:

curl --location 'https://dmsqaak.asite.com/api/collateral/<WorkspaceID>/getWorkspaceUsers' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Workspace Users List API call from the resultant XML of Workspace List API call
projectId	Specified Project Id

WebServiceURL:

https://dms.asite.com/api/{servicePath}/{projecId}/getWorkspaceUsers >workspaceUsers.xml

Sample Return Xml:


```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
        <UserCommon_VO>
                <User_Id>414819$$kdNQbh</User_Id>
                <User_Name>abctest12test</User_Name>
                <User_Status>1</User_Status>
                <User_Role>Workspace-Administrator, Bidder<User_Role>
                <User_RoleIds>167509$$YjoUd0, 168109$$lOfgJH</User_RoleIds>
        </UserCommon_VO>
        <UserCommon_VO>
                <User_Id>379501$$QxBRaf</User_Id>
                <User_Name>xyz</User_Name>
                <User_Status>1</User_Status>
                <User_Role>Workspace-Administrator, Test<User_Role>
                <User_RoleIds>167509$$YjoUd0, 168107$$VpzdcE</User_RoleIds>
        </UserCommon_VO>
        <UserCommon_VO>
                <User_Id>412601$$7JH0RQ</User_Id>
                <User_Name>AmrutDhudiya</User_Name>
                <User_Status>1</User_Status>
                <User_Role>Workspace-Administrator, Test<User_Role>
                <User_RoleIds>167509$$YjoUd0, 168107$$VpzdcE</User_RoleIds>
        </UserCommon_VO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
UserId	Returns the numeric id of a workspace user
UserName	Returns name of a workspace user
UserStatus	Returns status of user on workspace
UserRole	Returns role/roles of user on workspace
User_RoleIds	Returns roleId(s) of user on workspace

6.27. Workspace Roles API Service

Objective

The Workspace roles API service will return the collection of user roles active on a specified workspace.

Usage Rules

- User must have been logged in and executed Workspace List API

Function

- Use the following cURL command for Workspace Roles API Service

curl --location ' https://dmsqaak.asite.com/api/collateral/<WorkpaceID>/getWorkspaceroles' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace Roles from the resultant XML of Workspace List API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/{projecId}/getWorkspaceroles >workspaceRoles.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>
        <role_-vO generate-uRI="true">
            <role-iD>59045$$gcJrZy</role-iD>
            <name>My Test Role</name>
        </role_-vO>
```

```
        <role_-vO generate-uRI="true">
            <role-iD>58338$$NpKQYQ</role-iD>
            <name>Test&#x27;s</name>
        </role_-vO>
        <role_-vO generate-uRI="true">
             <role-iD>58218$$ujSx1Z</role-iD>
             <name>Workspace - Administrator</name>
        </role_-vO>
    </asiteDataList>
```


Default Fields Returned:

Field Name	Description
Role Id	Returns the numeric id of a workspace role
Role name	Returns name of a workspace role

6.28. Workspace POI(Purpose Of Issue) List API Service

Objective

The Workspace POI (Purpose Of Issue) List API Service will return the collection of types of POI available for a specified workspace.

Usage Rules

- User must have been logged in and executed Workspace List API

Function

- Use the following cURL command for Workspace POI List API Service:

curl --location 'https://dmsqaak.asite.com/api/collateral/<WorkspaceID>/getpoiForWorkspace' \ --header 'Cookie:ASessionID=<ASession_ID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace POI List from the resultant XML of Workspace List API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/{projecId}/getpoiForWorkspace >workspacePOI.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
        <POI_VO>
                <POI_Id>0</POI_Id>
                <PurposeOfIssue>---</PurposeOfIssue>
```

```
        </POI_VO>
        <POI_VO>
            <POI_Id>1</POI_Id>
            <PurposeOfIssue>For Review</PurposeOfIssue>
        </POI_VO>
        <POI_VO>
            <POI_Id>1</POI_Id>
            <PurposeOfIssue>POI 1</PurposeOfIssue>
        </POI_VO>

</asiteDataList>
```


Default Fields Returned:

Field Name	Description
POI Id	Returns the numeric id of POI Type
PurposeOfIssue	Returns name of POI Type of a workspace

6.29. Workspace DocStatus List API Service

Objective

The Workspace Doc Status API service will return the collection of DocStatus Types available for a specified workspace.

Usage Rules

- User must have been logged in and executed Workspace List API Function
- Use the following cURL command for Workspace DocStatus Type API Service

curl --location 'https://dmsqaak.asite.com/api/collateral/<WorkspaceID>/getDocStatusForWorkspace' \ --header 'Cookie: ASession=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace DocStatus Type from the resultant XML of Workspace List API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/{projecId}/getDocStatusForWorkspace>workspacedocStatus.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
        <status-vO generate-uRI="true">
                <status-name>---</status-name>
                <status-iD>998</status-iD>
```

```
        </status-vO>
        <status-vO generate-uRI="true">
                <status-name>Status 1</status-name>
                <status-iD>1</status-iD>
        </status-vO>
        <status-vO generate-uRI="true">
                <status-name>Status 2</status-name>
                <status-iD>2</status-iD>
        </status-vO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
Status Id	Returns the numeric id of DocStatus Type
Status name	Returns name of DocStatus Type

6.30. Workspace DrawingSeries List API Service

Objective

The Workspace Drawing Series List API service will return the collection of Drawing Series of a specified workspace.

Usage Rules

- User must have been logged in and executed Workspace List API Function
- Use the following cURL command for Workspace DrawingSeries List API Service

curl --location 'https://dmsqaak.asite.com/api/collateral/<WorkspaceID>/getDrawingSeriesForWorkspace' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace DrawingSeries List from the resultant XML of Workspace List API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/{projecId}/getDrawingSeriesForWorkspace >workspaceDrawingSeries.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
        <DrawingSeries_VO>
                <DrawongSeries_Id>65</DrawongSeries_Id>
                <DrawingSeries_Name>1000</DrawingSeries_Name>
        </DrawingSeries_VO>
```

```
        <DrawingSeries_VO>
                <DrawongSeries_Id>66</DrawongSeries_Id>
                <DrawingSeries_Name>2000</DrawingSeries_Name>
        </DrawingSeries_VO>
        <DrawingSeries_VO>
                <DrawongSeries_Id>67</DrawongSeries_Id>
                <DrawingSeries_Name>4000</DrawingSeries_Name>
        </DrawingSeries_VO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
DrawingSeries Id	Returns the numeric id of a DrawingSeries
DrawingSeries name	Returns name of a DrawingSeries

6.31. Organisation List API Service

Objective
The Organisation List API Service returns List of all active Organisations registered with Asite.

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command for Organisation List API Service

**curl --location 'https://dmsqaak.asite.com/api/collateral/getorglist' **

--header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Organisation List from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getorglist >organisationList.xml

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>

<OrgVO>

<OrgID>30$$hUmqFj</OrgID>

```
        <OrgName>Ocmis(UK)Ltd</OrgName>
    </OrgVO>
    <OrgVO>
        <OrgID>31$$BMqvEm</OrgID>
        <OrgName>MilesGroup</OrgName>
    </OrgVO>
    <OrgVO>
        <OrgID>32$$7bYbna</OrgID>
        <OrgName>Invent Water Features Limited</OrgName>
    </OrgVO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
Organisation Id	Returns the numeric id of an Organisation
Organisation name	Returns name of an Organisation

6.32. Organisation User List API Service

Objective

The Organisation User List API Service return List of users of a specified Organisation.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for Organisation Active Users List:

**curl --location 'https://dmsqaak.asite.com/api/collateral/getUserListForOrg' \ --header 'Cookie: ASessionID=<ASessionID>' **

- Use the following cURL command for Organisation All Users List:

curl --location 'https://dmsqaak.asite.com/api/collateral/getUserListForOrg' \ --header 'Cookie: ASessionID=<ASessionID>' \ --data "includeDeactivateUser=true"

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Organisation User List from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getUserListForOrg >organisationUserList.xml

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>

<User_VO>

<User_Id>15655$$ZGk5JC</User_Id>

<First_Name>Asite</First_Name>

<Last_Name>Loadtest1</Last_Name>

<Status_Id>1</Status_Id>

<User_emailid>Loadtest1@asite.com</User_emailid>
<User_Subscription_Type_Id>1</User_Subscription_Type_Id>

<User_Subscription_Plan_Id>2</User_Subscription_Plan_Id>

<Profile_Comments> profile comment</Profile_Comments>

</User_VO>

<User_VO>

<User_Id>16923$$Q0D4rt</User_Id>

<First_Name>Asite</First_Name>

<Last_Name>Loadtest10</Last_Name>

<Status_Id>1</Status_Id>

<User_emailid>Loadtest10@asite.com</User_emailid>

<User_Subscription_Type_Id>1</User_Subscription_Type_Id>

<User_Subscription_Plan_Id>2</User_Subscription_Plan_Id>

<Profile_Comments>profile comment</Profile_Comments>

</User_VO>

</asiteDataList>

Default Fields Returned:

Field Name	Description
UserId	Returns the numeric id of an Organisation User
FirstName	Returns FirstName of an Organisation User
LastName	Returns LastName of an Organisation User
StatusId	Returns status of an Organisation User

User_emailid	Returns email address of an Organisation User
User_Subscription_Type_Id	Returns *user subscription type id* of an Organisation User
User_Subscription_Plan_Id	Returns *user subscription plan id* of an Organisation User
Profile_Comments	Returns *profile comment* of an Organisation User

6.33. ApplicationType List API Service

Objective

The Application Type List API Service returns details of all available application types.

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command for ApplicationType List API Service

**curl --location 'https://dmsqaak.asite.com/api/collateral/getApplicationTypes' **
--header 'Cookie: AsessionID=<AsessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for ApplicationType List from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getApplicationTypes >applicationTypes.xml

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>

<space-type-vO space-type-iD="1$$EQYc8q" generate-uRI="true">

<space-type-name>Document, Workflow &Forms Manager</space-type-name>

</space-type-vO>

<space-type-vO space-type-iD="2$$CTnd6H" generate-uRI="true">

<space-type-name>Document Manager</space-type-name>

</space-type-vO>

<space-type-vO space-type-iD="4$$7WLNSP" generate-uRI="true">

<space-type-name>Document Manager - Enterprise</space-type-name>
</space-type-vO> </asiteDataList>

Default Fields Returned:

Field Name	Description
SpaceType Id	Returns the numeric id of an Application Type
SpacetypeName	Returns name of an Application Type

6.34. DataCenter List API Service

Objective

The DataCenter List API Service returns details of all available data centers.

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command for DataCenterList API Service

curl --location 'https://dmsqaak.asite.com/api/collateral/getDataCenterList' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for DataCenter List from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getDataCenterList >DataCenter.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
    <data-center-vO data-center-id="1" generate-uRI="true">
        <data-center-name>United Kingdom (EU01)</data-center-name>
    </data-center-vO>
```

<data-center-vO data-center-id="2" generate-uRI="true">

<data-center-name>North America (US01)</data-center-name>

</data-center-vO> </asiteDataList>

Default Fields Returned:

Field Name	Description
DataCenterId	Returns the numeric id of a DataCenter
DataCenter Name	Returns name of a DataCenter

6.35. Workspace Status Type API Service

Objective

The Workspace Status List API Service returns details of Types of the workspace statuses.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for Workspace StatusTypes API Service

curl --location 'https://dmsqaak.asite.com/api/collateral/getWorkspaceStatusList' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for workspace StatusTypes from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getWorkspaceStatusList >WorkspaceStatus.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
        <status-vO generate-uRI="true">
                <status-name>Open</status-name>
                <status-iD>5</status-iD>
```

```
        </status-vO>
        <status-vO generate-uRI="true">
            <status-name>Closed</status-name>
            <status-iD>6</status-iD>
        </status-vO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
StatusId	Returns the numeric id of Workspace status type
Status Name	Returns name of a Workspace status type

6.36. Workspace Subscription Type API Service

Objective
The Workspace Subscription Type API Service returns details of available workspace Subscription Types.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for workspace Subscription Types API Service

```
curl --location 'https://dmsqa.asite.com/api/collateral/getWorkspaceSubscriptionType'
    \  --header 'Cookie: ASessionID=<ASessionID>'
```

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for workspace Subscription Types from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getWorkspaceSubscriptionType >WorkspaceSubscription.xml

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>

<WorkspaceSubscription_VO>

<Subscription_Id>1</Subscription_Id>

<Subscription_Type>Flatfee based</Subscription_Type>

</WorkspaceSubscription_VO>
<WorkspaceSubscription_VO>

<Subscription_Id>2</Subscription_Id>

<Subscription_Type>Subscription based</Subscription_Type>

</WorkspaceSubscription_VO>

</asiteDataList>

Default Fields Returned:

Field Name	Description
Subscription Id	Returns the numeric id of Workspace subscription type
Subscription Type	Returns name of a Workspace subscription type

6.37. Workspace Branding List API Service

Objective
The Workspace Branding List API will return Branding list for Workspace creation. Extract the session id from the xml of the login API Call i.e. <Sessionid> tag from the resultant xml of Login API to execute Create Workspace API Service.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command to Get Workspace Branding List

**curl --location 'https://dmsqa.asite.com/api/workspace/workspacebrandinglist' \
--header 'Cookie: ASessionID=<ASessionID>'**

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for workspaceBrandingList API call from the resultant XML of Login API call

Sample Return XML:

This will return the workspace list that the logged in user has access to and the URIs for the API calls that can be made after workspace branding list API call has been made in <URI> tag in the resultant xml as follows:


```
<?xml version="1.0" encoding="ISO-8859-1" ?>

<ManageSpaceTO>

    <BrandingVOList>

        <BrandingTypeId>0</BrandingTypeId>

        <BrandingId>0</BrandingId>

        <BrandingName>Asite Branding</BrandingName>
```

```
        <ProjectBrandingOverOrgBranding>false</ProjectBrandingOverOrgBranding>
<HashedBrandingId>0$$g6YXe0</HashedBrandingId>

    </BrandingVOList>

</ManageSpaceTO>
```


6.38. PaperSize List API Service

Objective

The PaperSize List API returns Paper Size list required for publishing documents.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- Use the following cURL command to get PaperSize from API application:

  curl--location 'https://dmsqa.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/papersizelist' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for PaperSize List API call from the resultant XML of Workspace Folder List API call

Sample Return XML

This will return the workspace list that the logged in user has access to and the URIs for the API calls that can be made after paperSize list API call has been made in <URI> tag in the resultant xml as follows:


```
<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>
```

```
<asiteDataList>
    <integer>1</integer>
    <string>A0</string>
</asiteDataList>
<asiteDataList>
    <integer>2</integer>
    <string>A1</string>
</asiteDataList>
```

6.39. Available Attributes for Workspace API Service

Objective
The Available Attributes for Workspace API returns available attributes for specified workspace.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- Use the following cURL command to get Attributes for Workspace from API application

  curl--location 'https://dmsqa.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/getAvailableAttributes' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for **AvailableAttributes** API call from the resultant XML of Workspace Folder List API call

Sample Return XML

This will return the workspace list that the logged in user has access to and the URIs for the API calls that can be made after **Available Attributes** API call has been made in <URI> tag in the resultant xml as follows:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
    <asiteDataList>

        <AvailableAttributes>
            <Code>101</Code>
            <Description>ChangesAPPLy</Description>
        </AvailableAttributes>

        <AvailableAttributes>
                <Code>102</Code>
                <Description>Construction1</Description>
```

```
    </AvailableAttributes>

    <AvailableAttributes>
        <Code>103</Code>
        <Description>BuildingBridge</Description>
    </AvailableAttributes>

</asiteDataList>
```

6.40. Project Phases API Service

Objective

The Project Phases API Service returns details of available Project Phases

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command for Project Phases API Service

curl --location 'https://dmsqa.asite.com/api/collateral/getProjectPhaseTypes' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Project Phases from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getProjectPhaseTypes >ProjectPhases.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
    <project-phase-vO project-phase-id="1" generate-uRI="true">
        <project-phase>Feasibility</project-phase>
    </project-phase-vO>
    <project-phase-vO project-phase-id="2" generate-uRI="true">
        <project-phase>Pre-Construction</project-phase>
    </project-phase-vO>
```

<project-phase-vO project-phase-id="3" generate-uRI="true">

<project-phase>Construction</project-phase>
</project-phase-vO> </asiteDataList>

Default Fields Returned:

Field Name	Description
ProjectPhase Id	Returns the numeric id of Project Phase type
ProjectPhase	Returns name of a Project Phase type

6.41. Country List API Service

Objective

The Country List API Service returns list of countries

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command for Country List API Service

curl --location 'https://dmsqa.asite.com/api/collateral/getCountryList' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Country List from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getCountryList >CountryList.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>

<asiteDataList>

        <country-vO country-id="1" generate-uRI="true">

                <country-name>Afghanistan</country-name>

        </country-vO>

        <country-vO country-id="2" generate-uRI="true">

                <country-name>Albania</country-name>

        </country-vO>
```

```
        <country-vO country-id="3" generate-uRI="true">
            <country-name>Algeria</country-name>
        </country-vO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
Country Id	Returns the numeric id of Country
Country Name	Returns name of a Country

6.42. Region List for Country API Service

Objective

The Region List for Country API Service returns list of regions for specified country

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for region List for Country API Service

**curl --location --request GET 'https://dmsqaak.asite.com/api/collateral/getRegionListforCountry' **

**--header 'Cookie: ASessionID=<ASessionID>;' **

--form 'countryId="<CountryID>"'

Input Parameters

Parameter Name	Description
--data countryId	countryId for which region list will be returned
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Region List for Country from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getRegionListforCountry > RegionList.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
        <region-vO region-id="53">
                <region-name>Alberta</region-name>
        </region-vO>
```

<region-vO region-id="54">

<region-name>British Columbia</region-name>

</region-vO>

<region-vO region-id="55">
<region-name>Manitoba</region-name>

</region-vO> </asiteDataList>

Default Fields Returned:

Field Name	Description
Region Id	Returns the numeric id of region
Region Name	Returns name of a region

6.43. Workspace Setting Sort Options API Service

Objective

The Workspace Setting Sort Options API Service returns Lists of all active Document List Sort Options, Document Basket Sort Options, Document Distribution Report Sort Options, Form List Sort Options, Form Basket Sort Options, Form Distribution Report Sort Options, Comment Register Sort Options.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for Workspace Setting Sort Options API Service

curl --location 'https://dmsqa.asite.com/api/collateral/getWorkspaceSettingSortOption' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace Setting Sort Options from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getWorkspaceSettingSortOption > WorkspacesettingSortOptions.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1"?>
<WorkspaceSetting_VO>
        <Doc_List_Basket_Sort_Options generate-uRI="true">
                <name>Doc Ref</name>
                <value>2</value>
        </Doc_List_Basket_Sort_Options>
```

```
<Doc_List_Basket_Sort_Options generate-uRI="true">
        <name>Attached File</name>
        <value>3</value>
</Doc_List_Basket_Sort_Options>
<Comment_Reg_Sort_Options generate-uRI="true">
        <name>Doc Ref</name>
        <value>13</value>
</Comment_Reg_Sort_Options>
<Comment_Reg_Sort_Options generate-uRI="true">
        <name>Doc Title</name>
        <value>14</value>
</Comment_Reg_Sort_Options>
<Doc_Dist_Sort_Options generate-uRI="true">
        <name>Doc Ref</name>
        <value>25</value>
</Doc_Dist_Sort_Options>
<Form_List_Basket_Sort_Options generate-uRI="true">
        <name>FormID</name>
        <value>40</value>
</Form_List_Basket_Sort_Options>
<Form_List_Basket_Sort_Options generate-uRI="true">
        <name>Form Title</name>
        <value>41</value>
</Form_List_Basket_Sort_Options>
<Form_Dist_Sort_Options generate-uRI="true">
```

```
            <name>FormID</name>
            <value>46</value>
        </Form_Dist_Sort_Options>
        <Form_Dist_Sort_Options generate-uRI="true">
            <name>Form Title</name>
            <value>47</value>
        </Form_Dist_Sort_Options>
    <WorkspaceSetting_VO>
```

Default Fields Returned

Field Name	Description
name	Returns the name of option
Value	Returns numeric value(Id) of option

These Fields are returned for sort options mentioned below:

- Document List Sort Options
- Document Basket Sort Options
- Document Distribution Report Sort Options
- Form List Sort Options
- Form Basket Sort Options
- Form Distribution Report Sort Options
- Comment Register Sort Options

6.44. Workspace UserGroup List API

Objective

Workspace UserGroup API returns list of user groups assigned to the user.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have been logged in and executed Workspace List API Function
- Use the following cURL command to get UserGroup API application

**curl --location 'https://dmsqa.asite.com/api/workspace/<WorkspaceID>/getWorkspaceUserGroup' **

--header 'Cookie: ASessionID=<ASessionID>;

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace Setting Sort Options from the resultant XML of Login API call

Default Fields Returned

Field Name	Description
UserGroupName	Returns the name of user group
UserGroupId	Returns Id of user group
TotalUsers	Returns number of users relates to User group

Sample Return Xml:

<?xml version="1.0" encoding="ISO-8859-1" ?>

<asiteDataList>

<UserGroupVO>

<UserGroupId>389209$$eIWkyS</UserGroupId>
<UserGroupName>ArupUG1</UserGroupName>

<TotalUsers>1</TotalUsers>

</UserGroupVO>

</asiteDataList>

6.45. Create Workspace Role API

Objective

Create Workspace Role API allows to create role on any workspace

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have been logged in and executed Workspace List API Function
- Use the following cURL command to create Workspace Role API application

```
curl --location --request GET
'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/createWorkspaceRole' \

--header 'Cookie: ASessionID=<ASessionID>' \

--form 'roleName="<NamesOfRole>"'
```

Input Parameters

Parameter Name	Description
--data roleName	List of Name of Roles
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace Setting Sort Options from the resultant XML of Login API call

NOTE : Multiple roles are separated by ‘,’ (Comma).

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1" ?>
        <CreateEntityVO>
                <type>Create Workspace Role</type>
                <id>{#docd}</id>
                < status >Successful</status>
                <errorMsg>{#Failure cause message}</ errorMsg >
        </CreateEntityVO>
```

6.46. User Role Management API

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have been logged in and executed Workspace List API Function
- Use the following cURL command to run User Role Management API application

```
curl --location --request GET
'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/AssignWorkspaceRole'
\

--header 'Cookie: ASessionID=<ASessionID>' \

--form 'roleId="<roleId>"' \

--form 'userId="<userId>"' \

--form 'orgId="<orgId>"' \

--form 'userGroupId="<userGroupId>"' \

--form 'operationType="<operationType>"'
```

Input Parameters:

Parameter Name	Description

--data roleId userId orgId userGroupId operationType	 Hashed Id of role List of Hashed Id of user List of Hashed Id of organization List of Hashed Id of userGroup 1 = assign, 2 = remove
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Workspace Setting Sort Options from the resultant XML of Login API call

NOTE : List of multiple id are separated by ',' (Comma).

Sample Return Xml:

```
<?xml version="1.0" encoding="ISO-8859-1" ?>
        <CreateEntityVO>
                <type>Assign/Unassign Workspace Role</type>
                <id>{#docd}</id>
                < status >Successful</status>
                <errorMsg>{#Failer cause message}</ errorMsg >
        </CreateEntityVO>
```

6.47. Action list for Audit trail API service

Objective

The Action List for Audit trail API Service returns list of actions for Audit Trail

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for Action List for Audit Trail API Service

**curl --location 'https://dmsqaak.asite.com/api/collateral/getActionListForAuditTrail' **
--header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Action List for Audit Trail from the resultant XML of Login API call

WebServiceURL:

https://dms.asite.com/api/{servicePath}/getActionListForAuditTrail > ActionList.xml

Sample Return Xml:


```
<?xml version="1.0" encoding="ISO-8859-1"?>
<asiteDataList>
    <AuditTrail_VO>
        <Action_type_Id>3</Action_type_Id>
        <Action_Name>Downloaded</Action_Name>
    </AuditTrail_VO>
```

```
        <AuditTrail_VO>
            <Action_type_Id>4</Action_type_Id>
            <Action_Name>Printed</Action_Name>
            <Description />
        </AuditTrail_VO>
</asiteDataList>
```


Default Fields Returned:

Field Name	Description
Action Type Id	Returns the numeric id of an action
Action Name	Returns name of an action
Description	Returns description of an action

6.48. Get User By Email Address API Service

Objective
The Get User By Email Address API Service returns User Session Profile for specified email address

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Use the following cURL command for Get User By Email Address API Service

```
curl --location 'https://dmsqaak.asite.com/api/collateral/getUserProfileByEmailId' \
--header 'Cookie:  ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'emailId=User@asite.com'
```

Input Parameters

Parameter Name	Description
--data	Email Address of the user
ASessionID	session ID from the resultant XML of Login API call
<URI>	URI tag value for Get User By Email Address from the resultant XML of Login API call

WebServiceURL: https://dms.asite.com/api/{servicePath}/getUserProfileByEmailId >

UserSessionProfile.xml

Sample Return Xml:

```
<?xml version="1.0" encoding="UTF-8"?>
<UserProfile>
   <UserID>844264$$SjRRe2</UserID>
   <User_emailid>jharkhani@asite.com</User_emailid>
   <User_Name>Jay Harkhani</User_Name>
   <Organisation>Asite Solutions Ltd</Organisation>
```

<OrganisationId>3$$JYzInZ</OrganisationId>
<SessionTimeoutDuration>360</SessionTimeoutDuration>
<UserSubscriptionId>1</UserSubscriptionId>
<subscriptionPlanId>2</subscriptionPlanId>
<eGRNTimeoutDuration>0</eGRNTimeoutDuration>
<language>en_GB</language>

<UserImageName>https://www.asite.com/profilefiles/member_photos/photo_844264.jpg?v=201506-09 06:55:35.62</UserImageName>
<IsActive>true</IsActive>
<comments>User Registration No. 452178</comments>
</UserProfile>

Default Fields Returned:

Field Name	Description
User Id	Returns Hashed numeric id of User
User EmailId	Returns email address of the user
User Name	Returns name of the user
Organization	Returns Organization of the user
Organization Id	Returns Hashed Organization Id
Session Timeout Duration	Returns user session timeout value
User Subscriptionid	Returns user subscription status Id
Subscription Plan Id	Returns subscription plan Id of user
eGRNTimeoutDuration	Returns eGRN Timeout duration
Language	Returns language set by user
User Image Name	Returns URL for user image
Is Active	Returns user status (Active/Inactive)
Comments	Returns comments added in user profile

6.49. Forms Data Object List API Service

Objective

This API returns the data object List of forms for the given user.

Usage Rules

- User has to pass email Id and password with the Input parameters.
- Use the following cURL command to list data object of the specified user:

```
curl --location
'https://adoddleqaak.asite.com/commonapi/dataObjectService/dataObjectList' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'email=User@asite.com' \
--data-urlencode 'password=<password>' \
--data-urlencode 'projectName=<projectName>' \
--data-urlencode 'appBuilderId=<appBuilderId>' \
--data-urlencode 'objectType=Forms' \
--data-urlencode 'clientName=<clientName>' \
--data-urlencode 'timeStamp=<timeStamp>'
```

Input Parameters

Parameter Name	Description
Email	Email ID used for logging on to Asite Platform
Password	Password for login
projectName	Name of the project
appBuilderId	AppBuilder ID
objectType	Type of the object to retrieve
clientName	Name of the client(short identifier- i.e. NLS)
timestamp(optional)	Timestamp to get limited data of given object.
URI	https://adoddleak.asite.com/commonapi/dataObjectService/dataObjectList

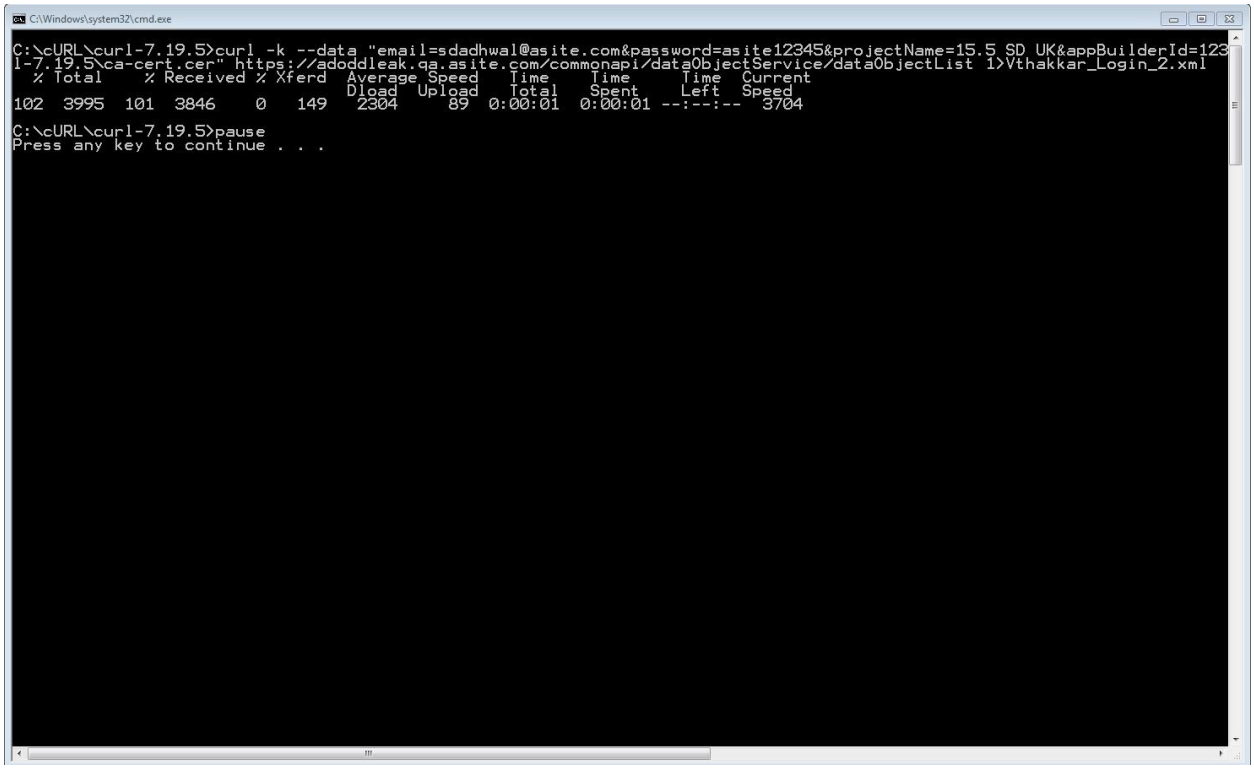

Sample Return XML:

This will return the data object list of forms.

<?xml version="1.0" encoding="UTF-8" standalone="true"?>
-<asite-array-list>
-<document>
<generateURI>true</generateURI>
<actions xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<allowReopenForm>false</allowReopenForm>
<appType>Project Forms</appType>
<assoccommentlist xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<assocformlist xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<assocfilelist xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<attachmentImageName/>
<canAccessHistory>true</canAccessHistory>
<canOrigChangeStatus>false</canOrigChangeStatus>
<closeOut>false</closeOut>
<formcode>ACF001</formcode>
<formid>2619339</formid>
<controllername xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<controlleruserid>0</controlleruserid>
-<customfieldsvalue>
<fieldvalue field="CFID_ORI_FORMTITLE">FormMailboxSimple</fieldvalue>
<fieldvalue field="CFID_ORI_USERREF">R16.0 Release</fieldvalue>
</customfieldsvalue>

<dc>UK</dc>
<doctype>Apps</doctype>
<isdraft>false</isdraft>
<fname>Suresh</fname>
<flagTypeId>0</flagTypeId>
<flagTypeImageName>flag_type/flag_0.png</flagTypeImageName>
<folderid>0</folderid>
<formcreationdate>02-Nov-2015#13:13 WET</formcreationdate>
<formCreationDateInMS>1446469986000</formCreationDateInMS>
<formgroupname>Customr Forms</formgroupname>
<formhasassocattach>false</formhasassocattach>
<formnum>1</formnum>
<formPrintEnabled>false</formPrintEnabled>
<formtypeid>2245270</formtypeid>
<formtypename>Email In Form</formtypename>
<hasassociation>false</hasassociation>
<hasattachment>false</hasattachment>
<hasOverallStatus>false</hasOverallStatus>
<id>ACF001</id>
<image xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<indent>-1</indent>
<instancegroupid>2243733</instancegroupid>
<invoiceColourCode>-1</invoiceColourCode>
<invoiceCountAgainstOrder>-1</invoiceCountAgainstOrder>
<lname>Dadhwal</lname>
<messageTypeImageName>icons/form.png</messageTypeImageName>
<msgcode>ORI001</msgcode>
<msgcreationdate>2015-11-02T13:13:06Z</msgcreationdate>
<msgid>2828121</msgid>
<msgoriginatorid>606147</msgoriginatorid>
<msgstatusid>20</msgstatusid>
<msgTypeCode>ORI</msgTypeCode>
<msgtypeid>1</msgtypeid>
<noOfActions>0</noOfActions>
<noOfMessages>0</noOfMessages>
<offlineformid>-1</offlineformid>
<orgid>3</orgid>
<orgname>Asite Solutions Ltd.</orgname>
<originator>https://www.asite.com/adoddleprofilefiles/member_photos/photo_606147_thumbn ail.jpg#Suresh</originator>
<originatorDisplayName>Suresh Dadhwal, Asite Solutions Ltd.</originatorDisplayName>
<email>sdadhwal@asite.com</email>
<originatoruserid>606147</originatoruserid>

```
<parentmsgid>0</parentmsgid>
<projectid>2060794</projectid>
<projectname>15.5 SD UK</projectname>
<project_APD_folder_id>0</project_APD_folder_id>
<formclosebydate xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<showPrintIcon>0</showPrintIcon>
<statusname xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
<statusChangeRestricted>false</statusChangeRestricted>
<statuschangeuseremail>sdadhwal@asite.com</statuschangeuseremail>
<statuschangeuserid>0</statuschangeuserid>
<statuschangeusername>Suresh Dadhwal</statuschangeusername>
<statuschangeuserorg>Asite Solutions Ltd.</statuschangeuserorg>
<statusChangeUserPic>https://www.asite.com/adoddleprofilefiles/member_photos/photo_606
147_thumbnail.jpg</statusChangeUserPic>
<customrecordstyle xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchemainstance"/>
<statusupdatedate>02-Nov-2015#13:13 WET</statusupdatedate>
<statusid>20</statusid>
<templateType>0</templateType>
<title>FormMailboxSimple</title>
<typeImage>icons/form.png</typeImage>
<updated>02-Nov-2015#13:13 WET</updated>
<updatedDateInMS>1446469986000</updatedDateInMS>
<userid>606147</userid>
<userref>R16.0 Release</userref>
</document>
</asite-array-list>
```


Schema (XSD) of the Return XML:

```
<xs:schema attributeFormDefault="unqualified" elementFormDefault="qualified"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="asite-array-list">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="document">
          <xs:complexType>
            <xs:sequence>
              <xs:element type="xs:string" name="generateURI"/>
              <xs:element type="xs:string" name="actions" nillable="true"/>
              <xs:element type="xs:string" name="allowReopenForm"/>
              <xs:element type="xs:string" name="appType"/>
              <xs:element type="xs:string" name="assoccommentlist" nillable="true"/>
              <xs:element type="xs:string" name="assocformlist" nillable="true"/>
              <xs:element type="xs:string" name="assocfilelist" nillable="true"/>
              <xs:element type="xs:string" name="attachmentImageName"/>
```

```
<xs:element type="xs:string" name="canAccessHistory"/>
<xs:element type="xs:string" name="canOrigChangeStatus"/>
<xs:element type="xs:string" name="closeOut"/>
<xs:element type="xs:string" name="formcode"/>
<xs:element type="xs:int" name="formid"/>
<xs:element type="xs:string" name="controllername" nillable="true"/>
<xs:element type="xs:byte" name="controlleruserid"/>
<xs:element name="customfieldsvalue">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="fieldvalue" maxOccurs="unbounded" minOccurs="0">
        <xs:complexType>
          <xs:simpleContent>
            <xs:extension base="xs:string">
              <xs:attribute type="xs:string" name="field" use="optional"/>
            </xs:extension>
          </xs:simpleContent>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element type="xs:string" name="dc"/>
<xs:element type="xs:string" name="doctype"/>
<xs:element type="xs:string" name="isdraft"/>
<xs:element type="xs:string" name="fname"/>
<xs:element type="xs:byte" name="flagTypeId"/>
<xs:element type="xs:string" name="flagTypeImageName"/>
<xs:element type="xs:byte" name="folderid"/>
<xs:element type="xs:string" name="formcreationdate"/>
<xs:element type="xs:long" name="formCreationDateInMS"/>
<xs:element type="xs:string" name="formgroupname"/>
<xs:element type="xs:string" name="formhasassocattach"/>
<xs:element type="xs:byte" name="formnum"/>
<xs:element type="xs:string" name="formPrintEnabled"/>
<xs:element type="xs:int" name="formtypeid"/>
<xs:element type="xs:string" name="formtypename"/>
<xs:element type="xs:string" name="hasassociation"/>
<xs:element type="xs:string" name="hasattachment"/>
<xs:element type="xs:string" name="hasOverallStatus"/>
<xs:element type="xs:string" name="id"/>
<xs:element type="xs:string" name="image" nillable="true"/>
<xs:element type="xs:byte" name="indent"/>
```

```
        <xs:element type="xs:int" name="instancegroupid"/>
        <xs:element type="xs:byte" name="invoiceColourCode"/>
        <xs:element type="xs:byte" name="invoiceCountAgainstOrder"/>
        <xs:element type="xs:string" name="lname"/>
        <xs:element type="xs:string" name="messageTypeImageName"/>
        <xs:element type="xs:string" name="msgcode"/>
        <xs:element type="xs:dateTime" name="msgcreationdate"/>
        <xs:element type="xs:int" name="msgid"/>
        <xs:element type="xs:int" name="msgoriginatorid"/>
        <xs:element type="xs:byte" name="msgstatusid"/>
        <xs:element type="xs:string" name="msgTypeCode"/>
        <xs:element type="xs:byte" name="msgtypeid"/>
        <xs:element type="xs:byte" name="noOfActions"/>
        <xs:element type="xs:byte" name="noOfMessages"/>
        <xs:element type="xs:byte" name="offlineformid"/>
        <xs:element type="xs:byte" name="orgid"/>
        <xs:element type="xs:string" name="orgname"/>
        <xs:element type="xs:string" name="originator"/>
        <xs:element type="xs:string" name="originatorDisplayName"/>
        <xs:element type="xs:string" name="email"/>
        <xs:element type="xs:int" name="originatoruserid"/>
        <xs:element type="xs:byte" name="parentmsgid"/>
        <xs:element type="xs:int" name="projectid"/>
        <xs:element type="xs:string" name="projectname"/>
        <xs:element type="xs:byte" name="project_APD_folder_id"/>
        <xs:element type="xs:string" name="formclosebydate" nillable="true"/>
        <xs:element type="xs:byte" name="showPrintIcon"/>
        <xs:element type="xs:string" name="statusname" nillable="true"/>
        <xs:element type="xs:string" name="statusChangeRestricted"/>
        <xs:element type="xs:string" name="statuschangeuseremail"/>
        <xs:element type="xs:byte" name="statuschangeuserid"/>
        <xs:element type="xs:string" name="statuschangeusername"/>
        <xs:element type="xs:string" name="statuschangeuserorg"/>
        <xs:element type="xs:string" name="statusChangeUserPic"/>
        <xs:element type="xs:string" name="customrecordstyle" nillable="true"/>
        <xs:element type="xs:string" name="statusupdatedate"/>
        <xs:element type="xs:byte" name="statusid"/>
        <xs:element type="xs:byte" name="templateType"/>
        <xs:element type="xs:string" name="title"/>
        <xs:element type="xs:string" name="typeImage"/>
        <xs:element type="xs:string" name="updated"/>
        <xs:element type="xs:long" name="updatedDateInMS"/>
        <xs:element type="xs:int" name="userid"/>
        <xs:element type="xs:string" name="userref"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:sequence>
```

```
    </xs:complexType>
  </xs:element>
</xs:schema>
```

Returned Member URL Resources:

- <URI> https://adoddleak.asite.com/commonapi/dataObjectService/dataObjectList </URI> is the URL you use to return list data object.

Fields Returned:

Field Name	Description
formtypeid	Returns the form type id
formtypename	Returns the form type name
appType	Returns the app type
formcode	Returns the form code.
title	Returns the title
userref	Returns the userref.
formgroupname	Returns the form group name.
customfieldsvalue	Returns the custom fields value.
formcreationdate	Returns the form creation date.
updated	Returns the updated date.
projectid	Returns the project Id.
projectname	Returns the project name.
originatoruserid	Returns the originator user id.
originatorDisplayName	Returns originator display name.

isdraft	Returns true for draft.
formclosebydate	Returns response requested by.
statusname	Returns the status name.

6.50. Document Search API

Objective
Document Search API returns a list of documents based on specified criteria provided in JSON format.

Usage Rules

- User must have been logged in using Login API.
- Below is the required JSON format for search criteria.

```
{
    "criteria" : [{
                "field" : <name of field 1>,
                "operator" : <operator id>,
                "values" : [<value 1>, <value 2>, <value n>]
            },
            {
                "field" : <name of field 2>,
                "operator" : <operator id>,
                "values" : [<value 1>, <value 2>, <value n>]
            }
    ],
    "recordLimit" : <Integer value>,
    "sortField": <name of field>,
    "sortOrder": <asc/desc>
}
```

- Please refer below table for search criteria json fields

No	Field Name	Description	Mandatory	Default value
1	criteria	Array of search criteria	Yes	
2	field	Field name in search criteria	Yes	
3	operator	Operator for search criteria	Yes	

4	values	Array of value(s) to be search for search criteria	Yes	
4	recordLimit	Number of documents to return after recordStart (Cannot exceed 1000)	No	10
6	sortField	Sort field name	No	revision_date
7	sortOrder	Sort field Order(asc/desc)	No	desc
8	generateShareLink	specify whether to generate document link or not value can be:	No	
		true: public link **false**: direct/private link(require login)		
9	showLatestRevision	specify whether to access latest revision or not for link value can be: **true**: access latest revision of document **false**: access revision on which link was created ACCESS can be view/download based on openAndView option	No	true
10	notifiyOnDownload	specify whether to send mail to link creator, when document download using shared link (only receive mail for public link)	No	false
11	openAndView	Specify whether to open document for view or download document when access document using link.	No	true
12	expiryAfterDuration	Shared link param which specify unit after that link will expire after specified unit Unit can be **h** : hours or **d** : days [1-24] h : after specific hours link will expiry [1-n]d : after specific day link will expiry Example : 9d , 10h	No	

13	expiryAfterViewCnt	Shared link param which specify ACCESS count after that link will expiry Value can be any number greater than 0	No	
14	viewAllUserAction	If false, return only actions which were distributed to logged in users. If true, return all actions.	No	false
15	cursorMark	**For first request:** pass *. **For subsequent request:** pass the cursorMark value which is received in the previous response.	No	

Note: expiryAfterDuration and expiryAfterViewCnt only applied if generateShareLink:true and folder level setting **Enable Public Links** sets to true

In case of generateShareLink:true and (expiryAfterDuration or expiryAfterViewCnt) is not specify then it will generate link which never expiry respect to folder level **Enable Public Links** option.

- Example: For JSON from above format

```
{
      "criteria" : [{
                  "field" : "project_name",
                  "operator" : 1,
                  "values" : ["Corporate Construction Site"]
            },{
                  "field" : "doc_ref",
                  "operator" : 3,
                  "values" : ["Points","Bridge"]
            },{
                  "field" : "Floors",
                  "operator" : 1,
                  "values" : ["First Floor"]
            }
      ],

      “cursorMark”: “*”,
      “viewAllUserAction”:true,
```

```
        "recordLimit" : 10,
        "sortField": "doc_ref",
        "sortOrder": "desc",
        "generateShareLink" : " true",
        "showLatestRevision" : "true",
        "notifiyOnDownload" : "false",
        "openAndView" : "false",
        "expiryAfterDuration" : "15d"
}
```

In API request, provide search criteria json in **searchCriteria** parameter.
By default, API is returning JSON in response - to get XML in response specify ***Accept*** header in request.
For XML - Accept : application/xml
For JSON - Accept : application/json

- List of search criteria supported by Document Search API are as mentioned below:

No	Field Name	Datatype	Sorting support	Remarks
1	doc_title	STRING	Yes	
2	doc_ref	STRING	Yes	
3	project_name	STRING	Yes	
4	folder_name	STRING	No	
5	purpose_of_issue	STRING	Yes	
6	publisher_name	STRING	Yes	
7	revision_num	STRING	Yes	
8	ver	STRING	Yes	

9	folder_path	STRING	Yes	
10	document_status	STRING	Yes	
11	file_name	STRING	Yes	
12	doctype	CHOICE	No	1,2,4,5 1-Document 2-Placeholder 4-IFC Model File 5-Emails Only
13	link_type	CHOICE	No	STATIC, DYNAMIC
14	revisions	CHOICE	No	CURRENT-SET, SUPERSEDED
15	association_attachment	CHOICE	No	1,2,3,5,6 1-Associated Discussions 2-Associated Files 3-Associated Forms 5-External Attachments 6-None
16	revision_date	DATE	Yes	Accept value in date formatted using user

				locale
17	is_public	BOOLEAN	No	
18	is_link	BOOLEAN	No	
19	is_active	BOOLEAN	No	
20	filesize	NUMBER	Yes	Accept value in bytes

21	project_id	NUMBER_ID	No	Need to provide hashed value
22	folder_id	NUMBER_ID	No	Need to provide hashed value
23	publisher_id	NUMBER_ID	No	Need to provide hashed value
24	publisher_organisation	STRING	Yes	
25	publisher_organisation_id	NUMBER_ID	No	Need to provide hashed value
26	updated_since	DURATION	No	Search updated document from current time. Need to pass Unit and UnitType **Unit** can be non-zero Integer **Unit type can be:** **m** for Minutes **h** for Hours **d** for Days **Negative Unit:** search updated document since last specified Unit of time to current time. **Positive Unit:** Not applicable for this field. **e.g.-5h:** search updated doc. since last 5 hour.
27	document_updated_on	DATE	Yes	Accepts value in date formatted using user
				locale

28	file_extension	STRING	Yes	search document based on file extension like: IFC
29	exact_folder_name	STRING	Yes	To provide folder name to exactly search for a particular folder related details.

- Please refer the table shown below for supported operators for different datatype.

No	Datatype	Description	Supported Operators	Operator Value
1	STRING	Used to search free text field like doc_title, project name. value for this data type any string	EQUALS NOT_EQUALS CONTAINS NOT_CONTAIN	1 2 3 4
2	CHOICE	Used to search field like link_type Any value from predefined set of value.	EQUALS	1
3	DATE	Used to search date related field value for this data type is formatted date in user locale	EQUALS GREATER_THAN_EQUAL LESS_THAN_EQUAL greater_than_equal and less_than_equal also support time(optional) in following format **formatted date#hh:mm:ss**	1 5 6
		Example	**Considered as**	
		formatted date#22	date, 22 hours	
		formatted date#22:55	date, 22 hours 55 minutes	
		formatted date#22:55:30	date, 22 hours 55 minutes 30 seconds	
4	BOOLEAN	Used to search Boolean field value for this data type is true/false	EQUALS	1
5	NUMBER	Used to search numeric field value for this data type is number	EQUALS NOT_EQUALS GREATER_THAN_EQUAL LESS_THAN_EQUAL	1 2 5 6

6	NUMBER_ID	Used to search id field value for this data type is number	EQUALS NOT_EQUALS	1 2
7	DURATION	Used to search date field relative to current time.	WITHIN	7
		Need to provide **Unit and UnitType** Unit can be non-zero Integer **Unit type can be:** **m** for Minutes **h** for Hours **d** for Days **Negative Unit:** search since last specified Unit of time to current time. **Positive Unit:** Search current time to specified Unit of time**.** **e.g.-5h**: search field since last 5 hour.		

- Please refer below table for supported custom attribute.

No	Custom Attribute Type	Supported Operators	Operator value	Sorting support	Remarks
1	TextBox-Integer TextBox-Decimal	EQUALS GREATER_THAN_EQUAL LESS_THAN_EQUAL	1 5 6	NO	
2	TextBox-Email TextBox-Letters and Numbers TextBox Letters	EQUALS CONTAINS	1 3	NO	
3	Date Picker	EQUALS GREATER_THAN_EQUAL LESS_THAN_EQUAL	1 5 6	NO	

4	Yes/No Radio	EQUALS	1	NO	value must be true/false
5	Multiple Selection Checkbox	EQUALS	1	NO	
6	Dropdown list	EQUALS	1	NO	

- Sample Document search API cURL Call

```
curl --location
'https://adoddleqaak.asite.com/commonapi/documentsearchapi/search' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Accept: application/json' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": <filedName>,
      "operator": <operator>,
      "values": [
        <value>
      ]
    },
     {
      "field": <filedName>,
      "operator": <operator>,
      "values": [
        <value>
      ]
    }
  ],
  "recordStart": <recordStart>,
```

"recordLimit": <recordLimit>,

"sortField": <sortField>,

"sortOrder": "asc"

}'

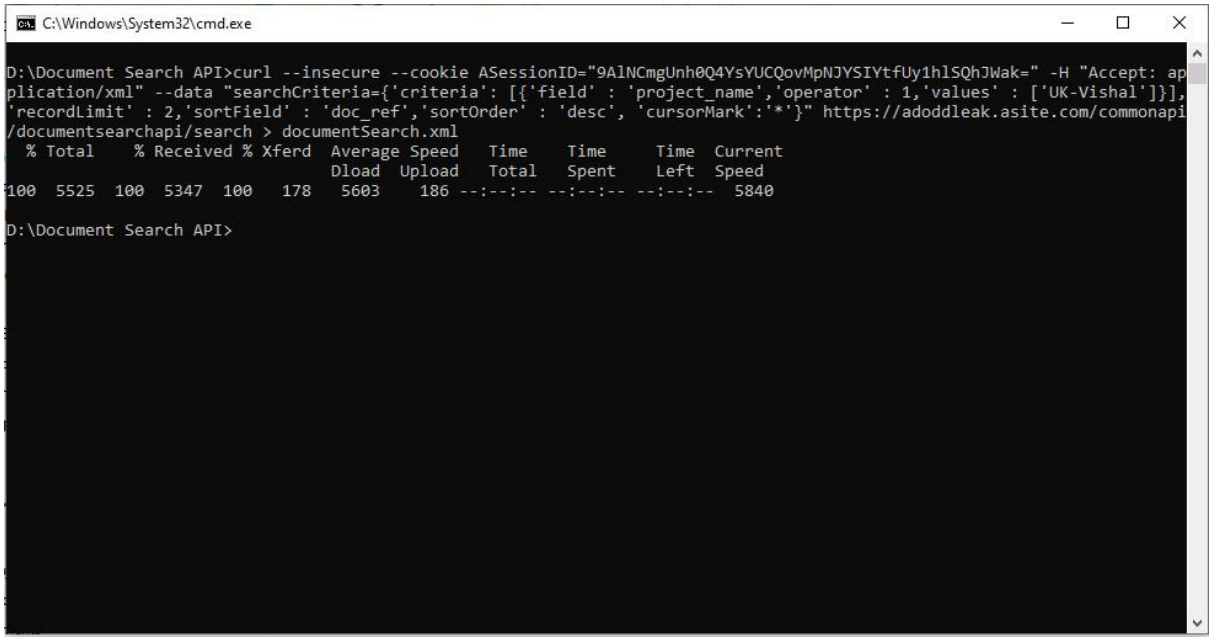

- Sample XML return by Document search API

<DocumentResponseVO>

<responseHeader>

<collection>revisions</collection>

<results>2</results>

*<results-total>*50267*</results-total>*

<cursorMark>AoI%2FA3dvcmtmbG93LWRhdGFiYXNlLWNvbm5lY3Rpb24taXNzdWUzUkVWMjExNDMxNl83NDc2NjgwNQ%3D%3D</cursorMark>

</responseHeader>

<documentVO>

<Attributes/>

<DocumentTypeId>1</DocumentTypeId>

```
<DcId>1</DcId>
<ViewerId>0</ViewerId>
<IsLink>false</IsLink>
<FileName>zzzz.jpg</FileName>
<FileNameDisplay>zzzz</FileNameDisplay>
<FileType>jpg</FileType>
<FolderPath>UK-Vishal\v1\zzzz.jpg</FolderPath>
<HasZipfile>false</HasZipfile>
<isRevCheckOut>true</isRevCheckOut>
<isLatestRevCheckOut>false</isLatestRevCheckOut>
<DocumentId>17277167$$JGHuaN</DocumentId>
<FolderId>22953608$$Ip1zSW</FolderId>
<DocRef>zzzz</DocRef>
<DocTitle>zzzz</DocTitle>
<IssNo>3</IssNo>
<RevNo>2</RevNo>
<RevisionId>23921496$$EKCULo</RevisionId>
<PublisherOrg>Asite Solutions Ltd</PublisherOrg>
<PublisherName>Vishal Patel</PublisherName>
<PublishedDate>14-Dec-2016#11:10 IST</PublishedDate>
<DocumentUpdatedOn>14-Dec-2016#11:10 IST</DocumentUpdatedOn>
<PurposeOfIssue>---</PurposeOfIssue>
<poId>0</poId>
<DocStatus>---</DocStatus>
<DocStatusId>998</DocStatusId>
<FileSize>7243</FileSize>
<IsLocked>true</IsLocked>
<isPrivate>false</isPrivate>
<DocActive>true</DocActive>
<UserId>0</UserId>
<publisherUserId>4087026$$0muywb</publisherUserId>
<DmCheckOutVO>
        <checkoutUserId>4087026$$0muywb</checkoutUserId>
<checkoutSuccess>true</checkoutSuccess>
        <checkoutUserName>Vishal Patel</checkoutUserName>
        <checkoutOrgname>Asite Solutions Ltd</checkoutOrgname>
        <dateCheckedOut>16-Dec-2016#15:52 IST</dateCheckedOut>
</DmCheckOutVO>
<Flag>No Flag</Flag>
<Discussions>true</Discussions>
<Attachment/>
<Associations/>
<Distributed>Yes</Distributed>
<DrawingSeries>1000</DrawingSeries>
<RevisionNotes/>
```

```
<ProjectName>UK-Vishal</ProjectName>
<HasMarkup>false</HasMarkup>
<Islatest>true</Islatest>
<LastStatusChangeDate/>
<StatusChangeNotes/>
<ProjectId>2114316$$ismPLi</ProjectId>
<FolderName>v1</FolderName>
<DaysSincePublished>2646 Days</DaysSincePublished>
<CommentsCount>1</CommentsCount>
<WorkflowName/>
<WorkflowStage/>
<WorkflowStatus/>
<WorkflowStartDate/>
<WorkflowEndDate/>

<URI>https://dmsak.asite.com/api/workspace/2114316$$ismPLi/folder/22953608$$I
p1zSW/downloadDocument/23921496$$EKCULo</URI>
<ProjectStatus>Open</ProjectStatus>
<DocumentActionVO>
<ActionName>For Comment</ActionName>
<ActionStatus>Completed</ActionStatus>
<ActionTime>0</ActionTime>
<ActionDate>12-Mar-2019#10:07 IST</ActionDate>
<ActionDays>1828 Days</ActionDays>
<ActionDueDate>28-Mar-2019#05:29 IST</ActionDueDate>
<RecipientName>Vishal Patel,Asite Solutions Ltd</RecipientName>
<RecipientOrg>3</RecipientOrg>

<ActionAssignedByEmail>vpatel@asite.com</ActionAssignedByEmail>
<ActionAssignedByOrg>Asite Solutions Ltd</ActionAssignedByOrg>
<ActionAssignedByUser>Vishal Patel,Asite Solutions
Ltd</ActionAssignedByUser>
<ActionCompletionDate>12-Mar-2019#10:07
IST</ActionCompletionDate>
<ActionNotes/>
<ActionAssignedByRole>Workspace -
Administrator</ActionAssignedByRole>
<TransmittalNumber>TRN00006</TransmittalNumber>
</DocumentActionVO>
</documentVO>
```

```
<documentVO>
        <Attributes/>
        <DocumentTypeId>1</DocumentTypeId>
        <DcId>1</DcId>
        <ViewerId>0</ViewerId>
        <IsLink>false</IsLink>
        <FileName>Workflow-Database-Connection-Issue.txt</FileName>
        <FileNameDisplay>Workflow-Database-ConnectionIssue</FileNameDisplay>
        <FileType>txt</FileType>
        <FolderPath>UK-Vishal\v1\Workflow-Database-Connection-
Issue.txt</FolderPath>
        <HasZipfile>false</HasZipfile>
        <isRevCheckOut>false</isRevCheckOut>
        <isLatestRevCheckOut>false</isLatestRevCheckOut>
        <DocumentId>31685498$$sY2E3j</DocumentId>
        <FolderId>22953608$$Ip1zSW</FolderId>
        <DocRef>Workflow-Database-Connection-Issue</DocRef>
        <DocTitle>Workflow-Database-Connection-Issue</DocTitle>
        <IssNo>1</IssNo>
        <RevNo>-</RevNo>
        <RevisionId>74766805$$SZMQyH</RevisionId>
        <PublisherOrg>Asite Solutions Ltd</PublisherOrg>
        <PublisherName>Vishal Patel</PublisherName>
        <PublishedDate>02-Jan-2021#20:09 IST</PublishedDate>
        <DocumentUpdatedOn>02-Jan-2021#20:09 IST</DocumentUpdatedOn>
        <PurposeOfIssue>---</PurposeOfIssue>
        <poiId>0</poiId>
        <DocStatus>---</DocStatus>
        <DocStatusId>998</DocStatusId>
        <FileSize>970255</FileSize>
        <IsLocked>false</IsLocked>
        <isPrivate>false</isPrivate>
        <DocActive>true</DocActive>
        <UserId>0</UserId>
        <publisherUserId>4087026$$0muywb</publisherUserId>
        <DmCheckOutVO>
                <checkoutUserId/>
                <checkoutSuccess/>
                <checkoutUserName/>
                <checkoutOrgname/>
                <dateCheckedOut/>
        </DmCheckOutVO>
        <Flag>No Flag</Flag>
        <Discussions>false</Discussions>
```

```
<Attachment/>
<Associations/>
<Distributed>No</Distributed>
<DrawingSeries/>
<RevisionNotes/>
<ProjectName>UK-Vishal</ProjectName>
<HasMarkup>false</HasMarkup>
<Islatest>true</Islatest>
<LastStatusChangeDate/>
<StatusChangeNotes/>
<ProjectId>2114316$$ismPLi</ProjectId>
<FolderName>v1</FolderName>
<DaysSincePublished>1165 Days</DaysSincePublished>
<CommentsCount>0</CommentsCount>
<WorkflowName/>
<WorkflowStage/>
<WorkflowStatus/>
<WorkflowStartDate/>
<WorkflowEndDate/>

<URI>https://dmsak.asite.com/api/workspace/2114316$$ismPLi/folder/22953608$$Ip1zSW/downloadDocument/74766805$$SZMQyH</URI>
<ProjectStatus>Open</ProjectStatus>
<DocumentActionVO>
    <ActionName/>
    <ActionStatus/>
    <ActionTime/>
    <ActionDate/>
    <ActionDays/>
    <ActionDueDate/>
    <RecipientName/>
    <RecipientOrg/>
    <ActionAssignedByEmail/>
    <ActionAssignedByOrg/>
    <ActionAssignedByUser/>
    <ActionCompletionDate/>
    <ActionNotes/>
    <ActionAssignedByRole/>
    <TransmittalNumber/>
</DocumentActionVO>
```

```
    </documentVO>
</DocumentResponseVO>
```

- **Example for cursorMark:**

First Request:

```
{
    "criteria" : [{
                    "field" : "project_name",
                    "operator" : 1,
                    "values" : ["UK-Vishal "]
    ],
    "recordLimit" : 1000,
    "cursorMark" : "*",
    "sortField": "doc_ref",
    "sortOrder": "desc"
}
```

First Response:

```
{
   "elementVOList": [
      {
                    .
                    .
                    .
      }
   ],
   "responseHeader": {
      "collection": "revisions",
      "results": "1000",
      "results-total": "50267",
      "cursorMark": "
AoI%2FA3dvcmtmbG93LWRhdGFiYXNlLWNvbm5lY3Rpb24taXNzdWUzUkVWMjExND
MxNl83NDc2NjgwNQ%3D%3D "
   }
}
```

Second Request (To get next batch):

```
{
    "criteria" : [{
                    "field" : "project_name",
                    "operator" : 1,
                    "values" : ["UK-Vishal"]
```

],
"recordLimit" : 1000,
"cursorMark" : "
AoI%2FA3dvcmtmbG93LWRhdGFiYXNlLWNvbm5lY3Rpb24taXNzdWUzUkVWMjExNDMxNI83NDc2NjgwNQ%3D%3D ", "sortField": "doc_ref",
"sortOrder": "desc"
}

- Following values are returned using the Document search API call results-total:

indicates the number of documents that matched with specified search criteria.

cursorMark: It will use for the next request. cursorMark field needs to be included in request json to receive a response.

results: specified document search Limit specified in recordLimit parameter

No	Field	Description
1	FolderPath	Returns the folder path of the parent folder (starting from APD)
	FileName	Returns the filename in the Document Folder
3	DocRef	Returns the Document Ref value specified in the Document Folder
4	DocTitle	Returns the Document Title value specified in the Document Folder
5	DocumentTypeId	Returns the Document Type ID
6	isPrivate	Returns the Publish Documents as Private setting specified in the Document Folder
7	IssNo	Returns the Issue No value of the Document in the Document Folder
8	RevNo	Returns the Rev No value of the Document in the Document Folder
9	PublisherName	Returns the Publisher Name of the Document in the Document Folder
10	PublisherOrg	Returns the Publisher Org value of the Document in the Document Folder

11	PublishedDate	Returns the Published Date of the Document in the Document Folder
12	DocActive	Returns the status of the document revision in the Document Folder
13	PurposeOfIssue	Returns the POI value of the document revision in the Document Folder
14	DocStatus	Returns the Document status of the document revision in the Document Folder
15	FileSize	Returns the File size of the document revision in the Document Folder
16	IsLink	Returns the document revision is link or not in the Document Folder
17	FileNameDisplay	Returns the File Display Name of the document revision in the Document Folder
18	FileType	Returns the File Type of the document revision in the Document Folder
19	HasZipfile	Returns the document revision has zip file or not in the Document Folder
20	isRevCheckOut	Returns the document checkout status
21	isLatestRevCheckOut	Returns the document checkout status for latest revision for Document
22	DocumentId	Returns the documentId for Document
23	FolderId	Returns the FolderId for Document
24	RevisionId	Returns the RevisionId for Document
25	IsLocked	Returns the document lock status for Document
26	publisherUserId	Returns the publisherUserId for Document
27	checkoutUserId	Returns the checkoutUserId for Document
28	URI	Returns the download URI for Document. If user has viewOnly permission on folder, then this node will not exist in response.
29	ActionName	Returns name of Action for Document
30	ActionStatus	Returns the ActionStatus status for Document
31	ActionTime	Returns the ActionTime for Document
32	checkoutUserName	Returns the Checkout User name of the Document
33	checkoutOrgname	Returns the Checkout User's organization name
33	checkoutSuccess	Returns the document checkout status for Document
34	dateCheckedOut	Returns the Checkout date for Document

35	Attributes	Returns the details of custom attribute values assign in Document
36	Flag	Returns the Flag for Document
37	Discussions	Returns the Discussions status for Document
38	Attachment	Returns the name of internal attachment for Document
39	Associations	Returns the Associations detail for Document
40	Distributed	Returns the Distributed status for Document
41	DrawingSeries	Returns the DrawingSeries for Document
42	RevisionNotes	Returns the RevisionNotes for Document
42	ProjectName	Returns the ProjectName for Document
43	WorkflowStage	Returns the WorkflowStage for Document
44	WorkflowStatus	Returns the WorkflowStatus for Document
45	DirectLink	Returns the DirectLink for Document. If user has viewOnly permission on the folder, then this node will not exist in response.
46	DocumentUpdatedOn	Returns the date/time when Document was updated
47	AttachmentURI	Returns the download URI for the attachment This field is added only when the revision has attachment, and the user has higher than “View Only” permission on the folder

- Sample Document search API cURL Call for parameter **exact_folder_name**

```
curl --location 'https://adoddleqaak.asite.com/commonapi/documentsearchapi/search' \
--header 'ASessionID: V29bZ1pjF8XtWPi565Yse5iPTJinVnS1iOsm6y2bNwc=' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Cookie: JSESSIONID=_tGKDUYUSJOK-zVZbyHHqP3A1oaW7u6WAi60enCK.adoddle;;
JSESSIONID=Y8HxOk98ZLDxS2Hngpr89E97AIP--Teiom3DVRt.adoddle' \
--header 'Accept: application/json' \
--data-urlencode 'searchCriteria={
"criteria": [
{
"field": "project_name",
"operator": 1,
"values": [
"AB_UK_first"
]
```

```
},
{
"field": "exact_folder_name",
"operator": 1,
"values": [
"sub 2"
]
}
],
"cursorMark": "*",
"recordLimit": 1000
}'
```


- Sample Document search API JSON for parameter **exact_folder_name**


```
{
  "elementVOList": [
    {
      "Attributes": null,
      "DocumentTypeId": "1",
      "DcId": "1",
      "ViewerId": "0",
      "IsLink": "false",
      "FileName": "TXT_25-09-2023_(9015).txt",
      "FileNameDisplay": "TXT_25-09-2023_(9015)",
      "FileType": "txt",
      "FolderPath": "AB_UK_first\\Folder 2\\AAA5\\sub 2\\TXT_25-09-2023_(9015).txt",
      "HasZipfile": "false",
      "isRevCheckOut": "false",
      "isLatestRevCheckOut": "false",
      "DocumentId": "16900505$$JPlh8D",
      "FolderId": "121882152$$zRlhNj",
      "DocRef": "TXT_25-09-2023_(9015)",
      "DocTitle": null,
      "IssNo": "1",
      "RevNo": "1",
      "RevisionId": "31037491$$xRpCan",
      "PublisherOrg": "Asite Solutions",
      "PublisherName": "Achal Shah (5361)",
      "PublishedDate": "05-Jun-2024#12:50 IST",
      "DocumentUpdatedOn": "05-Jun-2024#12:50 IST",
      "PurposeOfIssue": "---",
      "poId": "0",
      "DocStatus": "---",
      "DocStatusId": "3",
      "FileSize": "15360",
      "IsLocked": "false",
      "isPrivate": "true",
```

"DocActive": "true",
"UserId": "0",
"publisherUserId": "752058$$WZZQ34",
"DmCheckOutVO": {
"checkoutUserId": null,
"checkoutSuccess": null,
"checkoutUserName": null,
"checkoutOrgname": null,
"dateCheckedOut": null
},
"Flag": "No Flag",
"Discussions": "false",
"Attachment": null,
"Associations": null,
"Distributed": "No",
"DrawingSeries": null,
"RevisionNotes": null,
"ProjectName": "AB_UK_first",
"HasMarkup": false,
"Islatest": true,
"LastStatusChangeDate": null,
"StatusChangeNotes": null,
"ProjectId": "2136795$$FUXQqz",
"FolderName": "sub 2",
"DaysSincePublished": "25 Days",
"CommentsCount": "0",
"WorkflowName": null,
"WorkflowStage": null,
"WorkflowStatus": null,
"WorkflowStartDate": null,
"WorkflowEndDate": null,
"URI":
"https://dmsqaak.asite.com/api/workspace/2136795$$FUXQqz/folder/121882152$$zRlhNj/downloadDocument/31037491$$xRpCan",
"ProjectStatus": "Open",
"ProjectDescription": "India Live",
"DocumentActionVO": [
{
"ActionName": null,
"ActionStatus": null,
"ActionTime": null,
"ActionDate": null,
"ActionDays": null,
"ActionDueDate": null,

```
        "RecipientName": null,
        "RecipientOrg": null,
        "ActionAssignedByEmail": null,
        "ActionAssignedByOrg": null,
        "ActionAssignedByUser": null,
        "ActionCompletionDate": null,
        "ActionNotes": null,
        "ActionAssignedByRole": null,
        "TransmittalNumber": null
      }
    ]
  }
],
"responseHeader": {
  "collection": "revisions",
  "results": "1000",
  "results-total": "1",
  "cursorMark": "AoJ40ozf848DM1JFVjIxMzY3OTVfMzEwMzc0ODc%3D"
}
}
```


NOTE: Here the parameter **exact_folder_name** is used to search for exact full text search and not splitting by space e.g. if I search with “Demo 24” then it will search for all folder with name Demo 24 and not Demo / 24 individual words.

6.51. Document Download API

Objective

Document Download API downloads specific documents.

Usage Rules

- User must be logged in to Asite Platform using Login API Function
- Use the following cURL command for Document Download API Service:

**curl --location 'https://dmsak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/downloadDocument/<DocumentID>' **

--header 'Cookie: ASessionID=<ASessionID>;'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call
<URI>	Download URI tag value Document search API or Document List API

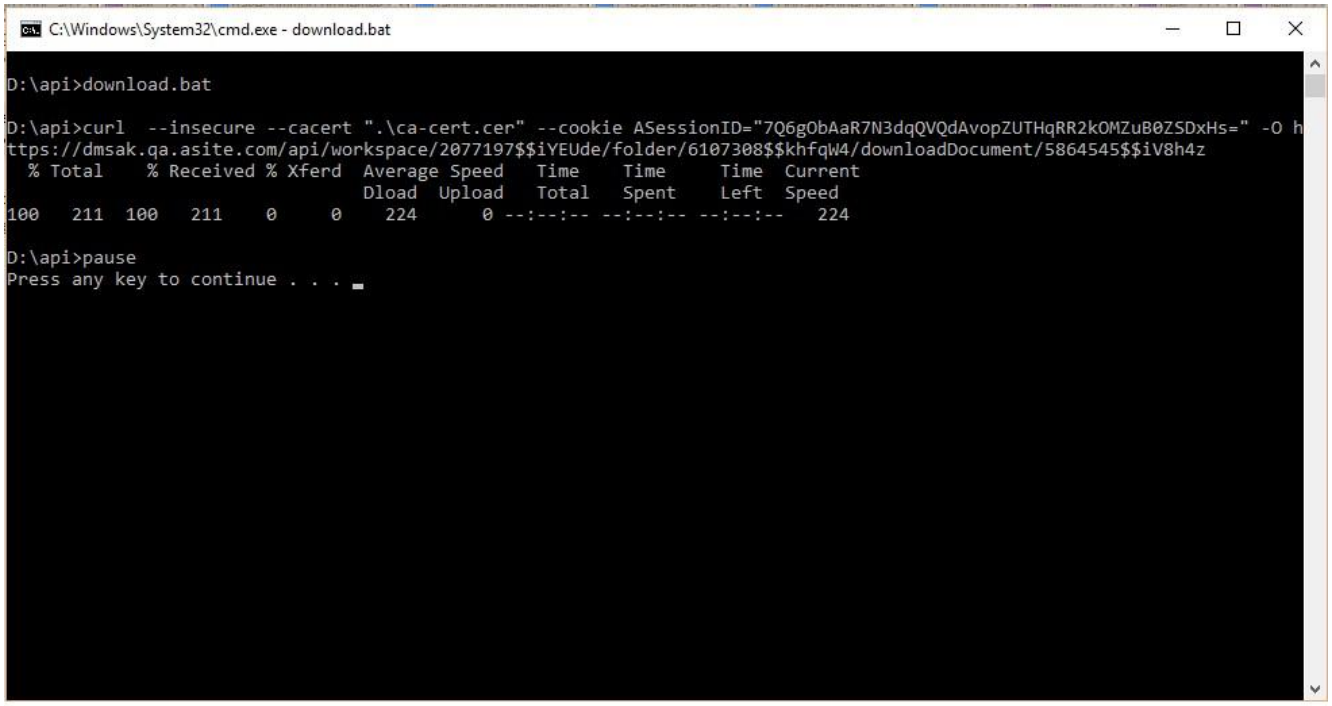

- If user has viewOnly permission on folder, download will fail with below response:

  <?xml version="1.0" encoding="UTF-8"?>
  <asiteDataList>
  <errorCode>228</errorCode>
  <errorMessage>DOCUMENT_DOWNLOAD_ERROR</errorMessage>
  <errorDescription>You cannot download this file due to one of the following reasons: 1.You do not have download privilege on project or download permission on folder, 2.File is checked out and is restricted for download</errorDescription> </asiteDataList>

6.52. Document Status Change API

Objective

The Document status change API is used to change the status of a document within a Workspace.

Usage Rules

- User must have been logged in and executed Workspace List as well as the Workspace Folder List API Function
- User must have executed Workspace DocStatus List API to get the list of DocStatus Types available for a specified workspace.
- Below is the required JSON format for the search criteria.

{

```
    "projectId": <Workspace Id>,
      "statusId": <Document status Id>,
      "revisionIds": <RevisionIds for which status needs to change>,
      "changeReason": <Reason for status change>
}
```

- **Input Parameters**

No	Field	Description	Mandatory
1	ASessionID	session ID from the resultant XML of Login API call>	Yes
2	<URI>	URI tag value for document status change API call from the resultant XML of Workspace folder List API call	Yes
3	projectId	Workspace Id to which documents belong	Yes
4	statusId	New status which needs to be assign	Yes
5	revisionIds	Comma separated revisionIds for which status needs to be apply	Yes
6	changeReason	Reason for changes the status	No

- Use the following cURL command to change document status

**curl --location --request GET 'https://dmsqaak.asite.com/api/workspace/<WorkspaceID>/folder/<FolderID>/docstatuschange' **

**--header 'Cookie: ASessionID=<ASessionID>' **

**--header 'Content-Type: application/x-www-form-urlencoded' **

--data-urlencode 'statusChangeData={

"projectId": <workspaceId>,

"statusId": <documentStatusId>,

"revisionIds": <RevisionIds>,

"changeReason": <Reason>

}'

Sample XML return by Document status change API:

```
<?xml version="1.0" encoding="UTF-8" ?>
<Collection>
        <CreateEntityVO>
                <Type>Change Status</Type>
                <Id>2</Id>
                <status>Successful</status>
        </CreateEntityVO>
</Collection>
```

- The above XML returns the following values using the Document status change API function call

Field Name	Description
Type	Returns the type of operation which gets execute.
Id	Returns the updated status Id value.
status	Returns the result status of called api.

6.53. Update Asite User API Service

Objective

The Update User API Service allow to update details of Asite user.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User must have executed Organisation User List API to get the users list and get value of userId for update.
- Update user access check applied.
- Below is the JSON format for update user. Send the fields which user wants to update.

```
{
     "userID": <hashed user id>,
     "prefixName": <prefix name>,
     "fName": <first name>,
     "mName": <middle name>,
     "lName": <last name>,
     "jobTitle": <job title of user>,
     "language": <language of user>,
     "userAccessView": <access view of user>,
     "start_date": <start date of subscription>,
      "end_date": <end date of subscription>,
      "never_exp": <Expiry of subscription>,
      "subscriptionPlanName": <subscription plan name>,
      "billToOrgId": <Biller organization id>,
      "contractNumber": <Asite contract number>,
      "emailNotification": <Email notification send to subscripted
user>,
      "is_active_user": < set user active/deactivate >,
      "comments": <comments of user>,
      "subscriptionName": <subscription of user>

}
```

Input Parameters:

Parameter Name	Description	Mandatory
ASessionID	session ID from the resultant XML of Login API call>	Yes

<URI>	URI tag value for **updateUser** API call from the resultant XML of Login API	Yes
userDetails	User details json	Yes

JSON input fields:

No	JSON Field	Description	Mandatory
1	userId	Hashed UserId of the user	Yes
2	prefixName	Prefix of the user's name	No
3	fName	First name of the user	No
4	mName	Middle name of the user	No
5	lName	Last name of the user	No
6	jobTitle	Job title of the user	No
7	language	Language of the user	No
8	userAccessView	It defines user access view	No
9	start_date	Start date of subscription plan	No
10	end_date	End date of subscription plan	No
11	never_exp	true - User subscription will never end. false – expire subscription on end_date.	No
12	subscriptionPlanName	Subscription plan assigned to the user	No
13	billToOrgId	Billing organization for the user. OrganizationId value can get from OrganisationId tag value of resultant XML of Login API.	No
14	contractNumber	Asite contract number of the user	No
15	emailNotification	Send instance email to subscribe user. (true – send email. false – email not sent)	No
16	is_active_user	true – make user active. false – make user inactive.	No
17	comments	Comments of the user	No
18	subscriptionName	Subscription of the user	No

Please refer below table for parameter values:

Parameter Name	**Values**
prefixName	Dr Mr Mrs Ms
subscriptionPlanName	Key Lite Key Professional Key Enterprise
userAccessView	Classic Adoddle Both
language	English(United Kingdom) English(United States) English(Canada) France(Français) Русский(Russia) Español(Spain) English(Australia) 中文(China) Deutsch(Germany) Gaeilge(Ireland) English(South Africa) العربية(Saudi Arabia) 日本語(Japan)

subscriptionName	subscribed subscription expired not subscribed

WebServiceURL:

https://dms.asite.com/api/{servicePath}/updateUser >updateUser.xml

Sample cURL command to call update user API:

```
curl --location
'https://dmsqaak.asite.com/api/portal/updateUser' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-
urlencoded' \
--data-urlencode 'userDetails={
  "userID": <UserID>,
  "prefixName": <prefixName>,
  "fName": <firstName>,
  "mName": <middleName>,
  "lName": <lastName>,
  "jobTitle": <jobTitle>,
  "language": <language>,
  "userAccessView": <accessView>,
  "start_date": <startDate>,
  "end_date": <endDate>,
```

```
  "never_exp": <Expiry>,
  "subscriptionPlanName": <planName>,
  "billToOrgId": <billerOrganizationId>,
  "contractNumber": <asiteContractNumber>,
  "emailNotification": <emailNotification>,
  "comments": <comments>,
  "subscriptionName": <subscription>
}'
```

Sample Return Xml:

```
<?xml version="1.0" encoding="UTF-8"?>
<asiteDataList>
 Updated Successfully
</asiteDataList>
```

6.54. Workspace Clone API Service

Objective

The workspace clone API Service allow to clone the workspace from workspace template.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function.
- Workspace template access check applied.
- Below is the JSON format for workspace clone API.

```
{
    "projectName" : <clone project name>,
    "selectedClientName" : <organization name>,
    "description" : <workspace description>,
    "startDate" : <start date of workspace>,
    "estFinishDate" : <end date of workspace>,
    " selectedDCId" : <data center Id of workspace>,
    " selectedSubscriptionName" : <workspace subscription type>

}
```

Input Parameters:

Parameter Name	Description	Mandat
ASessionID	session ID from the resultant XML of Login API call	Yes
<URI>	https://adoddleak.asite.com/commonapi/workspace/saveClonedWorkspace	Yes
templateName	Name of template from which clone workspace	Yes
Project	Json of clone workspace details	Yes
additionalSettings	Parameter for applying additional setting on cloned workspace. **True** : if settings are required to be applied **False** : if settings are not required to be applied If parameter is not sent, then by default the setting will not be applied	No

JSON input fields:

No	JSON Field	Description	Mandatory
1	projectName	Clone workspace Name	Yes
2	selectedClientName	Organisation name	Yes
3	description	workspace description	No
4	startDate	Start date of workspace	No
5	estFinishDate	End date of workspace	No
6	selectedDCId	Data center Id of workspace	No
7	selectedSubscriptionName	Workspace Subscription Type	No

Please refer below table for parameter values:

Parameter Name	**Values**
selectedDCId	1 = United Kingdom (EU01) 2 = North America (US01) 3 = Australia (AU01)

WebServiceURL: https://adoddleak.asite.com/commonapi/workspace/saveClonedWorkspace

>clonedWorkspace.xml

- **Sample cURL command to call Workspace Clone API:**

```
curl --location
'https://adoddleqaak.asite.com/commonapi/workspace/saveClonedWorkspace' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'templateName=<templateName>' \
--data-urlencode 'project={
  "projectName": <projectName>,
  "selectedClientName": <clientName>,
  "description": <description>,
  "startDate": <startDate>,
  "estFinishDate": <estFinishDate>,
```

"selectedDCId": <selectedDCId>,
"selectedSubscriptionName": <selectedSubscriptionName>
}'

Sample Return JSON:

{
"projectName": "Building Construction",
"projectId": "2083751$$gdZTB9",
"includeInAdoddle": false,
"featuredApp": false,
"hashedProjectId": "2083751$$QeQhej",
"spaceTypeId": 1,
"brandingId": 0,
"ownerOrgID": 3,
"ownerOrgName": "Asite Solutions Ltd.",
"countryID": 0,
"bimEnabled": false,
"viewerID": 5,
"viewerName": "Thin Client Viewer",
"statusID": 5,
"closeTime": 0,
"sendEmail": false,
"canCloseWorkspace": true,
"users": 0,
"projectPhaseId": 0,
"assignedOrgIds": "3",
"newAssignedOrgIds": "3",
"assignedProjectAdminIds": "",
"newAssignedProjectAdminIds": "475846",
"storageSize": 0,
"newStorageSize": 0,
"projectSubscriptionTypeId": 2,
"newSpaceTypeId": 1,
"newHashedSpaceTypeId": "1$$ZNAdNs",
"newSpaceTypeName": "Document, Workflow & Forms Manager",
"additionalDetailsLoaded": true,
"orgDetailsLoaded": false,
"adminDetailsLoaded": false,

"tenderAdminDetailsLoaded": false,
"modelDetailsLoaded": false,
"nonSubExpiredUsersList": [
{
"userID": "475846$$KeGGG4",
"username": "Jay Harkhani",
"fname": "Jay",
"lname": "Harkhani",
"orgID": 3,
"folderAccess": 1,
"orgName": "Asite Solutions Ltd.",
"userSubscriptionTypeId": 1,
"proxy_user_type_id": 0,
"subscriptionPlanId": 0,
"userSessionTimeOut": 0,
"isAgreedToTermsAndCondition": false,
"isPasswordReset": false,
"userAccountType": 0,
"billToOrg": 0,
"generateURI": true
}
],
"selectedOrgId": 0,
"assignDefaultAdmin": false,
"projectFileSysLocation": "//10.38.33.47/files/",
"checkOutPref": false,
"checkComparePref": false,
"calendarMailbox": "project_2083751@mail.asite.com",
"calendarMailboxPassword": "123",
"checkRevisionsAsPrivate": false,
"workspaceTypeId": "2$$LnOkGP",
"templateProjectId": "2083673", "selectedObjectIds":
"3,23,22,6,7,8,9,26,27,10,24,12,13,14,25,17,19,21,28,29,30,31,32,1,2,3,4,5,10,11,15,16",
"inheritObjectIds":
"3,23,22,6,7,8,9,26,27,10,24,12,13,14,25,17,19,21,28,29,30,31,32,1,2,3,4,5,10,11,15,16",
"projectCreationDate": "2017-03-14 12:34:05",
"objectListLoaded": true,
"objectXMLString": "<ROOT><wsobject obj_id=\"3\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"23\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"22\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"6\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"7\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"8\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"9\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"26\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"27\" inherite_flag=\"1\"

is_inheritence_update=\"0\" /><wsobject obj_id=\"10\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"24\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"12\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"13\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"14\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"25\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"17\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"19\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"21\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"28\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"29\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"30\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"31\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"32\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"1\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"2\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"3\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"4\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"5\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"10\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"11\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"15\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /><wsobject obj_id=\"16\" inherite_flag=\"1\"
is_inheritence_update=\"0\" /></ROOT>",
"workspaceSettingsVO": {
"docListBasketOptions": [
{
"name": "Doc Ref",
"value": "2",
"generateURI": true
},
{
"name": "Attached File",
"value": "3",
"generateURI": true
},
{
"name": "Checkout Status",
"value": "4",
"generateURI": true
},
{
"name": "Doc Title",

"value": "5",
"generateURI": true
},
{
"name": "Iss No",
"value": "8",
"generateURI": true
},
{
"name": "Rev",
"value": "9",
"generateURI": true
},
{
"name": "Published",
"value": "11",
"generateURI": true
}
],
"comRegOptions": [
{
"name": "Doc Ref",
"value": "13",
"generateURI": true
},
{
"name": "Doc Title",
"value": "14",
"generateURI": true
},
{
"name": "Iss No",
"value": "17",
"generateURI": true
},
{
"name": "Rev",
"value": "18",
"generateURI": true
},
{
"name": "Comment Title",
"value": "21",
"generateURI": true
},

```
      {
        "name": "Comment Date",
        "value": "23",
        "generateURI": true
      }
    ],
    "docDistOptions": [
      {
        "name": "Doc Ref",
        "value": "25",
        "generateURI": true
      },
      {
        "name": "Doc Title",
"value": "26",
        "generateURI": true
      },
      {
        "name": "Iss No",
        "value": "29",
        "generateURI": true
      },
      {
        "name": "Rev",
        "value": "30",
        "generateURI": true
      },
      {
        "name": "Published",
        "value": "32",
        "generateURI": true
      },
      {
        "name": "Assigned Date",
        "value": "37",
        "generateURI": true
      },
      {
        "name": "Action Due",
        "value": "38",
```

"generateURI": true
},
{
"name": "Transmittal No",
"value": "39",
"generateURI": true
}
],
"formListBasketOptions": [
{
"name": "FormID",
"value": "40",
"generateURI": true
},
{
"name": "Form Title",
"value": "41",
"generateURI": true
},
{
"name": "User Ref",
"value": "42",
"generateURI": true
},
{
"name": "Close Due",
"value": "43",
"generateURI": true
},
{
"name": "Msg Date",
"value": "45",
"generateURI": true
}
],
"formDistOptions": [
{
"name": "FormID",
"value": "46",
"generateURI": true
},
{
"name": "Form Title",
"value": "47",
"generateURI": true

```
    },
    {
      "name": "Close Due",
      "value": "48",
      "generateURI": true
    },
    {
      "name": "MsgId",
      "value": "49",
      "generateURI": true
    },
    {
      "name": "Msg Date",
      "value": "51",
      "generateURI": true
    },
    {
      "name": "Assigned Date",
      "value": "57",
      "generateURI": true
    },
    {
      "name": "Action Date",
      "value": "58",
      "generateURI": true
    }
  ],
  "docListSortFieldId": 0,
  "docBasketSortFieldId": 0,
  "comRegSortFieldId": 0,
  "docDistSortFieldId": 0,
  "formListSortFieldId": 0,
  "formBasketSortFieldId": 0,
  "formDistSortFieldId": 0,
  "docPerPage": 0,
  "formPerPage": 0,
  "checkOutPref": false,
  "checkComparePref": false,
  "checkCreateCommentPref": 0,
  "checkViewDocumentPoi": false,
```

"checkPrintDocumentPoi": false,
"checkViewDocumentStatus": false,
"checkPrintDocumentStatus": false,
"publishPrivateDocRevPref": false,
"applyToAllWorkspace": false,
"docListSortOrderValue": -1,
"docDistSortOrderValue": -1,
"docBasketSortOrderValue": -1,
"comRegSortOrderValue": -1,
"formListSortOrderValue": -1,
"formDistSortOrderValue": -1,
"formBasketSortOrderValue": -1,
"docActionNotificationFromPersonalEmailAdd": false,
"formActionNotificationFromPersonalEmailAdd": false,
"unreadCommentNotificationFromPersonalEmailAdd": false,
"wsInviteNotificationFromPersonalEmailAdd": false,
"docActionEmailSubject": "",
"formActionEmailSubject": "",
"unreadCommentEmailSubject": "",
"wsInviteEmailSubject": "",
"overwriteOrAppendEmailSubjDocAction": -1,
"overwriteOrAppendEmailSubjFormAction": -1,
"overwriteOrAppendEmailSubjUnreadComment": -1,
"overwriteOrAppendEmailSubjWsInvite": -1,
"workspaceQRCodeSettingsVO": {
"projectId": "2083751$$gdZTB9",
"supportQrCode": false,
"supportedFileFormates": [],
"qrCodePosition": "",
"qrCodeDisplacementTop": 0,
"qrCodeDisplacementLeft": 0, "qrCodeDisplacementBottom": 0,
"qrCodeDisplacementRight": 0,
"qrCodeDisplacementMeasureIn": "",
"verifyDocPOIs": false,
"verifyDocStatuses": false,
"resultantMessageLatest": "",
"resultantMessageSuperseded": "",
"selectedPurposeOfIssues": [],
"selectedStatuses": [],
"purposeOfIssueOptions": [
{
"purpose_issue_id": 0,
"created_by_org_id": 0,
"purpose": "---",

"project_id": "0$$1Cc65T",
"purpose_doc_issue_id_active": 0,
"is_active": 0,
"generateURI": true
}
],
"statusOptions": [
{
"always_active": false,
"userId": 0,
"isDeactive": false,
"defaultPermissionId": 0,
"statusName": "For Approve",
"statusID": 1,
"orgId": "0$$6PQWXA",
"generateURI": true
},
{
"always_active": false,
"userId": 0,
"isDeactive": false,
"defaultPermissionId": 0,
"statusName": "In progress",
"statusID": 2,
"orgId": "0$$6PQWXA",
"generateURI": true
},
{
"always_active": false,
"userId": 0,
"isDeactive": false,
"defaultPermissionId": 0, "statusName": "---",
"statusID": 998,
"orgId": "0$$6PQWXA",
"generateURI": true
},
{
"always_active": false,
"userId": 0,
"isDeactive": false,

```
        "defaultPermissionId": 0,
        "statusName": "Prepublished",
        "statusID": 999,
        "orgId": "0$$6PQWXA",
        "generateURI": true
      }
    ],
    "fileFormateOptions": [
      {
        "fileFormatId": 1,
        "fileFormat": "PDF",
        "generateURI": true
      }
    ],
    "applyAllPages": false,
    "folderId": "0$$E52dL6",
    "enableFolderQRCode": false
  },
  "sharingXRefsProjectTeam": true,
  "hasXref": false,
  "restrictDownloadOnCheckOut": false,
  "generateURI": true
},
"wsSettingsLoaded": true,
"enableInNavigator": false,
"enableSimpleUpload": false,
"includeSubFolders": true,
"regionId": 0,
"isProjectCreation": true,
"isCloned": true,
"dataCenterId": 1,
"projectDataSource": "java:/dmsdb",
"inheritanceOn": 0,
"isSyncIndexUpdate": true,
"aSessionId": "b6LzAV4Sr8MVQwdkaWjdnfJbmnx4w1jOYarXvZkIetU=",
"isUpdateOrgUsers": false,
"projectStatusChanged": false,
"allowSharedLink": false,
"fieldEnabled": true,
"enableQRCode": false,
"moduleId": 0,
"defaultPermissionTypeId": 0,
"isTemplate": false,
"generateURI": true
```

```
}
```

6.55. Get User Projects and Roles Details API Service

Objective
The Get User projects and roles details API Service returns provided User's projects along with roles details.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- User privilege check for project will be applied.
- Use the following cURL command for api call:

```
curl --location --request GET
'https://adoddleqaak.asite.com/commonapi/user/getUserWorkspaceAndRoleByUserId'
\

--header 'Cookie: ASessionID=<ASessionID>' \

--header 'Accept: application/json' \

--form 'userId="<hashedUserId>"'
```

Input Parameters

Parameter Name	Description	Mandatory
Accept	Set request header	No
userId	Hashed user Id of the user	Yes
ASessionID	session ID from the resultant XML of Login API call	Yes
<URI>	URI tag value for Get User projects and roles details from the resultant XML of Login API call	Yes

- By default, API is returning JSON in response - to get XML in response specify Accept header in request.

  For XML - Accept: application/xml
  For JSON - Accept: application/json

WebServiceURL:

https://adoddle.asite.com/commonapi/user/getUserWorkspaceAndRoleByUserId > UserProjectsAndRolesDetails.xml

Sample Return XML:

<?xml version='1.0' encoding='UTF-8'?>
<asiteDataList>
<WorkspaceVO>
<Workspace_Id>2076702$$cB7P4T</Workspace_Id>
<Workspace_Name>Construction Site</Workspace_Name>
<Roles>
<RoleVO>
<Workspace_Role>Administrator</Workspace_Role>
<Role_Id>2190637$$GQ2jtf</Role_Id>
</RoleVO>
</Roles>
</WorkspaceVO>
<WorkspaceVO>
<Workspace_Id>55285$$hI0jJC</Workspace_Id>
<Workspace_Name>Bridge development site 1</Workspace_Name>
<Roles>
<RoleVO>
<Workspace_Role>Workspace - Administrator</Workspace_Role>
<Role_Id>121248$$B83FCC</Role_Id>
</RoleVO>
<RoleVO>
<Workspace_Role>Project Manager</Workspace_Role>
<Role_Id>142382$$nNNk0F</Role_Id>
</RoleVO>
<RoleVO>
<Workspace_Role>Supervisor</Workspace_Role>
<Role_Id>158091$$1ZUBA3</Role_Id>
</RoleVO>
<RoleVO>
<Workspace_Role>Service Engineer</Workspace_Role>
<Role_Id>158122$$8zF57D</Role_Id>
</RoleVO>
</Roles>
</WorkspaceVO>
</asiteDataList>

Default Fields Returned

Field Name	Description
Workspace_Id	Returns Hashed numeric id of workspace
Workspace_Name	Returns workspace name
Workspace_Role	Returns workspace role name
Role_Id	Returns Hashed numeric id of workspace role

6.56. Form Search API

Objective

Form Search API returns a list of forms based on specified criteria provided in JSON format.

Usage Rules

- User must have been logged in using Login API.
- Retrieve URI Tag value for Form Search API from ResultXML of Login API.
- Below is the required JSON format for search criteria.

```
{
     "criteria": [{
                "field": <name of field 1>,
                "operator": <operator id>,
                "values": [<value 1>, <value 2>, <value n>]
           },
           {
                "field": <name of field 2>,
                "operator": <operator id>,
                "values": [<value 1>, <value 2>, <value n>]
           }
     ],
     “viewAllUserAction”:true,
     "recordStart": <Integer value>,
"recordLimit": <Integer value>,
     "sortField": <name of field>,
"sortOrder": <asc/desc>,
```

```
        "settings": {
            "includeMessages": <true/false>,
            "includeActions": <true/false>,
            "includeCustomFields": <true/false>,
            "formattedCustomFields": <true/false>,
            "appType": <Integer value>
        }
}
```

- Please refer below table for search criteria json field

No	json field	Description	Mandatory	Default value
1	Criteria	Array of search criteria	Yes	
2	Field	Field name in search criteria	Yes	
3	Operator	Operator for search criteria	Yes	
4	Values	Array of value(s) to be search for search criteria	Yes	
5	recordStart	Number of leading documents to skip	No	1
6	recordLimit	Number of documents to return after recordStart (Maximum records limit must not exceed 1000)	No	10
7	sortField	Sort field name	No	Updatedate
8	sortOrder	Sort field Order(asc/desc)	No	desc
9	Settings	Object of different setting to return details in result JSON.	No	
10	includeMessages	Include all messages of form in search result	No	false
11	includeActions	Include forms all actions data in search result	No	false
12	includeCustomFields	Include custom fields value of form in search result	No	false

13	formattedCustomFields	Include db custom fields (from database) for form in search result instead of custom fields from index. If this flag is set, then includeMessages and includeDBCustomFields flag will be treated as false.		
14	appType	It will return by default PROJECT_FORMS if appType parameter is not specified. Below are appType values for different types of forms. 1. Project Forms 2. Field 3. Contract 4. Exchange 5. FM 6. Finance 7. PPM 8. HR 9. H&S 10. PPMT 11. Procurement 12. Marketplace 13. Quality 14. RFIs 15. Change Orders 16. Site Photos	No	PROJECT_FORMS
		17. Submittals 18. Meeting Minutes 19. Daily Site Report 20. Punch Lists 21. Sustainability 22. Transmittals 23. Playbook		
15	viewAllUserAction	If false, return only actions which were distributed to logged in users. If true, return all actions.	No	false

- Example: For JSON from above format

```
{
    "criteria": [{
```

```
                "field": " ProjectName",
                "operator": 1,
                "values": ["Corporate Construction Site"]
            },{
                "field": " FormTitle",
                "operator": 3,
                "values": ["Bridge"]
            }
        ],
        “viewAllUserAction”:true,
        "recordStart": 1,
        "recordLimit": 10,
        "sortField": "FormTitle",
        "sortOrder": "desc",
        "settings": {
            "includeMessages": "true",
        "includeActions": "true",
            “appType”: 5
        }
}
```

In API request, provide search criteria json in **searchCriteria** parameter.
By default, API returning JSON in response to get XML in response specify ***Accept*** header in request.
For XML - Accept: application/xml
For JSON - Accept: application/json

- The search criteria supported by Form Search API are as mentioned below:

No	Field	Datatype	Sorting support	Remarks
1	UpdateDate	DATE	Yes	
2	ID	STRING	Yes	
3	FormCode	STRING	Yes	

4	FormName	STRING	Yes	
5	FormStatus	STRING	Yes	
6	ProjectName	STRING	Yes	
7	IsPublic	BOOLEAN	Yes	
8	MessageCreator	STRING	Yes	
9	UserRef	STRING	Yes	
10	IsDraft	BOOLEAN	Yes	
11	HasDocumentAttached	BOOLEAN	Yes	
12	HasDocumentAssociated	BOOLEAN	Yes	
13	HasDiscussionAssociated	BOOLEAN	Yes	
14	HasFormAssociated	BOOLEAN	Yes	
15	HasViewAssociated	BOOLEAN	Yes	
16	FormCreationdate	DATE	Yes	

- Please refer the table shown below for supported operators for different datatype.

No	Datatype	Description	Supported Operators	Operator Value
1	STRING	Used to search free text field like FormTitle, ProjectName. value for this data type any string	EQUALS NOT_EQUALS CONTAINS NOT_CONTAIN	1 2 3 4
2	DATE	Used to search date related field value for this data type is formatted date in user locale	EQUALS GREATER_THAN_EQUAL LESS_THAN_EQUAL	1 5 6
3	BOOLEAN	Used to search Boolean field value for this data type is true/false	EQUALS	1

- **Sample Form search API cURL Call:**

```
curl --location 'https://adoddleqaak.asite.com/commonapi/formsearchapi/search' \
--header 'Cookie: ASessionID=<ASessionID>;GUEST_LANGUAGE_ID=en_US' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Accept: application/json' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": <fieldName>,
      "operator": <operator>,
      "values": [
        <values>
      ]
    },
    {
      "field": <fieldName>,
      "operator": <operator>,
      "values": [
        <values>
      ]
    }
  ],
  "viewAllUserAction":true,
  "sortOrder": "desc",
  "sortField": <sortFieldName>,
  "recordStart": <recordStart>,
  "recordLimit": <recordLimit>,
  "settings": {
    "formattedCustomFields": true
  },
  "includeActions": "true",
  "appType": <appType>
}'
```

```
C:\WINDOWS\system32\cmd.exe

D:\api>curl --insecure --cacert ".\ca-cert.cer" --cookie ASessionID="08xVUky7jkmUd9XM3MfEgBXEpAwLwtI16oWZMIYVAJ4=" -H "A
ccept: application/xml" --data "searchCriteria={'criteria' :[{'field' : 'ProjectName','operator' : 1,'values' : ['Corpor
ate Construction Site']}, {'field' : 'FormTitle','operator' : 3,'values' : ['Bridge']}],'recordStart' : 1,'recordLimit'
: 1, 'sortField' : 'FormTitle','sortOrder' : 'desc', 'settings': { 'includeMessages' : true, 'includeActions' : true} }"
 https://adoddleqa2ak.asite.com/commonapi/formsearchapi/search   1>formSearch.xml
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100  3064  100  2737  100   327    430     51  0:00:06  0:00:06 --:--:--   581

D:\api>pause
Press any key to continue . . .
```

- **Sample XML return by Form search API:**

<FormResponseVO>
<responseHeader>
<results>1</results>
<results-total>2</results-total>
</responseHeader>
<FormList>
<Form>

<URI>https://dmsqa2ak.asite.com/api/workspace/2062764$$Svi5Xz/form/10088942$$V5WYHr/formdetails</URI>
<FormID>10088942$$V5WYHr</FormID>
<FormDetails>
<FormName>A combined Form</FormName>
<ProjectName>Corporate Construction Site</ProjectName>
<ID>ACF005(2)</ID>
<FormTitle>Bridge First Phase Design</FormTitle>
<UserRef>001</UserRef>
<UpdateDate>Dec 22, 2017#11:27 IST</UpdateDate>
<CloseDue>Dec 29, 2017#23:59 IST</CloseDue>
< FormCreationdate>*Dec 29, 2017#23:59 IST*</ FormCreationdate >
<FormStatus/>
<FormTypeId>2363753$$2X3xxV</FormTypeId>
<FormOriginator>Jay Harkhani</FormOriginator>
<CustomFields>
<CustomField>
<FieldName>CFID_DS_ISDRAFT_RES_MSG</FieldName>
<FieldValue/>
</CustomField>
<CustomField>

<FieldName>CFID_Asite_System_Data_Read_Only</FieldName>

```
                <FieldValue/>
            </CustomField>
            <CustomField>
                <FieldName>CFID_DS_FORMAUTONO</FieldName>
                <FieldValue/>
            </CustomField>
            <CustomField>
                <FieldName>CFID_Todays_Date</FieldName>
                <FieldValue>2016-05-21</FieldValue>
            </CustomField>
            <CustomField>

<FieldName>CFID_DS_PROJUSERS_ALL_ROLES</FieldName>
                <FieldValue/>
            </CustomField>
        </CustomFields>
        <MyActions>
            <FormAction>
                <ActionID>7</ActionID>
                <ActionName>For Information</ActionName>
                <ActionCompletionDate>Dec 22, 2017#18:16
IST</ActionCompletionDate>
                <ActionComplete>Yes</ActionComplete>
                <ActionCleared>No</ActionCleared>
                <ActionTime/>
            </FormAction>
            <FormAction>
                <ActionID>2</ActionID>
                <ActionName>Assign Status</ActionName>
                <ActionCompletionDate/>
                <ActionComplete>No</ActionComplete>
                <ActionCleared>No</ActionCleared>
                <ActionTime>-4 Days</ActionTime>
            </FormAction>
        </MyActions>
    </FormDetails>
    <FormMessages>
        <FormMessage>
            <Type>RES</Type>
            <Number>RES001</Number>
```

```
<FormMsgID>10105259$$w8f7ql</FormMsgID>
<MessageOriginator>Priyam Patel</MessageOriginator>
<CreationDate>Dec 22, 2017#10:58 IST</CreationDate>
<IsDraft>false</IsDraft>
<OriginatorUserId>516447$$KPbzpX</OriginatorUserId>
<HasDocumentAttached>true</HasDocumentAttached>
<HasDocumentAssociated>true</HasDocumentAssociated>
<HasDiscussionAssociated>false</HasDiscussionAssociated>
<HasFormAssociated>false</HasFormAssociated>
<HasViewAssociated>false</HasViewAssociated>
<CustomFields>
    <CustomField>
        <FieldName>CFID_DS_ISDRAFT_RES_MSG</FieldName>
        <FieldValue/>
    </CustomField>
    <CustomField>

<FieldName>CFID_Asite_System_Data_Read_Only</FieldName>
        <FieldValue/>
    </CustomField>
    <CustomField>
        <FieldName>CFID_DS_FORMAUTONO</FieldName>
        <FieldValue/>
    </CustomField>
    <CustomField>
        <FieldName>CFID_Todays_Date</FieldName>
        <FieldValue>2016-05-21</FieldValue>
    </CustomField>
    <CustomField>

<FieldName>CFID_DS_PROJUSERS_ALL_ROLES</FieldName>
        <FieldValue/>
    </CustomField>
</CustomFields>
<MyActions>
    <FormAction>
        <ActionID>7</ActionID>
        <ActionName>For Information</ActionName>
<ActionCompletionDate>Dec 22, 2017#18:16
IST</ActionCompletionDate>
        <ActionComplete>Yes</ActionComplete>
        <ActionCleared>No</ActionCleared>
        <ActionTime/>
    </FormAction>
```

```
            </MyActions>
        </FormMessage>
        <FormMessage>
            <Type>ORI</Type>
            <Number>ORI001</Number>
            <FormMsgID>10105229$$HMREQZ</FormMsgID>
            <MessageOriginator>Jay Harkhani</MessageOriginator>
            <CreationDate>Dec 22, 2017#10:58 IST</CreationDate>
            <IsDraft>false</IsDraft>
            <OriginatorUserId>475846$$iXvmA2</OriginatorUserId>
            <HasDocumentAttached>true</HasDocumentAttached>
            <HasDocumentAssociated>true</HasDocumentAssociated>
            <HasDiscussionAssociated>false</HasDiscussionAssociated>
            <HasFormAssociated>false</HasFormAssociated>
            <HasViewAssociated>false</HasViewAssociated>
            <CustomFields>
                <CustomField>
                    <FieldName>CFID_DS_ISDRAFT_RES_MSG</FieldName>
                    <FieldValue/>
                </CustomField>
                <CustomField>

<FieldName>CFID_Asite_System_Data_Read_Only</FieldName>
                    <FieldValue/>
                </CustomField>
                <CustomField>
                    <FieldName>CFID_DS_FORMAUTONO</FieldName>
                    <FieldValue/>
                </CustomField>
                <CustomField>
                    <FieldName>CFID_Todays_Date</FieldName>
                    <FieldValue>2016-05-21</FieldValue>
                </CustomField>
                <CustomField>

<FieldName>CFID_DS_PROJUSERS_ALL_ROLES</FieldName>
                    <FieldValue/>
                </CustomField>
            </CustomFields>
            <MyActions>
```

```
                <FormAction>
                    <ActionID>2</ActionID>
                    <ActionName>Assign Status</ActionName>
                    <ActionCompletionDate/>
                    <ActionComplete>No</ActionComplete>
                    <ActionCleared>No</ActionCleared>
                    <ActionTime>-4 Days</ActionTime>
                </FormAction>
            </MyActions>
        </FormMessage>
    </FormMessages>
  </Form>
</FormList>
</FormResponseVO>
```


- Following values are returned using the Form search API call

results-total: indicates the number of forms that matched with specified search criteria.

results: specified form search Limit specified in recordLimit parameter

No	Field Name	Description
1	FormID	Returns the formId for form
2	FormName	Returns the Form Type name
3	ID	Returns the Form ID
4	FormTitle	Returns the Form Title
5	UserRef	Returns the User ref for form
6	UpdateDate	Returns the Updated date of form
7	CloseDue	Returns the Close due date of form
8	FormStatus	Returns the Status of form
9	FormTypeId	Returns the Form Type Id of form
10	FormOriginator	Returns the Originator name of form
11	MyActions	Returns all actions of form
12	FormAction	Returns each action details
13	ActionID	Returns the Id of form action
14	ActionDisplayName	Returns the name of form action
15	ActionCompletionDate	Returns the completion date of form action
16	ActionComplete	Returns the action completion status. Value can be Yes or No. If action completed, then Yes Otherwise No.

17	ActionCleared	Returns the action cleared status. Value can be Yes or No. If action cleared, then Yes Otherwise No.
18	ActionTime	Returns the time remains to complete action. It can be negative value in case of action is overdue.
19	CustomFields	Returns the custom fields values of form.
20	FieldLabel	Returns fieldLabel value for HTML5 forms created via App Designer. If the fieldLabel is not there in form, simply the FieldName and FieldValue are returned in response.
21	FormCreationdate	Returns the Creation date of form

6.57. Task Search API

Objective

Task Search API returns a list of tasks based on specified criteria in JSON. It will return list of Documents and Apps. Task details on which the user has access to, regardless of recipient's, based on Task modification date. This includes task assignment, completion, delegation, deactivation and clear of tasks.

Usage Rules

- User must have been logged in using Login API.
- Retrieve URI Tag value for Task Search API from ResultXML of Login API.
- Below is the required JSON format for search criteria.

```
{
     "criteria": [{
                "field": <name of field 1>,
                "operator": <operator id>,
                "values": [<value 1>, <value 2>, <value n>]
           },
           {
                "field": <name of field 2>,
                "operator": <operator id>,
                "values": [<value 1>, <value 2>, <value n>]
           }
     ],
      "recordStart": <Integer value>,
     "recordLimit": <Integer value>
}
```

- Please refer below table for search criteria json fields

No	Field Name	Description	Mandatory	Default value
1	Criteria	Array of search criteria	Yes	
2	Field	Field name in search criteria	Yes	
3	Operator	Operator for search criteria	Yes	
4	Values	Array of value(s) to be search for search criteria	Yes	
5	recordStart	Number of leading documents to skip	No	1

6	recordLimit	Number of documents to return after recordStart (Cannot exceed 1000)	No	10
7	viewAllUserAction	specify whether to return all user's action	No	false

- Example: For JSON from above format

```
{
      "criteria": [{
                  "field": "project_name",
                  "operator": 1,
                  "values": ["Project Phase-1"]
            }, {
                  "field": "task_modification_date",
                  "operator": 5,
                  "values": ["4-dec-2018"]

            }, {
                  "field": "task_modification_date",
                  "operator": 6,
                  "values": ["10-dec-2018"]
            }, {
                  "field": "entity_type",
                  "operator": 1,
                  "values": ["1", "2"]
            }
      ],
      "recordStart": 1,
      "recordLimit": 10,
      "viewAllUserAction": false
}
```

Note: viewAllUserAction option can be used to specify whether to return all user actions or not.

- List of search criteria supported by Task Search API are as mentioned below:

No	Field Name	Datatype	Mandatory	Remarks
1	project_name	STRING	Yes	Project Name to be searched
2	task_modification_date	DATE	Yes	Task Modification Date (Please provide date range for this. It must be less than or equal to 30 days)
3	entity_type	CHOICE	Yes	Entity Type 1 for Form and 2 for Document

In API request, provide search criteria json in **searchCriteria** parameter.

By default, API returning JSON in response to get XML in response specify ***Accept*** header in request.
For XML - Accept: application/xml
For JSON - Accept: application/json

- List of search criteria supported by Task Search API are as mentioned below:

No	Datatyp e	Description	Supported Operators	Operato r Value
1	STRING	Used to search free text field like project name. value for this data type any string	EQUALS NOT_EQUALS CONTAINS NOT_CONTAIN	1 2 3 4
2	CHOICE	Used to search field like link_type Any value from predefine set of value.	EQUALS	1
3	DATE	Used to search date related field value for this data type is formatted date in user locale **Example**	EQUALS GREATER_THAN_EQUAL LESS_THAN_EQUAL greater_than_equal and less_than_equal also support time(optional) in following format **formatted date#hh:mm:ss Considered as**	1 5 6

		formatted date#22	date, 22 hours	
		formatted date#22:55	date, 22 hours 55 minutes	
		formatted date#22:55:30	date, 22 hours 55 minutes 30 seconds	

- **Sample Task search API cURL Call:**

```
curl --location 'https://adoddleqaak.asite.com/commonapi/tasksearchapi/search' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Accept: application/json' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": <fieldName>,
      "operator": <operator>,
      "values": [
        <values>
      ]
    },
    {
      "field": <fieldName>,
      "operator": <operator>,
      "values": [
        <values>
      ]
    },
    {
      "field": <fieldName>,
      "operator": <operator>,
      "values": [
        <values>
      ]
```

```
    }
  ],
  "recordStart": <recordStart>,
  "recordLimit": <recordLimit>,
  "viewAllUserAction": true
}'
```

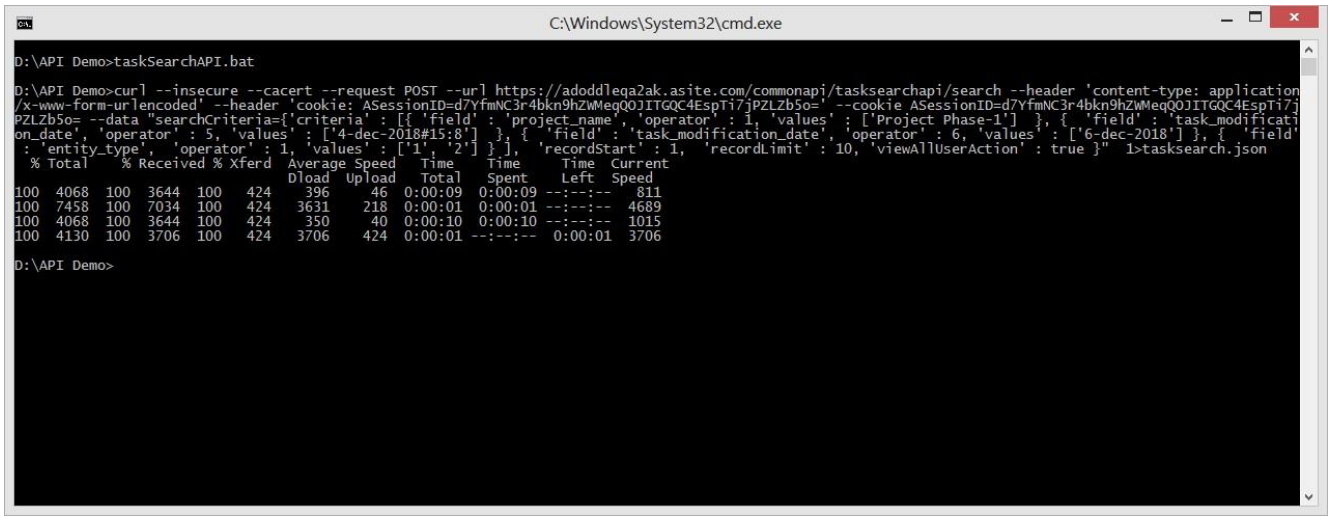

- **Sample XML return by Task search API:**

```
<ActionsResponseVO>
  <responseHeader>
    <results>10</results>
    <results-total>10</results-total>
    <collection>actionscomments</collection>
  </responseHeader>
  <actionVO>
    <project_id>2100598</project_id>
    <entity_type>2</entity_type>
    <resource_id>7101256</resource_id>
    <action_id>9</action_id>
    <distributor_user_id>702646</distributor_user_id>
    <recipient_id>654046</recipient_id>
    <recipient_org_id>3</recipient_org_id>
    <assignedBy_org_id>3</assignedBy_org_id>
    <action_date>04-Dec-2018#15:11 IST</action_date>
    <action_complete_date/>
    <due_date>10-Dec-2018#23:59 IST</due_date>
    <action_status>4</action_status>
```

<remarks>document distribution test</remarks>
<resource_parent_id>10482184</resource_parent_id>
<action_name>For Comment</action_name>
<action_notes>document distribution test</action_notes>
<assigined_by>Mahesh Meniya (5366),Asite Solutions</assigined_by>
<assigned_by_org_name>Asite Solutions</assigned_by_org_name>
<recipient_name>Bhaumik Joshi (5234),Asite Solutions</recipient_name>
<recipient_org_name>Asite Solutions</recipient_org_name>
<is_active>false</is_active>
<TransmittalNumber>T1234</TransmittalNumber>
<action_modification_date>04-Dec-2018#15:22 IST</action_modification_date>

</actionVO>
</ActionsResponseVO>

- Following values are returned using the Task search API call

  results-total: indicates the number of documents that matched with specified search criteria.

  results: specified document search Limit specified in recordLimit parameter

No	Field Name	Description
1	project_id	ProjectId for Action
2	entity_type	Entity Type (1 for form and 2 for document) for Action
3	resource_id	Resource Id (form message id for form and revision id for document) for action
4	action_id	ActionId for action document
5	distributor_user_id	Action distributor UserId
6	recipient_id	Action recipientId
7	recipient_org_id	OrgId of action recipient
8	assignedBy_org_id	OrgId of action Distributor
9	action_date	Action assign date
10	action_complete_date	Action completed date (for completed action)
11	due_date	Action due date (for due action)
12	action_status	Current status for action
13	remarks	Remarks for action

14	resource_parent_id	Resource Parent Id (form id for form and document id for document) for action
15	action_name	Action name
16	action_notes	Action note
17	assigined_by	Name of action distributor
18	assigned_by_org_name	Action distributor org name
19	recipient_name	Recipient name
20	recipient_org_name	Recipient org name
21	is_active	Returns the action status
22	action_modification_date	Action modification date

- We are supporting the same API with GET requests.

curl --location --request GET
'https://adoddlestg.asite.com/commonapi/tasksearchapi/search?viewAllUserAction=true&entity_type=1,2&project_name=Aldar - Mayan Project (UAT)&task_modification_date%235=01Feb-2023&task_modification_date%236=28-Feb-2023&recordStart=1&recordLimit=1000' \
--header 'Authorization: Basic amJhcmFpeWFAYXNpdGUuY29tOkFzaXRlQDEyMw==' \ --header 'Cookie:
JSESSIONID=zRq2m2v0CI9q6Qu51lvZcyG8BLluPW_QxWUv9LvF.adoddle; GUEST_LANGUAGE_ID=en_US'

6.58. Link Type Update API

Objective

Link Type Update API will update link type based on details specified in JSON. It will return respond based on operation completed successfully or not.

Usage Rules

- User must have been logged in using Login API.
- Retrieve URI Tag value for Link Type Update API from ResultXML of Workspace List API.
- Below are the required parameters for link type update.

```
projectId: <Hashed ProjectId> linkTypeDetails:
[{
        "revisionIds": <Hashed revisionIds>,
        "linkType": <update type Id>,
        "isLinkSupersededRevisions": <true/false>
}]
```

- Please refer below table for criteria json fields

No	Field Name	Description	Mandatory	Remarks
1	revisionIds	Comma separated revisionId for which want to update link.	Yes	
2	linkType	Link Type to be set.	Yes	1=Static 2=Dynamic
3	isLinkSupersededRevisions	To update link type in superseded revision	No	True/false. Default value false.

- Example:

1) To Update with same criteria for multiple revision mention comma separated values in revisionIds.

```
[{
        "revisionIds": "7167090$$wnUHSZ,7167089$$gEZJ80",
        "linkType": 2,
        "isLinkSupersededRevisions": true
}]
```

2) To Update with different criteria, provide JSONObject for each.

```
[{
        "revisionIds": "7167090$$wnUHSZ,7167080$$oa9CAB",
        "linkType": 2,
        "isLinkSupersededRevisions": true
},
{
        "revisionIds": "7167089$$gEZJ80",
        "linkType": 1,
        "isLinkSupersededRevisions": false
}]
```

- **Sample Link Update Type API cURL Call:**

```
curl --location 'https://adoddleqaak.asite.com/commonapi/document/updateLinkType' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'projectId=<WorkspaceID>' \
--data-urlencode 'linkTypeDetails=[{
  "revisionIds": "<revisionId>",
  "linkType": <linkTtype>,
  "isLinkSupersededRevisions": false
}]'
```

- **Sample XML return by Link Update Type API:**

```
<?xml version="1.0" encoding="UTF-8"?>
<data>
    <message>Link Updated Successfully</message>
    <status>Success</status>
</data>
```

6.59. Manage Custom Attribute Values API

Objective
Manage Custom Attribute Values API allow user to Add/Edit/Delete attribute values for type of Dropdown and Multi selection checkbox. Based on operation performance it will send JSON in response.

Usage Rules

- User must have been logged in using Login API.
- Below is the required JSON format for update attribute value.

```
attributeParam: {
      "projectId": <Id of project>,
      "projectName": <name of project>,
      "attributeId": <Id of custom attribute>,
      "attributeName": <name of custom attribute>,
      "attributeType": <Type of Custom attribute>,
      "operation": <Type of Operation>,
      "attributeValueParamVOs": [{
            "name": <name of field 2>,
      "newName": <operator id>,
            "code": <name of field 1>,
            "newCode": [<value 1>, <value 2>, <value n>],
            "isDefault": <To set it as default or not>,
      "languageValues": {
                  "<EN_GB|EN_US|EN_CA|FR_FR|RU_RU|ES_ES>": <language
            specific label>,
            }
      }]
}
```

- Please refer below table for manage attribute value json fields

No	json field	Description	Mandatory	Default value
1	attributeParam	JSON which contains details of project, attribute and its value	Yes	

2	projectId	Id of project in which attribute belongs	Any one of these	
3	projectName	Name of project in which attribute belongs		
4	attributeId	Id of attribute for which value wants	Any one	
		to be managed	of these	
5	attributeName	Name of attribute for which value wants to be managed		
6	attributeType	Type of attribute	No	
7	operation	Type of operation wants to be performed	Yes	
8	attributeValueParamVOs	JSON ARRAY of detail values to be Add/Update/Delete	Yes	
9	name	Existing attribute value name to be mentioned for UPDATE/DELETE operation	Yes. For UPDATE /DELETE operation	
10	code	Existing attribute value code to be mentioned for UPDATE/DELETE Operation	Yes. For UPDATE /DELETE operation	
11	newName	New attribute value	Yes	
12	newCode	New attribute value code	Yes	false
13	isDefault	To mark attribute value as default	No	False
14	langaugeValues	Specify language specific values	No	

- Example: For JSON from above format

```
attributeParam: {
      "projectName": "Shivalik Business Center",
      "attributeName": "Category",
      "attributeType": "DROPDOWN_LIST",
      "operation": "ADD",
      "attributeValueParamVOs": [{
            "newName": "Architectural",
            "newCode": "AR",
            "isDefault": true,
```

```
            "languageValues": {
                "EN_US": "Architectural"
            }
        }]
}
```

- Please refer below table for supported attribute type & Operations value:

No	Field	Value
1	attributeType	MULTIPLE_SELECTION_CHECKBOX
		DROPDOWN_LIST
2	operation	ADD
		UPDATE
		DELETE
3	languageValues	EN_GB
		EN_US
		EN_CA
		FR_FR
		RU_RU
		ES_ES

- **Sample Manage Custom Attribute Value API cURL Call:**

- ADD

curl --location
**'https://adoddleak.asite.com/commonapi/manageAttribute/updateAttributeValues' **

```
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--data-urlencode 'attributeParam={
   "projectName": <projectName>,
   "projectId": <projectId>,
   "attributeName": <attributeName>,
   "attributeType": <attributeType>,
   "operation": "ADD",
   "attributeValueParamVOs": [
      {
         "newName": <newAttributeName>,
         "newCode": <newAttributecODE>,
         "isDefault": false,
         "languageValues": {
          "EN_US": <newAttributeName>
         }
      }
   ]
}'
```

- UPDATE

```
curl --location
'https://adoddleak.asite.com/commonapi/manageAttribute/updateAttributeValues' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'attributeParam={
   "projectName": <projectName>,
   "projectId": <projectId>,
   "attributeName": <attributeName>,
   "attributeType": <attributeType>,
   "operation": "UPDATE",
   "attributeValueParamVOs": [
      {
         "newName": <newAttributeName>,
         "newCode": <newAttributecODE>,
         "isDefault": false,
         "languageValues": {
          "EN_US": <newAttributeName>
         }
      }
   ]
}'
```

- DELETE

```
curl --location
'https://adoddleak.asite.com/commonapi/manageAttribute/updateAttributeValues' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--data-urlencode 'attributeParam={
   "projectName": <projectName>,
   "attributeName": <attributeName>,
   "attributeType": <attributeType>,
   "operation": "DELETE",
   "attributeValueParamVOs": [
   {
     "newName": <newAttributeName>,
     "newCode": <newAttributecODE>,
     "isDefault": false
   }
 ]
}'
```

- **Sample XML return by Form search API:**

{"msg":"Request Completed Successfully"}

6.60. Custom Attribute Details API

Objective
Custom attribute details API allows user to get values of dropdown and multi selection checkbox.

Usage Rules

- User must have a valid API session.
- User needs to execute Workspace list API to get URL of this API.
- Below is the required JSON format for get attribute value details.

```
attributeDetailParam: {
      "projectId": <Id of project>,
      "projectName": <name of project>,
      "attributeId": <Id of custom attribute>,
```

```
      "attributeName": <name of custom attribute>
}
```

- Please refer below table for manage attribute value json fields

No	json field	Description	Mandatory	Default value
1	attributeDetailParam	JSON which contains details of project and attribute	Yes	
2	projectId	Id of project in which attribute belongs	Any one of these	
3	projectName	Name of project in which attribute belongs		
4	attributeId	Id of attribute for which value wants to be managed	Any one of these	
5	attributeName	Name of attribute for which value wants to be managed		

- Example: For JSON from above format

```
 attributeDetailParam:
{
      "projectName": "Shivalik Business Center",
      "attributeName": "Classification"
}
```

- **Sample Manage Custom Attribute Value API cURL Call:**

```
curl --location
'https://adoddleqaak.asite.com/commonapi/manageAttribute/getAttributeValue' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'attributeDetailParam={
   "projectId": "<WorkspaceID>",
   "attributeId": <AttributeID>
}'
```

- **Sample JSON return by Custom attribute detail API:**

```
{
   "customAttributeDataList": [
```

```
        {
            "inputValueList": [
                {
                    "name": "ERTH - Earthing",
                    "code": "ERTH",
                    "isDefault": false
                },
                {
                    "name": "EXHS – Exhaust",
                    "code": "EXHS",
"isDefault": true,
                    "languageValues": [
                        {
                            "languageId": "fr_FR",
                            "languageLabel": "échappement"
                        }
                    ]
                },
                {
                    "name": "FFEQ - Furniture, Fixtures & Equipment",
                    "code": "FFEQ",
                    "isDefault": false
                }
            ],
            "projectId": "2083674$$H4OpEQ",
            "attributeId": 1015,
            "attributeName": "Classification",
            "inputTypeId": 26,
            "authorUserId": 475846,
            "inputTypeName": "Dropdown list",
            "description": "Classification",
            "valueRequired": true,
            "isActive": 1
        }
    ]
}
```

6.61. Create Placeholder with Custom Attributes API

Objective
Create Placeholder with Custom Attributes API allows user to create Placeholder with custom attributes on workspace folder.

Usage Rules

- User must have been logged in using Login API and access to specified folder with necessary permission to create placeholder.
- Execute the login API Call
- Extract the session id from the resultant xml of the login API Call
- Execute the Workspace List API Call
- Extract the URI tag for Workspace from resultant xml of the Workspace List API
- Execute the Workspace Folder List API Call
- Extract the Create Placeholder URI tag from the resultant xml of the Workspace Folder List API Call

Below is the required JSON format to create placeholder:

```
placeHolderDetails:{
      "documentRef": "docref of placeholder",
      "revision": "revision of placeholder",
      "documentTitle": "doc title of placeholder",
      "purposeOfIssueName": "POI-information",
      "isPrivateRevision": true,
      "revisionNotes": "revision note of placeholder",
      "customAttributes": [{
            "attributeId": 1015,
            "attributeValues": ["value 1", "value 2"]
      }, {
            "attributeName": "attribute name 2",
            "attributeValues": ["code 1", "code 2"]
      }],
      "allowDocRefWithPreviousRevision": true }
```

- Please refer below table for Json fields:

No	Json field	Description	Mandatory	Default value

1	documentRef	Doc. ref for placeholder	Yes	NA
2	revision	Revision for placeholder	Yes	NA
3	documentTitle	Document title for placeholder	Yes	NA
4	purposeOfIssueName	Purpose of Issue for placeholder	Yes	NA
5	isPrivateRevision	Private Revision option for placeholder	No	False
6	revisionNotes	Revision notes for placeholder	No	NA
7	attributeId	Attribute Id for specific folder/project	Any one of these	NA
8	attributeName	Attribute name for specific folder/project		NA
9	attributeValues**	Attribute Value for specific attribute	Yes	NA
10	allowDocRefWithPreviousRevision	Create placeholder with previous revision for specific documentRef	No	False

For Dropdown type of attribute, need to specify the **code in attributeValues node.

For Multiple Selection Checkbox need to specify the **name in attributeValues node.

For Radio button need to specify **YES/NO in attributeValues node.

- **Sample API cURL Call:**

```
curl --location
'https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/folder/<FolderID>/createPlaceholder' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'placeHolderDetails={
  "documentRef": <documentRef>,
  "revision": <revisionNo>,
  "documentTitle": <documentTitle>,
  "purposeOfIssueName": <purposeOfIssueName>,
  "isPrivateRevision": false,
  "revisionNotes": <revisionNotes>,
  "allowDocRefWithPreviousRevision": true
}'
```

- **Sample JSON returned by API:**
- Success scenario:

```
{
    "documentRef": "docref of placeholder ",
    "success": true
}
```

- Failure scenario:

```
{
    "documentRef": "docref of placeholder ",
    "success": false,
    "errorCode": "error code",
    "errorMessage": "error description" }
```

Notes:

- During placeholder creation, if there are extra parameters of custom attributes that are passed by the request apart from the folder custom attribute; the extra parameters will be dropped. Essentially, only those parameters are considered which match with the folder custom attributes. The extra parameters will be available upon request.

- For same name attributes, Custom Attribute Id will be used to create placeholder.

- In case for Compound/Auto Sequence, value of doc_ref or customer attribute of the request will be overridden, and request parameter will not be applied.

6.62. Upload File with Custom Attributes API

Objective
Upload File with Custom Attributes API allows user to publish file with custom attributes on workspace folder.

Usage Rules

- User must login in using Login API and access to specified folder with necessary permission to upload file.
- Execute the login API Call
- Extract the session id from the resultant xml of the login API Call
- Execute the Workspace List API Call
- Extract the URI tag for Workspace from resultant xml of the Workspace List API
- Execute the Workspace Folder List API Call
- Extract the Upload with Custom Attribute URI tag from the resultant xml of the Workspace Folder List API Call

Below is the required JSON format to upload file:

```
uploadFileDetails={
      "documentRef": "docref of file",
      "revision": "revision of file",
      "documentTitle": "doc title of file",
      "purposeOfIssueName": "POI-information",
      "statusName": "Status-information",
      "isPrivateRevision": true,
      "revisionNotes": "revision note of file",
      "customAttributes": [{
            "attributeId": 1015,
            "attributeValues": ["value 1", "value 2"]
      }, {
            "attributeName": "attribute name 2",
            "attributeValues": ["code 1", "code 2"]
```

```
}],
"allowDocRefWithPreviousRevision": true }
```

Please refer below table for Json fields:

No	Json field	Description	Mandatory	Default value
1	documentRef	Doc. ref for file	Yes	NA
2	revision	Revision for file	Yes	NA
3	documentTitle	Document title for file	Yes	NA
4	purposeOfIssueName	Purpose of Issue for file	Yes	NA
5	statusName	Status for file	Yes	NA
6	isPrivateRevision	Private Revision option for file	No	NA
7	revisionNotes	Revision notes for file	No	NA
8	attributeId	Attribute Id for specific folder/project	Any one of these	NA
9	attributeName	Attribute name for specific folder/project		NA
10	attributeValues**	Attribute Value for specific attribute	Yes	NA
11	allowDocRefWithPreviousRevision	Upload with previous revision for specific documentRef	No	False

** For Dropdown type of attribute, need to specify **code** in attributeValues node.

For Multiple Selection Checkbox, need to specify **name in attributeValues node.

**For Radio button, need to specify YES/NO in attributeValues node.

Input Parameters:

Parameters Name	Description	Mandatory
Form Data	primaryFile=@Test1.txt;type=application/octet-stream	Yes
	secondaryFile=@Test2.txt;type=application/octet-stream	No
uploadFileDetails	JSON as above	Yes

- **Sample Upload File with Custom Attributes API cURL Call:**

```
curl --location
'https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/folder/<FolderI
D>/uploadFileWithCustomAttributes' \
--header 'Cookie: AsessionID=<ASessionID>' \
--header 'Accept: application/json' \
--form 'primaryFile=@"/path/to/file"' \
--form 'uploadFileDetails="{
  \"documentRef\": <docRef>,
  \"revision\": <revisionNo>,
  \"documentTitle\": <documentTitle>,
  \"purposeOfIssueName\": <purposeOfIssueName>,
  \"statusName\": <statusName>,
  \"isPrivateRevision\": false,
  \"revisionNotes\": <revisionNotes>,
  \"customAttributes\": [
    {
      \"attributeId\": <attributeId>,
      \"attributeValues\": [
        \"value 1\",
        \"value 2\"
      ]
    },
    {
      \"attributeName\": <attributeName>,
      \"attributeValues\": [
        \"code 1\",
        \"code 2\"
      ]
    }
  ]
}"'
```

- **Sample JSON returned by API:**
- Success scenario:

```
{
    "documentRef": "Test File",
    "success": true
}
```

- Failure scenario:

```
{
    "documentRef": "Test File",
    "success": false,
    "errorCode": "error code",
    "errorMessage": "error description"
}
```

For chunk upload user must follow below steps

We are also supporting chunk upload in the same API. This means that uploading files with custom attributes can be managed in smaller chunks of maximum 5 MB size.

Input parameters:

Parameters Name	Description	Mandatory
fileSize	fileSize is the total size of file.	Yes
originalFileName	originalFileName this name will be used when persistent chunks at temp location.	Yes
uploadedFileName	uploadedFileName is the filename with timestamp which was uploaded using the above API. Users can get this name from the chunk upload API response.	Yes

- Upload the first chunk using the below API call. Chunks will be uploaded first at the Temp directory.

```
curl --location
'http://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/folder/<FolderID>
/uploadFileWithCustomAttributes?uploadType=chunkUpload' \
--header 'Cookie: ASessionID=<ASessionID>' \
```

```
--form 'file=@"/path/to/file"' \
--form 'originalFileName="<originalFileName>"' \
--form 'fileSize="<fileSize>"'
```

- After uploading the first chunk, use the below API to upload the next chunks. Here users can get timeMilliSeconds from 1st step (above) API response, that we have to pass in the next all chunk uploads.

```
curl --location
'http://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/folder/<FolderID>
/uploadFileWithCustomAttributes?uploadType=chunkUpload' \
--header 'Cookie: ASessionID=<ASessionID>' \
--form 'file=@"/path/to/file"' \
--form 'fileSize=<fileSize>' \
--form 'originalFileName= <originalFileName>' \
--form 'timeMilliSeconds="1669186278368"'
```

- After successfully uploading all chunks please use the below API to commit files with custom attributes.

```
curl --location
'http://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/folder/<FolderID>
/uploadFileWithCustomAttributes' \
--header 'Cookie: ASessionID=<ASessionID>' \
--form 'fileSize="<fileSize>"' \
--form 'uploadedFileName="<uploadedFileName>"' \
--form 'originalFileName="<originalFileName>"' \
--form 'uploadFileDetails="{
 \"documentRef\": <docRef>,
 \"revision\": <revisionNo>,
 \"documentTitle\": <documentTitle>,
 \"purposeOfIssueName\": <purposeOfIssueName>,
 \"statusName\": <statusName>,
 \"isPrivateRevision\": false,
 \"revisionNotes\": <revisionNotes>,
 \"customAttributes\": [
  {
   \"attributeId\": <attributeId>,
   \"attributeValues\": [
    \"value 1\",
    \"value 2\"
   ]
  },
  {
   \"attributeName\": <attributeName>,
   \"attributeValues\": [
```

```
        \"code 1\",
        \"code 2\"
      ]
    }
  ]
}"'
```

6.63. File History API

Objective

File History API allows user to get file history of workspace folder file.

Usage Rules

- User must login in using Login API and access to specified folder with necessary permission to get file history.
- Execute the login API Call
- Extract the session id from the resultant xml of the login API Call
- Execute the Workspace List API Call
- Extract the URI tag for Workspace from resultant xml of the Workspace List API
- Execute the Workspace Folder List API Call
- Extract the File History URI tag from the resultant xml of the Workspace Folder List API Call

Below is the required JSON format to upload file:

```
{

  "docDetails": {
    "documentRef": ["Test001"]
  }

}
```

Please refer below table for Json fields:

No	Json field	Description	Mandatory	Default value
1	documentRef	Document reference	Yes	NA

Input Parameters:

Parameters Name	Description	Mandatory
docDetails	JSON as above	Yes

- **Sample get File History API cURL Call:**

```
curl --location --request GET
    'https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/folder/<Fol
    derID>/documentHistory' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'docDetails={
  "docDetails":{
    "documentRef": [<documentRefs>]
  }
}'
```

- **Sample JSON returned by API:**
- Success scenario:


```
{
"DocRef:Test001": [ {
            "revisionNum": "1",
            "revisionCounter": 1,
            "remarks": ["test"],
            "fileName": "Name of the File",
            "fileDescription": "Test001",
            "revisionDate": "17-Jun-2020#15:05 IST",
            "revisionStatusName": "Draft",
            "purposeOfIssue": "---",
```

```
                "revisionNotes": "",
                "orgName": "Asite Solutions",
                "reasonForStatusChange": "",
                "actionName": "Distributed",
                "user_name": "Dhaval Vekaria",
                "actionDate": "10-Jul-2020#11:19 IST",
                "proxyUserName": "Dhaval Vekaria",
                "proxyOrgName": "Asite Solutions",
                "actions": [
                 {
                    "instant_email_notif": "YES",
                    "objectName": "(U): Ajay Parmar",
                    "user_name": "Ajay Parmar",
                    "action_name": "For Comment",
                    "action_status": "Incomplete",
                    "distributor_user_name": "Dhaval Vekaria",
                    "revision_distribution_date": "10-Jul-
        2020#11:19 IST",
                    "action_due_by_date": "18-Jul-2020#23:59
        IST",
                    "action_notes": "Test Note",
                   "action_complete_date":"18-Jul-2020#23:59 IST
        ",
                    "transmittal_no": "TRN00001",
                    "remarks": "",
                    "distributor_org_name": "Asite Solutions",
                    "user_org_name": "Asite Solutions"

                  }
                ]
        }
    ]
}
```


Notes:

- Action section will only available if action is given
- In case of Model file “remarks, actionName, user_name, actionDate” fields have value and other are blank.

- Failure scenario:


```
{
```

```
        "documentRef": "Test001",

        "success": false,
        "errorCode": "error code",
        "errorMessage": "error description"
    }
```

6.64. Create/Edit Custom Attributes

Objective

This api allows user to create or edit Custom Attributes.

Usage Rules

- User must login in using Login API.
- *workspacelist* api returns hash projectId
- Manage Configurable Attributes permission will be required.

Method details:

Name	Value
Method	post
URL	https://adoddle.asite.com/commonapi/manageAttribute/saveCustomAttributes

Note: User can also get above url from *workspacelist* api response

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes
Content-type	application/json	Yes

Please refer below table for Json fields:

No	Field Name	Description	Mandatory	Default value
1	hashedProjectId	Hash value of projectId belongs to custom attribute.	Yes	NA
2	userId	Logged in userId	No	NA
3	proxyUserId	Proxy user id	No	NA
4	userType	User type id ONLINE_USER=1 PAPER_USER=2	No	NA

5	attributeTypeId	Type of Custom attribute refer ***attributeTypeId*** table	Yes	5(for simple attribute)
6	attributeName	Name of custom attribute	Yes	NA
7	description	Description of attribute	No	NA
8	setLanguageLabel	Language specific label 1 for apply 0 for do not apply	No	NA
9	langLabelsList	Define array of Language label details objects	If setLanguageLabel =1	NA
	• value	Language value	If setLanguageLabel =1	NA
	• languageId	Refer ***languageId*** column from ***languageId/Id*** table	If setLanguageLabel =1	NA
	• id	Refer ***Id*** column from ***languageId/Id*** table	If setLanguageLabel =1	NA
10	inputValueList	Define array of Dropdown option details objects	If inputTypeId = 26 (Dropdown list)	NA
	• value	Value of the dropdown option	If inputTypeId = 26 (Dropdown list)	NA
	• default	Default name of dropdown option	If inputTypeId = 26 (Dropdown list)	NA
	• name	Name of the dropdown option	If inputTypeId = 26 (Dropdown list)	NA
11	inputTypeId	Id of input type refer ***inputTypeId*** table	Yes	NA
12	inputDataTypeId	Id of input data type provided in inputDataTypeId table	If inputTypeId = 21 (Textbox)	NA

Refer ***inputTypeId*** details table

inputTypeId	**name**
21	Textbox
26	Dropdown list

Refer ***inputDataTypeId*** table

inputDataTypeId	**name**
7	Integer

8	Decimal
9	Email
10	Letters and Numbers
11	Letters
12	Date/Time

Refer ***languageId/Id*** table

Id	name	languageId
1	English (United Kingdom)	en_GB
2	English (United States)	en_US
3	English (Canada)	en_CA
4	français (France)	fr_FR
5	русский (Россия)	ru_RU
6	español (España)	es_ES
7	Nederlands(Netherlands)	nl_NL

Refer ***attributeTypeId*** table

attributeTypeId	name
5	Simple
6	Compound

Below given sample describes the format of request body JSON:

```
[
    {
        "hashedProjectId": "2081683$$oceSzv",
        "userId": 702646,
        "proxyUserId": 702646,
        "userType": 1,
        "attributeTypeId": 5,
        "attributeName": "api_textbox",
        "description": "api_textbox description",
        "setLanguageLabel": 1,
        "langLabelsList": [
            {
                "value": "eng_uk",
```

```
                        "languageId": "en_GB",
                        "id": 1
                    },
                    {
                        "value": "lng_fr",
                        "languageId": "fr_FR",
                        "id": 4
                    }
                ],
                "inputTypeId": 21,
                "inputDataTypeId": 11
            },
            {
                "hashedProjectId": "2081683$$oceSzv",
                "userId": 702646,
                "proxyUserId": 702646,
                "userType": 1,
                "attributeTypeId": 5,
                "attributeName": "api_dropdown",            "description":
"api_dropdown description",
                "setLanguageLabel": 1,
                "langLabelsList": [
                    {
                        "id": 1,
                        "value": "english_lable",
                        "languageId": "en_GB"
                    },
                    {
                        "id": 4,
                        "value": "french_lable",
                        "languageId": "fr_FR"
                    }
                ],
                "inputTypeId": 26,
                "inputValueList": [
                    {
                        "id": 1,
                        "name": "option_1",
                        "value": "101",
                        "defaultName": "opt1",
                        "default": true,
                        "languageId": "en_GB",
                        "inputValSubList": [
                            {
```

```
                                    "id": 4,
                                    "name": "opt1_fr",
                                    "value": "101",
                                    "default": false,
                                    "languageId": "fr_FR"
                                }
                            ]
                        },
                        {
                            "id": 1,
                            "name": "option_2",
                            "value": "102",
                            "defaultName": "opt2",
                            "default": false,
                            "languageId": "en_GB"
                        },
                        {
                            "value": "103",
                            "defaultName": "opt3",
                            "default": false
                        }
                    ],
                    "inputTypeName": "Dropdown list",
                    "valueRequired": true
                }
            ]
```


Sample saveCustomAttributes API cURL Call:

```
curl --location
'https://adoddleqaak.asite.com/commonapi/man
ageAttribute/saveCustomAttributes' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/json' \
--data '[
  {
```

"hashedProjectId": <WorkspceID>,
"userId": <UserID>,
"proxyUserId": <UserID>,
"userType": <userType>,
"attributeTypeId": <attributeTypeId>,
"attributeName": <attributeName>,
"description": <description>,
"setLanguageLabel": 1,
"langLabelsList": [
{
"value": "eng_uk",
"languageId": "en_GB",
"id": 1
},
{
"value": "lng_fr",
"languageId": "fr_FR",
"id": 4
}
],
"inputTypeId": <inputTypeId>,
"inputDataTypeId": <inputDataTypeId>
},
{
"hashedProjectId": <WorkspceID>,
"userId": <UserID>,
"proxyUserId": <ProxyUserID>,
"userType": <userType>,
"attributeTypeId": <attributeTypeId>,

```
"attributeName": <attributeName>,
"description": <description>,
"setLanguageLabel": 1,
"langLabelsList":
[
    {
        "id": 1,
        "value": "english_lable",
        "languageId": "en_GB"
    },
    {
        "id": 4,
        "value": "french_lable",
        "languageId": "fr_FR"
    }
],
"inputTypeId": 26,
"inputValueList": [
    {
        "id": 1,
        "name": "option_1",
        "value": <value>,
        "defaultName": "opt1",
        "default": true,
        "languageId": "en_GB",
        "inputValSubList": [
```

```
                {
                  "id": 4,
                  "name": "opt1_fr",
                  "value": <value>,
                  "default": false,
                  "languageId": "fr_FR"
                }
              ]
            },
            {
              "id": 1,
              "name": "option_2",
              "value": <value>,
              "defaultName": "opt2",
              "default": false,
              "languageId": "en_GB"
            },
            {
              "value": <value>,
              "defaultName": "opt3",
              "default": false
            }
          ],
          "inputTypeName": "Dropdown list",
          "valueRequired": true
        }
    ] '
```


Sample JSON response:


```
[
```

```
  {
    "attributeId": 1027,
    "attributeName": "api_textbox"
  },
  {
    "attributeId": 1028,
    "attributeName": "api_dropdown"
  }
]
```


6.65. Create/Edit Custom Attribute Set

Objective

This api allows user to create or edit Custom Attribute Set.

Usage Rules

- User must login in using Login API.
- User can get projectId hashed value from response of *workspacelist* api and folderId hashed value from response of *Workspace Folder List API* for selected project
- Manage Configurable Attributes permission will be required.
- In the case of edit, if we want to update attribute details of an attribute set, we have to pass attributes details which needs to be removed are in removedAttributes and attributes details which needs to be added are in addedAttributes as JSON objects. Attribute which user wants to remove/de-assign would be in removedAttributes and attributes which user wants to add/assign would be in addedAttributes.
- We can Add/Remove attributes only by attributeId and attributeName combination.
- We can also add compound attributes (e.g., doc ref) by providing assigned attributeId in associatedAttribList and compound attributeId, attributeName and seqNum in assignedAttributesList Json object.
- API will not allow to apply custom attribute set on the same folder; API will throw error message “Attribute set is already applied on the given folder” in response.
- We can set hierarchical attributes by providing mapping of parent and child attributes.

Method details:

Name	Value
Method	post
URL	https://adoddle.asite.com/commonapi/manageAttribute/saveCustomAttributeSet

Note: User can also get above url from *workspacelist* api response.

Headers:

Name	Value	Mandatory

ASessionID	session ID from the resultant XML of Login API call	Yes
Content-type	application/json	Yes

Please refer below table for Json fields:

No	Field Name	Description	Mandatory	Default value
1	hashedProjectId	Hash projectId of project belongs to custom attribute set.	Yes	NA
2	active	Attribute set is active or not.	No	true
3	hashedFolderIds	Comma separated folder Ids of a project defined in hashedProjectId to apply custom attribute set.	No	NA
4	defaultSet	Describes attribute Set is default or not on selected project	No	false
5	description	Description of attribute Set	No	NA
6	name	Name of attribute Set	No	NA
7	associatedAttribList	Define array of attribute details objects (simple and compound)	Yes	NA

	• attributeId	Id of attribute for which value wants to be managed	Yes	NA
	• attributeName	Name of attribute for which value wants to be managed	Yes	NA
	• attributeTypeName	Name of attribute type Simple: for simple attribute Compound: for Compound attribute	Yes	NA
	• autoGenSequence	Allow auto sequence generation	No	“0”
	• charLimit	Number of characters allowed	Yes, if autoGenSequence is yes otherwise No	NA
	• applyAsPrefix	Apply value as prefix or not	Yes, if autoGenSequence is yes otherwise No	“0”
	• seqStartsFrom	Sequence Number starts with	Yes, if autoGenSequence is yes otherwise No	NA

		Allowed numbers only		

	• autoSeqLevel	Id of project specific or folder specific to apply sequence. refer ***Auto Sequence Level*** table	Yes, if autoGenSequence is yes otherwise No	NA
	• separator	It can be “-”, “_”, “+”	Yes, in case of compound attribute	NA
8	assignedAttributesList	Define array of attribute objects while needs to be assigned to the attribute set	No	NA
	• seqNum	Compound attributes sequence	Yes, if assignedAttributesList specify	NA
	• attributeId	Id of attribute	Yes, if assignedAttributesList specify	NA
	• attributeName	Name of attribute	Yes, if assignedAttributesList specify	NA
9	removedAttributes	Define array of attribute objects while needs to be removed from the attribute set.	No	NA
	• attributeId	Id of attribute	Yes, if need to remove attribute	
	• attributeName	Name of attribute	Yes, if need to remove attribute	
10	addedAttributes	Define array of attribute objects while needs to be added to the attribute set. Note: refer sample example json	No	NA

11	attributeSetId	Id of attribute set with	Yes, in case of edit operation	NA
		reference to this attribute set will be updated		
12	hierarchicalAttributeList	JSONArray of Hierarchical attribute details	Yes, if need to set hierarchical attributes	NA
13	addedHierarchicalAttributes	JSONArray of Hierarchical attributes want to add in existing attribute set	Yes, if need to add hierarchy in existing set	NA
14	removedHierarchicalAttributes	JSONArray of Hierarchical attributes want to remove from existing attribute set	Yes, if need to remove hierarchy in existing set	NA
	• hierarchicalSubSetList	JSONArray of parent child attribute code details to define multiple mappings of parent values with child.	Yes, to define inside hierarchicalAttributeList or addedHierarchicalAttributes or removedHierarchicalAttributes mapping of parent/child codes	NA
	• parentCodes	JSONObject attribute for parent attribute code details. Multiple codes can be defined hash separated.	Yes, define inside hierarchicalSubSetList	NA
	• childCodes	JSONObject attribute for child attribute code details. Multiple codes can be defined hash separated.	Yes, define inside hierarchicalSubSetList	NA

	• parentAttributeId	Parent attribute Id.	Yes, define at same level of hierarchicalSubSetList	NA
	• childAttributeId	Child attribute Id	Yes, define at same level of hierarchicalSubSetList	NA

Refer ***Auto Sequence Level*** details from below table

autoSeqLevel	Name
29	Project Specific
30	Folder Specific
31	Specific to Compound Pattern - Project Specific
32	Specific to Compound Pattern - Folder Specific

Below given sample describes the format of request body JSON:

```
[
      {
            "hashedFolderIds": <Commaseparated FolderIDs in hash>,
            "hashedProjectId": <ProjectID in hash>,
            "description": <AttributeSet description>,
            "name": <AttributeSet name>,
            "active": <AttributeSet isactive or not- true or false>,
            "defaultSet": <DefaultSet true or false>,
            "associatedAttribList": [
                  {
                        "attributeId": <Id of customattribute>,
                        "attributeName": <Name of customattribute>,
                        "attributeTypeName": <Simple/Compound>,
                  "autoGenSequence": <Generate AutoSequence Yes or
No>,
                        "charLimit": <Character limit>,
                        "applyAsPrefix": <Prefix or suffix>,
                        " seqStartsFrom": <Sequence starts with>,
                        "autoSeqLevel": <IdofProject/Folderspecific>,
                        "seperator": <Separator for
compoundattributes>,
                        "assignedAttributesList": [
                              {
                                    "seqNum": <Compoundattribute
sequence number>,
      "attributeId": <Id of customattribute>,
                                    "attributeName": <Name of
customattribute>
```

```
                        }
                    ],
                    "hierarchicalAttributeList": [
                        {
                            "hierarchicalSubSetList": [
                                {
                                    "parentCodes": <Parent
attribute code values>,
                                    "childCodes": <Child
attribute code values>
                                }
                            ],
                            "parentAttributeId": <Parent attribute
Id>,
                            "childAttributeId": <Child attribute
Id>
                        }
                    ]
                }
            ]
        }
]
```

Sample JSON for create new attribute set:

```
[
    {
        "hashedFolderIds": "112132832$$QRperS",
        "hashedProjectId": "2081683$$oceSzv",
        "description": "api set description",
        "name": "api set",
        "active": "true",
        "defaultSet": "false",
        "associatedAttribList": [
            {
                "attributeId": 1027,
                "attributeName": "api_textbox",
                "attributeTypeName": "Simple"
            },
```

```
                    {
                          "attributeId": 1028,
                           "attributeName": "api_dropdown",
                          "attributeTypeName": "Simple"
                    }
              ]
        }
]
```

Sample cURL call for create new attribute set:

```
curl --location
'https://adoddleqaak.asite.com/commonapi/manageAttribute/saveCustomAttributeSet'
\
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/json' \
--data '[
   {
      "hashedProjectId": "<WorkspaceID>",
      "description": "api set description",
      "name": <name>,
      "active": "true",
      "defaultSet": "false",
      "associatedAttribList":
      [

         {
            "attributeId": <attributeId>,
            "attributeName": <attributeName>,
            "attributeTypeName": <attributeTypeName>
         },
         {
            "attributeId": <attributeId>,
            "attributeName": <attributeName>,
            "attributeTypeName": <attributeTypeName>
         }
      ]
   }
] '
```

Sample JSON to add new Attribute in attribute set For Simple attribute

```
[
        {
```

```
            "hashedProjectId": "2120352$$yqXzsM",
            "attributeSetId": 93477,
            "addedAttributes": [
                {
                    "attributeId": "1002",
                    "attributeName": "Discipline Designator",
                    "attributeTypeName": "Simple"
                }
            ]
        }
]
```

For Compound attribute

```
[
        {
            "hashedProjectId": "2120352$$yqXzsM",
            "attributeSetId": 93477,
            "addedAttributes": [
                {
                    "attributeId": "1",
                    "attributeTypeName": "Compound",
                    "attributeName": "Doc Ref (Document
Reference)",
                    "seperator": "-",
                    "assignedAttributesList": [
                        {
                            "attributeId": "1001",
                            "attributeName": "Project Title",
                            "seqNum": 1
                        }
                    ]
                }
            ]
        }
]
```

Sample json for remove attribute from attribute set

```
[
        {
            "hashedProjectId": "2120352$$yqXzsM",
```

```
            "attributeSetId": 93477,
            "removedAttributes": [
                  {
                        "attributeId": "1",
                        "attributeName": "Doc Ref (Document
Reference)"
                  }
            ]
      }
]
```


Note: If user needs to perform add attributes, remove attributes, and edit attributes in one go it requires to post combined json.

Sample json response for remove attribute from attribute set


```
{
      "httpCode": 200,
      "message": "Successful/Failure message",
      [
            {
                  "hashedFolderIds": "107746314$$0vz47C",
                  "hashedProjectId": "2120352$$Z6FTgl",
                  "description": "test",
                  "name": "Asitecustomattribute",
                  "active": true,
                  "defaultSet": "false",
                  "associatedAttribList": [
                        {
                              "attributeId": "1002",
                              "attributeName": "Discipline Designator",
                              "attributeTypeName": "Simple",
                        },
                        {
                              "attributeId": "1",
                              "attributeName": "Doc Ref (Document
Reference)",
                              "attributeTypeName": "Compound",
                              "autoGenSequence": "1",
                              "charLimit": "4",
                              "applyAsPrefix": "1",
                              "seqStartsFrom": "1000",
                              "autoSeqLevel": "30",
                              "seperator": "-",
                              "assignedAttributesList": [
```

```
                                        {
                                              "seqNum": "1",
                                              "attributeId": "1002",
                                              "attributeName": "Discipline
Designator"
                                        }
                                  ]
                            }
                      ]
                }
          ]
}
```


Sample json to create custom attribute set with hierarchical attributes


```
[
      {
            "hashedProjectId": "2087335$$CgHVKd",
            "hashedFolderIds": "110031203$$W94Osp",
            "description": "Region Details",
            "name": "Region Mapping",
            "active": "true",
            "defaultSet": "false",
            "associatedAttribList": [
                  {
                        "attributeId": 1003,
                        "attributeName": "Country",
                        "attributeTypeName": "Simple"
                  },
                  {
                        "attributeId": 1035,
                        "attributeName": "State",
                        "attributeTypeName": "Simple"
                  },
                  {
                        "attributeId": 1025,
                        "attributeName": "City",
                        "attributeTypeName": "Simple"
                  },
```

```
                {
                        "attributeId": 1027,
                        "attributeName": "My Classification",
                        "attributeTypeName": "Simple"
                }
            ],
            "hierarchicalAttributeList": [
                {
                        "hierarchicalSubSetList": [
                                {
                                        "parentCodes": "In",
                                        "childCodes": "GJ#MH"
                                },
                                {
                                        "parentCodes": "UK",
                                        "childCodes": "GL"
                                }
                        ],
                        "parentAttributeId": 1003,
                        "childAttributeId": 1035
                }
            ]
        }
]
```


Sample JSON to add hierarchical attributes in existing attribute set.


```
[
        {
            "hashedProjectId": "2087335$$CgHVKd",
            "attributeSetId": "4884",
            "addedHierarchicalAttributes": [
                {
                        "hierarchicalSubSetList": [
                                {
                                        "parentCodes": "CA",
                                        "childCodes": "ALB#NS"
                                }
                        ],
                        "parentAttributeId": 1003,
                        "childAttributeId": 1035
                }
            ]
        }
```

```
]
```

Sample JSON to remove hierarchical attributes in existing attribute set.

```
[
	{
		"hashedProjectId": "2087335$$CgHVKd",
		"attributeSetId": 4884,
		"removedHierarchicalAttributes": [
			{
				"hierarchicalSubSetList": [
					{
						"parentCodes": "UK",
	"childCodes": "GL"
					}
				],
				"parentAttributeId": "1003",
				"childAttributeId": "1035"
			}
		]
	}
]
```

6.66. Create comment API service

Objective
Create comment API will create comment on file based on parameters specified in request.

Sample cURL call to create comment:

```
 curl --location 'http://adoddleqaak.asite.com/commonapi/comment/create' \
--header 'Cookie: ASessionID=<ASessionID>\
--form 'commentVO="{
   \"projectId\": \"<WorkspaceID>\",
   \"revisionId\": \"<revisionId>\",
   \"createType\": 1,
   \"isPrivate\": true,
\"commentTitle\": \"<commentTitle>\",
\"commentText\": \"<commentText>\",    \"includeFileDistributedUsers\": \"true\",
\"distributionData\": {
\"distributionUserGroupIds\": \"< distributionUserGroupId >\",
      \"distributionUserList\": [
         {
            \"userId\": \"< userId >\",
            \"userType\": \"< userType >\",
            \"actionId\": \"< actionId >\",
            \"actionDueDate\": \"< actionDueDate >\"
         }
      ],
      \"distributionOrgList\": [
         {
            \"orgId\": \"<OrgId>\",
```

```
            \"actionId\": \" < actionId > \",
            \"actionDueDate\": \" < actionDueDate > \"
        }
    ],
    \"distributionRoleList\": [
        {
            \"roleId\": \"<roleId>\",
            \"actionId\": \" < actionId > \",
            \"actionDueDate\": \" < actionDueDate > \"
        }
    ]
  }
}'''
```

Usage Rules

- User must login in using Login API.

Method details:

Name	Value
Method	POST
URL	https://adoddleak.asite.com/commonapi/comment/create

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Please refer below table for Json fields:

No	Field Name	Description	Mandatory	Default value
1	projectId	Hashed value of projectId.	Yes	NA
2	revisionId	Hashed Value of revisionId.	Yes	NA
3	createType	1=create comment, 2= no comment, 4= reply comment	Yes	NA
4	isPrivate	true/false. To create private comment.	No	false
5	commentId	Comment Id on which you want to create reply.	Yes, If reply comment	NA
6	commentMsgId	Comment Msg Id on which you want to create reply.	Yes, If reply comment	NA
7	commentTitle	Comment Title.	Yes. Not required in case of no comments.	NA
8	commentText	Comment Description.	Yes. Not required in case of no comments.	NA
9	includeFileDistributedUsers	True to distribute comments to file distributed users.	No	false
10	distributionData	Distribution Data	No	NA
11	distributionUserGroupIds	Comma separated Distribution Group Ids	No	NA
12	distributionUserList	Distribution User List.	No	NA

	• userId	Hashed User Id to distribute comment to user.	Yes	NA
	• actionId	actionId to distribute action. 12 = For Distribution 13 = For Information 14 = For Status Change etc.	Yes	NA
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes	NA
13	distributionOrgList	Distribution Org List.	Yes	NA
	• orgId	Hashed Organisation Id to distribute comment to organisation.	Yes	NA
	• actionId	actionId to distribute action. 12 = For Distribution 13 = For Information 14 = For Status Change etc.	Yes	NA
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes	NA
14	distributionRoleList	Distribution Role List.	No	NA
	• roleId	Hashed Role Id to distribute comment to Role.	Yes	NA

	• actionId	actionId to distribute action. 12 = For Distribution 13 = For Information 14 = For Status Change etc.	Yes	NA
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes	NA
15	assocDocsJSON	Associated documents.	No	NA
	• projectId	Hashed Projectid of the project which belongs to file association.	Yes	NA
	• revision_id	Hashed RevisionId.	Yes	NA
16	assocFormsJSON	Associated Forms.	No	NA
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
	• commId	Hashed Form Id to associate.	Yes	NA
17	attachments	Comment Attachments	No	NA

Below given sample describes the format of request body JSON:

```
{
        "projectId": "2128206$$hPcXtj",
        "revisionId": "20736062$$IhX9Xs",
       "createType": 1,
       "isPrivate": true,
       "commentId": "12331212$$abcd",
       "commentMsgId": "655221$$abcd",
       "commentTitle": "Comment API Test",
```

```
"commentText": "Comment API Test",
"includeFileDistributedUsers": "true",
 "distributionData": {
   "distributionUserGroupIds": "10512700,10512699",
   "distributionUserList": [{
                "userId": "702646$$M0D3Qt",
                 "userType": "1",
                "actionId": "35",
                "actionDueDate": "25-Mar-2021"
                }],
    "distributionOrgList": [{
                "orgId": "833894$$vWZS9c",
                "actionId": "13",
                "actionDueDate": ""
                }],
    "distributionRoleList": [{
                "roleId": "3370611$$Phz8uB",
                "actionId": "",
                "actionDueDate": ""
                }]
 },
"assocDocsJSON": [{
    "revision_id": "20736183$$ejUZFO",
     "projectId": "2128206$$hPcXtj"
 }],
```

```
    "assocFromsJSON": [{
        "projectId": "2089963$$elZdQQ",
         "commId": "10461138$$6Ou0Fu"
    }]
}
```


6.67. Get Form template API Service

Objective

The Get Form Template API returns blank JSON of form fields with default structure which can be further use in create form API to fill values for custom fields of form. Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml to execute this API Service.

Usage Rules

- User must be logged in to Asite Platform using Login API Function
- User should call workspace list and form type list API to get projectId and app builder code.
- Use the following cURL command to get form template of the specified form:

**curl --location 'http://adoddleqaak.asite.com/commonapi/form/getFormTemplate' **

**--header 'Cookie: ASessionID=<ASessionID>' **

**--header 'Content-Type: application/x-www-form-urlencoded' **

**--data-urlencode 'projectId=<WorkspaceID>' **

**--data-urlencode 'project_name=<WorkspaceName>' **

--data-urlencode 'appBuilderCode=< appBuilderCode >'

Method details:

Name	Value
Method	POST
URL	Please refer below URL for different DC projects.

UK	https://adoddleak.asite.com/commonapi/form/getFormTemplate
US	https://adoddleb.asite.com/commonapi/form/getFormTemplate
AUS	https://adoddled.asite.com/commonapi/form/getFormTemplate
US Gov	https://adoddleusgov.asite.com/commonapi/form/getFormTemplate
UAE	https://adoddleuae.asite.com/commonapi/form/getFormTemplate
KSA	https://adoddleksa.asite.com/commonapi/form/getFormTemplate

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
projectId	Hashed projectId which will get from workspace list API
appBuilderCode	App builder code return from form type list API

- Sample JSON return by Get Form Template API:

{
"fieldJson": {
"myFields": {
"FORM_CUSTOM_FIELDS": {
"ORI_MSG_Custom_Fields": {

"ORI_Distribution": {
"ORI_Distribution_Users": [
{
"ORI_Actions": "",
"ORI_Dist_User": "",
"ORI_Proj_Roles": ""
}
]
},
"DSI_Todays_Date": "",
"ContractorRefNo": "",
"DSI_ValidationFlag": true,
"DSI_Formsettingmessage": "",
"Sub_Ref": "",
"Originator_Id": "",
"projectDetails": {
"ProjectDescr": "",
"KeyProject": "",
"ProjectPhase": "",
"ProjectStatus": "",
"Planning_Number": "",
"ConstructionMgr": "",
"PCEO": "",
"ProgramOfficer": "",
"ProgramManager": "",
"ProjectPSE": ""
},
"Location_Group": {
"Location_List": [
{

```
                "Location_Val": ""
            }
        ]
    },
    "RFI_Reference": "",
    "DS_Logo": "",
    "Number": "",
    "Project_plannin_number": "",
    "ORI_Dist_Groups": {
        "ORI_Groups": [
            {
                "ORI_Group_Name": "",
                "ORI_User_Id": "",
                "ORI_Action_Name": "",
                "ORI_User_Name": ""
            }
        ]
    },
    "Location_Attribute": "",
    "Date_of_issue": "",
    "IsContractorUser": "",
    "Further_Info_Required": "no",
    "Complete_response": "no",
    "ORI_FORMTITLE": "",
    "Information_Requested": "",
    "Reason_for_Request": "",
```

"Action_Requested": "",
"Notes": "",
"Probable_Time_Effect": "",
"Other_Ref": "",
"Due_Date": "",
"Initial_Estimate_Cost": "",
"Priority": "",
"Primary_Responder_Id": "",
"Primary_Responder": "",
"Disclaimer": "",
"Contract_Number": "",
"Recommendation": "",
"DS_Logo_Ori": "",
"Probable_Cost_Effect": "",
"CSI_Code": "",
"DSI_Strstatussettings": "",
"State": "",
"DSI_Strmainsettings": "",
"Detail_No": "",
"Primary_Responder_Goup": "",
"ORI_USERREF": "",
"Drawing_No": "",
"Initial_Estimate_Time": "",
"Other": ""
},
"RES_MSG_Custom_Fields": {
"RESPONSES": {
"RFI_ResponseBy": "",
"RFI_ResponseDate": "",

```
            "RFI_Response": ""
        },
        "Final_Responses": {
            "ALL_RES": {
                "Response": "",
                "ResponseDate": "",
                "ResponseBy": ""
            }
        },
        "Response_Dist_Groups": {
            "Response_Groups": [
                {
                    "RFI_Group_Name": "",
                    "RFI_User_Name": "",
                    "RFI_User_Id": "",
                    "isSelected": "",
                    "RFI_Action_Name": ""
                }
            ]
        },
        "Con_Distribution": {
            "Con_Distribution_Users": [
                {
                    "Con_Actions": "",
                    "Con_Dist_User": "",
                    "Con_Proj_Roles": "",
                    "Con_isSelected": ""
```

```
                    }
                ]
            },
            "Response_Distribution": {
                "Response_Distribution_Users": [
                    {
                        "RFI_Actions": "",
                        "RFI_Dist_User": "",
                        "isSelected": "",
                        "RFI_Proj_Roles": ""
                    }
                ]
            }
        },
        "DS_AUTONUMBER": {
            "DS_SEQ_LENGTH": "5",
            "DS_FORMAUTONO_CREATE": "ORI_USERREF",
            "DS_FORMAUTONO_ADD": ""
        },
        "DS_DATASOURCE": {
            "DS_MTA_PSR_Header_Details": "",
            "DS_ASI_Get_All_Default_FormSettingDetails": "",
            "DS_MTA_RFI_GET_CON_DISTRIBUTION_DATA":
"",
            "DS_Get_All_Responses": {
                "@DS_Get_All_Responses_PARAM":
"DS_Response_PARAM"
            },
            "DS_INCOMPLETE_MSG_ACTIONS": "",
            "DS_MTA_RFI_GET_PREVIOUS_DATA": "",
```

"DS_WORKSPACE_ROLES_with_ID": "",
"DS_GET_GUID": "",
"DS_ASI_Get_All_Dynamic_Formsettings": "",
"DS_ALL_STATUS_WithCloseout": "",
"DS_INCOMPLETE_ACTIONS_BYMSG": "",
"DS_MTA_RFI_GET_ALL_DATA": "",
"DS_Response_PARAM": "#RFI_ResponseBy#RFI_ResponseDate#RFI_Response",
"DS_ASI_GET_Organization_Logo": "",
"DS_DLF_GET_DTF_DISTRIBUTION_LIST": "",
"DS_ASI_Configurable_Attributes": "",
"DS_DIST_GROUP_DETAILS": "",
"DS_FIRST_RES_MSG_DTLS": ""
},
"DSI_Group": "",
"DSI_CREATE_FWD_RES": {
"DSI_Can_Reply": ""
},
"DSI_Formsettings": {
"DSI_Formsetting": {
"Expected_value": "",
"Setting_name": "",
"Original_value": ""
}
},
"DSI_FinalCallBack_Group": {
"DSI_FinalCallback_Field": "",

```
                "DS_CALL_METHOD": "1",
                "DS_ALLOWSERVERCALL_FOR_TABLES": false
            }
        },
        "Asite_System_Data_Read_Only": {
            "_2_Printing_Data": {
                "DS_PRINTEDON": "",
                "DS_PRINTEDBY": ""
            },
            "_4_Form_Type_Data": {
                "DS_FORMGROUPCODE": "",
                "DS_FORMAUTONO": "",
                "DS_FORMNAME": ""
            },
            "_3_Project_Data": {
                "DS_PROJECTNAME": "",
                "DS_CLIENT": ""
            },
            "_5_Form_Data": {
                "DS_ISDRAFT_RES_MSG": "",
                "DS_DISTRIBUTION": "",
                "DS_ISDRAFT": "",
                "DS_FORMCONTENT": "",
                "DS_FORMCONTENT3": "",
                "DS_ORIGINATOR": "",
                "DS_FORMCONTENT2": "",
                "DS_RES_COUNT": "",
                "DS_FORMCONTENT1": "",
                "DS_SEND_MSG": "",
```

"DS_ATTRIBUTES": "",
"DS_FORMID": "",
"DS_DATEOFISSUE": "",
"Status_Data": {
"DS_APPROVEDON": "",
"DS_CLOSEDUEDATE": "",
"DS_ALL_ACTIVE_FORM_STATUS": "",
"DS_ALL_FORMSTATUS": "",
"DS_APPROVEDBY": "",
"DS_CLOSE_DUE_DATE": "",
"DS_FORMSTATUS": ""
},
"DS_DRAFT_MSG": "",
"DS_AUTO_ASSOC_FORMS": "",
"DS_CONTROLLERNAME": "",
"DS_MAXORGFORMNO": "",
"DS_ISDRAFT_RES": "",
"DS_ISDRAFT_EDITORI": "",
"DS_FETCH_USER_DETAILS": "",
"DS_MAXFORMNO": "",
"DS_AppBuilderID": "",
"DS_FORMAUTONO_PREFIX": "",
"DS_ISDRAFT_FWD_MSG": ""
},
"_1_User_Data": {
"DS_WORKINGUSER": "",
"DS_WORKINGUSERROLE": "",

```
                "DS_WORKINGUSER_ID": "",
                "DS_WORKINGUSER_ALL_ROLES": ""
            },
            "_6_Form_MSG_Data": {
                "DS_MSGCREATOR": "",
                "DS_MSGDATE": "",
                "DS_MSGID": "",
                "DS_MSGRELEASEDATE": "",
                "DS_MSGSTATUS": "",
                "ORI_MSG_Data": {
                    "DS_DOC_ASSOCIATIONS_ORI": "",
                    "DS_FORM_ASSOCIATIONS_ORI": "",
                    "DS_ATTACHMENTS_ORI": ""
                }
            }
        },
        "Asite_System_Data_Read_Write": {
            "Auto_Distribution_Actions": {
                "Auto_Distribute_Action": [
                    {
                        "DS_ADO_ACTIONDUEDATE": "",
                        "DS_ADO_TYPE": "3",
                        "DS_ADO_FORM": "",
                        "DS_ADO_FORMACTIONS": "",
                        "DS_ADO_MSG_TYPE": "",
                        "DS_ADO_PROJDISTUSERS": "",
                        "DS_ADO_PROJDISTGROUPS": ""
                    }
                ],
```

"DS_AUTODISTRIBUTE_OTHERS": "0"

},

"ORI_MSG_Fields": {

"SP_RES_PRINT_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_FORMNAME,DS_MTA_PSR_Header_Details,DS_MTA_RFI_GET_CON_DISTRIBUTION_DATA",

"SP_RES_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_Get_All_Responses,DS_INCOMPLETE_MSG_ACTIONS,DS_INCOMPLETE_ACTIONS_BYMSG,DS_AppBuilderID,DS_MTA_RFI_GET_ALL_DATA,DS_ASI_Configurable_Attributes,DS_DLF_GET_DTF_DISTRIBUTION_LIST,DS_WORKSPACE_ROLES_with_ID,DS_DIST_GROUP_DETAILS,DS_FORMACTIONS,DS_PROJORGANISATIONS_ID,DS_ASI_GET_Organization_Logo,DS_FORMNAME,DS_MTA_PSR_Header_Details,DS_MTA_RFI_GET_PREVIOUS_DATA,DS_MTA_RFI_GET_CON_DISTRIBUTION_DATA,DS_FIRST_RES_MSG_DTLS",

"SP_ORI_PRINT_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_WORKINGUSER_ALL_ROLES, DS_FORMNAME,DS_MTA_PSR_Header_Details",

"SP_FORM_PRINT_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE,

DS_MSGCREATOR, DS_PROJORGANISATIONS,
DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES,
DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_WORKINGUSER_ALL_ROLES,
DS_FORMNAME,DS_MTA_PSR_Header_Details",

"SP_ORI_VIEW": "DS_FORMID, DS_ISDRAFT,
DS_ISDRAFT_EDITORI, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG,
DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS,
DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_I
SDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE,
DS_MSGCREATOR, DS_PROJORGANISATIONS,
DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES,
DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_ASI_Get_All_Dynamic_Formsetti
ngs,DS_ALL_STATUS_WithCloseout,DS_ASI_Get_All_Default_FormSettingDetails,DS_FO
RMAUTONO_PREFIX,DS_FORMAUTONO,DS_MTA_RFI_GET_PREVIOUS_DATA,DS_A
SI_Configurable_Attributes,DS_DIST_GROUP_DETAILS,DS_GET_GUID,DS_PROJORGA
NISATIONS_ID,DS_ASI_GET_Organization_Logo,DS_WORKSPACE_ROLES_with_ID,DS
_FORMNAME,DS_MTA_PSR_Header_Details"

},

"DS_PROJORGANISATIONS": "",

"DS_PROJUSERS_ALL_ROLES": "",

"DS_PROJDISTGROUPS": "",

"DS_AUTODISTRIBUTE": "",

"Auto_Complete_msg_Actions": {

"Auto_Complete_msg_Action": [

{

"DS_MSG_AC_ACTION": "",

"DS_MSG_AC_USERID": "",

"DS_MSG_AC_TYPE": "",

"DS_MSG_AC_FORM": "",

"DS_MSG_AC_ACTION_REMARKS":
"",

"DS_MSG_AC_MSG_TYPE": ""

}

],

"DS_AUTOCOMPLETE_ACTION_MSG_APP_ID": ""

},

"DS_PROJORGANISATIONS_ID": "",
"DS_INCOMPLETE_ACTIONS": "",
"Auto_Distribute_Group": {
"Auto_Distribute_Users": [
{
"DS_ACTIONDUEDATE": "",
"DS_FORMACTIONS": "",
"DS_PROJDISTUSERS": ""
}
]
}
}
}
},
"instanceGroupID": "10575242$$pXWZ6h"
}

6.68. Create form message API

Objective

Create form message API will create ORI form message of given form instance Id.

Usage Rules

- User must be logged in to Asite Platform using Login API Function
- User should call workspace list, form type list API and get Form template API to get projectId, instance group Id and sample JSON of form custom fields for fieldJson to be filled.

Sample cURL call to create form message:

```
curl --location 'http://adoddleqaak.asite.com/commonapi/form/createFormMsg' \
--header 'Cookie: ASessionID=<ASessionID>' \
--form 'formMetaData="{
  \"fieldJson\": {
    \"myFields\": {
      \"extraParams\": null,
      \"ORI_FORMTITLE\": \"\",
      \"Text_Area\": \"This is a test form message\",
      \"Asite_System_Data_Read_Write\": {
        \"ORI_MSG_Fields\": \"\"
      }
    }
  },
  \"hashProjectId\": \"<WorkspaceID>\",
  \"hashInstanceGroupId\": \"<InstanceGroupID>\",
  \"distributionDetails\": {
    \"selectedDistUsers\": [
      {
        \"hUserID\": \"<HashedUserID>\",
        \"hActionID\": \"<HashedActionID>\",
        \"user_type\": \"< user_type >\",
        \"actionDueDate\": \"< actionDueDate >\"
      }
    ]
  }
}"'
```

Method details:

Name	Value
Method	POST
URL	Please refer below URL for different DC projects.
UK	https://adoddleak.asite.com/commonapi/form/createFormMsg
US	https://adoddleb.asite.com/commonapi/form/createFormMsg
AUS	https://adoddled.asite.com/commonapi/form/createFormMsg
US Gov	https://adoddleusgov.asite.com/commonapi/form/createFormMsg
UAE	https://adoddleuae.asite.com/commonapi/form/createFormMsg
KSA	https://adoddleksa.asite.com/commonapi/form/createFormMsg

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Parameters:

Name	Value	Mandatory
formMetaData	JSONObject contains details for form creation.	Yes
attachment	File object. It will upload as external attachments of form. In case of multiple attachment please define attachment as parameter again and send file with it.	No

Inline_(AttachmentName) Note: The name of parameter should be mentioned against the field in which we want our Inline Attachment to be attached.	File to uploaded	No

Please refer below table for Json (formMetaData) fields:

No	Field Name	Description	Mandatory
1	hashProjectId	Hashed value of projectId.	Yes
2	hashInstanceGroupId	Hashed Value of instance groupId.	Yes
3	fieldJson	Form fields JSON. For which blank JSON can be get from getFormTemplate API call.	Yes
4	formAssociateDoc	JSONArray of documents which want to association with form.	No
	• projectId	Hashed value of projectId of associate document.	Yes, If associate document
	• folderId	Hashed value of folderId of associate document	Yes, If associate document
	• revisionId	Hashed value of revisionId of associate document	Yes, If associate document
5	formAssociateApp	JSONArray of forms which want to association with form.	No
	• projectId	Hashed value of projectId of associate form.	Yes, If associate form
	• FormId	Hashed value of formId of associate form.	Yes, If associate form

6	FormAssociateComment	JSONArray of comments which want to association with form.	No
	• projectId	Hashed value of projectId of associate comment.	Yes, If associate comment
	• revisionId	Hashed User Id to distribute comment to user.	Yes
	• commented		Yes
	• commentMsgId	Action due date. Need to specify based on user locale.	Yes
7	distributionDetails	JSONObject of form distribution details.	No
	selectedDistUsers	JSONArray of users to whom forms get distribute	No
	• hUserID	Hashed User Id	Yes, if distribute to user
	• hActionID	Hashed actionId to distribute action.	Yes, if distribute to user
	• user_type	Type of User.	No
		1 = Online 2 = Paper user	
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes
	selectedDistOrgs	JSONArray of organization to whom forms get distribute	Yes

	• hOrgID	Action due date. Need to specify based on user locale.	Yes, if distribute to Org
	• hActionID	Hashed actionId to distribute action.	Yes, if distribute to Org
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes, if distribute to Org
	selectedDistRoles	JSONArray of roles to whom forms get distribute	No
	• hRoleID	Hashed role Id	Yes, if distribute to role
	• hActionID	Hashed actionId to distribute action.	Yes, if distribute to role
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes, if distribute to role
	selectedDistGroups	Comma separated string of distribution group to whom form get distribute	No

If distribution defined within form and want to use that user needs to define distribution details in fieldJson as below:

"Auto_Distribute_Users": [{

"DS_ACTIONDUEDATE": "YYYY-MM-DD",

"DS_FORMACTIONS": "actionId#actionName",

"DS_PROJDISTUSERS": "userId # user name , org. name"

}]

Sample:

"Auto_Distribute_Users": [{

"DS_ACTIONDUEDATE": "2021-12-11",

"DS_FORMACTIONS": "3#Respond",

"DS_PROJDISTUSERS": "507744 # Haresh Asal , Asite Solutions"

}]

For action and its relevant Ids, please refer below details:

Action name	Action Id
For Acknowledgement	37
For Information	7
Respond	3
Assign Status	2
Attach Docs	5
Distribute	6
For Action	36
Review Draft	34

Below given sample describes the format of request body JSON (formMetaData):

{
"fieldJson": {
"myFields": {
"FORM_CUSTOM_FIELDS": {
"ORI_MSG_Custom_Fields": {
"ORI_Distribution": {
"ORI_Distribution_Users": [
{
"ORI_Actions": "23",
"ORI_Dist_User": "",
"ORI_Proj_Roles": ""

```
                    }
                ]
            },
            "DSI_Todays_Date": "",
            "ContractorRefNo": "JRF111",
            "DSI_ValidationFlag": true,
            "DSI_Formsettingmessage": "",
            "Sub_Ref": "Road",
            "Originator_Id": "",
            "projectDetails": {
                "ProjectDescr": "A34-MTA Developer
Workspace",
                "KeyProject": "",
                "ProjectPhase": "",
                "ProjectStatus": "Contract In Default",
                "Planning_Number": "sR34-1243",
                "ConstructionMgr": "Construction Mgr",
                "PCEO": "",
                "ProgramOfficer": "Program Officer",
                "ProgramManager": "Program Manager",
                "ProjectPSE": ""
            },
            "Location_Group": {
                "Location_List": [
                    {
                        "Location_Val": "Edit Location"
                    }
                ]
            },
            "RFI_Reference": "",
```

"DS_Logo": "",
"Number": "",
"Project_plannin_number": "",
"ORI_Dist_Groups": {
"ORI_Groups": [
{
"ORI_Group_Name": "",
"ORI_User_Id": "",
"ORI_Action_Name": "",
"ORI_User_Name": ""
}
]
},
"Location_Attribute": "",
"Date_of_issue": "",
"IsContractorUser": "",
"Further_Info_Required": "no",
"Complete_response": "no",
"ORI_FORMTITLE": "Test form 4",
"Information_Requested": "road construction details",
"Reason_for_Request": "Insufficient Information",
"Action_Requested": "Clarification",
"Notes": "quality check",
"Probable_Time_Effect": "Increase",
"Other_Ref": "Trees",
"Due_Date": "",

"Initial_Estimate_Cost": "2500",
"Priority": "Medium",
"Primary_Responder_Id": "",
"Primary_Responder": "",
"Disclaimer": "",
"Contract_Number": "",
"Recommendation": "better steel",
"DS_Logo_Ori": "",
"Probable_Cost_Effect": "",
"CSI_Code": "",
"DSI_Strstatussettings": "",
"State": "",
"DSI_Strmainsettings": "",
"Detail_No": "AG0987",
"Primary_Responder_Goup": "Primary Responders",
"ORI_USERREF": "",
"Drawing_No": "0125",
"Initial_Estimate_Time": "20",
"Other": ""
},
"RES_MSG_Custom_Fields": {
"RESPONSES": {
"RFI_ResponseBy": "",
"RFI_ResponseDate": "",
"RFI_Response": ""
},
"Final_Responses": {
"ALL_RES": {
"Response": "",

```
                "ResponseDate": "",
                "ResponseBy": ""
            }
        },
        "Response_Dist_Groups": {
            "Response_Groups": [
                {
                    "RFI_Group_Name": "",
                    "RFI_User_Name": "",
                    "RFI_User_Id": "",
                    "isSelected": "",
                    "RFI_Action_Name": ""
                }
            ]
        },
        "Con_Distribution": {
            "Con_Distribution_Users": [
                {
                    "Con_Actions": "",
                    "Con_Dist_User": "",
                    "Con_Proj_Roles": "",
                    "Con_isSelected": ""
                }
            ]
        },
        "Response_Distribution": {
            "Response_Distribution_Users": [
```

{
"RFI_Actions": "",
"RFI_Dist_User": "",
"isSelected": "",
"RFI_Proj_Roles": ""
}
]
}
},
"DS_AUTONUMBER": {
"DS_SEQ_LENGTH": "5",
"DS_FORMAUTONO_CREATE": "ORI_USERREF",
"DS_FORMAUTONO_ADD": ""
},
"DS_DATASOURCE": {
"DS_MTA_PSR_Header_Details": "",
"DS_ASI_Get_All_Default_FormSettingDetails": "",
"DS_MTA_RFI_GET_CON_DISTRIBUTION_DATA": "",
"DS_Get_All_Responses": {
"@DS_Get_All_Responses_PARAM": "DS_Response_PARAM"
},
"DS_INCOMPLETE_MSG_ACTIONS": "",
"DS_MTA_RFI_GET_PREVIOUS_DATA": "",
"DS_WORKSPACE_ROLES_with_ID": "",
"DS_GET_GUID": "",
"DS_ASI_Get_All_Dynamic_Formsettings": "",
"DS_ALL_STATUS_WithCloseout": "",
"DS_INCOMPLETE_ACTIONS_BYMSG": "",

"DS_MTA_RFI_GET_ALL_DATA": "",
"DS_Response_PARAM": "#RFI_ResponseBy#RFI_ResponseDate#RFI_Response",
"DS_ASI_GET_Organization_Logo": "",
"DS_DLF_GET_DTF_DISTRIBUTION_LIST": "",
"DS_ASI_Configurable_Attributes": "",
"DS_DIST_GROUP_DETAILS": "",
"DS_FIRST_RES_MSG_DTLS": ""
},
"DSI_Group": "",
"DSI_CREATE_FWD_RES": {
"DSI_Can_Reply": ""
},
"DSI_Formsettings": {
"DSI_Formsetting": {
"Expected_value": "",
"Setting_name": "",
"Original_value": ""
}
},
"DSI_FinalCallBack_Group": {
"DSI_FinalCallback_Field": "",
"DS_CALL_METHOD": "1",
"DS_ALLOWSERVERCALL_FOR_TABLES": false
}
},
"Asite_System_Data_Read_Only": {

"_2_Printing_Data": {
"DS_PRINTEDON": "",
"DS_PRINTEDBY": ""
},
"_4_Form_Type_Data": {
"DS_FORMGROUPCODE": "",
"DS_FORMAUTONO": "",
"DS_FORMNAME": ""
},
"_3_Project_Data": {
"DS_PROJECTNAME": "",
"DS_CLIENT": ""
},
"_5_Form_Data": {
"DS_ISDRAFT_RES_MSG": "",
"DS_DISTRIBUTION": "",
"DS_ISDRAFT": "",
"DS_FORMCONTENT": "",
"DS_FORMCONTENT3": "",
"DS_ORIGINATOR": "",
"DS_FORMCONTENT2": "",
"DS_RES_COUNT": "",
"DS_FORMCONTENT1": "",
"DS_SEND_MSG": "",
"DS_ATTRIBUTES": "",
"DS_FORMID": "",
"DS_DATEOFISSUE": "",
"Status_Data": {
"DS_APPROVEDON": "",

"DS_CLOSEDUEDATE": "",
"DS_ALL_ACTIVE_FORM_STATUS": "",
"DS_ALL_FORMSTATUS": "",
"DS_APPROVEDBY": "",
"DS_CLOSE_DUE_DATE": "",
"DS_FORMSTATUS": ""
},
"DS_DRAFT_MSG": "",
"DS_AUTO_ASSOC_FORMS": "",
"DS_CONTROLLERNAME": "",
"DS_MAXORGFORMNO": "",
"DS_ISDRAFT_RES": "",
"DS_ISDRAFT_EDITORI": "",
"DS_FETCH_USER_DETAILS": "",
"DS_MAXFORMNO": "",
"DS_AppBuilderID": "",
"DS_FORMAUTONO_PREFIX": "",
"DS_ISDRAFT_FWD_MSG": ""
},
"_1_User_Data": {
"DS_WORKINGUSER": "",
"DS_WORKINGUSERROLE": "",
"DS_WORKINGUSER_ID": "",
"DS_WORKINGUSER_ALL_ROLES": ""
},
"_6_Form_MSG_Data": {
"DS_MSGCREATOR": "",

"DS_MSGDATE": "",
"DS_MSGID": "",
"DS_MSGRELEASEDATE": "",
"DS_MSGSTATUS": "",
"ORI_MSG_Data": {
"DS_DOC_ASSOCIATIONS_ORI": "",
"DS_FORM_ASSOCIATIONS_ORI": "",
"DS_ATTACHMENTS_ORI": ""
}
}
},
"Asite_System_Data_Read_Write": {
"Auto_Distribution_Actions": {
"Auto_Distribute_Action": [
{
"DS_ADO_ACTIONDUEDATE": "",
"DS_ADO_TYPE": "3",
"DS_ADO_FORM": "",
"DS_ADO_FORMACTIONS": "",
"DS_ADO_MSG_TYPE": "",
"DS_ADO_PROJDISTUSERS": "",
"DS_ADO_PROJDISTGROUPS": ""
}
],
"DS_AUTODISTRIBUTE_OTHERS": "0"
},
"ORI_MSG_Fields": {
"SP_RES_PRINT_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_I

SDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_FORMNAME,DS_MTA_PSR_Header_Details,DS_MTA_RFI_GET_CON_DISTRIBUTION_DATA",

"SP_RES_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_Get_All_Responses,DS_INCOMPLETE_MSG_ACTIONS,DS_INCOMPLETE_ACTIONS_BYMSG,DS_AppBuilderID,DS_MTA_RFI_GET_ALL_DATA,DS_ASI_Configurable_Attributes,DS_DLF_GET_DTF_DISTRIBUTION_LIST,DS_WORKSPACE_ROLES_with_ID,DS_DIST_GROUP_DETAILS,DS_FORMACTIONS,DS_PROJORGANISATIONS_ID,DS_ASI_GET_Organization_Logo,DS_FORMNAME,DS_MTA_PSR_Header_Details,DS_MTA_RFI_GET_PREVIOUS_DATA,DS_MTA_RFI_GET_CON_DISTRIBUTION_DATA,DS_FIRST_RES_MSG_DTLS",

"SP_ORI_PRINT_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_WORKINGUSER_ALL_ROLES, DS_FORMNAME,DS_MTA_PSR_Header_Details",

"SP_FORM_PRINT_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_ISDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_WORKINGUSER_ALL_ROLES, DS_FORMNAME,DS_MTA_PSR_Header_Details",

"SP_ORI_VIEW": "DS_FORMID, DS_ISDRAFT, DS_ISDRAFT_EDITORI, DS_ISDRAFT_RES, DS_ISDRAFT_RES_MSG, DS_WORKINGUSER, DS_WORKINGUSER_ID, DS_INCOMPLETE_ACTIONS, DS_ALL_FORMSTATUS,DS_FORMSTATUS,DS_ORIGINATOR,DS_DATEOFISSUE,DS_I

SDRAFT_FWD_MSG, DS_ALL_ACTIVE_FORM_STATUS, DS_MSGDATE, DS_MSGCREATOR, DS_PROJORGANISATIONS, DS_PROJDISTGROUPS,DS_PROJUSERS_ALL_ROLES, DS_PROJDISTUSERS,DS_FETCH_USER_DETAILS,DS_ASI_Get_All_Dynamic_Formsettings,DS_ALL_STATUS_WithCloseout,DS_ASI_Get_All_Default_FormSettingDetails,DS_FORMAUTONO_PREFIX,DS_FORMAUTONO,DS_MTA_RFI_GET_PREVIOUS_DATA,DS_ASI_Configurable_Attributes,DS_DIST_GROUP_DETAILS,DS_GET_GUID,DS_PROJORGANISATIONS_ID,DS_ASI_GET_Organization_Logo,DS_WORKSPACE_ROLES_with_ID,DS_FORMNAME,DS_MTA_PSR_Header_Details"

},

"DS_PROJORGANISATIONS": "",

"DS_PROJUSERS_ALL_ROLES": "",

"DS_PROJDISTGROUPS": "",

"DS_AUTODISTRIBUTE": "",

"Auto_Complete_msg_Actions": {

"Auto_Complete_msg_Action": [

{

"DS_MSG_AC_ACTION": "",

"DS_MSG_AC_USERID": "",

"DS_MSG_AC_TYPE": "",

"DS_MSG_AC_FORM": "",

"DS_MSG_AC_ACTION_REMARKS": "",

"DS_MSG_AC_MSG_TYPE": ""

}

],

"DS_AUTOCOMPLETE_ACTION_MSG_APP_ID": ""

},

"DS_PROJORGANISATIONS_ID": "",

"DS_INCOMPLETE_ACTIONS": "",

"Auto_Distribute_Group": {

"Auto_Distribute_Users": [

{

"DS_ACTIONDUEDATE": "2021-12-11",
"DS_FORMACTIONS": "3#Respond",
"DS_PROJDISTUSERS": "507744 #
Haresh Asal , Asite Solutions"
}
]
}
}
}
},
"hashProjectId": "2063696$$EZ1gHM",
"hashInstanceGroupId": "10332850$$LHYYBD",
"formAssociateDoc": [
{
"projectId": "2063696$$EZ1gHM",
"folderId": "91290081$$ODvOpZ",
"revisionId": "7935878$$jwmACY"
},
{
"projectId": "2063696$$EZ1gHM",
"folderId": "91290081$$ODvOpZ",
"revisionId": "7935877$$VULhqs"
}
],
"distributionDetails": {
"selectedDistUsers": [
{

"hUserID": "442032$$VR5k4G",
"hActionID": "7$$EZ1gHM",
"user_type": "1",
"actionDueDate": "18-Dec-2021"
}
]
}
}

Below given sample describes the format of request body JSON with inline attachment (formMetaData):

{
"fieldJson": {
"myFields": {
"FORM_CUSTOM_FIELDS": {
"ORI_MSG_Custom_Fields": {
"Category_Old": "",
"Originator": "T",
"FCR_Files_Group": {
"FCR_Files": [
{
"FCR_Attachment": "Inline_Test"
},
{
"FCR_Attachment": "Inline_Test1"
}

]
}
}

}
}
},
"hashProjectId": "163143$$ZtZHqD",
"hashInstanceGroupId": "175642$$ZqMJ0a"
}

The file to be uploaded should have parameters *Inline_Test* and *Inline_Test1*.

6.69. Project Custom Attribute details API

Objective

This API is used to get all custom attribute list of specific projects.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- URI of this API can be got from workspace listing API response

Sample cURL call for Project Custom Attribute Details:

```
curl --location
    'https://adoddleqaak.asite.com/commonapi/manageAttribute/getProjectCustomAttr
    ibutes' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'projectId=<WorkspaceID>'
```

Method details:

Name	Value
Method	Post
Sample URL	https://adoddleak.asite.com/commonapi/manageAttribute/getProjectCustomAttributes

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Input Parameters

Parameter Name	Description
projectId	Provide hashed projectId of which attributes want to retrieve.
projectName	Provide project name of which attributes want to retrieve.

- Note: Please define projectId or projectName.

Sample response of API is as below:


```
[
  {
    "projectId": "2087335$$vEYuRk",
    "childProjectId": 0,
    "userId": 0,
    "proxyUserId": 0,
    "userType": 0,
    "attributeId": 1001,
    "attributeTypeId": 5,
    "attributeName": "Description",
    "description": "Description",
    "setLanguageLabel": 0,
    "autoGenSequence": 0,
    "autoSeqLevel": 0,
    "charLimit": 0,
    "startsFrom": 0,
    "applyAsPrefix": 0,
    "inputTypeId": 21,
    "inputValueTypeId": 0,
    "inputValueList": [
      {
        "inputValueTypeId": 0,
        "Id": 409213,
        "name": "",
        "value": "1",
        "isDefault": true,
        "defaultName": "null",
        "assignedAtFolderLevel": false,
        "generateURI": true
      }
```

```
        ],
        "inputDataTypeId": 10,
        "valueRequired": false,
        "validationTypeId": 0,
        "applicableEntityId": 0,
        "editable": true,
        "scope": 0,
        "applyToAllEntities": 0,
        "inputTypeName": "Textbox",
        "isActive": 1,
        "inherited": false,
        "assignedToCompound": false,
        "isSystemAttribute": false,
        "seqNum": 0,
        "attIndexId": 1,
        "originalAttributeId": 0,
        "rowId": 0,
        "folderId": "0$$dk8XLO",
        "isDisplaySearch": true,
        "isAssociated": false,
        "isAssocWithFile": false,
        "isForSolrImport": false,
        "hierarchicalAttribute": 0,
        "attributeSetId": -1,
        "isAppliedOnset": false,
        "isRevisionFound": false,
        "isCodeChanged": false,
        "defaultSelected": 0,
        "sequnceNumber": 0,
        "className": "customAttributes",
        "isAttributeNameChanged": false,
        "isFilterValue": 0,
        "generateURI": true
    },
    {
        "projectId": "2087335$$vEYuRk",        "childProjectId": 0,
        "userId": 0,
        "proxyUserId": 0,
        "userType": 0,
        "attributeId": 1003,
        "attributeTypeId": 5,
        "attributeName": "Country",
        "description": "Country",
        "setLanguageLabel": 0,
```

"autoGenSequence": 0,
"autoSeqLevel": 0,
"charLimit": 0,
"startsFrom": 0,
"applyAsPrefix": 0,
"inputTypeId": 26,
"inputValueTypeId": 0,
"inputValueList": [
{
"inputValueTypeId": 0,
"Id": 2548452,
"name": "",
"value": "In",
"isDefault": false,
"defaultName": "India",
"assignedAtFolderLevel": false,
"generateURI": true
},
{
"inputValueTypeId": 0,
"Id": 2548456,
"name": "",
"value": "AUS",
"isDefault": false,
"defaultName": "Aust",
"assignedAtFolderLevel": false,
"generateURI": true
},
{
"inputValueTypeId": 0,
"Id": 2548457,
"name": "",
"value": "UK",
"isDefault": false,
"defaultName": "United Kingdom",
"assignedAtFolderLevel": false,
"generateURI": true
},
{
"inputValueTypeId": 0,
"Id": 2548458,
"name": "",
"value": "US",
"isDefault": false,
"defaultName": "United States",
"assignedAtFolderLevel": false, "generateURI": true
}
],
"inputDataTypeId": 0,

"valueRequired": false,
"validationTypeId": 0,
"applicableEntityId": 0,
"editable": true,
"scope": 0,
"applyToAllEntities": 0,
"inputTypeName": "Dropdown list",
"isActive": 1,
"inherited": false,
"assignedToCompound": false,
"isSystemAttribute": false,
"seqNum": 0,
"attIndexId": 1,
"originalAttributeId": 0,
"rowId": 0,
"folderId": "0$$dk8XLO",
"isDisplaySearch": true,
"isAssociated": false,
"isAssocWithFile": false,
"isForSolrImport": false,
"hierarchicalAttribute": 0,
"attributeSetId": -1,
"isAppliedOnset": false,
"isRevisionFound": false,
"isCodeChanged": false,
"defaultSelected": 0,
"sequnceNumber": 0,
"className": "customAttributes",
"isAttributeNameChanged": false,
"isFilterValue": 0,
"generateURI": true
}
]

6.70. Project Custom Attribute Set details API

Objective

This API is used to get all custom attribute set of specific projects.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function.

Sample cURL call for Project Custom Attribute Set Details:

```
curl --location
    'https://adoddleqaak.asite.com/commonapi/manageAttribute/getProjectCustomAttributeSet' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'projectId=<WorkspaceID>'
```

- URI of this API can be got from workspace listing API response

Method details:

Name	Value
Method	Post
Sample Url	https://adoddleak.asite.com/commonapi/manageAttribute/getProjectCustomAttributeSet

Headers:

Name	Value	Mandatory
ASession ID	session ID from the resultant XML of Login API call	Yes

Input Parameters

Parameter Name	Description
projectId	Provide hashed projectId of which attributes want to retrieve.
projectName	Provide project name of which attributes want to retrieve.

- **Note**: Please define projectId or projectName.


```
[
  {
    "attributeSetName": "All type Attributes",
    "attributeSetId": 21366
  },
  {
    "attributeSetName": "Drawing Location",
    "attributeSetId": 23051
  }
```

]

6.71. Form status change history API

Objective

This API is use for getting history of form status change based on given criteria.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- URI of this API can be got from *Login* API response**.**

Sample cURL call for Form status change history:

```
curl --location 'https://adoddleqaak.asite.com/commonapi/form/getFormStatusHistory'
    \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
"projectId": "<workspaceID>",
"formTypeName": "FormMsgTest",
"appBuilderId": "FormMsgTest",
"startDateTime": "< startDateTime >",
"endDateTime": "< endDateTime >"
} '
```

Method details:

Name	Value
Method	Post
Sample URL	https://adoddleak.asite.com/commonapi/form/getFormStatusHistory

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Parameters:

Name	Value	Mandatory
searchCriteria	JSONObject contains search criteria for form status change history.	Yes

Please refer below table for JSON (searchCriteria) fields:

No	Field Name	Description	Mandatory
1	projectId	Hashed value of projectIds. Multiple projectIds can be define comma separated.	No
2	projectName	Project name. Multiple values can be used as comma separated list.	No
3	formTypeName	Form type name to retrieve data of specific form type.	No
4	appBuilderId	Provide app Builder Code to retrieve data of specific form type.	No
5	startDateTime	Start date from where check about forms status gets change. Value should be as per User date format and time zone.	Yes
6	endDateTime	End date till check about forms status gets change. Value should be as per User date format and time zone.	Yes

Note: We need to pass projectId or projectName.

Sample input JSON for API call as below

Below given sample describes the format of request body JSON:

```
{
    "projectId": <Comma separated ProjectIds in hash>,
    "formTypeName": <Comma separated form type names>,
    "appBuilderId": <Comma separated app builder id>,
    "startDateTime": <start date and time>,
    "endDateTime": <end date and time>
}
```

Sample response JSON is as below:

[{
"projectName": "Universal Web Viewer_RS",
"id": "BPNO024",
"formID": "10910758$$cC43MO",
"formTypeName": "By Pass NO",
"title": "By rohit.singh",
"formOriginatorOrg": "Asite Solutions",
"formOriginator": "Rohit (Rohit.Singh@asite.com) Singh",
"formCreationDate": "22-Mar-2022#13:40 IST",
"isActive": "Yes",
"islatest": "No",
"newStatus": "Closed-Rejected",
"statusChangeDate": "22-Mar-2022#16:48 IST",
"statusChangedByOrganization": "Asite Solutions",
"statusChangedByUser": "Rohit Singh (QA-5365)",
"formCloseDate": null,
"closedOut": "No",
"appBuilderID": "ASI-RFI",
"userRef": ""
},
{
"projectName": "Universal Web Viewer_RS",
"id": "BPNO024",
"formID": "10910758$$cC43MO",
"formTypeName": "By Pass NO",
"title": "By rohit.singh",
"formOriginatorOrg": "Asite Solutions",
"formOriginator": "Rohit (Rohit.Singh@asite.com) Singh",
"formCreationDate": "22-Mar-2022#13:40 IST",
"isActive": "Yes",
"islatest": "No",
"newStatus": "Closed",
"statusChangeDate": "22-Mar-2022#16:46 IST",
"statusChangedByOrganization": "Asite Solutions",
"statusChangedByUser": "Rohit Singh (QA-5365)",
"formCloseDate": null,
"closedOut": "No",
"appBuilderID": "ASI-RFI",

"userRef": ""
}]

6.72. Form distribution history API

Objective

This API is use for getting history of form distribution based on given criteria.

Sample cURL call for Form Distribution History:

```
curl --location 'https://adoddleqaak.asite.com/commonapi/form/getFormDistributionHistory' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
"projectId": "<WorkspaceID>",
"formTypeName": "<formTypeName>",
"appBuilderId": "<appBuilderId>",
"startDateTime": "< startDateTime >",
"endDateTime": "< endDateTime >"
} '
```

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- URI of this API can be got from *Login* API response.

Method details:

Name	Value
Method	Post
Sample URL	https://adoddleak.asite.com/commonapi/form/getFormDistributionHistory

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Parameters:

Name	Value	Mandatory
searchCriteria	JSONObject contains search criteria for form status change history.	Yes

Please refer below table for JSON (searchCriteria) fields:

No	Field Name	Description	Mandatory
1	projectId	Hashed value of projectIds. Multiple projectIds can be define comma separated.	No
2	projectName	Project name. Multiple values can be used as a comma separated list.	No
3	formTypeName	Form type name to retrieve data of specific form type.	No
4	appBuilderId	Provide app Builder Code to retrieve data of specific form type.	No
5	startDateTime	Start date from where check about forms distribution happen. Value should be as per User date format and time zone.	Yes
6	endDateTime	End date till check about forms distribution happen. Value should be as per User date format and time zone.	Yes

Note: We need to pass projectId or projectName.

Sample input JSON for API call as below

Below given sample describes the format of request body JSON:

```
{
    "projectId": <Comma separated ProjectIds in hash>,
    "formTypeName": <Comma separated form type names>,
```

```
        "appBuilderId": <Comma separated app builder id>,
        "startDateTime": <start date and time>,
        "endDateTime": <end date and time>
}
```

Sample response JSON is as below:


```
[{
        "projectName": "Iconic building",
        "id": "RFI063",
        "formID": "10932387$$EAUgvu",
        "formTypeName": "Request for Information",
        "userRef": null,
        "title": "First Phase",
        "formCreationDate": "12-May-2022#05:53:07:60 WET",
        "formCloseBydate": "20-May-2022#23:59:59:00 WET",
        "formStatus": "Open",
        "reasonForStatusChange": "",
        "actionAssignedByUser": "Ankit Motaval",
        "actionAssignedByOrg": "Asite Solutions",
        "recipientName": "Jay Harkhani",
        "recipientOrg": "Asite Solutions",
        "recipientAction": "For Acknowledgement",
        "actionAssignDate": "12-May-2022#05:53:07:00 WET",
        "actionDueDate": "16-May-2022#23:59:59:00 WET",
        "actionCompletedDate": null,
        "actionDays": "0",
        "actionStatus": "Incomplete",
        "documentAssociations": null,
        "formAssociations": null,
        "hasAttachment": "No",
        "msgID": "ORI001",
        "appBuilderID": "ASI-RFI",
        "updateDate": "12-May-2022#05:53:07:107 WET"
    },
    {
        "projectName": "Iconic building",
        "id": "RFI061",
        "formID": "10930530$$Pix2TK",
```

"formTypeName": "Request for Information",
"userRef": null,
"title": "Second Floor",
"formCreationDate": "10-May-2022#06:43:50:127 WET",
"formCloseBydate": "26-May-2022#23:59:59:00 WET",
"formStatus": "Open",
"reasonForStatusChange": "",
"actionAssignedByUser": "Ankit Motaval",
"actionAssignedByOrg": "Asite Solutions",
"recipientName": "Jay Harkhani",
"recipientOrg": "Asite Solutions",
"recipientAction": "For Acknowledgement",
"actionAssignDate": "11-May-2022#14:17:46:00 WET",
"actionDueDate": "15-May-2022#23:59:59:00 WET",
"actionCompletedDate": null,
"actionDays": "-1",
"actionStatus": "Overdue",
"documentAssociations": null,
"formAssociations": null,
"hasAttachment": "No",
"msgID": "ORI001",
"appBuilderID": "ASI-RFI",
"updateDate": "11-May-2022#14:17:46:847 WET"
}]

7.73 Get Form Permissions with Roles

Objective

This API will return list of forms, and their permissions assigned for the selected workspace as per searching criteria provided.

In case of FormName and AppBuilderId search use either one parameter for searching to avoid duplicate records.

Usage Rules

- User must have Manage App permission to call this API.
- User must have been logged in to Asite Platform using Login API Function
- URI of this API can be got from *Login* API response.

Method details:

Name	Value
Method	Post

Sample URL	https://{adoddle_url}/commonapi/form/getFormRolePermission

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Parameters:

Name	Value	Mandatory
projectId	Hashed Project ID	Yes
formName	Form-Type-Name as per form settings, values should be provided in JSON Array Format.	No
roleName	role name parameter, values should be provided in JSON Array Format.	No
roleId	roleId for specific role permissions.	No
permissionName	Permission Name, values should be provided in JSON Array Format.	No
appBuilderId	AppBuilderCode for a form, values should be provided in JSON Array Format.	No

Sample cURL call for Get Form Permissions with Roles:

```
curl --location
'https://adoddleqaak.asite.com/commonapi/form/getFormRolePermission' \

--header 'Cookie: ASessionID=<ASessionID>' \

--header 'Content-Type: application/x-www-form-urlencoded' \

--data-urlencode 'projectId=<WorkspaceID>' \

--data-urlencode 'roleID=<roleID>' \
```

**--data-urlencode 'roleName=<roleName>' **

**--data-urlencode 'formName=<formName>' **

**--data-urlencode 'appBuilderId=<appBuilderrId>' **

--data-urlencode 'permissionName=<permissionName>'

Sample response JSON is as below:


```
{
    "RolePermissionVO": [
        {
            "delete": false,
            "generateURI": true,
            "projectVO": null,
            "readOnly": true,
            "uri": null,
            "workspaceRoleTO": {
                "assignedUserCount": 0,
                "deletedPermissionVOList": null,
                "formTypePrivVOList": [
                    {
                        "formTypeID": 10602076,
                        "formTypeName": "02. Project BOQ",
                        "generateURI": true,
                        "inherited": false,
                        "isPublic": true,
                        "privilegeFlagList": [
                            {
                                "displayCheckbox": true,
```

"displayValue": false,

"generateURI": true,

"privilegeID": 35,
"privilegeName": "no_access",

"uri": null

},

{

"displayCheckbox": true,

"displayValue": true,

"generateURI": true,

"privilegeID": 30,

"privilegeName": "create_form",

"uri": null

},

{

"displayCheckbox": false,

"displayValue": false,

"generateURI": true,

"privilegeID": 36,

"privilegeName": "view_private_allorg",

"uri": null

},

{

"displayCheckbox": false,

"displayValue": false,

"generateURI": true,
"privilegeID": 75,
"privilegeName": "view_private_ownorg",
"uri": null
},
{
"displayCheckbox": false,
"displayValue": false,
"generateURI": true,
"privilegeID": 31,
"privilegeName": "control",
"uri": null
},
{
"displayCheckbox": true,
"displayValue": true,
"generateURI": true,
"privilegeID": 79,
"privilegeName": "view_draft_ownorg",
"uri": null
},
{
"displayCheckbox": true,
"displayValue": true,
"generateURI": true,
"privilegeID": 80,
"privilegeName": "view_draft_allorg",

"uri": null
}
],
"uri": null
}
],
"generateURI": true,
"inherited": false,
"name": "Workspace - Administrator",
"newPermissionVOList": null,
"permissionVOList": [],
"privilegeVOList": null,
"projectId": 0,
"projectSubscriptionType": 0,
"roleId": 3438021,
"status": 0,
"systemRole": true,
"uri": null
}
}
]
}

Scenario	Response Code	Response Message

If User don't have permission	403	user don't have permission to access this resource
Any error while processing request	500	There was an error while processing request. Please try again.
Success	200	Response JSON with Form Permissions details
Blank Project ID	400	Parameter missing! Please specify Project ID and try again.

7.74 Get Form Attachment and Associations

Objective

This API will return attachments and associations for the form.

- User must have been logged in to Asite Platform using Login API Function
- URI of this API can be got from *Login* API response**.**

Method details:

Name	Value
Method	Post
Sample URL	https://{adoddle_url}/commonapi/workspace/{workspace_id}/form/getFormAttachmentAndAssociationDetails

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Parameters:

Name	Value	Mandatory
entityType	FORM	Yes
requestEntityType	Attachments/ Files/Forms/Location/All	Yes
formId	Hashed FormId	Yes

Sample cURL call for Get Form Attachment and Associations:

curl --location '
https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/form/getFormAttachmentAndAssociationDetails

**' \ --header 'Cookie: ASessionID=<ASessionID>' **

**--header 'Content-Type: application/x-www-form-urlencoded' **

**--data-urlencode 'entityType=<entityType>' **

--data-urlencode 'requestedEntityType=< 'requestedEntityType >

--data-urlencode 'formId=< formId >'

Sample Response:

{

"totalDocs": 0,

"recordBatchSize": 250,

"listingType": 72,
"currentPageNo": 1,

"recordStartFrom": 1,

"columnHeader": [

{

"id": "0",

"fieldName": "revisionId",

"solrIndexfieldName": "",

"colDisplayName": "",

"colType": "checkbox",

"userIndex": 0,

"imgName": "",
"tooltipSrc": "",
"dataType": "checkbox",
"function": "",
"funParams": "",
"wrapData": "",
"widthOfColumn": 31,
"isSortSupported": false,
"isCustomAttributeColumn": false,
"isActive": false
},
{
"id": "5",
"fieldName": "attachedBy",
"solrIndexfieldName": "",
"colDisplayName": "Attached By",
"colType": "imgwithtext",
"userIndex": 5,
"imgName": "",
"tooltipSrc": "attachedBy",
"dataType": "imgwithtext",
"function": "",
"funParams": "",
"wrapData": "",
"widthOfColumn": 125,
"isSortSupported": false,
"isCustomAttributeColumn": false,

"isActive": false
},
{
"id": "6",
"fieldName": "attachedDate",
"solrIndexfieldName": "",
"colDisplayName": "Date",
"colType": "text",
"userIndex": 6,
"imgName": "",
"tooltipSrc": "attachedDate",
"dataType": "timestamp",
"function": "",
"funParams": "",
"wrapData": "",
"widthOfColumn": 55,
"isSortSupported": false,
"isCustomAttributeColumn": false,
"isActive": false
},
{
"id": "3",
"fieldName": "fileName",
"solrIndexfieldName": "",

"colDisplayName": "File Name",

"colType": "text",

"userIndex": 3,

"imgName": "",

"tooltipSrc": "",

"dataType": "text",

"function": "openFileForAttatchment",

"funParams": "projectId, revisionId, fileName, msgId, commentMsgId, dcId, hasOnlineViewerSupport, attachmentId",

"wrapData": "",

"widthOfColumn": 132,

"isSortSupported": false,

"isCustomAttributeColumn": false,

"isActive": false

},

{

"id": "4",

"fieldName": "fileSize",

"solrIndexfieldName": "",

"colDisplayName": "File Size",

"colType": "text",

"userIndex": 4,

"imgName": "",
"tooltipSrc": "File Size",

"dataType": "text",

"function": "",

"funParams": "",

"wrapData": "",

"widthOfColumn": 88,
"isSortSupported": false,
"isCustomAttributeColumn": false,
"isActive": false
},
{
"id": "2",
"fieldName": "parentMsgCode",
"solrIndexfieldName": "",
"colDisplayName": "Msg ID",
"colType": "text",
"userIndex": 2,
"imgName": "",
"tooltipSrc": "code",
"dataType": "text",
"function": "",
"funParams": "",
"wrapData": "",
"widthOfColumn": 125,
"isSortSupported": false,
"isCustomAttributeColumn": false,
"isActive": false
},
{

"id": "1",
"fieldName": "fileType",
"solrIndexfieldName": "",
"colDisplayName": "Type",
"colType": "img",
"userIndex": 1,
"imgName": "",
"tooltipSrc": "",
"dataType": "img",
"function": "downloadingAssociatedAttachment",
"funParams": "projectId, revisionId, dcId",
"wrapData": "",
"widthOfColumn": 25,
"isSortSupported": false,
"isCustomAttributeColumn": false,
"isActive": false
}
],
"data": {
"attachments": [
{
"fileType": "filetype/csv.gif",
"fileName": "Collab-application (28).csv",
"revisionId": "24088202$$uSYTSZ",
"fileSize": "5276 KB",
"hasAccess": true,
"canDownload": true,

"publisherUserId": 0,

"hasBravaSupport": true,

"docId": "12140059$$WHaJdf",

"attachedBy": "https://portalqa.asite.com/adoddleprofilefiles/member_photos/photo_1109976_thumbnail.jpg?v=1620379588000#Ankit",

"attachedDateInTimeStamp": "Jun 16, 2022 6:14:00 AM",

"attachedDate": "15-Jun-2022#18:14 SST",

"attachedById": 1109976,

"attachedByName": "Ankit Motaval",

"isLink": false,

"linkType": "Static",

"isHasXref": false,

"documentTypeId": 0,

"isRevPrivate": false,

"isAccess": true,

"isDocActive": true,

"folderPermissionValue": 0,

"isRevInDistList": false,

"isPasswordProtected": false,

"attachmentId": "0$$dmNQAS",

"viewAlwaysFormAssociationParent": true,

"viewAlwaysDocAssociationParent": false,

"allowDownloadToken": "1$$9GQdLa",

"downloadImageName": "icons/downloads.png",

"hasOnlineViewerSupport": true,

"newSysLocation": "project_2113171/formtype_10592603/form_10592603/msg_11269001/24088202.csv",

"type": 3,
"msgId": "11269001$$G27cEG",

"msgCreationDate": "Jun 16, 2022 6:14:00 AM",

"projectId": "2113171$$dVDR7A",

"folderId": "112595030$$4RZPRf",

"dcId": 1,

"childProjectId": 0,

"userId": 0,

"resourceId": 0,

"parentMsgId": 11269001,

"parentMsgCode": "ORI001",

"assocsParentId": "0$$Drqcbu",

"generateURI": true

}

],

"formUserSet": [],

"allowSelectedDocsDownload": false,

"allowAllDocsDownload": false,

"generateURI": true

},

"sortField": "",

"sortFieldType": "",

"sortOrder": "",

"editable": true,

"isIncludeSubFolder": true,

"totalListData": 0

}

7.75 Logout API Service

Objective

The Logout API Logs the user out of the Asite Platform. It returns the logout status – whether successful or not on execution of the API function. Extract the session id Extract the session id from the xml of the login API Call <Sessionid> tag from the resultant xml to execute logout API.

Usage Rules

- User must have been logged in to Asite Platform using Login API

Function

- Use the following cURL command to Logout from API application:

curl --location 'https://dmsqaak.asite.com/api/workspace/logout' \ --header 'Cookie: ASessionID=<ASessionID>'

Input Parameters

Parameter Name	Description
ASessionID	session ID from the resultant XML of Login API call>
<URI>	URI tag value for Logging out from the resultant XML of Login API call

Sample Return Xml

This will return the logout confirmation for the user and the resultant XML as follows:

<?xml version="1.0" encoding="ISO-8859-1"?>

<string>Logged out successfully.</string>

Schema (XSD) of the Return XML

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified">
<xs:element name="string" type="xs:string"/>
</xs:schema>
```

Default Fields Returned

Field Name	Description
String	Returns the status of logout – whether the user was able to successfully logout of the application

7.76 Quality Plan Listing API

Objective

The Quality plan Listing API returns a list of the Quality plans. It supports filtering records based on projectId, planCreationDate and lastupdatedate. We can also limit the number of results by specifying recordStart and recordLimit.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Request method details:

Name	Value
Method	GET

URL	adoddleak.asite.com/commonapi/qaplan/getQualityPlanList;searchCriteria={
	"criteria" : [{
	"field" : <name of field 1>,
	"operator" : <operator id>,
	"values" : [<value 1>,<value 2>,...]
	},{
	"field" : <name of field 2>,
	"operator" : <operator id>,
	"values" : [<value 1>,<value 2>,...]
	}
	],
	projectId:<id of Project>, recordLimit:<limit
	of records>, recordStart:<start of records>
	}

- Fields in criteria Json with description:

Field	Description
planCreationDate	Filter with **planCreationDate** which is return from response
lastUpdationDate	Filter with **lastUpdateDate** which is return from response

- Request parameters details:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	criteria	Json Array	Array of search criteria	No	
2	field	String	Field name in search criteria	Yes	
3	operator	Integer	Operator for search criteria • 1 – Equals • 5 – Greater than • 6 – Less than Note: Time With Date Not supported with Operator = 1	Yes	
4	values	String Array	Array of value(s) to be search for search criteria	Yes	
5	projectId	String	Id of the project with hashed values	Yes	
6	recordStart	Long	Number of Quality Plans to skip	Yes	1
7	recordLimit	Long	Number of Quality Plans to return after recordStart (Maximum records limit must not exceed 1000)	Yes	10

- **Request cURL example:**

Operator:- 1

```
curl --request GET
'https://adoddleak.asite.com/commonapi/qaplan/getQualityPlanList;searchCriteria={
    "criteria" : [{
            "field" : "planCreationDate",
            "operator" : 1,
            "values" : ["25-Jan-2016"]
        },{
            "field" : "lastUpdationDate",
            "operator" : 1,
            "values" : ["25-Jan-2016"]
        }
    ],
    projectId:2115713$$LhnntS,
    recordLimit:10,
    recordStart:1
}' \
--header 'Cookie: AsessionID=Pnasdffn0FXvK9qY6HSNQRP8aUowL8KfhVeoG7Mx6ws=;'
```

Operator:- 5

```
curl --request GET
     'https://adoddleak.asite.com/commonapi/qaplan/getQualityPlanList;searchCriteria={
    "criteria" : [{
            "field" : "planCreationDate",
            "operator" : 5,
            "values" : ["25-Jan-2016T06:16:00"]
        },{
            "field" : "lastUpdationDate",
            "operator" : 5,
            "values" : ["25-Jan-2016T06:16:00"]
        }
    ],
    projectId:2115713$$LhnntS,
    recordLimit:10,
    recordStart:1
}' \
--header 'Cookie:
     AsessionID=Pnasdffn0FXvK9qY6HSNQRP8aUowL8KfhVeoG7Mx6ws=;'curl --request
     GET 'https://adoddleak.asite.com/commonapi/qaplan/getQualityPlanList;searchCriteria={
    "criteria" : [{
            "field" : "planCreationDate",
            "operator" : 5,
```

```
            "values" : ["25-Jan-2016T06:16:00"]
        },{
            "field" : "lastUpdationDate",
            "operator" : 5,
            "values" : ["25-Jan-2016T06:16:00"]
        }
    ],
    projectId:2115713$$LhnntS,
    recordLimit:10,
    recordStart:1
}' \
--header 'Cookie: AsessionID=Pnasdffn0FXvK9qY6HSNQRP8aUowL8KfhVeoG7Mx6ws=;'
```

Operator:- 6

```
curl --request GET
'https://adoddleak.asite.com/commonapi/qaplan/getQualityPlanList;searchCriteria={
    "criteria" : [{
            "field" : "planCreationDate",
            "operator" : 6,
            "values" : ["25-Jan-2016T06:16:00"]
        },{
            "field" : "lastUpdationDate",
            "operator" : 6,
            "values" : ["25-Jan-2016T06:16:00"]
        }
    ],
    projectId:2115713$$LhnntS,
recordLimit:10,     recordStart:1
}' \
--header 'Cookie: AsessionID=Pnasdffn0FXvK9qY6HSNQRP8aUowL8KfhVeoG7Mx6ws=;'
```

Response

- Response parameters details:

No	Field Name	Description
1	commonAttributes	Json of common attributes
2	totalRecords	Total quality plan record
3	results	total result
4	data	Array of value(s) to be search for search criteria
5	projectId	Id of the project with hashed values
6	projectName	Name of the project
7	planId	Id of the plan with hashed values
8	planTitle	Title of the plan
9	percentageCompletion	Percentage of the location completion
10	planCreationDate	Created Date of the Plan
11	createdByName	Name of the Plan Creator
12	lastupdatedate	Update Date of the Plan
13	lastupdatedbyName	Name of the user that last updated the Plan
14	updatedDateInMS	Date in Millisecond when plan was updated
15	PlanCreationDateInMS	Date in Millisecond of Plan Creation
16	FirstName	First Name of the Plan Creator
17	lastName	Last Name of the Plan Creator
18	orgName	Organization of the Plan Creator
19	lastUpdatedUserOrg	Plan Updating User’s Organization

**curl --location 'https://adoddleqaak.asite.com/commonapi/qaplan/getPlanAssociation?projectId=<WorkspaceID>&planId=<PlanID>&recordStart=1&recordLimit=100' **
--header 'Cookie: ASessionID=<ASessionID>'

- Response example:


```
{
   "commonAttributes": {
      "totalRecords": "10",
      "results": "1000"
   },
   "data": [
      {
         "projectId": "2167893$$4TAnBr",
         "projectName": "project",
         "planId": "1242$$efb9OF",
```

"planTitle": "plan",
"percentageCompletion": 9,
"planCreationDate": "06-Jan-2022#09:34 WET",
"createdByName": "Vishal Vadgama, Asite solutions Ltd",
"lastupdatedate": "08-Nov-2022#09:53 WET",
"lastupdatedbyName": "Vishal Vadgama",
"updatedDateInMS": 1667901189000,
"planCreationDateInMS": 1641461648000,
"firstName": "Vishal",
"lastName": "Vadgama",
"orgName": "Asite solutions Ltd",
"lastUpdatedUserOrg": "Asite Solutions Ltd"
}
]
}

7.77 Quality Plan Association API

Objective
The Quality plan association API returns the plan Association data to users for a particular plan. User needs to call Association API with projectId, planId and respective parameters with

<ASessionId >from Login API

Usage Rules

- User must be logged in to the Asite Platform using Login API Function
- Use the following cURL command to use the Quality Plan API:

**curl --location --globoff 'https://adoddleqaak.asite.com/commonapi/qaplan/getPlanAssociation/?projectId={projectId}&planId={planId}&recordStart={recordStartFrom}&recordLimit={recordLimit}' **

--header 'Cookie: ASessionID=<ASessionID>;'

Method details:

Name	Value
Method	GET
Sample URL	https://adoddleak.asite.com/commonapi/qaplan/getPlanAssociation/?projectId={projectId}&planId={planId}&recordStart={recordStartFrom}&recordLimit={recordLimit}

Input Parameters

Parameters	Description	Required
projectId	Id of the project with hashed values	Mandatory Fields
planId	Id of the plan with hashed values in which user wants to get association Data	Mandatory Fields
recordStart	Initially its value is 1 after that it's from recordLimit+1	Mandatory Fields
recordLimit	Limit of the record which user wants Max 1000 records	Mandatory Fields

Sample Return Json:

{

"totalRecordCount**": {Total Records available for Association},**

"associationList": [

{

"activitySeq**": {Activity Squence shows that on which location this activity will shows, it should be 1, 2, 3, 4}**,

"activityType": **Form or file Association**,

"associateProjectId": **{Associated projectID},**

"associateFolderId": **{File's associated folderID},**

"associateRevisionId": **{File's associated revisionID},**

"deliverableActivityId": **{Associate Activity Ids}**,

"qiActivityId": **{Activity Id}**,

"qiLocationId": **{Location Id of location}**,

"qiStatusId”**: {Status Id e.g., Running/Not Started},**

"isAssociationRequired": **false**,

"link": {**Associated document or form Link**},

"statusColor": **{Status Color}**,

"statusName": **{Running/ Not started}**

},

{

"activitySeq": **{Activity Squence shows that on which location this activity will shows, it should be 1, 2, 3, 4}**,

"activityType": **{Activity Type files/Forms},**

"associateProjectId": **{Associated projectID},**

"associateFormId": **{Associated Form ID},**

"deliverableActivityId": **{ID of association},**

"qiActivityId": **{Activity ID}**

"qiLocationId": **{Location ID}**

"qiStatusId": **{Status ID},**

"msgId": **{Message Id of Form}**,

"isAssociationRequired": false,

"link": **{Link of Form/File Association},**

"statusColor": **{Status color}**,
"statusName": {IN Progress, Not Started, NA}

}]

}

7.77 Quality Plan Location API

Objective

The Quality plan Location API returns the plan Location data to the user for a plan. User needs to call Location API with projectId, planId and respective parameters with

<ASessionId > from Login API

Usage Rules

- User must be logged in to the Asite Platform using Login API

Function

- Use the following cURL command to Use Quality Plan API:

```
curl --location
'https://adoddleak.asite.com/commonapi/qaplan/getPlanLocation?projectId=<WorkspaceID>&planId=<PlanID>&recordStart=1&recordLimit=100' \

--header 'Cookie: ASessionID=<ASessionID>'
```

Method details:

Name	Value
Method	GET
Sample URL	https://adoddleak.asite.com/commonapi/qaplan/getPlanLocation/?projectId={projectId}&planId={planId}&recordStart={recordStartFrom}&recordLimit={recordLimit}

Input Parameters

Parameters	Description	Required
projectId	Id of the project with hashed values	Mandatory Field
planId	Id of the plan with hashed values in which user wants to get Data	Mandatory Field
recordStart	Initially its value is 1 after that it's from recordLimit+1	Mandatory Field
recordLimit	Limit of the record which user want; Max record must be 1000	Mandatory Field

Sample Return Json

{

"totalRecordCount**": {Total Records available for Location},**

“locationList”: [

{

"isAssociationRequired": {**It shows that association required or not**},

"name": **{Name of the Quality Plan Location}**,

"percentageCompelition": {**It shows that how many percentages completed of that activity},**

"qiLocationId": **{ID of the Location}**

}

]

}

7.78 Quality Plan Activity API

Objective

The Quality plan Location API returns the plan Activity data to the users for a particular plan. User needs to call Activity API with projectId, planId and respective parameters with

<ASessionId > from Login API

Usage Rules

- User must be logged in to the Asite Platform using Login API

Function

- Use the following cURL command to Use Quality Plan API

curl --location 'https://adoddle.asite.com/commonapi/qaplan/getPlanActivities?projectId=<WorkspaceID>&planId=<PlanID>&recordStart=1&recordLimit=100' \ --header 'Cookie: ASessionID=<ASessionID>'

Name	Value

Method	GET
Sample URL	https://adoddleak.asite.com/commonapi/qaplan/getPlanActivities/?projectId={projectId}&planId={planId}&recordStart={recordStartFrom}&recordLimit={recordLimit}

Input Parameters:

Parameters	Description	Required
projectId	Id of the project with hashed values	Mandatory Fields
planId	Id of the plan with hashed values in which user wants to get Data	Mandatory Fields
recordStart	Initially its value is 1 after that it's from recordLimit+1	Mandatory Fields
recordLimit	Limit of the record which user want; Max record must be 1000	Mandatory Fields

Sample Return Json:

{

"totalRecordCount**": {Total Records available for Activity},**

"activityList": [

{

"folderId": **{Folder Id of Associate Files}**,

"folderPath": **{Folder Path of associate Path}**,

"associationType": **{1= File Association, 2= Form Association},**

"activityName": **{Name of the Activity}**,

"activitySeq": **{Sequence of the Activity}**,

"activityType": **{Its shows type of Activity Files/Forms}**

},

{

"formTypeCode": **{Code of the form Type}**,

"formTypeId": **{Id of the form Type}**,

"formTypeName": **{Name of the form Type}**,

"associationType": **{Form Association= 2/ File Association= 1}**, "activityName": **{Name of the Activity which is configured at the time of plan configuration},**

"activitySeq": **{Sequence of Activity}**,

"activityType": **{Its shows type of Activity Files/Forms}**

}

]

}

7.79 Attachment Download API

Objective

This API is used to download a specific attachment

Usage Rules

- URI of this API can be got from Document Search API response, field “AttachmentURI”
- User should have higher than "View Only" permission on the folder
- Use the following cURL command to use this API:

**curl --location 'https://downloadqab.asite.com/download/document/internalAttachment?projectId=%3CWorkspaceID%3E&attachmentId=%3CAttachmentID%3E' **

--header 'Cookie: ASessionID=<ASessionID>'

Method details:

Name	Value
Method	GET
Sample URL	https://downloadak.asite.com/download/document/internalAttachment?projectId={projectId} &attachmentId={attachmentId}

Request Parameters:

Name	Description	Mandatory
projectId	Hashed project Id	Yes
attachmentId	Hashed attachment Id	Yes

7.80 Marketplace - Update Universal Org. profile

Objective

This API is used to update org. profile in marketplace.

Usage Rules

- User must have been logged in using Login API.
- Pass ASessionID (received from Login API) cookie while make API call.

```
curl --location 'https://uk.marketplaceqaak.asite.com/marketplace/api/uop/updateprofile' \
--header 'Cookie: ASessionID=<ASessionID>' \
--header 'Accept: application/json' \
--form 'updateProfileData="{
  \"orgId\": <OrgID>,
  \"findCustomField\": {
 \"<customfieldname>\": <fieldvalue>
 },
  \"uopData\": [
```

```
{
  \"sectionName\": \"Financials & Insurances\",
  \"data\": [
    {
      \"sectionName\": \"SME\",
      \"data\": [
        {
          \"fieldName\":
\"Are_you_an_SME_under_the_term_of_the_UK_European_definition?\",
          \"value\": \"true\"
        },
        {
          \"fieldName\": \"Can_you_provide_Surety_Bonds?\",
          \"value\": \"true\"
        }
      ]
    },
    {
      \"sectionName\": \"Annual Turnover\",
      \"data\": [
        {
          \"fieldName\": \"annualTurnover\",
          \"value\": [
            [
              {
                \"fieldName\": \"annualTurnoverPeriod\",
                \"value\": \"2018\"
```

```
          },
          {
            \"fieldName\": \"annualTurnoverAmount\",
            \"value\": \"33\"
          }
        ],
        [
          {
            \"fieldName\": \"annualTurnoverPeriod\",
            \"value\": \"2020\"
          },
          {
            \"fieldName\": \"annualTurnoverAmount\",
            \"value\": \"3000\"
          }
        ],
        [
          {
            \"fieldName\": \"annualTurnoverPeriod\",
            \"value\": \"2013\"
          },
          {
            \"fieldName\": \"annualTurnoverAmount\",
            \"value\": \"55555\"
          }
        ]
      ]
    }
  ]
},
```

{
\"sectionName\": \"Insurances\",
\"data\": [
{
\"fieldName\": \"insuranceCover\",
\"value\": [
[
{
\"fieldName\": \"typeOfCover\",
\"value\": \"Other\"
},
{
\"fieldName\": \"insuranceExpiry\",
\"value\": \"30-apr-2024\"
},
{
\"fieldName\": \"Policy_No\",
\"value\": \"74581\"
},
{
\"fieldName\": \"InsuranceCarrier\",
\"value\": \"wrwerfrwe\"
},
{
\"fieldName\": \"insuranceMaxCover\",
\"value\": \"4535335\"
},

```
                {
                  \"fieldName\": \"insurancertificate\",
                  \"value\": \"at\"
                }
              ]
            ]
          }
        ]
      }
    ]
  }
]
}"' \
--form 'attachments=@"/home/asite/Downloads/2.jpg"'
```

Method details:

Name	Value
Method	POST (form-data)
Sample URL	https://uk.marketplace.asite.com/marketplace/api/uop/updateprofile

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes
Content-type	multipart/form-data	Yes

Request Parameters:

Name	Description	Mandatory
updateProfileData	JSONObject of Universal org. profile update data.	Yes
Attachments	Binary content of files.	No

Notes:

- When send details fields should be given under correct section. For more details, please refer sample JSON.
- For repeating values need to pass **all values** (existing/new) as it always **removes** existing values and add which are pass in API.
- For attachments, parameter name and attachment field value should be same.

  i.e.: In below scenario we want to upload file for certificate field.

```
{
        "fieldName": "certificate",
        "value": "certification1"
}
certification1: <file binary content>
```

- Multiple values need to pass with "|" separated. i.e. Access Barriers|Accommodation.
- For dropdown, need to pass value same as select from WebApp. We can also use below API to get available options of download.

Method details:

Name	Value
Method	GET
URI	https://uk.marketplace.asite.com/marketplace/uop/fieldLookupData/<<fieldname>>
Sample URL	https://uk.marketplace.asite.com/marketplace/uop/fieldLookupData/entityType

- Below is the required JSON format for update org. profile data.

```
{
    "orgId": <org. id>,
    "findCustomField": {
          "<customfieldname>": <fieldvalue>
   },
    "uopData":
    [{
          "sectionName": <section name>,
    "data":
          [{
```

```
                "sectionName": <sub-section name>,
                "data":
                [{
                        "fieldName": <field name>,
                        "value": <field value>
                }]
            }]
        }],
        "uopCustomData":
        [{
            "data":
            [{
                "fieldName": <field name>,
                "value": <field value>
            }]
        }]
}
```

Parameter details:

Name	Is Mandatory ?	Sample Value
orgId	Either of these parameters is required to identify which organization value needs to be updated.	"orgId": 574896

findCustomField		"findCustomField": {
		"No.": "SUB0000001"
		}

uopData	Yes	Link for JSON: https://adoddleak.asite.com/lnk/oRBkrpaIXMErMnFpq7Xr
uopCustomData	No	Link for JSON: https://adoddleak.asite.com/lnk/rAKkjkdtpdyMd4t8jqA6

- Please refer section and field hierarchy in below JSON to set value for specific field and pass in same structure while making the call to update API. For Update API, you need to pass fieldname and value only. Other fields are for reference only and just included to help you understand the type, validation, and UI label (Label on Marketplace WebApp) of the respective fields.

  `Link for JSON`: https://adoddleak.asite.com/lnk/4A9rjrpfBdyMd9fejqA6

- fieldTypeId details:

fieldTypeId	Field type name
1	Text Box
2	Text Area
4	Radio
5	Dropdown
7	Attachment
8	Repeating Table
9	Date picker
10	Label
11	Radio - Public / Private
12	Multi Section Checkbox - Public / Private

- validationTypeId details:

validationTypeId	Details
1	Need unique value for field.
2	Field is mandatory
3	Only Characters and Numbers allowed
4	Please enter only numbers
5	Please enter only alphabets
6	Length should not exceed 200 characters
8	Length should not exceed 15 digits
9	Please enter valid Email ID

10	Please enter valid website address/link
12	Length should not exceed 4 digits
14	Length should not exceed 25 digits
16	Length should not exceed 50 characters
17	Length should not exceed 100 characters
19	Percentage should be in range of [0-100]
22	Key Contact should be a registered user
23	Zip Code does not match with City or State.
29	Invalid Telephone Number
30	Value specified is not valid for the system
31	File attachment is mandatory. (For questions if value set as Yes).
33	Number allows maximum 2 values after decimal
35	Invalid VAT Number

7.81 Quality Plan Details API

Objective

The Quality Plan Details API returns Activity configurations and Location details along with its associations for a specific plan. It supports filtering Locations based on last updated date search filters.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function

- Request method details:

Name	Value
Method	GET

URL	https://adoddleak.asite.com/commonapi/qaplan/getPlanDetails;searchCriteria={
	"criteria" : [{
	"field" : <name of field 1>,
	"operator" : <operator id>,
	"values" : [<value 1>,<value 2>,...]
	}
	
	],
	projectId:<id of Project>, recordLimit:<limit of records>,
	recordStart:<start of records>
	}

- Fields in criteria Json with description:

Field	Description
updationDate	Filter Locations based on the value specified.

- Request parameters details:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	criteria	Json Array	Array of search criteria	No	
2	field	String	Field name in search criteria	Yes	
3	operator	Integer	Operator for search criteria • 1 – Equals • 5 – Greater than • 6 – Less than Note: Time with Date Not supported with Operator = 1	Yes	
4	values	String Array	Array of value(s) to be search for search criteria	Yes	
5	projectId	String	Id of the project with hashed values	Yes	
6	recordStart	Long	Initially its value is 1 after that it's from recordLimit+1	Yes	1
7	recordLimit	Long	Number of Quality Plans record to return after recordStart (Maximum records limit must not exceed 1000)	Yes	10

- **Request cURL example:**

```
curl --location --request GET
'https://adoddleqaak.asite.com/commonapi/qaplan/getPlanDetails' \
--header 'Cookie: AsessionID=<ASessionID>;' \
--header 'Accept: application/json' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": "updationDate",
      "operator": <Operator>,
      "values": [
        <DateTime>
      ]
    }
  ],
```

```
  "projectId": <ProjectID>,
  "planId": <PlanID>,
  "recordLimit": 10,
  "recordStart": 1
}'
```

Response

- Response parameters details:

No	Field Name	Description
1	Locations	Array of locations Associated with plan
2	creationDate	Location creation Date
3	updationDate	Location updation Date
4	updatedById	UserId of user who updated location
6	isDeleted	Location deleted or not. Returns true/false
7	locationPath	Path of the location
8	qiLocationId	Id of Quality Plan Location
9	qiParentId	Id of Parent Quality Plan
10	Name	Name of the location
13	isAssociationRequired	Allowed location level association or not
14	percentageCompletion	Percentage completion of location
16	Association	Array of Association linked with location

16.1	creationDate	Association Creation Date
16.2	createdById	Association created user id
16.3	updationDate	Association updation date
16.4	updatedById	Association updation user id
16.5	isAccess	User able to access or not. Returns true/false
16.6	documentId	Associated Document's Id
16.7	associatedFolderId	Associated Document's folder Id
16.8	activitySeq	Sequence of Activity
16.9	qiStatusId	Status id of the association.

16.10	statusName	Activity Status Name (2 = In Progress/ 3 = Closed/ 1 = Not started)
16.11	startusColor	Activity Status colour
16.12	deliverableActivityId	It's Id of Activity in which document/form is associated
16.13	qiLocationId	Location Id
16.14	associateRevId	RevisionId of associated document
16.15	associateProjectId	ProjectId of associated document
16.16	isAssociationRequired	Permission to check that association required or not (true/false)
16.17	activityTypeId	Activity Type Id (form Activity/ file Activity)
16.18	Link	Associated document/ Form direct link
16.19	formTypeId	FormTypeId of associated Form
16.20	msgId	Message Id of associated form
16.21	associatedFormId	Id of associated form
17	Activities	Array of activities associated with plan
17.1	qiActivityId	Id of the Activity
17.2	activityType	Activity type id (0 = files/form 1= Hold Point)
17.3	associationType	Association Type Id (1 = file association, 2 = Form Association)
17.4	activityName	Name of the Activity
17.5	folderId	Site location folder Id
17.6	folderPath	Path of the site folder
17.7	isAccess	User can be able to assess or not (true/false)
17.8	activitySeq	Sequence of the Activity
17.9	creationDate	Date of the Activity Creation
17.10	createdById	Activity created user Id
17.11	updationDate	Activity updated date
17.12	updatedById	Activity updated user Id
17.13	appTypeId	Id of the associated form App Type
17.14	template_type_id	Template type Id of associated form
17.15	fileStatusIds	List of the associated file status
17.16	isDeleted	Noted that activity deleted or not
17.17	isStatusChanged	Status is changed to original or not

- **Response example:**

```
{
```

```
"locations": [

  {
    "creationDate": "2022-11-21 06:27:26.81",
    "createdById": "1198854$$oIAw0G",
    "updationDate": "2022-11-21 06:27:26.81",
    "updatedById": "1198854$$oIAw0G",
    "isDeleted": false,
    "locationPath": "Export-Defect-Site",
    "qiLocationId": "1509711$$sFqNhB",
    "qiParentId": "1509711$$sFqNhB",
    "name": "Export-Defect-Site",
    "isAssociationRequired": true,
    "percentageCompletion": 50,
    "associations": [
      {
        "creationDate": "2022-11-21 06:29:58.62",
        "createdById": "1198854$$oIAw0G",
        "updationDate": "2022-11-21 06:44:02.45",
        "updatedById": "1198854$$oIAw0G",
        "activitySeq": 1,
        "activityType": 0,
```

"associateProjectId": "2138660$$15W5YV",
"associateFolderId": "112712732$$TXXNi8",
"associateRevId": "24372065$$O231q6",
"deliverableActivityId": "6156986$$KJPWLF",
"folderId": "112712732$$TXXNi8",
"qiActivityId": "5596$$N98tTQ",
"qiLocationId": "1509711$$sFqNhB",
"qiStatusId": " $$utAEgE",
"isAssociationRequired": false,
"link":
"https://portaldev.asite.com/da/notification?action_id=413&nlid=1_6_2138660_112712732_24372065$$BhGcJ5",
"statusColor": "#81BD8B",
"statusName": "Closed"
},
{
"creationDate": "2022-11-21 06:29:58.62",
"createdById": "1198854$$oIAw0G",
"updationDate": "2022-11-21 06:44:08.533",
"updatedById": "1198854$$oIAw0G",
"activitySeq": 2,
"activityType": 0,
"associateProjectId": "2138660$$15W5YV",
"associateFormId": "10972882$$pdbNps",
"formTypeId": "10626834$$BPfz3e",
"deliverableActivityId": "6156987$$MsObN8",
"qiActivityId": "5597$$PUK8zq",
"qiLocationId": "1509711$$sFqNhB",
"qiStatusId": "2$$xpB3Zs",
"msgId": "11297685$$MzZ83F",
"isAssociationRequired": false,
"link":
"https://portaldev.asite.com/da/notification?action_id=413&nlid=1_7_2138660_10626834_10972882_11297685_0$$FSs2wI",
"statusColor": "#EBAA32",
"statusName": "In Progress"
},
{
"creationDate": "2022-11-21 06:29:58.62",
"createdById": "1198854$$oIAw0G",
"updationDate": "2022-11-21 06:29:58.62",
"updatedById": "1198854$$oIAw0G",
"activitySeq": 3,
"activityType": 1,

"deliverableActivityId": "6156988$$xRfFQQ",

```
                "qiActivityId": "5598$$QhpQ7Z",
                "qiLocationId": "1509711$$sFqNhB",
                "qiStatusId": "1$$kubCDD",
                "isAssociationRequired": false,
                "link": "",
                "statusColor": "#F24043",
                "statusName": "Not Started"
            }
        ]
    }
],
"activities": [
    {
        "creationDate": "2022-11-21 06:29:58.62",
        "createdById": "1198854$$oIAw0G",
        "updationDate": "2022-11-21 06:29:58.62",
        "updatedById": "1198854$$oIAw0G",
        "appTypeId": 0,
        "isDeleted": false,
        "templateTypeId": 0,
        "folderId": "112712732$$TXXNi8",
        "folderPath": "CP-Master2\\General",
        "associationType": 1,
        "activityName": "General",
        "activitySeq": 1,
        "activityType": 0,
        "qiActivityId": "5596$$N98tTQ",
        "fileStatusIds": {
            "998": "---"
        }
    },
    {
        "creationDate": "2022-11-21 06:29:58.62",
        "createdById": "1198854$$oIAw0G",
        "updationDate": "2022-11-21 06:29:58.62",
        "updatedById": "1198854$$oIAw0G",
        "appTypeId": 2,
        "isDeleted": false,
        "templateTypeId": 0,
```

"instanceGroupId": "10626688$$ItchGg",
"appBuilderCode": "ASI-SITE",
"formTypeCode": "SITE",
"formTypeId": "10626834$$BPfz3e",
"formTypeName": "Site Tasks",
"associationType": 2,

```
            "activityName": "Site Tasks",
            "activitySeq": 2,
            "activityType": 0,
            "qiActivityId": "5597$$PUK8zq"
        },
        {
            "creationDate": "2022-11-21 06:29:58.62",
            "createdById": "1198854$$oIAw0G",
            "updationDate": "2022-11-21 06:29:58.62",
            "updatedById": "1198854$$oIAw0G",
            "appTypeId": 0,
            "isDeleted": false,
            "templateTypeId": 0,
            "associationType": 0,
            "activityName": "Hold Point",
            "activitySeq": 3,
            "activityType": 1,
            "qiActivityId": "5598$$QhpQ7Z"
        }
    ]
}
```


Name	Value
Method	GET
URL	https://adoddleak.asite.com/commonapi/workspace/{workspaceId}/documents/{documentId}/status

7.82 Document Status History API

Objective:

The Document Status History API returns history of the document status changes. It supports sorting and filtering for status changed by and status changed date fields and default sorting order is descending on status changed date. The status changed by field only supports equals operator.

Usage Rules:

- User must have been logged in to Asite Platform using Login API Function

Method details:

Headers:

Name	Value	Mandatory
ASessionID	Session ID from the resultant XML of Login API call	Yes

Request Parameters:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	revisionIds	String	Hashed comma separated revision Id's	No	
2	sortField	String	Sorting field name	No	
3	sortOrder	String	Sorting order (asc/desc)	No	desc
4	searchCriteria	JSON Array	Array of search criteria	No	
5	field	String	Field name in search criteria	Yes	
6	operator	Integer	Operator for search criteria • 1 – Equals • 5 – Greater than equals • 6 – Less than equals	Yes	
7	values	String Array	Array of value(s) to be search for search criteria	Yes	

- Request CURL example:

```
curl --location --request GET
'https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/documents
/<DocumentID>/statusHistory' \

--header 'Cookie: ASessionID=<ASessionID>; JSESSIONID=Cr-
9PWn7IoJWsDmc9cpCLQRdPBcXQjQUrngp9G6.adoddle' \

--header 'Accept: application/json' \

--header 'Content-Type: application/x-www-form-urlencoded' \

--data-urlencode 'revisionIds=<revisionID>' \
```

```
--data-urlencode 'sortField=<sortFieldName>' \
--data-urlencode 'sortOrder=asc' \
--data-urlencode 'searchCriteria={
  "field": "statusChangedDate",
  "operator": <Operator>,
  "values": [
    <DateTime>
  ]
 },
 {
  "field": "statusChangedBy",
  "operator": <Operator>,
  "values": [
    <Value>
  ]
 }'
```

- **Response:**


```
[
    {
        "newStatus": "In Progress",
        "oldStatus": "ToDO",
        "statusChangedBy": "Rutvik Patel",
        "statusChangedDate": "Dec 15, 2021#23:56 WET",
        "reasonForChange": "test",
  "remarks": "User Added to Distribution List.- Action \"For Information\" assigned and
    cleared",
        "revisionId": "20011197$$6vmmSL",
```

```
        "fileName": "18F9DFCA-test_Ver1.PNG"
    },
    {
        "newStatus": "---",
        "oldStatus": "In Progress",
        "statusChangedBy": "Ankit Motaval",
        "statusChangedDate": "Dec 1, 2022#13:53 WET",
        "reasonForChange": "test ---",
        "revisionId": "20011197$$6vmmSL",
        "fileName": "18F9DFCA-test_Ver1.PNG"
    }
]
```


• Response parameters details:

No	Field Name	Description
1	newStatus	New status of the document revision
2	oldStatus	Old status of the document revision
3	statusChangedBy	Name of the status changed by
4	statusChangedDate	Date of the status changed
6	reasonForChange	Reason for the status changed
7	remarks	Status changed remarks
8	revisionId	Document revision Id
9	fileName	Name of the file

7.83 Get Document Comments API

Objective:
The Document Comment API returns Comments and draft that are posted on a particular file.

Usage Rules:

- User must have been logged in to Asite Platform using Login API Function

Method Details:

Name	Value
Method	GET

URL	adoddleak.asite.com/commonapi/workspace/2138685$$u1tNPQ/documents /revisions/24381366$$jTBsVp/comments

Headers:

Name	Value	Mandatory
ASessionID	Session ID from the resultant XML of Login API call	Yes

Request parameters:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	worspaceId	Hashed Value	Project Id	Yes	
2	revisionId	Hashed Value	Revision Id	Yes	

- **Request CURL example:**

**curl --location 'https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID/documents/revisions/<revisionID>/comments' **
--header 'Cookie: ASessionID=<ASessionID>;'

- **Response:**


```
[
  {
    "commentId": "11555712$$XHc2Uz",
    "revisionId": "24381366$$jTBsVp",
    "replyCount": 0,
    "messageVO": [
      {
        "commentMessageId": "11562671$$tGFp0s",
        "commentTitle": "Draft 1st",
        "commentText": "<p>Draft test</p>",
        "commentCreationDate": "27-Dec-2022#09:41 IST",
```

```
            "messageAuthorId": "1930553$$aGQNkP",
            "authorName": "Tripti Singh, Asite Solutions Ltd",
            "parentMessageId": "11562671$$tGFp0s",
            "orgName": "Asite Solutions Ltd",
            "isDraft": true,
            "commentIdText": "DOC-COM005",
            "hasMarkup": false,
            "isPrivate": false,
            "messageCreatedBefore": "1 weeks, 6 hours, 57 minutes ago"
        }
    ]
},
{
    "commentId": "11555697$$SELe0r",
    "revisionId": "24381366$$jTBsVp",
    "replyCount": 1,
    "messageVO": [
        {
            "commentMessageId": "11562654$$htsERw",
            "commentTitle": "Test Comment 3rd",
            "commentText": "<p>test comment id msg 1</p>",
            "commentCreationDate": "23-Dec-2022#11:48 IST",
            "messageAuthorId": "1930553$$aGQNkP",
            "authorName": "Tripti Singh, Asite Solutions Ltd",
            "parentMessageId": "11562654$$htsERw",
            "orgName": "Asite Solutions Ltd",
            "isDraft": false,
            "commentIdText": "DOC-COM003",
            "hasMarkup": false,
            "isPrivate": false,
            "messageCreatedBefore": "1 weeks, 4 days, 4 hours, 50 minutes ago"
        },
        {
            "commentMessageId": "11562655$$4fovc1",
            "commentTitle": "Re: Test Comment 3rd",
            "commentText": "<p>comment msg id test reply 1</p>",
            "commentCreationDate": "23-Dec-2022#11:50 IST",
            "messageAuthorId": "1930553$$aGQNkP",
            "authorName": "Tripti Singh, Asite Solutions Ltd",
            "parentMessageId": "11562654$$htsERw",
            "orgName": "Asite Solutions Ltd",
            "isDraft": false,
            "commentIdText": "DOC-COM004",
            "hasMarkup": false,
            "isPrivate": false,
            "messageCreatedBefore": "1 weeks, 4 days, 4 hours, 48 minutes ago"
        }
    ]
},
```

```
  {
    "commentId": "11555465$$SiLcZB",
    "revisionId": "24381366$$jTBsVp",
    "replyCount": 1,
    "messageVO": [
      {
        "commentMessageId": "11562417$$7WxmXQ",
        "commentTitle": "Test comment 1",
        "commentText": "<p>Comment Api test 1st comment </p>",
        "commentCreationDate": "24-Nov-2022#11:58 IST",
        "messageAuthorId": "1930553$$aGQNkP",
        "authorName": "Tripti Singh, Asite Solutions Ltd",
        "parentMessageId": "11562417$$7WxmXQ",
        "orgName": "Asite Solutions Ltd",
        "isDraft": false,
        "commentIdText": "DOC-COM001",
        "hasMarkup": false,
        "isPrivate": false,
        "messageCreatedBefore": "1 months, 1 weeks, 3 days, 4 hours, 40 minutes
ago"
      },
      {
        "commentMessageId": "11562418$$Xh7tAr",
        "commentTitle": "Re: Test comment 1",
        "commentText": "<p>Comment API test 2nd comment</p>",
        "commentCreationDate": "24-Nov-2022#11:59 IST",
        "messageAuthorId": "1930553$$aGQNkP",
        "authorName": "Tripti Singh, Asite Solutions Ltd",
        "parentMessageId": "11562417$$7WxmXQ",
        "orgName": "Asite Solutions Ltd",
        "isDraft": false,
        "commentIdText": "DOC-COM002",
        "hasMarkup": false,
        "isPrivate": false,
        "messageCreatedBefore": "1 months, 1 weeks, 3 days, 4 hours, 39 minutes
ago"
      }
    ]
  }
]
```


- Response parameters details:

No	Field Name	Description
1	commentId	Id of the comment
2	revisionId	Revision Id of the File
3	replyCount	Reply count on the comment
4	messageVO	Array of comment messages.

4.1	commentMessageId	Id of particular comment message
4.2	commentTitle	Tittle of the comment
4.3	commentText	Exact comment text
4.4	commentCreationDate	Date and time of the comment creation
4.5	messageAuthorId	Id of messaging author
4.6	authorName	Name of the commenting author
4.7	parentMessageId	Id of the parent message
4.8	orgName	Organisation name of the commenting message author
4.9	isDraft	Show whether it is a draft or not
4.10	commentIdText	Text comment Id
4.11	isPrivate	Show whether it is a private message/draft or not
4.12	messageCreatedBefore	Show how much time before message was created
4.13	isAccess	User able to access or not. Returns true/false

7.84 Edit Form Message API

Objective:

Update the existing ORI forms for the given formId and messageId.

Usage Rules:

1. User must be logged in to Asite Platform using Login API Function
2. Users should call ***Workspace List***, ***Get Form JSON*** *and* ***Form Search API*** to get projectId, instance group Id and *existing form* JSON of given form id.

Method details:

Name	Value
Method	POST
URL	Please refer below URL for different DC projects.
UK	https://adoddleak.asite.com/commonapi/form/editFormMsg
US	https://adoddleb.asite.com/commonapi/form/editFormMsg
AUS	https://adoddled.asite.com/commonapi/form/editFormMsg
US Gov	https://adoddleusgov.asite.com/commonapi/form/editFormMsg
UAE	https://adoddleuae.asite.com/commonapi/form/editFormMsg
KSA	https://adoddleksa.asite.com/commonapi/form/editFormMsg

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Request parameters:

Name	Value	Mandatory
formMetaData	JSONObject contains details for form creation.	Yes
attachment	File object. It will upload as external attachments of the form. In case of multiple attachment please define attachment as parameter again and send a file with it.	No
Inline_(AttachmentName) Note: The name of the parameter should be mentioned against the field in which we want our Inline Attachment to be attached.	File to uploaded	No

Please refer below table for Json (formMetaData) fields:

No	Field Name	Description	Mandatory
1	hashProjectId	Hashed value of projectId.	Yes
2	hashInstanceGroupId	Hashed Value of instance groupId.	Yes
3	formId	Hashed Value of Form Id	Yes
4	messageId	Hashed Value of Message Id	Yes
5	fieldJson	Form fields JSON. For which blank JSON can be obtained from getFormTemplate API call.	Yes
4	formAssociateDoc	JSONArray of documents which want to be associated with form.	No
	projectId	Hashed value of projectId of associate document.	Yes, If associate document

	folderId	Hashed value of folderId of associate document	Yes, If associate document
	revisionId	Hashed value of revisionId of associate document	Yes, If associate document
5	formAssociateApp	JSONArray of forms which want to associate with form.	No
	projectId	Hashed value of projectId of associate form.	Yes, If associate form
	FormId	Hashed value of formId of associate form.	Yes, If associate form
6	FormAssociateComment	JSONArray of comments which want to be associated with form.	No
	projectId	Hashed value of projectId of associate comment.	Yes, If associate comment
	revisionId	Hashed User Id to distribute comments to users.	Yes
	commented		Yes
	commentMsgId	Action due date. Need to specify based on user locale.	Yes

7	distributionDetails	JSONObject of form distribution details.	No
	selectedDistUsers	JSONArray of users to whom forms get distribute	No
	hUserID	Hashed User Id	Yes, if distribute to user
	hActionID	Hashed actionId to distribute action.	Yes, if distribute to user

	user_type	Type of User. 1 = Online 2 = Paper user	No
	actionDueDate	Action due date. Need to specify based on user locale.	Yes
	selectedDistOrgs	JSONArray of organization to whom forms get distribute	Yes
	hOrgID	Action due date. Need to specify based on user locale.	Yes, if distribute to Org
	hActionID	Hashed actionId to distribute action.	Yes, if distribute to Org
	actionDueDate	Action due date. Need to specify based on user locale.	Yes, if distribute to Org
	selectedDistRoles	JSONArray of roles to whom forms get distribute	No
	hRoleID	Hashed role Id	Yes, if distribute to role
	hActionID	Hashed actionId to distribute action.	Yes, if distribute to role
	actionDueDate	Action due date. Need to specify based on user locale.	Yes, if distribute to role
	selectedDistGroups	Comma separated string of distribution group to whom form get distribute	No

If distribution defined within form and want to use that user needs to define distribution details in fieldJson as below:

"Auto_Distribute_Users": [{

"DS_ACTIONDUEDATE": "YYYY-MM-DD",

"DS_FORMACTIONS": "actionId#actionName",

"DS_PROJDISTUSERS": "userId # user name , org. name"

}]

Sample:

"Auto_Distribute_Users": [{

"DS_ACTIONDUEDATE": "2021-12-11",

"DS_FORMACTIONS": "3#Respond",

"DS_PROJDISTUSERS": "507744 # Haresh Asal , Asite Solutions"

}]

For action and its relevant Ids, please refer below details:

Action name	**Action Id**
For Acknowledgement	37
For Information	7
Respond	3
Assign Status	2
Attach Docs	5
Distribute	6
For Action	36
Review Draft	34

- **Request CURL example:**

```
curl --location 'https://adoddleqaak.asite.com/commonapi/form/editFormMsg' \
--header 'Cookie: ASessionID=<ASessionID>' \
--form 'formMetaData="{
   \"fieldJson\": {
      \"myFields\": {
```

```
            \"Checkbox\": \"\",
            \"Textbox\": \"Hello this is test create message\",
            \"extraParams\": null,
            \"ORI_FORMTITLE\": \"Test Edit message\",
            \"RichText_Area\": \"Hello this is test create message,Test create message\",
            \"Asite_System_Data_Read_Write\": {
                \"ORI_MSG_Fields\": \"Edit Msg api test\"
            }
        }
    },
    \"hashProjectId\": \"<workspaceID>\",
    \"hashInstanceGroupId\": \"<InstanceGroupID>\",
    \"formId\": \"<FromID>",
    \"msgId\": \"<msgID>\"
}'"
```

- **Response:**

```
{
    "formId": "10962159$$ZD0GQF",
    "msgId": "11284957$$BNPuIb"
}
```

7.85 Get Users API

Objective

The Get Users API returns list of users for a particular organization.

Usage Rules

1. User must have been logged in to Asite Platform using Login API Function
2. Syntax of cURL command:

   **curl --location 'https://adoddleqaak.asite.com/commonapi/organization/users' **

   **--header 'Cookie: AsessionID=<ASessionID>;' **

   --header 'Accept: application/json'

Request:

1. Request method details:

Name	Value
Method	GET
URL	https://adoddle.asite.com/commonapi/organization/users

Response:

• Response parameters details:

No	Field Name	Description
1	orgName	Organization name
2	orgId	Organization Id
3	users	Array of users for a particular organization

3.1	firstName	User first name
3.2	lastName	User last name
3.3	userEmailId	User email id
3.4	userSubscriptionPlanId	User subscription plan Id
3.5	userSubscriptionTypeId	User subscription type Id

 Response example:

```
{
  "orgName":"Asite Solutions",
  "orgId":3,
```

```
  "users":[
    {
        "firstName": "LT1025",
"lastName": "LNAME",
        "userEmailId": "user1025@asite.com",
        "userSubscriptionPlanId": 0,
        "userSubscriptionTypeId": 3,
        "userId": "681676$$W2ON0W"
      },
      {
        "firstName": "LT1026",
"lastName": "LNAME",
        "userEmailId": "user1026@asite.com",
        "userSubscriptionPlanId": 0,
        "userSubscriptionTypeId": 3,
        "userId": "681681$$TsOhmV"
      }
  ]
```


7.86 Custom Attribute Set Details API

Objective

This API is used to get custom attribute set details, hierarchical attribute set details and folder details on which particular attribute set is applied for a specified attribute set and project.

Usage Rules

1. User must have been logged in to Asite Platform using Login API Function **Method details:**

Name	Value
Method	Post
Sample URL	https://adoddle.asite.com/commonapi/manageAttribute/getAttributeSetDetails

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Request Parameters

Parameters	Description	Required

projectId	Provide hashed projectId of which attributes want to retrieve.	Either projectId or projectName need to be passed
projectName	Provide project name of which attributes want to retrieve.	Either projectId or projectName need to be passed
attributeSetId	Provide attribute set id of which attribute details want to retrieve	Mandatory Field
includeAttributeDetails	Provide Boolean value either true or false	No, by default: false
includeFolderDetails	Provide Boolean value either true or false	No, by default false

Request cURL example:

1.1. This is old api behaviour which return hierarchical attribute set details for a particular attribute set and project:

```
curl --location
'https://adoddle.asite.com/commonapi/manageAttribute/getAttributeSetDetails' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Accept: application/json' \
--data-urlencode 'projectId=<ProjectID>' \
--data-urlencode 'attributeSetId=<AttributeSetId>'
```

Sample Response:


```
[
  {
    "childAttributeName": "Attribute B",
    "parentAttributeName": "Attribute A",
    "parentChildRelation": {
      "A 101": "B 101#B 102",
      "A 102": "B 102"
    }
  },
  {
    "childAttributeName": "Attribute P2",
```

```
        "parentAttributeName": "Attribute A",
        "parentChildRelation": {
            "A 101": "B1"
        }
    },
    {
        "childAttributeName": "Attribute D",
        "parentAttributeName": "Attribute C",
        "parentChildRelation": {
            "C 103": "D 103",
            "C 102": "D 102",
            "C 101": "D 101"
        }
    }
]
```


1.2. When includeAttributeDetails is passed as true then return details required for specified attribute set and project along with hierarchical attribute set details.

```
curl --location
'https://adoddle.asite.com/commonapi/manageAttribute/getAttributeSetDetails' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Accept: application/json' \
--data-urlencode 'projectId=<ProjectID>' \
--data-urlencode 'attributeSetId=<AttributeSetId>' \
--data-urlencode 'includeAttributeDetails=true'
```

Sample Response:


```
{
    "isActive": true,
    "isDefault": false,
    "attributeList": [
        {
            "attributeId": 1023,
            "attributeName": "Attribute A",
            "isCompound": false,
            "autoGenSequence": false
        },
        {
            "attributeId": 1024,
            "attributeName": "Attribute B",
            "isCompound": false,
            "autoGenSequence": false
        },
        {
            "attributeId": 1025,
            "attributeName": "Attribute C",
            "isCompound": false,
```

```
        "autoGenSequence": false
    },
    {
        "attributeId": 1026,
        "attributeName": "Attribute D",
        "isCompound": false,
        "autoGenSequence": false
    },
    {
        "attributeId": 1084,
        "attributeName": "Doc Ref",
        "isCompound": true,
        "autoGenSequence": true,
        "sequenceLevel": "29",
        "charLimit": "3",
        "startsFrom": "201",
        "appliesAs": "suffix",
        "separator": "_",
        "subAttributeList": [
            {
                "attributeId": 1023,
                "attributeName": "Attribute A",
                "sequenceId": 1
            },
            {
                "attributeId": 1024,
                "attributeName": "Attribute B",
                "sequenceId": 2
            },
            {
                "attributeId": 1025,
                "attributeName": "Attribute C",
                "sequenceId": 3
            }
        ]
    },
    {
        "attributeId": 1035,
        "attributeName": "Attribute S1",
        "isCompound": false,
        "autoGenSequence": false
    },
    {
        "attributeId": 1031,
```

```
            "attributeName": "Attribute P2",
            "isCompound": false,
            "autoGenSequence": false
        }
    ],
    "hierarchicalAttributeSet": [
        {
            "childAttributeName": "Attribute B",
            "parentAttributeName": "Attribute A",
            "parentChildRelation": {
                "A 101": "B 101#B 102",
                "A 102": "B 102"
            }
        },
        {
            "childAttributeName": "Attribute P2",
            "parentAttributeName": "Attribute A",
            "parentChildRelation": {
                "A 101": "B1"
            }
        },
        {
            "childAttributeName": "Attribute D",
            "parentAttributeName": "Attribute C",
            "parentChildRelation": {
                "C 103": "D 103",
                "C 102": "D 102",
                "C 101": "D 101"
            }
        }
    ]
}
```


1.3. When includeAttributeDetails and includeFolderDetails is passed as true then return details required for specified attribute set and project along with hierarchical attribute set details and folder details on which this attribute set is applied.

```
curl --location
'https://adoddle.asite.com/commonapi/manageAttribute/getAttributeSetDetails' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Accept: application/json' \
--data-urlencode 'projectId=<ProjectID>' \
--data-urlencode 'attributeSetId=<AttributeSetId>' \
--data-urlencode 'includeAttributeDetails=true' \
--data-urlencode 'includeFolderDetails=true'
```

Sample Response:


```
{
    "isActive": true,
    "isDefault": false,
    "attributeList": [
        {
            "attributeId": 1023,
            "attributeName": "Attribute A",
            "isCompound": false,
            "autoGenSequence": false
        },
        {
            "attributeId": 1024,
            "attributeName": "Attribute B",
            "isCompound": false,
            "autoGenSequence": false
        },
        {
            "attributeId": 1025,
            "attributeName": "Attribute C",
            "isCompound": false,
            "autoGenSequence": false
        },
        {
            "attributeId": 1026,
            "attributeName": "Attribute D",
            "isCompound": false,
            "autoGenSequence": false
        },
        {
            "attributeId": 1084,
            "attributeName": "Doc Ref",
            "isCompound": true,
            "autoGenSequence": true,
            "sequenceLevel": "29",
            "charLimit": "3",
            "startsFrom": "201",
            "appliesAs": "suffix",
            "separator": "_",
            "subAttributeList": [
                {
                    "attributeId": 1023,
                    "attributeName": "Attribute A",
                    "sequenceId": 1
```

```
            },
            {
                "attributeId": 1024,
                "attributeName": "Attribute B",
                "sequenceId": 2
            },
            {
                "attributeId": 1025,
                "attributeName": "Attribute C",
                "sequenceId": 3
            }
        ]
    },
    {
        "attributeId": 1035,
        "attributeName": "Attribute S1",
        "isCompound": false,
        "autoGenSequence": false
    },
    {
        "attributeId": 1031,
        "attributeName": "Attribute P2",
        "isCompound": false,
        "autoGenSequence": false
    }
],
"hierarchicalAttributeSet": [
    {
        "childAttributeName": "Attribute B",
        "parentAttributeName": "Attribute A",
        "parentChildRelation": {
            "A 101": "B 101#B 102",
            "A 102": "B 102"
        }
    },
    {
        "childAttributeName": "Attribute P2",
        "parentAttributeName": "Attribute A",
        "parentChildRelation": {
            "A 101": "B1"
        }
    },
    {
        "childAttributeName": "Attribute D",
        "parentAttributeName": "Attribute C",
        "parentChildRelation": {
            "C 103": "D 103",
            "C 102": "D 102",
            "C 101": "D 101"
```

```
            }
        }
    ],
    "folderList": [
        {
            "folderPath": "am_project\\Folder 1",
            "folderName": "Folder 1",
            "folderId": 108973843
        },
{
            "folderPath": "am_project\\Folder 1\\Folder 1.1",
            "folderName": "Folder 1.1",
            "folderId": 108973860
        }
    ]
}
```


1.4. When includeFolderDetails is passed as true then return folder details on which this attribute set is applied along with hierarchical attribute set details.

```
curl --location
'https://adoddleqaak.asite.com/commonapi/manageAttribute/getAttributeSetDetails' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--header 'Accept: application/json' \
--data-urlencode 'projectId=<ProjectId>' \
--data-urlencode 'attributeSetId=<AttributeSetId>' \
--data-urlencode 'includeFolderDetails=true'
```

Sample Response:


```
{
    "isActive": true,
    "isDefault": false,
    "hierarchicalAttributeSet": [
        {
            "childAttributeName": "Attribute B",
            "parentAttributeName": "Attribute A",
            "parentChildRelation": {
                "A 101": "B 101#B 102",
                "A 102": "B 102"
            }
        },
        {
```

```
            "childAttributeName": "Attribute P2",
            "parentAttributeName": "Attribute A",
            "parentChildRelation": {
                "A 101": "B1"
            }
        },
        {
            "childAttributeName": "Attribute D",
            "parentAttributeName": "Attribute C",
            "parentChildRelation": {
                "C 103": "D 103",
                "C 102": "D 102",
                "C 101": "D 101"
            }
        }
    ],
    "folderList": [
        {
            "folderPath": "am_project\\Folder 1",
            "folderName": "Folder 1",
            "folderId": 108973843
        },
{
            "folderPath": "am_project\\Folder 1\\Folder 1.1",
            "folderName": "Folder 1.1",
            "folderId": 108973860
        }
    ]
}
```


7.87 Team Directory API new version

Objective:

The Team Directory API returns a list of users having access with roles to the workspace.

Usage Rules:

- User must have logged in to Asite Platform using Login API Function.
- User must have executed Workspace list API to get the URL for team directory API.

Method details:

Name	Value
Method	GET
URL	https://adoddleqaak.asite.com/commonapi/workspace/teamdirectory

Headers:

Name	Value	Mandatory
ASessionID	Session ID from the resultant XML of Login API call	Yes
Accept	application/xml or application/json	No

Request Parameters:

No	Field Name	Description	Mandatory
1	projectName	Project Name	Yes
2	orgId	Hashed organization Id	No
3	roleId	Hashed Role Id	No
4	userName	Username	No

- **Request CURL example:**

**curl --location 'https://adoddleqaak.asite.com/commonapi/workspace//teamdirectory;projectName=<ProjectName>' **

**--header 'Cookie: AsessionID=<AsessionID>;' **

--header 'Accept: application/json'

- **JSON Response:**


```
[
        {
                "firstName": "Ankit",
                "lastName": "Motaval",
                "name": "Ankit Motaval",
                "orgName": "N K RRR",
                "workspaceRole": "Workspace - Administrator",
                "telephone": "999",
                "emailId": "amotaval@asite.com",
                "id": "1109976$$boCouy",
                "orgId": "3$$QHx6eQ"
        },
        {
                "firstName": "Rupesh",
```

```
            "lastName": "Raghani",
            "name": "Rupesh Raghani",
            "orgName": "N K RRR",
            "workspaceRole": "Workspace - Administrator",
            "emailId": "rraghani@asite.com",
            "id": "1186640$$hAiR52",
            "orgId": "3$$QHx6eQ"
        }
]
```


• **XML Response**


```
<?xml version="1.0" encoding="UTF-8"?>
<users>
    <user>
        <firstName>Ankit</firstName>
        <lastName>Motaval</lastName>
        <name>Ankit Motaval</name>
        <orgName>N K RRR</orgName>
        <workspaceRole>Workspace - Administrator</workspaceRole>
        <telephone>999</telephone>
        <emailId>amotaval@asite.com</emailId>
        <id>1109976$$boCouy</id>
        <orgId>3$$QHx6eQ</orgId>
    </user>
    <user>
        <firstName>Rupesh</firstName>
        <lastName>Raghani</lastName>
        <name>Rupesh Raghani</name>
        <orgName>N K RRR</orgName>
        <workspaceRole>Workspace - Administrator</workspaceRole>
        <emailId>rraghani@asite.com</emailId>
        <id>1186640$$hAiR52</id>
        <orgId>3$$QHx6eQ</orgId>
    </user>
</users>
```


• Response parameters details:

No	Field Name	Description
1	firstName	First Name of the user

2	lastName	Last Name of the user
3	name	User Name of the user
4	orgName	Organization Name of the user
5	workspaceRole	Workspace role name of the user
6	emailId	Email Id of the user
7	id	User Id of the user
8	orgId	Organization Id of the user

7.88 Quality Plan Location-wise Details from Template

Objective

This API return's locations details along with its associations for a specific plan. It supports project_template_name from input parameters and based on project_template_name returns cloned projects plan locations along with associations. Project template name can be multiple comma-separated

Usage Rules

- User must have been logged in to Asite Platform using Login API Function

- Request method details:

Name	Value
Method	GET
URL	https://adoddleak.asite.com/commonapi/qaplan/getQAPlanLocationWiseFromTemplates ?project_template_name=<Comma separated Name of Template> &recordStart=<recordStartFrom> &recordLimit=<recordLimit>

Method details:

Name	Value
Method	GET

URL	https://adoddleak.asite.com/commonapi/qaplan/getQAPlanLocationWiseFromTemplates

Headers:

Name	Value	Mandatory
ASessionID	Session ID from the resultant XML of Login API call	Yes

Request Parameters:

No	Field Name	Description	Mandatory
1	project_template_name	Comma separated Name of Template	Yes
2	recordStart	Number of leading documents to skip	Yes
3	recordLimit	Number of documents to return after recordStart (Cannot exceed 1000)	Yes

- **Request cURL example:**

**curl --location 'https://adoddleqaak.asite.com/commonapi/qaplan/getQAPlanLocationWiseFromTemplates?project_template_name=<Comma separated Name of Template>&recordStart=<recordStartFrom>&recordLimit=<recordLimit>' **
**--header 'Cookie: ASessionID=<ASessionID>; JSESSIONID=bvFMkAW1ymUJOnzm1uVgGvnRUBrR8LkwINhPX_Yf.adoddle' **
--header 'Accept: application/json'

Response:

- Response parameters details:

No	Field Name	Description
1	totalRecordCount	Total number of records plans available for template
2	data	Locations and association data plan wise
2.1	projectPlanDetails	Project and plan id with template Id and template Name
2.1.1	projectId	ID of the project
2.1.2	projectName	Name Of the Project
2.1.3	planId	ID of the plan
2.1.4	planName	Name Of the Plan
2.1.5	templateId	ID of the Template
2.1.6	templateName	Name of the Template

2.2	Locations	Array of locations Associated with plan
2.2.1	creationDate	Location creation Date
2.2.2	updationDate	Location updation Date
2.2.3	updatedById	User Id of user who updated location
2.2.4	isDeleted	Location deleted or not. Returns true/false
2.2.5	locationPath	Path of the location
2.3.6	qiLocationId	Id of Quality Plan Location
2.2.7	qiParentId	Id of Parent Quality Plan
2.2.8	Name	Name of the location
2.2.9	isAssociationRequired	Allowed location level association or not
2.2.10	percentageCompletion	Percentage completion of location
2.3	Association	Array of Association linked with location

2.3.1	creationDate	Association Creation Date
2.3.2	createdById	Association created user id
2.3.3	updationDate	Association updation date
2.3.4	updatedById	Association updation user id
2.3.6	documentId	Associated Document's Id
2.3.7	associatedFolderId	Associated Document's folder Id
2.3.8	activitySeq	Sequence of Activity
2.3.9	qiStatusId	Status id of the association.
2.3.10	statusName	Activity Status Name (2 = In Progress/ 3 = Closed/ 1 = Not started)
2.3.11	startusColor	Activity Status colour
2.3.12	deliverableActivityId	It's Id of Activity in which document/form is associated
2.3.13	qiLocationId	Location Id
2.3.14	associateRevId	Revision Id of associated document
2.3.15	associateProjectId	ProjectId of associated document
2.3.16	isAssociationRequired	Permission to check that association required or not (true/false)
2.3.17	activityTypeId	Activity Type Id (form Activity/ file Activity)

2.3.18	link	Associated document/ Form direct link
2.3.19	formTypeId	FormTypeId of associated Form
2.3.20	msgId	Message Id of associated form
2.3.21	associatedFormId	Id of associated form

- **Response example:**


```
{
    "totalRecordCount": 5,
    "data": [
        {
            "projectPlanDetails": {
                "projectID": "2134620$$aQ5FD2",
                "planId": "5287$$Fj72kH",
                "projectName": "Yash",
                "planName": "Quality Plan",
                "templateId": "0$$hNcK2l"
            },
            "Location": {
                "creationDate": "2023-06-13 07:47:34.017",
"createdById": "1930349$$oJr4r0",
                "updationDate": "2023-06-13 07:47:34.017",
                "updatedById": "1930349$$oJr4r0",
                "siteLocationId": "112721411",
                "isDeleted": false,
                "locationPath": "Yash\\General",
                "isFileUploaded": false,
                "qiLocationId": "1510163$$3NeSjf",
                "qiParentId": "1510162$$u0M1xa",
                "name": "General",
                "siteFolderId": "112721411$$R5gtwu",
                "isLinked": true,
                "isAssociationRequired": true,
                "percentageCompelition": 0,
                "deliverableActivities": [
                    {
```

```
            "creationDate": "2023-06-13 07:47:52.667",
            "createdById": "1930349$$oJr4r0",
            "updationDate": "2023-06-13 07:47:52.667",
            "updatedById": "1930349$$oJr4r0",
            "isAccess": false,
            "isWorking": true,
            "activitySeq": 1,
            "qiStatusId": "1$$rnx0zB",
            "statusName": "Not Started",
            "statusColor": "#4CB0F0",
            "deliverableActivityId": "6158337$$WYrdmg",
            "qiLocationId": "1510163$$3NeSjf",
            "qiActivityId": "5775$$EtavkI",
            "associateRevId": "$$khtZ3p",
            "isAssociationRequired": true,
            "activityType": 0,
            "link": "",
            "generateURI": true
        },
        {
            "creationDate": "2023-06-13 07:47:52.667",
            "createdById": "1930349$$oJr4r0",
            "updationDate": "2023-06-13 07:47:52.667",
            "updatedById": "1930349$$oJr4r0",
            "isAccess": false,
            "isWorking": true,
            "activitySeq": 2,
            "qiStatusId": "1$$rnx0zB",
            "statusName": "Not Started",
            "statusColor": "#4CB0F0",
            "deliverableActivityId": "6158338$$60bovx",
            "qiLocationId": "1510163$$3NeSjf",
            "qiActivityId": "5776$$yU9SP1",
            "associateRevId": "$$khtZ3p",
            "isAssociationRequired": true,
            "activityType": 0,
            "link": "",
            "generateURI": true
        }
    ],
```

```
                "hasLocation": false,
                "generateURI": true
            }
        },
        {
            "projectPlanDetails": {
                "projectID": "2134620$$aQ5FD2",
                "planId": "5287$$Fj72kH",
                "projectName": "Yash",
                "planName": "Quality Plan",
                "templateId": "0$$hNcK2l"
            },
            "Location": {
                "creationDate": "2023-06-13 07:47:34.017",
"createdById": "1930349$$oJr4r0",
                "updationDate": "2023-06-13 07:47:34.017",
                "updatedById": "1930349$$oJr4r0",
                "siteLocationId": "112721412",
                "isDeleted": false,
                "locationPath": "Yash\\General\\Loc1",
                "isFileUploaded": false,
                "qiLocationId": "1510164$$5klULe",
                "qiParentId": "1510163$$3NeSjf",
                "name": "Loc1",
                "siteFolderId": "112721412$$FdZQOZ",
                "isLinked": true,
                "isAssociationRequired": true,
                "percentageCompelition": 0,
                "deliverableActivities": [
                    {
                        "creationDate": "2023-06-13 07:47:52.667",
"createdById": "1930349$$oJr4r0",
                        "updationDate": "2023-06-13 07:47:52.667",
                        "updatedById": "1930349$$oJr4r0",
                        "isAccess": false,
                        "isWorking": true,
                        "activitySeq": 1,
                        "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                        "statusColor": "#4CB0F0",
```

```
                        "deliverableActivityId": "6158339$$nww6S7",
                        "qiLocationId": "1510164$$5klULe",
                        "qiActivityId": "5775$$EtavkI",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 0,
                        "link": "",
                        "generateURI": true
                    },
                    {
                        "creationDate": "2023-06-13 07:47:52.667",
"createdById": "1930349$$oJr4r0",
                       "updationDate": "2023-06-13 07:47:52.667",
                       "updatedById": "1930349$$oJr4r0",
                       "isAccess": false,
                       "isWorking": true,
                        "activitySeq": 2,
                        "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                       "statusColor": "#4CB0F0",
                        "deliverableActivityId": "6158340$$GpLQ0O",
                        "qiLocationId": "1510164$$5klULe",
                        "qiActivityId": "5776$$yU9SP1",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 0,
                        "link": "",
                        "generateURI": true
                    }
                ],
                "hasLocation": false,
                "generateURI": true
            }
        },
        {
            "projectPlanDetails": {
                "projectID": "2134620$$aQ5FD2",
                "planId": "5287$$Fj72kH",
                "projectName": "Yash",
                "planName": "Quality Plan",
```

```
                "templateId": "0$$hNcK2l"
            },
            "Location": {
                "creationDate": "2023-06-13 07:47:34.017",
 "createdById": "1930349$$oJr4r0",
                "updationDate": "2023-06-13 07:47:34.017",
                "updatedById": "1930349$$oJr4r0",
                "siteLocationId": "112721413",
                "isDeleted": false,
                "locationPath": "Yash\\General\\Loc2",
                "isFileUploaded": false,
                "qiLocationId": "1510165$$tJqKNI",
                "qiParentId": "1510163$$3NeSjf",
                "name": "Loc2",
                "siteFolderId": "112721413$$LjzKyF",
                "isLinked": true,
                "isAssociationRequired": true,
                "percentageCompelition": 0,
                "deliverableActivities": [
                    {
                        "creationDate": "2023-06-13 07:47:52.667",
                        "createdById": "1930349$$oJr4r0",
                        "updationDate": "2023-06-13 07:47:52.667",
                        "updatedById": "1930349$$oJr4r0",
                        "isAccess": false,
                        "isWorking": true,
                        "activitySeq": 1,
                       "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                        "statusColor": "#4CB0F0",
                        "deliverableActivityId": "6158341$$i73d9L",
                        "qiLocationId": "1510165$$tJqKNI",
                        "qiActivityId": "5775$$EtavkI",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 0,
                        "link": "",
                        "generateURI": true
                    },
                    {
```

```
                    "creationDate": "2023-06-13 07:47:52.667",
                    "createdById": "1930349$$oJr4r0",
                    "updationDate": "2023-06-13 07:47:52.667",
                    "updatedById": "1930349$$oJr4r0",
                    "isAccess": false,
                    "isWorking": true,
                    "activitySeq": 2,
                    "qiStatusId": "1$$rnx0zB",
                    "statusName": "Not Started",
                    "statusColor": "#4CB0F0",
                    "deliverableActivityId": "6158342$$kD2ZJD",
                    "qiLocationId": "1510165$$tJqKNI",
                    "qiActivityId": "5776$$yU9SP1",
                    "associateRevId": "$$khtZ3p",
                    "isAssociationRequired": true,
                    "activityType": 0,
                    "link": "",
                    "generateURI": true
                }
            ],
            "hasLocation": false,
            "generateURI": true
        }
    },
    {
        "projectPlanDetails": {
            "projectID": "2134620$$aQ5FD2",
            "planId": "5288$$jKAMwn",
        "projectName": "Yash",
          "planName": "Check Plan",
          "templateId": "0$$hNcK2l"
        },
        "Location": {
            "creationDate": "2023-06-14 06:02:50.977",
        "createdById": "1930349$$oJr4r0",
            "updationDate": "2023-06-14 06:02:50.977",
            "updatedById": "1930349$$oJr4r0",
            "siteLocationId": "112710179",
            "isDeleted": false,
            "locationPath": "Yash\\abc",
```

```
                "isFileUploaded": false,
                "qiLocationId": "1510271$$2OqmT4",
                "qiParentId": "1510270$$r6gA4I",
                "name": "abc",
                "siteFolderId": "112710179$$fbYvDl",
                "isLinked": true,
                "isAssociationRequired": true,
                "percentageCompelition": 0,
                "deliverableActivities": [
                    {
                        "creationDate": "2023-06-14 06:03:17.483",
"createdById": "1930349$$oJr4r0",
                        "updationDate": "2023-06-14 06:03:17.483",
                        "updatedById": "1930349$$oJr4r0",
                        "isAccess": false,
                        "isWorking": true,
                        "activitySeq": 1,
                        "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                        "statusColor": "#4CB0F0",
                        "deliverableActivityId": "6158863$$izMyIx",
                        "qiLocationId": "1510271$$2OqmT4",
                        "qiActivityId": "5777$$Z6QD7G",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 0,
                        "link": "",
                        "generateURI": true
                    },
                    {
                        "creationDate": "2023-06-14 06:03:17.483",
"createdById": "1930349$$oJr4r0",
                        "updationDate": "2023-06-14 06:03:17.483",
                        "updatedById": "1930349$$oJr4r0",
                        "isAccess": false,
                        "isWorking": true,
                        "activitySeq": 2,
                        "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                        "statusColor": "#4CB0F0",
```

```
                        "deliverableActivityId": "6158864$$SJCKBD",
                        "qiLocationId": "1510271$$2OqmT4",
                        "qiActivityId": "5778$$WZOSQF",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 0,
                        "link": "",
                        "generateURI": true
                    },
                    {
                        "creationDate": "2023-06-14 06:03:17.483",
"createdById": "1930349$$oJr4r0",
                        "updationDate": "2023-06-14 06:03:17.483",
                        "updatedById": "1930349$$oJr4r0",
                        "isAccess": false,
                        "isWorking": false,
                        "activitySeq": 3,
                        "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                        "statusColor": "#4CB0F0",
                        "deliverableActivityId": "6158865$$ZYF9Zn",
                        "qiLocationId": "1510271$$2OqmT4",
                        "qiActivityId": "5779$$vS8xaW",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 1,
                        "link": "",
                        "generateURI": true
                    }
                ],
                "hasLocation": false,
                "generateURI": true
            }
        },
        {
            "projectPlanDetails": {
                "projectID": "2134620$$aQ5FD2",
                "planId": "5288$$jKAMwn",
"projectName": "Yash",
                "planName": "Check Plan",
```

```
        "templateId": "0$$hNcK2l"
    },
    "Location": {
        "creationDate": "2023-06-14 06:02:50.977",
        "createdById": "1930349$$oJr4r0",
        "updationDate": "2023-06-14 06:02:50.977",
        "updatedById": "1930349$$oJr4r0",
        "siteLocationId": "112731715",
        "isDeleted": false,
        "locationPath": "Yash\\123",
        "isFileUploaded": false,
        "qiLocationId": "1510272$$aIaCh3",
        "qiParentId": "1510270$$r6gA4I",
        "name": "123",
        "siteFolderId": "112731715$$YPsQcj",
        "isLinked": true,
        "isAssociationRequired": true,
        "percentageCompelition": 0,
        "deliverableActivities": [
            {
                "creationDate": "2023-06-14 06:03:17.483",
                "createdById": "1930349$$oJr4r0",
                "updationDate": "2023-06-14 06:03:17.483",
                "updatedById": "1930349$$oJr4r0",
                "isAccess": false,
                "isWorking": true,
                "activitySeq": 1,
                "qiStatusId": "1$$rnx0zB",
                "statusName": "Not Started",
                "statusColor": "#4CB0F0",
                "deliverableActivityId": "6158866$$m92ckw",
                "qiLocationId": "1510272$$aIaCh3",
                "qiActivityId": "5777$$Z6QD7G",
                "associateRevId": "$$khtZ3p",
                "isAssociationRequired": true,
                "activityType": 0,
                "link": "",
                "generateURI": true
            },
            {
```

"creationDate": "2023-06-14 06:03:17.483",
"createdById": "1930349$$oJr4r0",
"updationDate": "2023-06-14 06:03:17.483",
"updatedById": "1930349$$oJr4r0",
"isAccess": false,
"isWorking": true,
"activitySeq": 2,
"qiStatusId": "1$$rnx0zB",
"statusName": "Not Started",
"statusColor": "#4CB0F0",
"deliverableActivityId": "6158867$$fpNKul",
"qiLocationId": "1510272$$aIaCh3",
"qiActivityId": "5778$$WZOSQF",
"associateRevId": "$$khtZ3p",
"isAssociationRequired": true,
"activityType": 0,

```
                        "link": "",
                        "generateURI": true
                    },
                    {
                        "creationDate": "2023-06-14 06:03:17.483",
                        "createdById": "1930349$$oJr4r0",
                        "updationDate": "2023-06-14 06:03:17.483",
                        "updatedById": "1930349$$oJr4r0",
                        "isAccess": false,
                        "isWorking": false,
                        "activitySeq": 3,
                        "qiStatusId": "1$$rnx0zB",
                        "statusName": "Not Started",
                        "statusColor": "#4CB0F0",
                        "deliverableActivityId": "6158868$$20RDBZ",
                        "qiLocationId": "1510272$$aIaCh3",
                        "qiActivityId": "5779$$vS8xaW",
                        "associateRevId": "$$khtZ3p",
                        "isAssociationRequired": true,
                        "activityType": 1,
                        "link": "",
                        "generateURI": true
                    }
                ],
                "hasLocation": false,
                "generateURI": true
            }
        }
    ] }
```


7.89 Quality Plan Activities Details from Template

Objective

This API returns activities details for a specific plan. It supports templateNames from input parameters and based on templateNames returns cloned projects plan Activity.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function
- Request method details:

Name	Value
Method	GET

URL	https://adoddleak.asite.com/commonapi/qaplan/getQAPlanActivitiesFromTemplates;
	searchCriteria={
	"criteria" : [{
	"field" : <name of field 1>,
	"operator" : <operator id>,
	"values" : [<value 1>,<value 2>,...]
	}
	project_template_name: <Comma separated Name of Template>,
	recordLimit:<limit of records>,
	recordStart:<start of records>
	}

Method details:

- Fields in criteria Json with description:

Field	Description
lastUpdatedOn	Filter with **lastUpdatedOn** which is return from response

- Request parameters details:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	criteria	Json Array	Array of search criteria	No	
2	field	String	Field name in search criteria	Yes	
3	operator	Integer	Operator for search criteria • 1 – Equals • 5 – Greater than • 6 – Less than Note: Time With Date Not	Yes	
			supported with Operator = 1		
4	values	String Array	Array of value(s) to be search for search criteria	Yes	

5	project_template_name	String	Comma separated Name of Template	Yes	
6	recordStart	Long	Number of Quality Plans to skip	Yes	1
7	recordLimit	Long	Number of Quality Plans to return after recordStart (Maximum records limit must not exceed 1000)	Yes	10

- **Request cURL example:**

Operator:- 1

```
curl --location --request GET
'https://adoddleqaak.asite.com/commonapi/qaplan/getQAPlanActivitiesFrom
Templates' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Accept: application/json' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": "lastUpdatedOn",
      "operator": 1,
      "values": [
        "20-Jan-2025"
      ]
    }
  ],
  "project_template_name": "Template1",
  "recordLimit": 10,
  "recordStart": 1
}'
```

Operator:- 5

```
curl --location --request GET
'https://adoddleqaak.asite.com/commonapi/qaplan/getQAPlanActivitiesFrom
Templates' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Accept: application/json' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": "lastUpdatedOn",
```

```
      "operator": 5,
      "values": [
        "20-Jan-2025"
      ]
    }
  ],
  "project_template_name": "Template1",
  "recordLimit": 10,
  "recordStart": 1
}'
```

Operator:- 6

```
curl --location --request GET
'https://adoddleqaak.asite.com/commonapi/qaplan/getQAPlanActivitiesFrom
Templates' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Accept: application/json' \
--header 'Content-Type: application/x-www-form-urlencoded' \
--data-urlencode 'searchCriteria={
  "criteria": [
    {
      "field": "lastUpdatedOn",
      "operator": 6,
      "values": [
        "20-Jan-2025"
      ]
    }
  ],
  "project_template_name": "Template1",
  "recordLimit": 10,
  "recordStart": 1
}'
```

Response:

- Response parameters details:

No	Field Name	Description
1	`totalRecordCount`	Total number of records plans available for template
2	data	Activities data plan wise
2.1	projectPlanDetails projectId	Project and plan id with template Id and templateName

2.1.1		ID of the project
2.1.2	projectName	Name Of the Project
2.1.3	planId	ID of the plan
2.1.4	planName	Name Of the Plan
2.1.5	templateId	ID of the Template
2.1.6	templateName	Name of the Template
2.2	Activity	Activities with plan
2.2.1	folderId	FolderId for Associated file
2.2.2	folderPath	FolderPath of associated
2.2.3	associationType	associationType of files/ forms
2.2.4	activityName	Activity Name
2.2.5	activitySeq	Sequence of Activity created In plan
2.3.6	activityType	Activity Type (Files/Forms)
2.2.7	qiActivityId	Id of the Activity
2.2.8	fileStatusIds	Array of the Status which is available in folders

- **Response example:**


```
{
    "totalRecordCount": 10,
    "data": [
        {
            "projectPlanDetails": {
                "projectId": "2155406$$x5jCJj",
                "planId": "5536$$iHcO0i",
                "projectName": "23062023_Cloned_1",
                "planName": "test plan",
                "templateId": "2155405$$FW7zsE",
                "templateName": "test Termplate"
            },
            "Activity": {
                "folderId": "115336169$$NMR6QP",
                "folderPath": "23062023_Cloned_1\\2",
                "associationType": 1,
                "activityName": "2",
                "activitySeq": 1,
                "activityType": 0,
                "qiActivityId": "7769$$jM7G3M",
                "fileStatusIds": {
                    "998": "---"
```

```
            }
          }

        }
    ]
}
```

7.90 Create POI API

Objective:

This API create POI in the workspace.

Usage Rules:

- User must have logged in to Asite Platform using Login API Function.

Method details:

Name	Value
Method	POST
URL	https://adoddleqaak.asite.com/commonapi/workspace/2140660$$UbkfYE/poi

Headers:

Name	Value	Mandatory
ASessionID	Session ID from the resultant XML of Login API call	Yes

Request Parameters:

No	Field Name	Description	Mandatory
1	projectId	Project Id	Yes
2	Json Data	POI details	Yes

Request Json:

No	Field Name	Mandatory	Description
1	poiName	Yes	Name of the poi that user want to add
2	abbreviation	No	Abbreviation for POI
3	users	No	List of UserId and accessId of the User
4	roles	No	List of RoleId and accessId of the Role

5	orgs	No	List of OrgId and accessId of the Org
6	defaultPermissionId	Yes	Default permission of the POI 4: No Access 5: Access to use-Attribute Changes 6: Access to use-Publish 7: Admin

Json example:


```
[
  {
    "poiName": "Ready",
    "abbreviation": "r",
    "roles": [
      {
        "roleId": "3468637$$21Zm7v",
        "acessId": 7
      }
    ],
    "users": [
      {
        "userId": "1941036$$9NGPKx",
        "accessId": 7
      }
    ],
    "orgs": [
      {
        "orgId": "3$$LJGUqE",
        "accessId": 7
      }
    ],
```

```
        "defaultPermissionId": 4
    }
]
```

• **Request CURL example**:

```
curl --location
'https://adoddleqaak.asite.com/commonapi/workspace/<WorkspaceID>/poi' \
--header 'Cookie: ASessionID=<ASessionID>;' \
--header 'Content-Type: application/json' \
--data '[
    {
        "poiName": "Ready",
        "abbreviation": "r",
        "roles": [
            {
                "roleId": <RoleID>,
                "acessId": 7
            }
        ],
        "users": [
            {
                "userId": <UserID>,
                "accessId": 7
            }
        ],
        "orgs": [
            {
                "orgId": <OrgID>,
                "accessId": 7
            }
        ],
        "defaultPermissionId": 4
    }
]'
```

• **Response:**

POI created

7.91 User Profile Details API

Objective:

This API returns basic details of the user profile.

Usage Rules:

User must have logged in to the Asite Platform using Login API Function.

Method details:

Name	Value
Method	GET
URL	https://adoddleqaak.asite.com/commonapi/user/userProfileDetails

Headers:

Name	Value	Mandatory
ASessionID	Session Id from the resultant XML of the Login API call	Yes

Request CURL example:

**curl --location 'https://adoddleqaak.asite.com/commonapi/user/userProfileDetails' **

--header 'Cookie: ASessionID=<ASessionID>;'

Response


```
{
    "userId": 2025909,
    "firstName": "Ikshika",
    "lastName": "Chotai",
    "userName": "Ikshika Chotai",
    "emailId": "ichotai@asite.com",
    "orgId": 3,
    "orgName": "Asite Solutions"
}
```


7.92 Create Review Comment API

Objective:
Create review comment API will create review comment on file based on parameters specified in request.

Usage Rules:

- User must login in using Login API. And project must be “review comment” enabled, This URL is part of response when we use firstpage_doclist and nextpage_doclist APIs.

Method details:

Name	Value
Method	POST
URL	https://adoddleak.asite.com/commonapi/review/create

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Please refer below table for Json fields:

No	Field Name	Description	Mandatory	Default value
1	projectId	Hashed value of projectId.	Yes	NA
2	revisionId	Hashed Value of revisionId.	Yes	NA
3	createType	1=create comment, 2= no comment	Yes	NA
4	isPrivate	true/false. To create private comment.	No	false
5	status	Status of review comment.	No	---
6	title	Title of review comment.	Yes	NA
7	customAttributes	To provide custom attribute value which are available on review comment template	No	NA
	• `attributeName`	Name of attribute		
	• `attributeValues`	List of values for this attribute		
8	distributionData	Distribution Data	Yes. But its optional for	NA

			No Comment.	
	distributionUserGroupIds	Comma separated Distribution Group Ids	No	NA
	distributionUserList	Distribution User List.	No	NA
	• userId	Hashed User Id to distribute comment to user.	Yes	NA
	• actionId	actionId to distribute action. 12 = For Distribution 13 = For Information 14 = For Status Change etc.	Yes	NA
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes	NA
	distributionOrgList	Distribution Org List.	Yes	NA
	• orgId	Hashed Organisation Id to distribute comment to organisation.	Yes	NA
	• actionId	actionId to distribute action. 12 = For Distribution 13 = For Information 14 = For Status Change etc.	Yes	NA
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes	NA
	distributionRoleList	Distribution Role List.	No	NA
	• roleId	Hashed Role Id to distribute comment to Role.	Yes	NA
	• actionId	actionId to distribute action. 12 = For Distribution 13 = For Information 14 = For Status Change etc.	Yes	NA
	• actionDueDate	Action due date. Need to specify based on user locale.	Yes	NA
9	comments	List of comments	Yes	
	• commentText	Actual comment text of review	Yes	
	• hasAttachments	True if comment has attachments.	No	false
	assocDocsJSON	Associated documents.	No	NA

	• projectId	Hashed Projectid of the project which belongs to file association.	Yes	NA
	• revision_id	Hashed RevisionId.	Yes	NA
	assocFormsJSON	Associated Forms.	No	NA
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
	• commId	Hashed Form Id to associate.	Yes	NA
	assocReviewJSON	Associated reviews	No	NA
	• reviewId	Hashed review id to associate	Yes	NA
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
10	attachedFiles	Comment Attachments	No	NA
11	assocMarkupJSON	Associated Markups	No	Na
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
	• markupId	Hashed markup Id to associate. Should be associated with current document revision.	Yes	NA

Below given sample describes the format of request body JSON:


```
{
  "projectId": "2458777$$h23FDFF",
  "revisionId": "2258777$$h23FDFF",
  "reviewTypeId": 1,
  "isPrivate": false,
  "status": "---",
  "title": "Review Comment",
  "customAttributes": [
    {
      "attributeName": "Review Disciplines",
      "attributeValues": [
        "Architect"
      ]
    }
  ],
  "distributionData": {
    "distributionUserGroupIds": "10543227",
    "distributionUserList": [
      {
        "userId": "1878488$$ekURM5",
        "actionId": "35",
```

```
      "userType": "1",
      "actionDueDate": "25-Aug-2025"
    }
  ],
  "distributionOrgList": [
    {
      "orgId": "5808987$$dVuisu",
      "actionId": "13",
      "actionDueDate": "25-Mar-2025"
    }
  ],
  "distributionRoleList": [
    {
      "roleId": "3474341$$1iNzQr",
      "actionId": "35",
      "actionDueDate": "25-Aug-2025"
    }
  ]
},
"comments": [
  {
    "commentText": "Hi, comment 1",
    "hasAttachments": true,
    "attachedFiles": [
      "abc.png"
    ],
    "assocDocsJSON": [
      {
        "revision_id": "24676339$$ZBwxyW",
        "projectId": "2458777$$h23FDFF"
      }
    ],
    "assocMarkupJSON": [
      {
        "markupId": "2185758$$xbpbqC",
        "projectId": "2458777$$h23FDFF"
      }
    ]
  },
  {
    "commentText": "Hi, comment 2 ",
    "assocReviewsJSON": [
      {
        "reviewId": "18297$$QFUj7i",
        "projectId": "2458777$$h23FDFF"
      }
    ],
    "assocFormsJSON": [
      {
```

```
        "formId": "11062343$$5VeUH9",
        "projectId": "2140523$$ngKyj6"
      }
    ]
  }
 ]
}
```


7.93 Create Review Comment Reply API

Objective
"Create review comment reply API" will create review comment reply on review based on parameters specified in request.

Usage Rules

- User must login in using Login API. And project must be "review comment" enabled.

Method details:

Name	Value
Method	POST
URL	https://adoddleak.asite.com/commonapi/review/createReviewResponse

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Please refer below table for Json fields:

No	Field Name	Description	Mandatory	Default value
1	projectId	Hashed value of projectId.	Yes	NA
2	revisionId	Hashed Value of revisionId.	Yes	NA
3	reviewId	Hashed value of reviewid	Yes	NA
4	commentId	Hashed value of commentId.	Yes	NA
5	parentMessageId	Hashed value of parentMessageId	Yes	NA
6	commentText	Reply text.	Yes	NA
7	hasAttachments	True if comment has attachments.	No	false

8	assocDocsJSON	Associated documents.	No	NA
	• projectId	Hashed Projectid of the project which belongs to file association.	Yes	NA
	• revision_id	Hashed RevisionId.	Yes	NA
9	assocFormsJSON	Associated Forms.	No	NA
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
	• commId	Hashed Form Id to associate.	Yes	NA
10	assocReviewJSON	Associated reviews	No	NA
	• reviewId	Hashed review id to associate	Yes	NA
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
11	attachments	Comment Attachments	No	NA
11	assocMarkupJSON	Associated Markups	No	Na
	• projectId	Hashed ProjectId of the project which belongs to form association.	Yes	NA
	• markupId	Hashed markup id to associate. Should be associated with current document revision.	Yes	NA

Below given sample describes the format of request body JSON:


```
{
  "projectId": "2258777$$h23FDFF",
  "revisionId": "24676389$$ZBwxyW",
  "reviewId": "18302$$GgfqOQ",
  "commentId": "12084$$NL5Pfl",
  "parentMessageId": "12893$$tRZrHW",
  "commentText": "Comment Reply",
  "hasAttachments": true,
  "attachedFiles": [
    "abc.png"
  ],
  "assocDocsJSON": [
    {
      "revision_id": "24676339$$ZBwxyW",
      "projectId": "2258777$$h23FDFF"
    }
  ],
  "assocMarkupJSON": [
    {
      "markupId": "2185758$$xbpbqC",
      "projectId": "2258777$$h23FDFF"
    }
```

```
  ],
  "assocReviewsJSON": [
    {
      "reviewId": "18297$$QFUj7i",
      "projectId": "2258777$$h23FDFF"
    }
  ],
  "assocFormsJSON": [
    {
      "formId": "11062343$$5VeUH9",
      "projectId": "2140523$$ngKyj6"
    }
  ]
}
```


7.94 Get Review Comment Listing API

Objective
The get review comments API returns list of review comments for a particular revision.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function and provided project must be review enabled.

Method details:

Name	Value
Method	POST
URL	https://adoddleak.asite.com/commonapi/review/getReviewList

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes
Content-Type	application/x-www-form-urlencoded	Yes

- **Request parameters details:**

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	revisionId	String	Hashed value of revisionId	Yes	NA
2	projectId	String	Hashed value of projectId	Yes	NA

Response

- Response parameters details:

No	Field Name	Description
1	reviewId	Hashed value of review.
2	title	Title of review.
3	isPrivate	True if review is private.
4	createdDate	Date when review is created.
5	reviewDetailURL	URL to get specific review details.
6	projectId	Hashed value of projectId.
7	revisionId	Hashed value of revisionId.
8	customAttributes	Contains value of Review Disciplines.
9	Status	Status of review.
10	authorName	Creator of review.


```
[
  {
    "reviewId": "18296$$M1mF0J",
    "title": "Review 1",
    "status": "Status1",
    "isPrivate": false,
    "createdDate": "26-Dec-2024#09:51 IST",
    "authorName": "Darshan Joshi, R1 Asite Solution",
    "reviewDetailURL":
"https://adoddleak.asite.com//commonapi/review/getReviewDetails/2136375$$uq4lnw/24471
007$$kOsBwz/18296$$M1mF0J",
    "projectId": "2136375$$uq4lnw",
    "revisionId": "24471007$$kOsBwz",
    "customAttributes": {
      "Review Disciplines": [
        "Contractor (Contractor)"
      ]
    },
    "generateURI": true
  },
  {
    "reviewId": "17655$$agpGsc",
    "title": "Review 2",
    "status": "Status2",
    "isPrivate": false,
    "createdDate": "27-May-2024#10:45 IST",
    "authorName": "Dharmesh Khandhar, R1 Asite Solution",
    "reviewDetailURL":
"https://adoddleak.asite.com//commonapi/review/getReviewDetails/2136375$$uq4lnw/24471
007$$kOsBwz/17655$$agpGsc",
    "projectId": "2136375$$uq4lnw",
    "revisionId": "24471007$$kOsBwz",
    "customAttributes": {
      "Review Disciplines": [
```

"Contractor (Contractor)"
]
},
"generateURI": true
}
]

7.95 Get Review Comment Details API

Objective
The get review comment details API returns details of provided review.

Usage Rules
- User must have been logged in to Asite Platform using Login API Function and project must be review enabled.

Method details:

Name	Value
Method	GET
URL	https://adoddle.asite.com//commonapi/review/getReviewDetails/2119063$$msa3hx/19311825$$hS5BUb/1395$$2qDXlY

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes

Request parameters:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	worspaceId	Hashed Value	Project Id	Yes	NA
2	revisionId	Hashed Value	Revision Id	Yes	NA
3	reviewId	Hashed Value	Review comment Id	Yes	NA

- **Response parameters details:**

No	Field Name	Description

1	reviewId	Hashed value of reviewid
2	title	Title of review comment
3	isPrivate	True if review comment is private
4	createdDate	Date when review comment is created
5	comments	List of all comments with its data
6	projectId	Hashed value of projectId
7	revisionId	Hashed value of revisionId
8	customAttributes	Contains value of Review Disciplines
9	status	Contains status of review
10	authorName	Creator of review comment.
11	commentID	Unique id of comment.
12	replyCount	Represents count of reply on comment.
13	messages	List of all messages including replies.
14	text	Comment message text.
15	messageId	Hashed value of messageId
16	messageAuthorId	Hashed value of message creator user id.
17	parentMessageId	Hashed value of messageId of parent message.
18	createdBefore	Current time difference with created time.
19	recipients	List that contains recipients.
20	userId	Hashed user id of recipient.
21	userName	Name of recipient.

Response JSON:


```
{
   "reviewId": "18296$$M1mF0J",
   "title": "Review Comment",
   "status": "Status",
   "isPrivate": false,
   "createdDate": "26-Dec-2024#09:51 IST",
   "authorName": "Darshan Joshi, R1 Asite Solution",
   "projectId": "2136375$$uq4lnw",
   "revisionId": "24471007$$kOsBwz",
   "comments": [
      {
         "commentID": "12073$$qgGm9y",
         "replyCount": 1,
         "messages": [
            {
               "text": "<p>Comment 1</p>",
               "messageId": "12865$$Hpfbvf",
               "creationDate": "26-Dec-2024#09:51 IST",
               "authorName": "Darshan Joshi",
               "messageAuthorId": "1029850$$4VKBiY",
               "parentMessageId": "12865$$Hpfbvf",
               "createdBefore": "1 days, 8 hours, 29 minutes ago"
            },
            {
               "text": "<p>Reply</p>",
               "messageId": "12866$$CyQBLW",
```

```
                "creationDate": "26-Dec-2024#09:52 IST",
                "authorName": "Darshan Joshi",
                "messageAuthorId": "1029850$$4VKBiY",
                "parentMessageId": "12865$$Hpfbvf",
                "createdBefore": "1 days, 8 hours, 28 minutes ago"
            }
        ]
    },
    {
        "commentID": "12072$$TGbvJk",
        "replyCount": 0,
        "messages": [
            {
                "text": "<p>Comment 2</p>",
                "messageId": "12864$$hGA5LF",
                "creationDate": "26-Dec-2024#09:51 IST",
                "authorName": "Darshan Joshi",
                "messageAuthorId": "1029850$$4VKBiY",
                "parentMessageId": "12864$$hGA5LF",
                "createdBefore": "1 days, 8 hours, 29 minutes ago"
            }
        ]
    }
  ],
  "customAttributes": {
    "Review Disciplines": [
        "Contractor"
    ]
  },
  "recipients": [
    {
        "userId": "1132726$$0EXvbe",
        "userName": "Dharmesh Khandhar, R1 Asite Solution"
    },
    {
        "userId": "1132731$$4B0N9H",
        "userName": "Pradip Vadasak, R1 Asite Solution"
    }
  ],
  "generateURI": true
}
```


7.96 Get Folder Attributes API

Objective
The get folder attributes API returns details of attributes present for a particular folder.

Usage Rules

- User must have been logged in to Asite Platform using Login API Function.
- Sample cURL to get folder attributes:

**curl --location 'https://adoddleqaak.asite.com/commonapi/folder/getFolderAttributes' **

```
--header 'Accept: application/json, text/javascript, */*; q=0.01' \
--header 'Content-Type: application/x-www-form-urlencoded; charset=UTF-8' \
--header 'Cookie: JSESSIONID=XWGyaG-p99KajGPcFmvNJ0xUMWRjsFZR7K0-C_Ky.adoddle; GUEST_LANGUAGE_ID=en_GB; JSESSIONID=_i6OaWmn2zpD43II4SPlmJq71LjaJeNL073jCT0j.Portal; ASessionID=hwX3Pxu7IV0XlaBPJVbPc57xn4euxKEMaOs4vzwOJJI=;; JSESSIONID=FigkOa8RxDCzgXo8y0Q49PqgO0FPL6OjvElvJ5HU.adoddle' \
--data-urlencode 'projectId=2144418$$QPLUKm' \
--data-urlencode 'folderId=135948769$$h7irnU'
```

Method details:

Name	Value
Method	POST
URL	https://adoddleqaak.asite.com/commonapi/folder/getFolderAttributes

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes
Content-Type	application/x-www-form-urlencoded	Yes
Accept	application/json	No

- **Request parameters details:**

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	folderId	String	Hashed value of folderId	Yes	NA
2	projectId	String	Hashed value of projectId	Yes	NA

Response JSON:

```
{
    "type": "object",
    "properties": {
        "DocStatus": {
            "type": "string",
            "title": "DocStatus"
        },
        "PublisherOrg": {
            "type": "string",
            "title": "PublisherOrg"
        },
```

```
"DocTitle": {
    "type": "string",
    "title": "DocTitle"
},
"ProjectName": {
    "type": "string",
    "title": "ProjectName"
},
"DirectLink": {
    "type": "string",
    "title": "DirectLink"
},
"FolderPath": {
    "type": "string",
    "title": "FolderPath"
},
"FileName": {
    "type": "string",
    "title": "FileName"
},
"DocRef": {
    "type": "string",
    "title": "DocRef"
},
"isPrivate": {
    "type": "string",
    "title": "isPrivate"
},
"POIAbbreviation": {
    "type": "string",
    "title": "POIAbbreviation"
},
"RevNo": {
    "type": "string",
    "title": "RevNo"
},
"PublisherName": {
    "type": "string",
    "title": "PublisherName"
},
"PurposeOfIssue": {
    "type": "string",
    "title": "PurposeOfIssue"
},
"PublishedDate": {
    "type": "string",
    "title": "PublishedDate"
},
"StatusAbbreviation": {
    "type": "string",
    "title": "StatusAbbreviation"
},
"RevisionNotes": {
    "type": "string",
```

```
            "title": "RevisionNotes"
        },
        "FileSize": {
            "type": "string",
            "title": "FileSize"
        }
    }
}
```


7.97 Update Document MetaData API

Objective
This API allows user to update custom and system attribute.

Usage Rules
User must login in using Login API
Call workspacelist api to get projectId

Call folders api to get folderId

Call firstpage_docList api to get revisionId,documentId

Call workspace api to get the url for getProjectCustomAttributes to get the attribute Id for custom attribute

Method details:

Name	Value
Method	POST
URL	https://adoddleak.asite.com/commonapi/document/updateDocumentMetaData

Headers:

Name	Value	Mandatory
ASessionID	session ID from the resultant XML of Login API call	Yes
Content-type	application/json	Yes

Request parameters details:

No	Field Name	Data Type of Field	Description	Mandatory	Default value
1	projectId	String	Hashed projectId of the document that is being	Yes	NA

			used		
2	folderId	String	Hashed folderId of the document that is being used	Yes	NA
3	revisionId	String	Hashed revisionId of the document	Yes	NA
4	documentId	String	Hashed revisionId of the document	Yes	NA
5	attribute	JsonObject	Attribute json	Yes	NA
6	documentRef	String	Updated value of DocRef	No	NA
7	documentTitle	String	Updated value of DocTitle	No	NA
8	purposeOfIssueName	String	Updated value of POI	No	NA
9	isPrivateRevision	Boolean	Mark True if need private document	No	false
10	revisionNotes	String	Updated value of Revision notes	No	NA
11	revision	String	Updated value of RevNo	No	NA
12	statusName	String	Updated value of Status	No	NA
13	customAttributes	JsonAttay	Custom Attribute json	No	NA
14	attributeId	Integer	Attribute Id of the custom attribute	Yes	NA
15	attributeValues	JsonArray	Updated value for the custom attribute	Yes	N/A

Response JSON


```
[
  {
    "projectId": "2113171$$XA9ftd",
    "folderId": "115538168$$cQZMZS",
    "revisionId": "24703771$$RcDlZa",
    "documentId": "12334532$$xYiSdN",
    "attribute": {
      "documentRef": "DocRef 03",
      "documentTitle": "DocTitle 01",
      "purposeOfIssueName": "test 1",
      "statusName": "ST1",
      "isPrivateRevision": true,
      "revisionNotes": "Notes revision 6",
```

```
"revision": "a1",
"customAttributes": [
  {
    "attributeId": "1019",
    "attributeValues": [
      "JAVA",
      "PYTHON"
    ]
  },
  {
    "attributeId": "1030",
    "attributeValues": [
      "text value"
    ]
  },
  {
    "attributeId": "1032",
    "attributeValues": [
      "1"
    ]
  },
  {
    "attributeId": "1011",
    "attributeValues": [
      "101"
    ]
  },
  {
    "attributeId": "1020",
    "attributeValues": [
      "26-Jan-2025"
    ]
```

```
                },
                {
                    "attributeId": "1034",
                    "attributeValues": [
                        "23.03489710,72.50146044"
                    ]
                },
                {
                    "attributeId": "1033",
                    "attributeValues": [
                        "101"
                    ]
                },
                {
                    "attributeId": "1036",
                    "attributeValues": [
                        "102"
                    ]
                },
                {
                    "attributeId": "1002",
                    "attributeValues": [
                        "Ahmedabad",
                        "Surat"
                    ]
                }
            ]
        }
    }
]
```

Request CURL example:

```
curl --location
'https://adoddleqaak.asite.com/commonapi/document/updateDocumentMetaData' \
--header 'Accept: application/json' \
--header 'Cookie:
ASessionID=1fKWdWY2xe2Gf3bU4Kr3v1BabiUwRYZdoWMbJgnNkN4=;
JSESSIONID=0imxmDkAbMPhIR4G6AaE_znzqWwl8-hgZ42iiEEf.adoddle' \
--header 'Content-Type: application/json' \
--data '[
  {
    "projectId": "2113171$$XA9ftd",
    "folderId": "115538168$$cQZMZS",
    "revisionId": "24703771$$RcDlZa",
    "documentId": "12334532$$xYiSdN",
    "attribute": {
      "documentRef": "DocRef 03",
      "documentTitle": "DocTitle 01",
      "purposeOfIssueName": "test 1",
      "statusName": "ST1",
      "isPrivateRevision": true,
      "revisionNotes": "Notes revision 6",
      "revision": "a1",
      "customAttributes": [
        {
          "attributeId": "1019",
          "attributeValues": [
            "JAVA",
            "PYTHON"
          ]
        },
        {
          "attributeId": "1030",
          "attributeValues": [
```

```
            "text value"
        ]
    },
    {
        "attributeId": "1032",
        "attributeValues": [
            "1"
        ]
    },
    {
        "attributeId": "1011",
        "attributeValues": [
            "101"
        ]
    },
    {
        "attributeId": "1020",
        "attributeValues": [
            "26-Jan-2025"
        ]
    },
    {
        "attributeId": "1034",
        "attributeValues": [
            "23.03489710,72.50146044"
        ]
    },
    {
        "attributeId": "1033",
        "attributeValues": [
            "101"
        ]
```

```
            },
            {
                "attributeId": "1036",
                "attributeValues": [
                    "102"
                ]
            },
            {
                "attributeId": "1002",
                "attributeValues": [
                    "Ahmedabad",
                    "Surat"
                ]
            }
        ]
    }
  }
]'
```

8 Accessing the Asite API Service

Users registered and subscribed to Asite can access Data on Asite platform using Asite API functions.

Such users will be able to make API function calls either by using any REST based API (e.g. cURL) or using direct Web Service queries for AppBuilder Forms.

Note: If in case you don't get an appropriate response code in APIs then you can just add the User-Agent=ApiClient in header in the API request.

8.1 Accessing API Functions using cURL commands

cURL is a command line tool for transferring data with URL syntax, supporting FTP, FTPS, HTTP, HTTPS, SCP, SFTP, TFTP, TELNET, DICT, LDAP, LDAPS, FILE, IMAP, SMTP, POP3 and RTSP.

cURL supports SSL certificates, HTTP POST, HTTP PUT, FTP uploading, HTTP form-based upload, proxies, cookies, userID - password authentication (Basic, Digest, NTLM, Negotiate, kerberos), file transfer resume, proxy tunnelling and a busload of other useful functions.

cURL is free and open software that compiles and runs under a wide variety of operating systems.

- Following dll files will also be required for accessing the data using Asite API
- *libssl32.dll*
- *libeay32.dll*

8.2 File downloads

Advanced client tools (like Java/c#/VBA based) transparently handle SSL handshaking process, so it does not require you to explicitly pass Asite API certificate while invoking API.

However, if required download the Asite API certificate (AsiteAPI.cer) from the below link for invoking API:

Download the certificate by clicking on the link

https://adoddleak.asite.com/adoddlepublic/dpd/EMKb4dUgnne56Urnye6

Click on the Install Certificate… button to install the certificate

Required files can be downloaded and stored to local folder from the following location:

- cURL.exe file: To download the cURL exe click here (http://curl.haxx.se/download.html) Library files

Download the files listed below if they do not exist within your c:\windows\system32\ (or equivalent) folder:

- libssl32.dll: To download the libssl32.dll click here (http://www.dll4free.com/libssl32.dll.html) or click http://curl.haxx.se/download.html to download the related version library files
- libeay32.dll: To download the libeay32.dll click here (http://www.dll4free.com/libeay32.dll.html) or click http://curl.haxx.se/download.html to download the related version library files

This document describes the framework for Asite product development process and the change management process for Asite products, with the following stated purposes:

- To provide for planning of project goals, resources, activities for Product Development & Enhancement.

- To ensure that responsibility and accountability are clearly defined within the product development process.
- To ensure client requirements are properly understood, analysed and documented to provide appropriate products & services to the customer.
- To analyse and decide the technical design features required for the right solution.
- To carry out execution activities as per the plan, technical design and to satisfy customer requirements.