

Keen: Kotlin Genetic Algorithms Framework

*Thesis for the degrees of
Civil Engineer in Computer Science
and
Master of Science in Computing*



Ignacio Slater Muñoz

Departamento de Ciencias de la Computación

Facultad de Ciencias Físicas y Matemáticas

Universidad de Chile.

Thesis Author

Nancy Hitschfeld. PhD.

Departamento de Ciencias de la Computación

Facultad de Ciencias Físicas y Matemáticas

Universidad de Chile

Thesis Supervisor

Alexandre Bergel. PhD.

Relational AI

Switzerland

Second Supervisor

Santiago, Chile

2023-08-18

v0.5.2308-1

This work, “Keen: Kotlin Genetic Algorithms Framework”, is a derivative of “Simple, Lightweight, and Adaptive TeX” by R8V.,
used under [CC BY 4.0](#).

Abstract

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Contents

1	Introduction	1
1.1	Motivation	1
1.2	Hypothesis and Research Questions	2
1.2.1	Hypothesis	2
1.2.2	Research Questions	2
1.3	Objectives	2
1.3.1	Main Objective	2
1.3.2	Specific Objectives	2
1.4	Methodology	3
1.5	Thesis Structure	3
2	Theoretical Framework	5
2.1	Evolutionary Algorithms	5
2.2	Genetic Algorithms	6
2.2.1	Representation and Evaluation	6
2.2.2	Initialization	7
2.2.3	Selection	8
2.2.4	Variation	9
2.2.5	Termination	13
2.3	Genetic Programming	13
2.3.1	Representation and Evaluation	14
2.3.2	Initialization	19
2.3.3	Selection	23
2.3.4	Variation	23
3	State of the Art: Relevant Work	29
3.1	The One Max Problem	29
3.2	Agile Artificial Intelligence in Pharo	30
3.3	Distributed Evolutionary Algorithms in <i>Python</i> (DEAP)	31
3.4	Jenetics: Java Genetic Algorithm Library	33
3.5	ECJ: A Java-based Evolutionary Computation Research System	35
3.6	GeneticSharp: Comprehensive Overview of a .NET Genetic Algorithm Library	39
3.7	Other Libraries	42
4	The Keen Framework	43
4.1	Introduction	43
4.2	Architecture	43
4.3	Genetic Algorithms	45
4.3.1	Genetic Material	45
4.3.2	Evolution Engine	46
4.3.3	Evolution Listeners	48
4.4	Genetic Operators	49
4.4.1	Word Guessing Problem	50
4.4.2	Selection	51

4.4.3	Mutation	53
4.4.4	Crossover	56
4.5	Genetic Programming	60
4.5.1	Primitive Set	60
4.5.2	Genetic Operators	61
4.6	Parallelism	63
4.7	Extensibility	63
4.8	Conclusion	64
5	Case Study: Real Function Optimization	65
5.1	Introduction	65
5.2	Problem Description	65
5.3	Solution	66
5.4	Results	66
5.5	Conclusion	67
6	Case Study: Knapsack Problem	69
6.1	Introduction	69
6.2	Problem Description	69
6.2.1	0-1 Knapsack Problem	69
6.2.2	Unbounded Knapsack Problem	70
6.3	Solution Strategies for Knapsack Problems	70
6.3.1	0-1 Knapsack Problem	70
6.4	Results	71
6.5	Conclusion	71
7	Case Study: Crash Reproduction	73
7.1	Introduction	73
7.2	Problem Description	74
7.3	Solution	74
7.4	Results	75
7.5	Conclusion	75
8	Conclusions	77
8.1	Summary	77
8.2	Contributions	78
8.3	Future Work	78
8.3.1	Genetic Algorithms	78
8.3.2	Genetic Programming	79
8.3.3	Multi-Objective Evolution	80
8.3.4	Neuroevolution	81
8.3.5	Coevolution	81
8.3.6	Evolution Strategy	82
8.3.7	Other evolutionary algorithms	83
8.3.8	Crash Reproduction	83
A	Glossary	85
B	Test Functions for Optimization	89
B.1	Ackley Function	89
B.2	Beale Function	90
B.3	Booth Function	90
B.4	Bukin Function N.6	90
B.5	The Cross-in-Tray Function	91
B.6	Easom Function	92

B.7	Eggholder Function	92
B.8	Goldstein-Price Function	93
B.9	Himmelblau's Function	94
B.10	Hölder Table Function	95
B.11	Lévi Function N.13	95
B.12	Matyas Function	96
B.13	McCormick Function	97
B.14	Rastrigin Function	97
B.15	The Rosenbrock Function	99
B.16	Schaffer Function N.2	99
B.17	Schaffer Function N.4	100
B.18	The Sphere Function	102
B.19	Styblinski-Tang function	102
B.20	Three-Hump Camel Function	103
C	Additional Listings	105

Chapter 1

Introduction

1.1 Motivation

The inception of artificial intelligence (AI) as we perceive it today is deeply rooted in the mid-20th century when Alan Turing proposed the intriguing question, “Can machines think?” [1]. This seminal query catalyzed a remarkable evolution in the field, leading to the emergence of a diverse spectrum of AI applications that persistently extend and advance.

Among the early endeavors to emulate evolution artificially, Nills Aall Barricelli’s initiative in 1954 stands out. Barricelli construed evolution as a purely statistical process, setting a novel precedent for the field of evolutionary computation (EC) [3]. This groundbreaking exploration established the parameters for an evolutionary system, which necessitated the system’s components to exhibit capabilities of reproduction and mutation, thereby facilitating evolution through natural selection or the survival of the fittest.

Expanding upon these foundational principles, John Holland’s influential book, *Adaptation in Natural and Artificial Systems* [5], unveiled genetic algorithms (GA). This innovative methodology for addressing optimization problems drew inspiration from natural selection and genetic mechanisms. Holland’s work solidified the field of evolutionary algorithms (EA), igniting the development of a plethora of techniques and algorithms, including but not limited to, genetic algorithms, genetic programming, and evolutionary strategies.

Despite the proven efficacy of evolutionary algorithms in resolving intricate optimization problems ranging from scheduling and data mining to machine learning and beyond, their execution can be challenging, frequently demanding extensive, repetitive coding. As the uptake of AI continues to soar, the requirement for streamlined, intuitive libraries and frameworks that empower efficient experimentation and application of these potent algorithms grows concomitantly.

The *Kotlin* programming language emerges as a promising platform for developing such a framework [52]. *Kotlin* distinguishes itself with its lucid syntax, static typing, and flawless interoperability with Java, making it an attractive choice for AI and EC enthusiasts [41, 42, 53]. The significance of *Kotlin* has been formally acknowledged in *Android* app development [40], and it continues to gain popularity among developers, with over 60% of *Android* developers now using it [39]. Furthermore, according to a *Github* study, *Kotlin* emerged as the ninth fastest-growing language worldwide from 2021 to 2023, overtaking *Python* by 0.4% [59].

The allure of *Kotlin* is further amplified by its multiplatform feature, which permits code sharing across a wide range of platforms, including JVM, *JavaScript*, *Android*, *iOS*, and native desktop applications. This cross-platform compatibility promotes enhanced productivity and consistency in software development.

Kotlin also supports functional programming (FP) and coroutines, which simplify the development of asynchronous and concurrent applications. This functionality proves particularly beneficial in the realm of evolutionary algorithms that often necessitate the execution of numerous concurrent processes. Moreover, *Kotlin*’s capabilities align well with the design of *Domain Specific Languages* (DSLs) [60], which can be used to concisely and intuitively define the problem domain.

Given these compelling features, this thesis aims to exploit the prowess of *Kotlin* to architect and implement a pioneering genetic algorithms framework, thereby augmenting the ever-growing application of *Kotlin* within the AI community. We expect this

framework to stimulate research and applications in the field, hastening the creation of novel algorithms and techniques.

1.2 Hypothesis and Research Questions

1.2.1 Hypothesis

The *Kotlin* programming language, known for its expressive syntax, simplicity, and cross-platform capabilities, presents an opportunity for enhancing the field of evolutionary algorithms. We hypothesize that the development of an efficient and user-friendly genetic algorithms framework in *Kotlin* could significantly streamline the implementation process of these algorithms, thereby catalyzing innovation and expediting research in this domain.

1.2.2 Research Questions

To assess the validity of our hypothesis and further investigate the potential benefits of the proposed *Kotlin*-based framework, we outline the following pivotal research questions:

1. What constitute the *fundamental requirements* for a versatile, efficient, and user-friendly genetic algorithm framework?
2. How can the *unique language features* of *Kotlin* be leveraged to fulfill these requirements and facilitate the development and use of genetic algorithms?
3. How does the performance and *ease of use* of a *Kotlin*-based genetic algorithms framework compare to that of existing solutions, particularly in terms of syntactical complexity?
4. In what ways can the proposed *Kotlin*-based framework be applied to *address complex real-world problems*, thereby demonstrating its practical viability and potential to contribute to advancements in AI and evolutionary computation?
5. What potential opportunities exist for the *enhancement and expansion* of the proposed *Kotlin*-based genetic algorithm framework in the future?

These research questions serve as guideposts for our exploration into the feasibility and potential impact of using *Kotlin* to develop a novel genetic algorithms framework. Each question targets a specific facet of the project, offering a holistic understanding of the technical intricacies, practical applications, and future prospects of our proposed framework.

1.3 Objectives

The primary objectives of this thesis are set forth to establish a solid foundation for the design, implementation, and evaluation of a novel, efficient, and user-friendly genetic algorithms framework using the *Kotlin* programming language.

1.3.1 Main Objective

The main objective of this study is to develop a *Kotlin*-based genetic algorithms framework that is versatile, efficient, and user-friendly. The framework should be able to support classical GAs, as seen in section 2.2 on page 6, and be easily extensible to support future enhancements and expansions such as new algorithms, like GP, and genetic operators.

1.3.2 Specific Objectives

Building upon the primary objectives, the following specific objectives have been established to guide this research:

1. **Language Feature Utilization:** Examine and utilize *Kotlin*'s unique language features, such as its expressive syntax, static typing, and its ease of developing DSLs, to design and implement a genetic algorithms framework. This exploration should enhance the design and implementation of the genetic algorithms framework, ensuring it is efficient, robust, and user-friendly.
2. **Framework Efficiency:** Design the genetic algorithms framework to optimize computational efficiency. This should involve algorithmic improvements, effective use of *Kotlin*'s language features, and careful resource management.

3. **User-friendliness:** Ensure the framework is accessible and user-friendly. It should present a clear, intuitive API for users to define and manipulate genetic algorithms, easing the learning curve and fostering adoption among AI and EC practitioners.
4. **Comparative Study:** Conduct comparative studies between the *Kotlin*-based genetic algorithms framework and existing solutions, particularly in terms of syntactical complexity, and ease of use. This should provide a benchmark to evaluate the advantages and potential areas of improvement for our framework.
5. **Real-world Applications:** Apply the proposed *Kotlin*-based framework to address complex real-world problems. This will not only demonstrate the practical viability of the framework but also its potential to contribute to advancements in AI and EC.
6. **Future Enhancements and Expansion:** Anticipate and propose potential enhancements and extensions for the *Kotlin*-based genetic algorithms framework. Discuss its adaptability to incorporate future advancements in AI and EC, ensuring its sustainability and continued relevance.

These specific objectives aim to add more granularity to our research focus, ensuring a comprehensive and detailed exploration of the possibilities offered by *Kotlin* for the development of a novel genetic algorithms framework.

1.4 Methodology

Our research methodology employs a multi-faceted approach comprised of distinct phases. This approach maintains a balance between theoretical exploration and practical application, with a consistent emphasis on rigorous analysis and evaluation.

1. **Literature Review and Language Exploration:** We initiate our research with an exhaustive study and analysis of the current literature pertaining to genetic algorithm frameworks, thereby discerning their respective merits and shortcomings. This analysis will serve as a cornerstone for defining the quintessential attributes for a versatile, efficient, and user-friendly genetic algorithms framework. Concurrently, we will conduct an in-depth investigation of the unique language features offered by *Kotlin*, discerning their potential contributions to the design and development of the proposed framework.
2. **Framework Design and Development:** Informed by the comprehensive literature review and language exploration, we will transition to the design and implementation phase of the *Kotlin*-based genetic algorithms framework. The design strategy will involve the thoughtful employment of *Kotlin*'s unique features such as its expressive syntax, static typing, and ease of crafting DSLs, thereby ensuring that the resulting framework is efficient, robust, and user-friendly.
3. **Application to Real-world Challenges:** Subsequently, we will utilize the developed *Kotlin*-based framework to address complex real-world problems. This stage will function as a testing ground to demonstrate the practical applicability, potential contributions, and viability of the framework in fostering advancements in the realms of AI and evolutionary computation.
4. **Future Adaptability and Expansion:** In the final phase of our research, we will deliberate upon prospective enhancements and extensions for the *Kotlin*-based genetic algorithms framework. Moreover, this phase will entail an assessment of the framework's adaptability and scalability to accommodate future advancements in AI and evolutionary computation, thereby assuring its long-term sustainability and relevance.

Throughout the implementation of our research methodology, we will uphold an analytical and critical perspective to discern the significance of our findings and their implications. We acknowledge and uphold the ethical principles of transparency and honesty in reporting our results and documenting the progress of our research.

1.5 Thesis Structure

1. **Background (chapter 2 on page 5):** This chapter offers a necessary foundation for understanding the central concepts utilized in this thesis. It encompasses a theoretical analysis of the relevant algorithms, setting the stage for the discussions and investigations that follow.
2. **State of the Art (chapter 3 on page 29):** Here, we present a comprehensive review of the current advancements in the domain of evolutionary computation. We particularly emphasize and examine the prevailing frameworks in this field, facilitating a comparative context for our research.

3. **Framework Design and Implementation** ([chapter 4 on page 43](#)): This chapter elucidates the architecture of our framework, detailing the design considerations and the subsequent implementation.
4. **Function Optimization Case Study** ([chapter 5 on page 65](#)): In this section, we put our framework to the test by applying it to a real-world function optimization problem. We utilize 20 classical benchmark functions to assess the framework's performance, with the functions elaborately displayed in [appendix B on page 89](#).
5. **Knapsack Problem Case Study** ([chapter 6 on page 69](#)): This chapter features another practical application of the framework, in this case, tackling the Knapsack Problem. We test the framework against two different variants of this problem: the 0-1 Knapsack Problem and the Unbounded Knapsack Problem, evaluating its adaptability and robustness.
6. **Crash Reproduction Problem Case Study** ([chapter 7 on page 73](#)): In our third case study, we explore the application of the framework to a crash reproduction problem, showcasing its utility in a distinctly different domain.
7. **Conclusion and Future Work** ([chapter 8 on page 77](#)): In the concluding chapter, we summarize the breadth of work accomplished in this thesis and propose potential avenues for future investigations and enhancements based on our findings.

This structure facilitates a progressive narrative of our research, allowing for a coherent understanding of our objectives, methodology, and outcomes.

Chapter 2

Theoretical Framework

The objective of this chapter is to provide the reader with the theoretical background necessary to understand the rest of the document.

2.1 Evolutionary Algorithms

In the field of computational intelligence, *evolutionary algorithms* (EA) [23] are a family of algorithms inspired by the process of natural selection. They are part of the larger field of *evolutionary computation*,¹ which is a subfield of *metaheuristics*.²

EAs are algorithms that perform optimization or learning tasks by evolving solutions to a given problem via emergent intelligence [9]. These tasks may range from function optimization to machine learning or game AI development. EAs have three main characteristics:

- **POPULATION-BASED:** These algorithms work with a **population of solutions**, allowing them to explore the search space in *parallel*.
- **FITNESS-ORIENTED:** The solutions in the population are evaluated using a *fitness function*, which is a **problem-dependent function** that assigns a value to each solution based on its quality. The goal of the algorithm is to find the solution with the highest³ fitness.
- **VARIATION-DRIVEN:** The candidate solutions are modified using *genetic operators*, such as mutation, crossover, and selection, to create new solutions. These operators are usually based on the biological processes of *mutation* and *recombination*.

Remark. “Parallel” in this context means that the algorithm is exploring multiple points in the search space in the same generation (iteration). It should not be confused with parallel computing, which is a technique used to speed up the execution of the algorithm by running it on multiple processors.

Even though EAs are parallel in nature, they can be run on a single processor. Nevertheless, this parallel nature makes them a good candidate for parallel computing; in this thesis we will explore the use of parallel computing to speed up the execution of certain stages of the algorithm.

While these principles serve as the foundation for most EAs, it’s important to note that some variants may prioritize some principles over others, or introduce new principles. This diversity allows EAs to be adapted to a wide range of problems and scenarios.

¹See definition A.7 on page 86

²See definition A.14 on page 87

³In some cases, the goal is to minimize the fitness function, in which case the algorithm will aim to find the solution with the lowest fitness.

2.2 Genetic Algorithms

Genetic Algorithms (GA)⁴ [5, 6, 23, 24] are a type of EA where a *population of individuals*⁵ representing candidate solutions to an optimization problem evolves towards better solutions. Each individual is defined by its location in the search space, known as its *genotype*⁶, and its fitness value, computed by a *fitness function*. At a high level, GA is an automatic method for problem-solving, starting from a *high-level statement* of the desired outcome, without needing the user to predefined the solution's form or structure.

The classical GA operates as follows:

Listing 2.1– Genetic algorithm

```

var population = initialize_population // Creates a random population of individuals
evaluate(population) // Calculates the fitness of each individual
while (termination condition not met) { // Could be a pre-defined number of generations, a
    // desired fitness level, etc.
    val survivors = select_survivors(population)
    → // Selects individuals for the next generation
    val parents = select_parents(population) // Selects a subset of individuals as parents
    val offspring = alter(parents) // Applies genetic operators to offspring, creating
        // variations
    evaluate(offspring) // Calculates the fitness of each new individual
    population = survivors + offspring // Creates the next generation
}
return population.fittest // Returns the most fit individual

```

The exact implementation of each of these steps depends on the specific problem at hand. Factors such as the problem's complexity, the representation of individuals, or even the computational resources available, can greatly influence the choice of methods used for initialization, selection, alteration, and survivor selection.

2.2.1 Representation and Evaluation

A pivotal component of a Genetic Algorithm (GA) is the representation of individuals, which encodes potential solutions into a form manipulable by the GA. This representation delineates the algorithm's search space and is a prime determinant of its performance.

The predominant representation is a matrix of genes⁷ termed the *genotype*⁸, wherein each column is denoted as a *chromosome*⁹.

Definition 2.1 (Cardinality of the search space). *The cardinality of the search space is the number of different individuals that can be represented by the encoding.*

Formally, given a vector of alphabets ($\mathcal{A}_1, \mathcal{A}_2, \dots, \mathcal{A}_n$), and a representation \mathbf{G} with n chromosomes of lengths (m_1, m_2, \dots, m_n) where each chromosome is encoded using the alphabet \mathcal{A}_i , the cardinality of the search space S is defined as:

$$|S| = \prod_{i=1}^n |\mathcal{A}_i|^{m_i} \quad (2.1)$$

Note that this definition assumes that the chromosomes are independent, which may not be the same for all evolutionary algorithms.

⁴Also known as Simple Genetic Algorithms (SGA) [23], or Traditional Genetic Algorithms (TGA) [24].

⁵See definition A.12 on page 86.

⁶See definition A.11 on page 86

⁷See definition A.8 on page 86

⁸See [61]

⁹See definition A.4 on page 85

Remark. In the original publication of the GA [5], the genotype was known as the **environment** (E) and the search space was defined as a class \mathcal{E} of all possible environments.

To illustrate this concept, consider the following problem: given a binary string of length n , find the string that has the most ones, this is known as the **One Max problem** (OMP) [12]¹⁰ (refer to section 3.1 on page 29 for a more detailed description of the problem). In this case, we can use a single column matrix \mathbf{G} to represent the individual, where each gene $g_i \in \mathcal{A}$ represents the i -th bit of the string, where $\mathcal{A} = \{0, 1\}$ is the alphabet containing the two possible values of a bit.

Then,

$$|S_{\text{OMP}}| = \prod_{i=1}^1 |\mathcal{A}|^n = 2^n$$

Knowing this, we can conclude that an exhaustive search of the search space would require evaluating 2^n individuals, and thus the algorithm would have a time complexity of $\mathcal{O}(2^n)$.

This is a very simple example, but we can see how a naive search algorithm would have a very high time complexity. This would be of the utmost importance in a real world problem, where the search space would be much larger.

With a representation defined, we can now define an evaluation method for the individuals, which is done using a **fitness function**.

Definition 2.2 (Fitness function). A **fitness function** is a function $\phi : S \rightarrow \mathbb{R}^n$, where S is the search space and n is the number of objectives of the optimization problem, that takes a genotype as input and returns a vector of real numbers representing how close the individual is to the global optimum of each objective.

The fitness function is usually defined by the user of the algorithm, and it is problem dependent.

Definition 2.3 (Batch fitness function). A **batch fitness function** $\Phi : \mathbb{P} \rightarrow \mathbb{R}^{m \times n}$ is a function that maps a population to a matrix of real numbers, where m is the number of individuals in the population and n is the number of objectives of the optimization problem.

The one max problem is a maximization problem with a single objective, so the fitness function would be defined as follows:

$$\phi_{\mathbf{G}} = \sum_{i=1}^n g_i \tag{2.2}$$

Having laid the groundwork by illustrating the pivotal role of representation in GAs, we've delineated how the representation forms the backbone of the algorithm's search space and in turn determines its performance. Key terminologies, including the genotype, chromosomes, cardinality of the search space, and the crucial role of the fitness function, have been elucidated with references and examples. With this foundational knowledge, in the forthcoming section, we will delve deeper into the initialization phase of the algorithm, setting the stage for how the GA seeds its initial population and embarks on the quest for optimal solutions.

2.2.2 Initialization

In the initialization phase of a genetic algorithm, the foundational stage is set for the algorithm's evolutionary journey. Here, we define and setup the population of individuals to be employed in the search process. Whether informed by prior knowledge or randomly generated, each individual's evaluation is pivotal to steer the algorithm's quest for optimal solutions.

As we delve further, stages such as selection (section 2.2.3 on the following page), crossover (section 2.2.4.1 on page 10), and mutation (section 2.2.4.2 on page 11) build upon this foundational phase.

A GA operates on a group of individuals termed a **population**. Determining the population's size and its initialization is crucial. Typically, this initialization process leans on randomness, but it can also be informed by insights about the problem at hand [17].

¹⁰Also **Ones Counting** problem [61], or **Max Ones** problem [46].

Upon initializing the population, each individual undergoes evaluation to receive a ***fitness value***. This step is imperative to glean insights about the problem, thereby directing the search towards enhanced solutions.

Using the ***One Max*** problem as a backdrop, where there's an absence of prior problem knowledge, the initialization encompasses a blind search of the search space, rendering it random. For each population member, a random binary string of length n is generated.

Let's assume that we have a population of size 4, and that the length of the binary strings is $n = 4$.

The initialization process could generate the following individuals:¹¹

Generation 0		
Individual	Binary string	Fitness
I_1	1100	2
I_2	0001	1
I_3	0000	0
I_4	0100	1

Table 2.1: Population of individuals in generation 0

	Fitness	Individual
Best	2	I_1
Worst	0	I_3
Average	1	
Standard deviation	0.817	

Table 2.2: Fitness of the individuals in generation 0

Emphasis should be placed on the aggregation functions outlined in table 2.2. The ***average fitness*** is straightforward, offering an overall view of the population's performance; a higher¹² average suggests better overall performance. On the other hand, the ***standard deviation*** gauges the dispersion of fitness values around this average. A low standard deviation indicates a homogeneous population, which might hint at ***premature convergence*** due to limited search space exploration. Conversely, a high standard deviation signifies a diverse population, potentially suggesting ***excessive exploration*** without honing in on promising areas.

The initialization phase of a genetic algorithm sets the foundation by establishing the population of individuals for the search. This population might be randomized or informed by prior domain knowledge. Each member of this population undergoes a fitness evaluation, directing the search towards optimal outcomes. Using our OMP example, we commenced with a four-individual population with binary strings of length $n = 4$, assessing their fitness. This foundational step paves the way for the ensuing phases of selection (section 2.2.3), crossover (section 2.2.4.1 on page 10), and mutation (section 2.2.4.2 on page 11).

2.2.3 Selection

Following the initialization phase, a genetic algorithm (GA) progresses through its main evolutionary cycle. Key to this cycle is the process of selection, which mirrors natural selection by favoring individuals with higher fitness for reproduction.

Given a population P comprising N individuals, each identified by their fitness value ϕ_i (where $i \in \{1, \dots, N\}$), the survival rate σ helps control elitism.¹³ This rate determines the portion of the population that proceeds to the next generation without change. Specifically, $\lfloor \sigma N \rfloor$ individuals continue, while the remaining $\lceil (1 - \sigma)N \rceil$ are replaced by their descendants.¹⁴

¹¹Since the nature of genetic algorithms is stochastic, the initialization process could generate different individuals each time the algorithm is run. For this example, we selected a specific set of individuals in a way that makes it easier to get a grasp of the algorithm.

¹²Remember, a "higher fitness" refers to proximity to the optimal solution, not necessarily the greatest numerical value.

¹³For more on elitism, refer to definition A.5 on page 85.

¹⁴Using both the *floor* and *ceiling* functions ensures a consistent total population of N .

Definition 2.4 (Selection Operator). *A tool for choosing specific members from a population, formally expressed as:*

$$\Sigma : \mathbb{P} \times \mathbb{N} \times \dots \rightarrow \mathbb{P}; (P, n, \dots) \mapsto \Sigma(P, n, \dots)$$

Parameters include:

- \mathbb{P} : Set of possible populations.
- \mathbb{N} : Set of natural numbers.
- P : A given population.
- n : Number of selections from P .
- $\Sigma(P, n)$: Resultant population from the selections.

This selection operator usually integrates randomness, bringing some unpredictability to the process. As an exemplification, let's consider the *roulette wheel* selection operator.¹⁵ Here, individuals are assigned selection probabilities according to their fitness, as expressed by:

$$\rho_{\Sigma}(i) = \frac{\phi_i}{\sum_{j=1}^N \phi_j} \quad (2.3)$$

Individual	Fitness	Selection Probability
I_1	2	50%
I_2	1	25%
I_3	0	0%
I_4	1	25%

Table 2.3: Probabilities of selection for our sample population.

Following this, individuals are probabilistically selected for survival. For instance, if I_2 persists, the remaining I_1 , I_3 , and I_4 yield their places to the offspring.

Concluding this introduction to selection in GAs, the subsequent sections will investigate this process further and introduce the variation operators crucial for offspring generation.

2.2.4 Variation

Variation is the process of creating new individuals from existing ones in the pursuit of exploring the solution space. This is crucial in a Genetic Algorithm (GA) to avoid premature convergence to sub-optimal solutions. In a GA, variation is achieved by applying **variation operators** to the individuals in the population. The most common variation operators are **crossover** and **mutation**, which will be explored in this section.

Definition 2.5 (Variation operator). *A variation operator is used to create new individuals from existing ones. Formally, it is a variadic function represented as*

$$\varphi : \mathbb{P} \times \mathbb{R} \times \dots \rightarrow \mathbb{P}; (P, \rho_{\varphi}, \dots) \mapsto \varphi(P, \rho_{\varphi}, \dots)$$

where:

- \mathbb{P} is the set of all possible populations,
- \mathbb{R} is the set of real numbers,
- P is the population to be varied,
- ρ_{φ} is the probability of applying the operator to an individual in the population.

The additional arguments depend on the specific implementation of the variation operator. The role of these arguments will be clarified in section 4.4 on page 49.

¹⁵Refer to section 4.4.2.2 on page 52 for details.

2.2.4.1 Crossover

In genetic algorithms, a prominent variation operator is the *crossover*. This operator mirrors the genetic recombination seen in nature.¹⁶ It facilitates the exchange of genetic material between two individuals, spawning a new generation.

Definition 2.6 (Crossover operator). *The crossover operator recombines genetic material from existing individuals to create new ones. Formally, it is represented as:*

$$X : \mathbb{P} \times \mathbb{R} \times \dots \rightarrow \mathbb{P}; (P, \rho_X, \dots) \mapsto X(P, \rho_X, \dots)$$

with the following parameters:

- \mathbb{P} – the set of all possible populations,
- \mathbb{R} – the set of real numbers,
- P – the population under variation,
- ρ_X – probability of applying the operator to an individual.

In our analysis, we employ a condensed version of the *single-point crossover* operator.¹⁷ This operator picks the first half of the genes from two parental figures and births two new offspring by swapping these chosen genes.

Take, for instance, two parent individuals, $I_1 = 1100$ and $I_2 = 0001$. Utilizing the *single-point crossover* operator, we select the first half of the genes: 11 from I_1 and 00 from I_2 . This exchange produces the offspring $O_1 = 1101$ and $O_2 = 0000$, demonstrated in fig. 2.1.

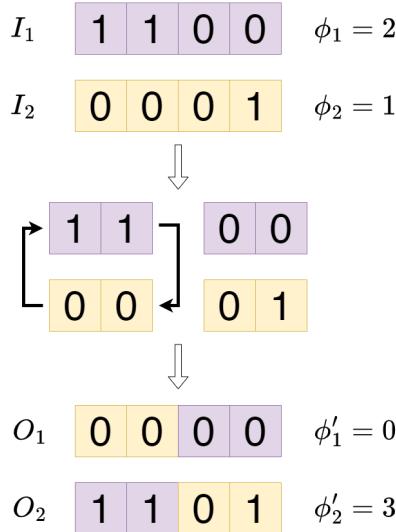


Figure 2.1: Single-point crossover

Following another iteration of the single-point crossover operator, we can generate a result as shown in table 2.4 on the facing page, leading to a new population $\mathbf{O} = \{(0000, 0), (1101, 3), (0101, 2)\}$.

If we now use these offspring as-is to create the next generation, we would obtain the population shown in table 2.5 on the next page:

¹⁶Also known as *crossing-over* in [5].

¹⁷Refer to section 4.4.4.6 on page 59.

Generation 0 → Generation 1			
I	Φ_I	O	Φ_O
$\begin{bmatrix} 1100 \\ 0001 \end{bmatrix}$	$\begin{bmatrix} 2 \\ 1 \end{bmatrix}$	$\begin{bmatrix} 0000 \\ 1101 \end{bmatrix}$	$\begin{bmatrix} 0 \\ 3 \end{bmatrix}$
$\begin{bmatrix} 0001 \\ 0100 \end{bmatrix}$	$\begin{bmatrix} 1 \\ 1 \end{bmatrix}$	$\begin{bmatrix} 0101 \\ \cdot \end{bmatrix}$	$\begin{bmatrix} 2 \\ \cdot \end{bmatrix}$

Table 2.4: Illustration of the single-point crossover operation. In this procedure, two parent individuals are selected and a cut point is chosen. Each offspring is then formed by combining the genes from the parents: one gets the genes from the first part of the first parent and the second part of the second parent, while the other gets the genes from the first part of the second parent and the second part of the first parent. Here, \cdot represents a “discarded” value (since according to the survival rate, only three offspring need to be produced).

Generation 1		
Individual	Binary String	Fitness
I_2	0001	1
O_1	0000	0
O_2	1101	3
O_3	0101	2

Table 2.5: Population after applying the single-point crossover operator. Note that I_2 is the survivor of the previous generation picked in section 2.2.3 on page 8.

	Fitness	Individual
Best	3	O_2
Worst	0	O_1
Average		1.25
Standard deviation		1.291

Table 2.6: Fitness of the population after applying the single-point crossover operator. “Best” refers to the individual with the highest fitness, and “Worst” refers to the individual with the lowest fitness

By the metrics in table 2.6, the population’s average fitness rises from 1 to 1.25, with the fittest individual’s score jumping from 2 to 3. This uplift highlights the crossover operator’s role in directing the search towards enhanced solutions.

While the crossover operation elevates the average population fitness, incorporating a **mutation** operator can further boost genetic diversity¹⁸ and sidestep early convergence to inferior solutions. The subsequent section delves into this operation.

2.2.4.2 Mutation

While the crossover operator effectively recombines existing genetic material, it is limited by the genetic diversity already present in the population. This can sometimes lead to premature convergence, especially for complex problems characterized by numerous local optima, like the **Rastrigin function**.¹⁹

To combat this and infuse fresh *diversity*, the **mutation** operator is employed. It introduces small, probabilistic changes to the genetic makeup of individuals.

¹⁸See definition A.10 on page 86.

¹⁹Refer to appendix B.14 on page 97.

Definition 2.7 (Mutation operator). *The mutation operator introduces variations in an individual's genetic material based on a predefined probability, resulting in a new population. Formally, a mutation operator can be represented as:*

$$M : \mathbb{P} \times [0, 1] \times \dots \rightarrow \mathbb{P}; (P, \mu, \dots) \mapsto M(P, \mu, \dots)$$

Where:

- \mathbb{P} denotes the set of all possible populations.
- \mathbb{R} signifies the set of real numbers.
- P stands for the current population.
- μ indicates the mutation rate – the chance of an individual undergoing mutation.

Additional parameters vary depending on the specific mutation operator in play.

For example, the “One Max” problem might employ a **bit-flip** mutation.²⁰ This mutation scans every gene in an individual, flipping it based on a predetermined probability.

Let's say we apply this mutation with a rate of $\mu = 1$ to the population post-crossover (as discussed in section 2.2.4.1 on page 10). The resulting mutated population, O' , is illustrated in table 2.7.

Generation 0 → Generation 1			
I	Φ_I	O'	Φ_O
$\begin{bmatrix} 0000 \\ 1101 \\ 0101 \end{bmatrix}$	$\begin{bmatrix} 0 \\ 3 \\ 2 \end{bmatrix}$	$\begin{bmatrix} 1111 \\ 0010 \\ 1010 \end{bmatrix}$	$\begin{bmatrix} 4 \\ 1 \\ 2 \end{bmatrix}$

Table 2.7: Illustration of the **bit-flip** mutation operator applied to the population resulting from the crossover operation in section 2.2.4.1 on page 10.

By analyzing the resulting offspring, as highlighted in table 2.8, we can observe the mutation's role in enhancing diversity. For instance, no member of the original population had a 1 in the third position, rendering crossover incapable of producing such a gene configuration. However, post-mutation, three individuals exhibit this trait.

Generation 1		
Individual	Binary String	Fitness
I_2	0001	1
O'_1	1111	4
O'_2	0010	1
O'_3	1010	2

Table 2.8: Population after applying the **bit-flip** mutation operator to the population resulting from the crossover operation in section 2.2.4.1 on page 10.

	Fitness	Individual
Best	4	O'_1
Worst	0	(I_2, O'_2)
Average	2	
Standard deviation	1.414	

Table 2.9: Fitness of the population after applying the **bit-flip** mutation operator to the population resulting from the crossover operation in section 2.2.4.1 on page 10.

In summary, the mutation operator serves a pivotal role in genetic algorithms. It rejuvenates population diversity, mitigating early convergence to suboptimal solutions. By fostering exploration of the search landscape, it allows potentially superior traits

²⁰For more details, refer to section 4.4.3.2 on page 54.

to surface. Nonetheless, the mutation rate's calibration is a balancing act: excessively high rates might destabilize favorable traits, while overly conservative rates might inadequately deter premature convergence. The specific mutation operator and its associated rate significantly influence the genetic algorithm's exploratory efficiency.

Having concluded the variation phase, we can transition to the subsequent stage of the genetic algorithm.

2.2.5 Termination

The genetic algorithm assesses the termination criteria after generating each new population. If met, the algorithm ends and outputs the best-found individual. Otherwise, the generational cycle repeats.

Suppose our termination criterion is the identification of an individual with all ones, represented as 1111. This would mean the fitness function, ϕ_G , attains the value 4.

During our exploration, after applying the variation operators, we indeed discovered the individual 1111. This satisfies our termination criterion, prompting the algorithm to conclude its operation.

Yet, as illustrated in table 2.10, the algorithm has not scoured the entire search space. Instead, the genetic algorithm prioritizes a fitness-guided exploration over a complete one. Still, witnessing the increasing fitness of individuals over generations signals a trend towards an optimal or near-optimal solution.

	00	01	10	11
00	■	■	■	
01	■	■		
10			■	
11	■	■		■

Table 2.10: A map of the search space explored by the genetic algorithm. Dark gray cells denote the candidates the algorithm reviewed. The position of each individual corresponds to its binary representation, using the row for the first two bits and the column for the last two.

In small search arenas, the distinction between a genetic algorithm and random searches might appear negligible. However, as the search space expands, which we delve into later in this thesis, the difference becomes substantial.

Despite their stochastic nature, genetic algorithms do not always promise optimal outcomes. Their efficacy hinges on various components, including the fitness function, representation, variation operators, and selection techniques. This thesis delves deeper into these elements and analyzes their performance across diverse problems.

In essence, the termination phase is pivotal in dictating the final outcome of the genetic algorithm. By setting a clear termination condition, like achieving the highest fitness score, the algorithm efficiently navigates the search terrain. Although it might not exhaustively search, it employs a fitness-centric strategy to steer closer to optimal solutions. It's vital to acknowledge the intrinsic limitations of genetic algorithms. Yet, when configured right, their capability to overshadow random searches, especially in vast spaces, is undeniable. We'll further explore this subject in the subsequent segments of this thesis.

2.3 Genetic Programming

Genetic Programming (GP) [6, 8, 18, 23] is a specialized branch of Evolutionary Algorithms (EA) which focuses on evolving a population of computer programs to solve a given problem. One can perceive GP as an extension of Genetic Algorithms (GA), the key distinction being the problem each approach solves: GA optimizes parameters to enhance a given function, whilst GP induces programs.²¹

Despite these differences, GP and GA share various characteristics such as the utilization of a population of individuals, the employment of a fitness function to evaluate the individuals, and the application of genetic operators to generate new individuals. Notwithstanding, GP adopts a unique representation for the individuals and unique genetic operators.

²¹For a formal definition of program induction, refer to definition A.20 on page 87.

Remark. Although GP operates a fitness-guided search in the space of computer programs, it can be deemed as an optimization problem, akin to GA.

Each individual in a GP population embodies a computer program composed of a set of primitives, referred to as *functions* and *terminals*. An intuitive way to comprehend primitives is by visualizing a composite pattern where the functions equate to composite objects and the terminals to leaf objects (refer to fig. 2.2). An *abstract syntax tree* (AST) is an example of a program representation where the functions correspond to the internal nodes, and the terminals to the leaf nodes.

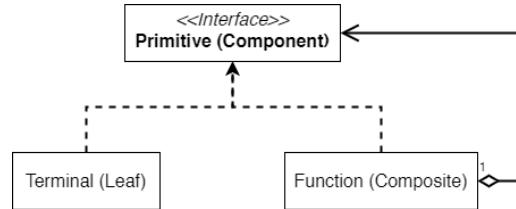


Figure 2.2: The composite structure of a GP individual, illustrating the relationship between functions and terminals

The general GP algorithm is represented in algorithm 1, which closely resembles the GA algorithm with the main disparity being the nature of the *genetic operators* in GP.

Algorithm 1 Outline of the Genetic Programming algorithm, showcasing its structural similarities with the Genetic Algorithm

- ```

1: Generate an initial population by recursively building random programs.
2: Execute each program and assign a fitness value to it.
3: repeat
4: parents \leftarrow selectParents(population) \triangleright Parent selection for reproduction
5: alter(offspring) \triangleright Apply genetic operators to offspring
6: population \leftarrow selectSurvivors(population, offspring) \triangleright Survivor selection to form next generation
7: until termination condition is met \triangleright Termination can be a fixed number of generations, or a satisfactory fitness level, etc.
8: return fittest(population) \triangleright Return the best solution found

```

In the ensuing sections, we will delve into the fundamental components of a GP algorithm and elucidate them through an example.

### 2.3.1 Representation and Evaluation

### 2.3.1.1 Representation

As with GAs, the representation of the individuals is one of the most important aspects of a GP. The representation is the encoding of potential solutions to the problem into a form that can be manipulated,<sup>22</sup> executed and evaluated by the algorithm.

Various methods exist for program representation, such as utilizing an abstract syntax tree, a linear sequence of instructions, a stack of instructions, or a combination of these approaches. However, the most common representation is the ***tree representation***, where the program is represented as a composite data structure like the one shown in the introduction to this section.

Let's illustrate this with an example problem: given a set of  $n$  points in the plane, find the curve that best fits the points. This is a very common problem in statistics, and it is known as the *symbolic regression* problem [6]. In this example, our goal is to use symbolic regression to approximate the function

$$f(x) = 5x^3 - 2x^2 + \sin(x) - 7; \quad x \in [-1, 1] \quad (2.4)$$

using this function, we can generate a set of points that lies on the curve as shown in fig. 2.3 on the next page and table 2.11 on the facing page.

<sup>22</sup>For example, by applying genetic operators.

The next step in preparing our GP setup is to define the primitive set, which includes the functions and terminals that the algorithm can use to construct candidate solutions. In this case, we will use the following set of functions and terminals:

- Functions: 1. + (Addition) 2. – (Subtraction) 3.  $\times$  (Multiplication) 4. / (Division) 5. sin (Sine) 6. cos (Cosine) 7. pow (Power)
- Terminals: 1.  $x$  (The variable  $x$ ) 2.  $\{c \mid c \in [1, 7] \wedge c \in \mathbb{Z}\}$  (An ephemeral constant)<sup>23</sup>

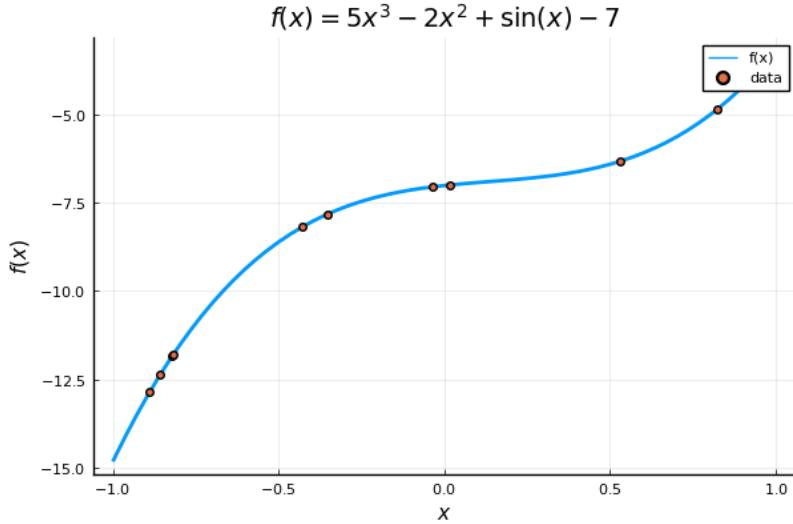


Figure 2.3: A set of points generated from the function  $5x^3 - 2x^2 + \sin(x) - 7$

| $x$       | $y$         |
|-----------|-------------|
| 0.889 160 | -12.872 629 |
| 0.856 103 | -12.358 361 |
| 0.821 295 | -11.851 004 |
| 0.818 193 | -11.807 452 |
| 0.429 859 | -8.183 442  |
| 0.352 328 | -7.812 033  |
| 0.035 776 | -7.038 557  |
| 0.017 450 | -6.983 134  |
| 0.529 010 | -6.314 804  |
| 0.821 101 | -4.848 557  |

Table 2.11: A set of points generated from the function  $5x^3 - 2x^2 + \sin(x) - 7$

Using this set of functions and terminals, we can represent the program as a tree, as shown in fig. 2.4 on the following page.

Note that this definition arises the possibility of having a program that has an infinite number of nodes, as the tree can grow indefinitely. This leads the search to be unsuccessful since the probability of finding a solution is close to zero, for example, the probability of finding a solution on the initial population would be:  $\lim_{x \rightarrow \infty} \frac{1}{x} = 0$ . To avoid this issue of potentially infinite trees, we typically impose certain **constraints** on the generation of the trees. The most common constraints are the **maximum height** of the tree and the **maximum number of nodes** in the tree.

<sup>23</sup>See definition A.6 on page 85.

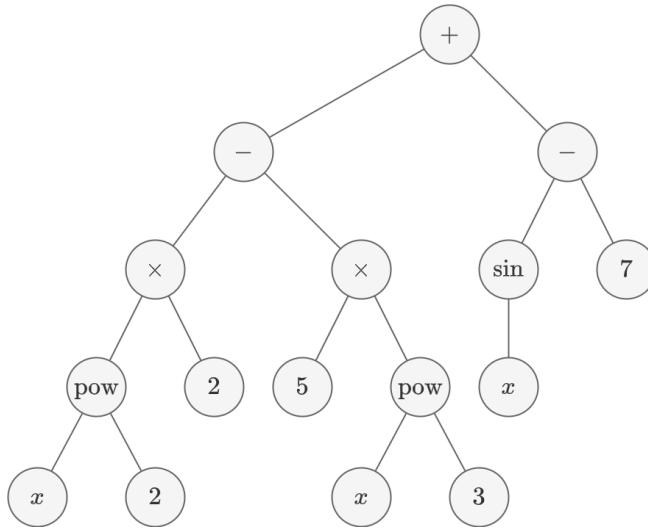


Figure 2.4: A possible tree representation of the program  $5x^3 - 2x^2 + \sin(x) - 7$

### 2.3.1.2 Search space

Using this representation, we can define the **genotype** of the individuals to contain only one **chromosome** which is composed of a single **gene**<sup>24</sup> that is the tree representation of the program. Recalling the definition of cardinality presented in definition 2.1 on page 6, we can see that the cardinality of the search space will be the number of possible trees that can be generated using the primitive set and the maximum height of the tree.

**Lemma 2.1.** Let  $\mathbb{T}_H$  be the set of all possible **labeled trees** of height  $H$ , with  $H \in \mathbb{N}$ . Given the sets  $\mathcal{T}$  and  $\mathcal{F}$  corresponding to the possible labels of terminal nodes (nodes that do not have children) and the possible labels of internal nodes (nodes that have children) respectively, the number of trees in  $\mathbb{T}_H$  is given by the following recurrence relation:

$$|\mathbb{T}_H(\mathcal{T}, \mathcal{F})| = \begin{cases} |\mathcal{T}| & \text{if } H = 0 \\ \sum_{f \in \mathcal{F}} |\mathbb{T}_{H-1}(\mathcal{T}, \mathcal{F})|^{A(f)} & \text{if } H > 0 \end{cases} \quad (2.5)$$

where  $A(f)$  is the arity of the node  $f$ .

**Proof.** For the proof, we will use induction on the height of the tree. For the sake of brevity, we will use the notation  $|\mathbb{T}_H(\mathcal{T}, \mathcal{F})| = |\mathbb{T}_H|$ .

**2.3.1.2.1 Base case:  $H = 0$**  If the height of the tree is 0, then the tree is composed of a single node, which is a terminal node. Thus, the number of possible trees is equal to the number of possible terminal nodes, which arises:

$$|\mathbb{T}_0| = |\mathcal{T}|$$

**2.3.1.2.2 Base case:  $H = 1$**  If the height of the tree is 1, then the tree is composed of a root node, which is an internal node, and a set of children, which are terminal nodes. Suppose that the root node has the label  $f \in \mathcal{F}$  and arity  $A(f)$ .

Since the children are terminal nodes, each children can have any of the labels in  $\mathcal{T}$ . Thus, the number of trees rooted at  $f$  is equal to the number of possible combinations of  $A(f)$  elements (with repetition and order) from the set  $\mathcal{T}$ , this is:

<sup>24</sup>Although the most common representation is to have a single gene referencing the root of the tree, several variations that use multi-gene chromosomes have been proposed, such as Koza's *Automatically Defined Functions* [8], Angeline and Pollack's *Genetic Library Builder* [7, 9], or Rosca and Ballard's *Adaptive Representation* [10].

$$\prod_{i=1}^{A(f)} |\mathcal{T}| = |\mathcal{T}|^{A(f)}$$

Since the root node can have any of the labels in  $\mathcal{F}$ , the number of possible trees of height 1 is equal to:

$$|\mathbb{T}_1| = \sum_{f \in \mathcal{F}} |\mathcal{T}|^{A(f)}$$

**2.3.1.2.3 Inductive step:**  $H > 1$  Suppose the statement holds true for  $H = h$ . We aim to prove that the statement also holds true for  $H = h + 1$ .

Since a terminal node cannot have children,<sup>25</sup> each tree of height  $h + 1$  has a root with one of the labels from the set  $\mathcal{F}$ , and the remaining  $h$  layers are fully formed subtrees of height  $h$ .

For a given node label  $f \in \mathcal{F}$  with arity  $A(f)$ , each child is the root of a subtree of height  $h$ . Given our inductive assumption, there are  $|\mathbb{T}_h|$  possible such subtrees.

Since all subtrees are independent, the number of possible trees with the root  $f$  is  $|\mathbb{T}_h|^{A(f)}$ , which is the product of  $|\mathbb{T}_h|$  over the arity of  $f$ .

We can sum this quantity over all  $f \in \mathcal{F}$  to get the total number of possible trees of height  $h + 1$ :

$$|\mathbb{T}_{h+1}| = \sum_{f \in \mathcal{F}} |\mathbb{T}_h|^{A(f)}$$

□

**Lemma 2.2.** Let  $\mathbb{T}_{\leq H}$  be the set of all possible **labeled trees** of height  $h \leq H$ , with  $H \in \mathbb{N}$  and  $h \in \mathbb{N}$ . Given the sets  $\mathcal{T}$  and  $\mathcal{F}$  corresponding to the possible labels of terminal nodes and the possible labels of internal nodes respectively, the number of trees in  $\mathbb{T}_{\leq H}$  is given by the following recurrence relation:

$$|\mathbb{T}_{\leq H}(\mathcal{T}, \mathcal{F})| = \begin{cases} |\mathcal{T}| & \text{if } H = 0 \\ |\mathbb{T}_H(\mathcal{T}, \mathcal{F})| + |\mathbb{T}_{\leq H-1}(\mathcal{T}, \mathcal{F})| & \text{if } H > 0 \end{cases} \quad (2.6)$$

Where  $\mathbb{T}_H$  is the set of all possible trees of height  $H$ .

**Proof.** For the sake of simplicity, we will use the notation  $|\mathbb{T}_{\leq H}| = |\mathbb{T}_{\leq H}(\mathcal{T}, \mathcal{F})|$  and  $|\mathbb{T}_H| = |\mathbb{T}_H(\mathcal{T}, \mathcal{F})|$ .

The set  $\mathbb{T}_{\leq H}$  can be partitioned into two disjoint sets: the set of all possible trees of height  $H$  and the set of all possible trees of height  $h < H$ . Thus we have:

$$|\mathbb{T}_{\leq H}| = |\mathbb{T}_H| + |\mathbb{T}_{\leq H-1}|$$

□

**Theorem 2.1.** Let  $\mathbb{T}_{\leq H}$  be the set of all possible **labeled trees** of height  $h \leq H$ , with  $H \in \mathbb{N}$  and  $h \in \mathbb{N}$ . Given the sets  $\mathcal{T}$  and  $\mathcal{F}$  corresponding to the possible labels of terminal nodes and the possible labels of internal nodes respectively, the number of trees in  $\mathbb{T}_{\leq H}$  is given by the following recurrence relation:

$$|\mathbb{T}_{\leq H}(\mathcal{T}, \mathcal{F})| = \begin{cases} |\mathcal{T}| & \text{if } H = 0 \\ \left( \sum_{h=0}^{H-1} \sum_{f \in \mathcal{F}} |\mathbb{T}_h(\mathcal{T}, \mathcal{F})|^{A(f)} \right) + |\mathcal{T}| & \text{if } H > 0 \end{cases} \quad (2.7)$$

<sup>25</sup>This could also be interpreted as a terminal node having an arity of 0, or that all terminal nodes are leaves.

Where  $\mathbb{T}_H$  is the set of all possible trees of height  $H$  and  $A(f)$  is the arity of the node  $f$ .

**Proof.** From lemma 2.2 on the preceding page we know the number of trees of height  $H$  or less is given by:

$$|\mathbb{T}_{\leq H}| = |\mathbb{T}_H| + |\mathbb{T}_{\leq H-1}|$$

Then, by applying lemma 2.1 on page 16, we get:

$$|\mathbb{T}_{\leq H}| = \left( \sum_{f \in \mathcal{F}} |\mathbb{T}_{H-1}|^{A(f)} \right) + |\mathbb{T}_{\leq H-1}|$$

By unrolling the recurrence relation, we get:

$$\begin{aligned} |\mathbb{T}_{\leq H}| &= \left( \sum_{f \in \mathcal{F}} |\mathbb{T}_{H-1}|^{A(f)} \right) + |\mathbb{T}_{\leq H-1}| \\ &= \left( \sum_{f \in \mathcal{F}} |\mathbb{T}_{H-1}|^{A(f)} \right) + \left( \sum_{f \in \mathcal{F}} |\mathbb{T}_{H-2}|^{A(f)} \right) + \cdots + \left( \sum_{f \in \mathcal{F}} |\mathbb{T}_1|^{A(f)} \right) + \left( \sum_{f \in \mathcal{F}} |\mathbb{T}_0|^{A(f)} \right) + |\mathbb{T}_0| \\ &= \left( \sum_{h=0}^{H-1} \sum_{f \in \mathcal{F}} |\mathbb{T}_h(\mathcal{T}, \mathcal{F})|^{A(f)} \right) + |\mathcal{T}| \end{aligned}$$

□

With this result, we can now calculate the cardinality of the search space of the genetic programming algorithm for a given maximum height  $H$ , since a program can be seen as a *labeled tree*. Then, given the set  $\mathcal{T} = \{x, c\}$  and the set  $\mathcal{F} = \{+, -, \times, /, \text{sin}, \text{cos}, \text{exp}, \text{log}\}$ , where

$$A(f) = \begin{cases} 2 & \text{if } f \in \{+, -, \times, /, \text{pow}\} \\ 1 & \text{if } f \in \{\text{sin}, \text{cos}\} \end{cases}$$

Given that the height of the AST of the target program is 4, we can use 5 as the maximum height of the programs in the search space (to allow a little of “breathing room” to the generated programs). Noting that, since  $c$  can be one of 7 possible values,  $|\mathcal{T}| = 8$ , we can calculate the cardinality of the search space as follows:

$$\begin{aligned} |\mathcal{S}| &= |\mathbb{T}_{\leq 5}(\mathcal{T}, \mathcal{F})| = \left( \sum_{h=0}^4 \sum_{f \in \mathcal{F}} |\mathbb{T}_h(\mathcal{T}, \mathcal{F})|^{A(f)} \right) + 8 \\ &\approx 9.531\,142 \times 10^{37} \\ &\approx 10^{38} \end{aligned}$$

Thus, the search space of the genetic programming algorithm is of the order of  $10^{38}$  programs.<sup>26</sup> It should be easy to see that the size of the search space make it unfeasible to perform an exhaustive search. This is why we need to use a heuristic search algorithm, such as genetic programming. In fig. 2.5 on the next page we can see how the number of trees of height less or equal to  $h$  rapidly increases as  $h$  increases.

<sup>26</sup>This value was computed using the script shown in listing C.1 on page 105.

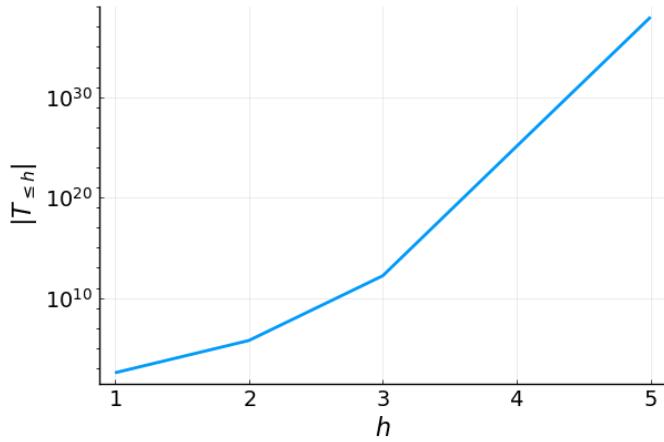


Figure 2.5: Total number of trees of height less or equal to  $h$  for  $h \in \{0, \dots, 5\}$  and  $\mathcal{T} = \{x, c\}$  and  $\mathcal{F} = \{+, -, \times, /, \sin, \cos, \text{pow}\}$ . Note that the  $Y$  axis is in logarithmic scale.

### 2.3.1.3 Evaluation

Now, we need to define how to evaluate the fitness of a program. Again, there are many ways to do this, but a common way is to use the **mean squared error** (MSE) between the points and the program.

**Definition 2.8** (Mean Squared Error). *If a vector of  $n$  predictions is generated from a sample of  $n$  data points on all variables, and  $y_i$  is the  $i$ -th observed value and  $\hat{y}_i$  is the  $i$ -th prediction, then the MSE of the predictor is a function  $\text{MSE} : \mathbb{R}^n \times \mathbb{R}^n \rightarrow \mathbb{R}$  defined as:*

$$\text{MSE}(\mathbf{y}, \hat{\mathbf{y}}) = \frac{1}{n} \sum_{i=1}^n (\mathbf{y}_i - \hat{\mathbf{y}}_i)^2 \quad (2.8)$$

The MSE is a common measure of the quality of an estimator, used in many *machine learning* problems.

In our case, we will use the MSE to evaluate the fitness of a program. Consider a program  $P$  and two sets of points,  $\mathbf{x}$  and  $\mathbf{y}$ , as outlined in table 2.11 on page 15. Suppose also that  $P[\mathbf{x}]$  is the set of points generated by evaluating  $P$  on the points of  $\mathbf{x}$ , and that  $P(x)$  is the result of evaluating  $P$  on the point  $x$ . Then, we can define the fitness of  $P$  as:

$$\phi_P = \text{MSE}(\mathbf{y}, P[\mathbf{x}]) = \frac{1}{n} \sum_{i=1}^n (\mathbf{y}_i - P(\mathbf{x}_i))^2 \quad (2.9)$$

This section elucidated the pivotal aspects of Genetic Programming (GP), focusing on representation of individuals and their evaluation. Individuals, potential solutions to a problem, can be encoded in several ways including tree representation. A common statistical problem, symbolic regression, was illustrated using a set of points on a curve from a function involving both polynomial and trigonometric elements. By defining a set of functions and terminals, these points were represented as a tree. The fitness of an individual program was assessed using the Mean Squared Error (MSE) between the points on the curve generated by the function and the points produced by the program. Thus, in the context of this problem, the fittest individual is the one that minimizes this error, i.e., best fits the curve. The methods described here underscore the versatility and applicability of GP to various types of problems. This method of representation and evaluation provides a robust basis for generating evolving populations of programs. In the next sections we will discuss the mechanisms for generating these populations and the evolutionary operators that act on them.

### 2.3.2 Initialization

As with other evolutionary algorithms, the algorithm starts by generating a population of random individuals.

There are many ways to generate random individuals, but a very common (and simple) method is the *grow method* [6]. In this method, a maximum height is defined, and the algorithm then creates a random tree with a given minimum height and a maximum height.

**Remark.** A tree with a height of 0 is a tree with only one node, the root.

The grow method then proceeds to recursively generate the trees with random nodes until a terminal node is selected or the maximum height is reached. This method is shown in algorithm 2.

---

**Algorithm 2** The grow method for generating random trees

---

**Require:**  $l \in \mathbb{N}$ ,  $h \in \mathbb{N}$

**Require:**  $l \leq h$

**Require:** a random integer  $n$  such that  $l \leq n \leq h$

**Require:**  $\mathbf{t}$  and  $\mathbf{f}$  are the sets of terminal and function nodes respectively, where  $\mathbf{t} \neq \emptyset$  and  $\mathbf{f} \neq \emptyset$

**Ensure:** a random tree with a height between  $l$  and  $h$

```

1: function grow(\mathbf{t} , \mathbf{f} , d)
2: $c \leftarrow \emptyset$
3: if $d = n \vee \left(d \geq l \wedge \text{random}() < \frac{|\mathbf{t}|}{|\mathbf{t}| + |\mathbf{f}|} \right)$ then
4: return a random node from \mathbf{t}
5: else
6: $f \leftarrow$ a random node from \mathbf{f}
7: for i in $1 \dots \text{arity}(f)$ do
8: $c_i \leftarrow$ grow(\mathbf{t} , \mathbf{f} , $d + 1$)
9: $c \leftarrow c \cup \{c_i\}$
10: end for
11: return a tree with root f and children c
12: end if
13: end function
```

---

With this method, the algorithm can generate trees where the size of the longest path from the root to a leaf is a number  $n \in [l, h]$ .

Now that the algorithm can generate random trees, it can generate a random population of trees by generating a random tree for each individual in the population. Assuming a population size of  $p = 4$ , a maximum height of  $h = 3$ , a minimum height of  $l = 1$ , and the primitives set defined in the previous section, the algorithm could generate the population:  $\mathbf{P} = \{\mathbf{I}_1, \mathbf{I}_2, \mathbf{I}_3, \mathbf{I}_4\} = \left\{ \frac{3}{\sin(2)} \times 5^3, 7 - (5 + \sin(x)), 7 + 2, 5x^2 \right\}$ , as shown in fig. 2.6 on the facing page.

The next step is to calculate the fitness of each individual in the population. If we recall, the fitness function is the MSE between the expected output and the actual output of the individual.

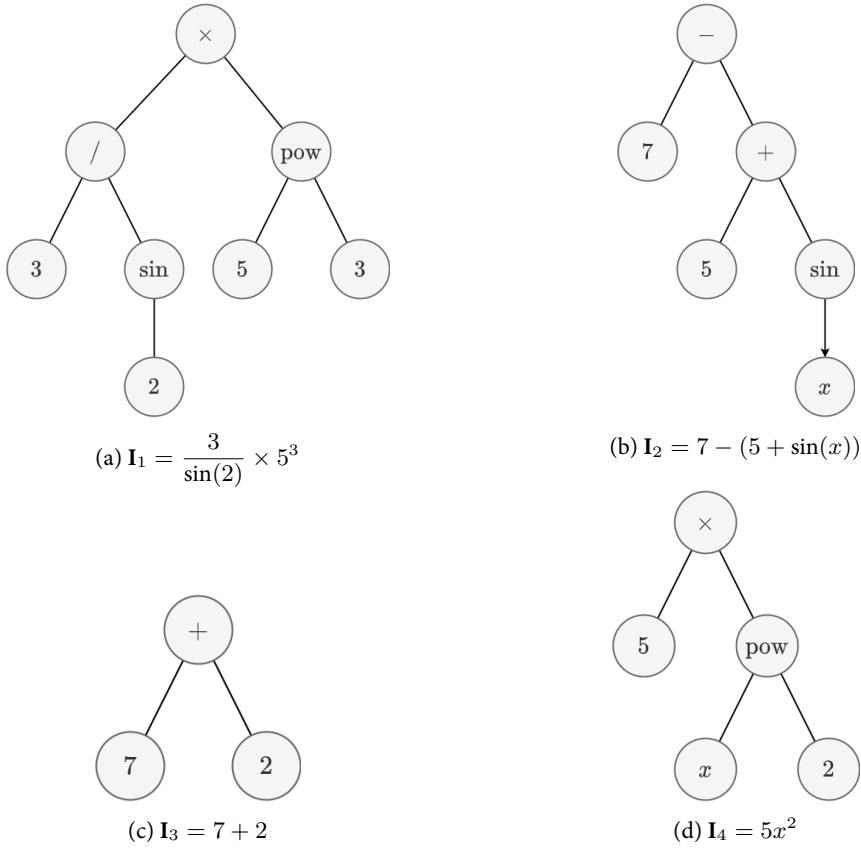


Figure 2.6: A population of random trees.

$$\begin{aligned} \text{MSE}(\mathbf{y}, \mathbf{I}_1[\mathbf{x}]) &= \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - \mathbf{I}_1(\mathbf{x}_i))^2 = \frac{1}{10} \sum_{i=1}^{10} \left( \mathbf{y}_i - \frac{3}{\sin(2)} \cdot 5^3 \right)^2 \\ &\approx 177\,596.851\,131 \\ \text{MSE}(\mathbf{y}, \mathbf{I}_2[\mathbf{x}]) &= \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - \mathbf{I}_2(\mathbf{x}_i))^2 = \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - 7 - (5 + \sin(x_i)))^2 \\ &\approx 137.398\,836 \\ \text{MSE}(\mathbf{y}, \mathbf{I}_3[\mathbf{x}]) &= \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - \mathbf{I}_3(\mathbf{x}_i))^2 = \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - (7 + 2))^2 \\ &\approx 331.924\,267 \\ \text{MSE}(\mathbf{y}, \mathbf{I}_4[\mathbf{x}]) &= \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - \mathbf{I}_4(\mathbf{x}_i))^2 = \frac{1}{10} \sum_{i=1}^{10} (\mathbf{y}_i - 5x^2)^2 \\ &\approx 138.079\,865 \end{aligned}$$

With this, we can assign a fitness to each individual in the population as shown in table 2.12 on the next page. A summary of the population's fitness is shown in table 2.13 on the following page.

We can observe that the worst individual has an error significantly larger than the best individual. This is to be expected, as the MSE is a measure of the error that escalates exponentially with the difference between the expected and actual output.

| Generation 0 |                               |        |                 |
|--------------|-------------------------------|--------|-----------------|
| Individual   | Program                       | Height | Fitness         |
| $I_1(x)$     | $\frac{3}{\sin(2)} \cdot 5^3$ | 3      | 177 596.851 131 |
| $I_2(x)$     | $7 - (5 + \sin(x))$           | 3      | 137.398 835     |
| $I_3(x)$     | $7 + 2$                       | 1      | 331.924 267     |
| $I_4(x)$     | $5x^2$                        | 2      | 138.079 865     |

Table 2.12: Initial population of the genetic programming algorithm

|                    | Fitness         | Individual |
|--------------------|-----------------|------------|
| Best               | 137.398 835     | $I_2(x)$   |
| Worst              | 177 596.851 131 | $I_1(x)$   |
| Average            | 44 551.063 525  |            |
| Standard deviation | 76 814.062 197  |            |

Table 2.13: Fitness of the individuals in generation 0

A graphical representation of the population is shown in fig. 2.7. It is clear from the figure that the worst individual is  $I_1$ .

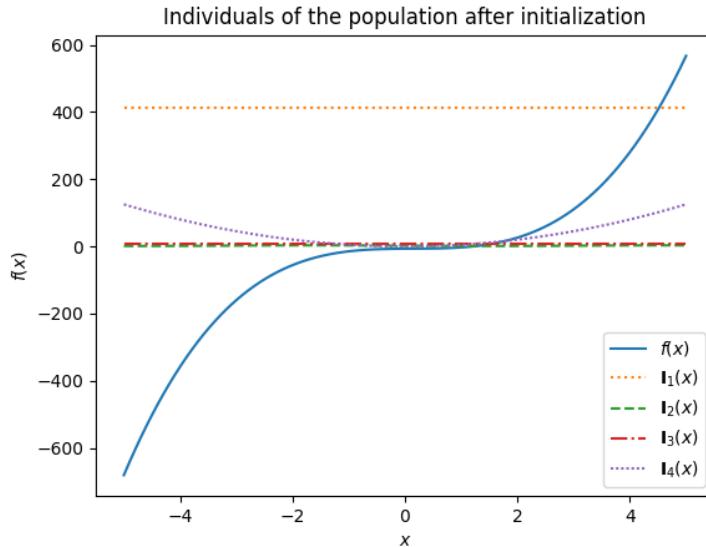


Figure 2.7: Graphical representation of the population in generation 0 compared to the expected output.

In summary, the initialization stage of the genetic programming algorithm, a population of random individuals, represented as trees, was generated using the “grow method”. The height of these trees, signifying the length of the longest path from the root to a leaf, is determined randomly within a specified range. Each tree is recursively populated with random nodes until a terminal node is chosen or the maximum height is reached. Once a random population of trees is created, the fitness of each individual, based on the Mean Squared Error (MSE) between the expected and actual output, is calculated. This results in the assignment of fitness scores to all individuals, facilitating the evaluation and selection process in the succeeding stages of the algorithm. The output of this process is a random population of trees with fitness scores and height measurements, ready for the next steps of selection, crossover, and mutation.

### 2.3.3 Selection

The selection process in Genetic Programming (GP) is similar to that of Genetic Algorithms (GA). However, unique modifications have been proposed for the standard process in GP, which consider the semantics, or the functional behavior, of the programs being evolved [26]. This work will not delve into this topic, as it is beyond the scope of this document.

For the problem under study, we use a selection process similar to the one used in the *One Max* problem (a simple optimization problem where the objective is to maximize the number of ones in a binary string). The equation for calculating the selection probability will diverge from eq. (2.3) on page 9, as it presumes the fittest individual is the one with the highest fitness value. In contrast, the symbolic regression problem, which is our focus, considers the individual with the lowest fitness value as the fittest.

For this particular case of the symbolic regression problem, we adjust our approach to selection. We introduce a *corrected fitness function*,  $\phi'$ , defined as:

$$\phi'(I) = \left( \sum \Phi_{\mathbf{P}} \right) - \phi_I \quad (2.10)$$

Here,  $\phi_I$  signifies the fitness of individual  $I$ , and  $\Phi_{\mathbf{P}}$  represents the *batch fitness function* defined in definition 2.3 on page 7 applied to the population  $\mathbf{P}$ . We then define the selection probability for an individual  $\mathbf{P}_i$  as:

$$p_i = \frac{\phi'(\mathbf{P}_i)}{\sum_{j=1}^N \phi'(\mathbf{P}_j)} \quad (2.11)$$

In this equation,  $N$  stands for the size of the population.

With this methodology, we calculate the selection probabilities for the population as illustrated in table 2.14. The outcome shows that the individual with the highest error has a considerably low probability of being selected, while the other individuals have roughly equal chances.

| Individual        | Fitness         | Selection probability |
|-------------------|-----------------|-----------------------|
| $\mathbf{I}_1(x)$ | 607 402 968     | 0.113 615%            |
| $\mathbf{I}_2(x)$ | 178 066.855 263 | 33.307 633%           |
| $\mathbf{I}_3(x)$ | 177 872.329 832 | 33.271 246%           |
| $\mathbf{I}_4(x)$ | 178 066.174 234 | 33.307 505%           |

Table 2.14: Selection probabilities for the symbolic regression problem.

Assuming a *survival rate* of 50%, let's consider that the selection process favors  $I_2$  and  $I_3$  as survivors due to their higher selection probabilities (as shown in the previous table). In this scenario,  $I_1$  and  $I_4$  are identified as the ones to be replaced by the offspring in the next generation. A comparison between the survivors and the target function is shown in fig. 2.8 on the next page.

To conclude, this section discussed the selection process in Genetic Programming (GP), noting that it largely mirrors that of Genetic Algorithms (GA) with some differences. These differences primarily focus on the semantics of the programs being evolved. The symbolic regression problem, necessitates a corrected fitness function and an adjusted selection probability equation. We outlined how these modifications are implemented and computed selection probabilities for a hypothetical population. A survival rate of 50% resulted in two individuals being selected as survivors and two being marked for replacement in the next generation. This lays the groundwork for the next phase of the process, which is variation.

### 2.3.4 Variation

Analogous to GA, the individuals in a GP population undergo a variation process. For the symbolic regression problem under consideration, we introduce variation using two specific operators: *crossover* and *mutation*.

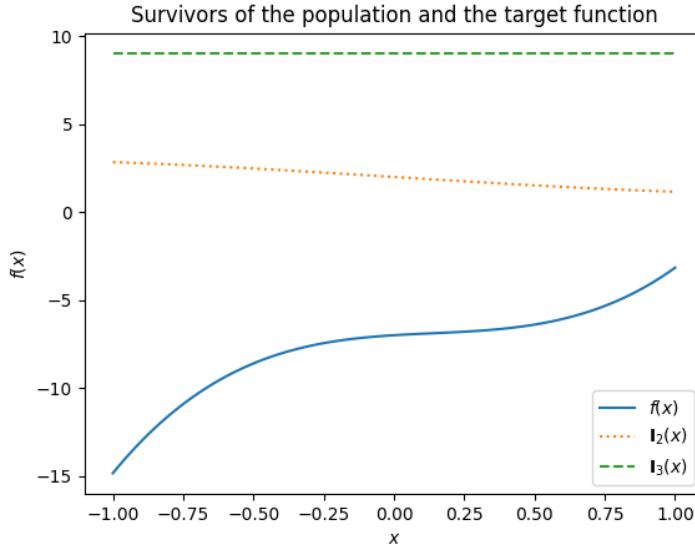


Figure 2.8: Comparison between the survivors and the target function.

#### 2.3.4.1 Crossover

Variation operators in Genetic Programming (GP) must maintain the syntactic correctness of the programs or individuals. For crossover, this implies that the resultant offspring must be syntactically correct programs.

The crossover operator used in Genetic Algorithms (GAs), described in section 2.2.4.1 on page 10, is not typically suitable for GP, as it does not guarantee the syntactic correctness of the resulting individuals. Though there could be instances where the crossover operator used in GAs is applicable to GP, as depicted in chapter 7 on page 73, these are not common scenarios.

The choice of operator in GP depends on the representation of the individuals.

For tree-based GP, the fundamental crossover operator is the **subtree crossover**, referenced in ?? on page ??.

This operator selects a random node from each parent and exchanges the subtrees rooted at these nodes. Usually, a constraint similar to the one used for generating the initial population is applied to this operator to prevent the creation of overly large trees.

Assuming we select two individuals,  $\mathbf{I}_1$  and  $\mathbf{I}_2$ , from the population, the subtree crossover operator chooses a random node from each individual, say  $\clubsuit = 7$  from  $\mathbf{I}_1$  and  $\diamond = x^2$  from  $\mathbf{I}_2$ . The subtrees rooted at these nodes are then interchanged, as shown below:

$$\begin{aligned} \chi(\mathbf{I}_2, \mathbf{I}_4) &= \chi(\clubsuit - (5 + \sin(x)), 5\diamond) \\ &= (\diamond - (5 + \sin(x)), 5\clubsuit) \\ \Leftrightarrow (\mathbf{O}_1, \mathbf{O}_2) &= (x^2 - (5 + \sin(x)), 5 \cdot 7) \end{aligned}$$

where  $\chi$  signifies the subtree crossover operator between two individuals. The crossover of  $\mathbf{I}_1$  and  $\mathbf{I}_2$  is depicted in fig. 2.9 on the next page.

Following the application of the subtree crossover operator, the fitness of the individuals in the population is evaluated as shown in table 2.15 on the facing page. A summary of the population's fitness is given in table 2.16 on the next page.

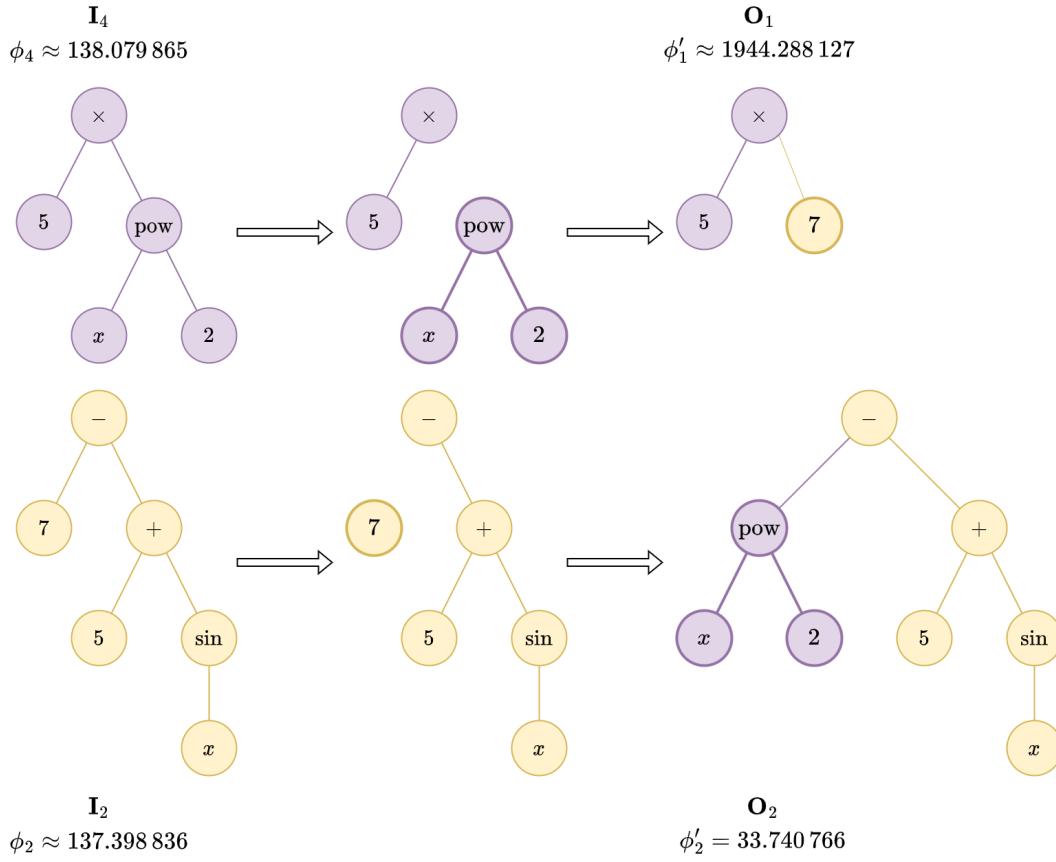


Figure 2.9: Crossing over of  $\mathbf{I}_2 = 7 - (5 + \sin(x))$  and  $\mathbf{I}_4 = 5x^2$ , producing  $\mathbf{O}_1 = x^2 - (5 + \sin(x))$  and  $\mathbf{O}_2 = 5 \cdot 7$ .

| Generation 1      |                       |              |
|-------------------|-----------------------|--------------|
| Individual        | Program               | Fitness      |
| $\mathbf{I}_2(x)$ | $7 - (5 + \sin(x))$   | 137.398 835  |
| $\mathbf{I}_3(x)$ | $7 + 2$               | 331.924 267  |
| $\mathbf{O}_1(x)$ | $5 \cdot 7$           | 1944.288 127 |
| $\mathbf{O}_2(x)$ | $x^2 - (5 + \sin(x))$ | 33.740 766   |

Table 2.15: Population after applying the subtree crossover operator.

|                    | Fitness      | Individual        |
|--------------------|--------------|-------------------|
| Best               | 33.740 766   | $\mathbf{O}_2(x)$ |
| Worst              | 1944.288 127 | $\mathbf{O}_1(x)$ |
| Average            | 611.837 999  |                   |
| Standard deviation | 776.701 997  |                   |

Table 2.16: Fitness summary of the population after applying the subtree crossover operator.

A notable improvement in the population's fitness is observed after the application of the subtree crossover operator. Comparing the results from table 2.13 on page 22, we find that the average fitness (or error) has dropped from 44 551.063 525 to 611.837 999, equating to an improvement of approximately 98.627%.

$$\frac{\bar{\Phi}_i - \bar{\Phi}_X}{\bar{\Phi}_i} = \frac{44\,551.063\,525 - 611.837\,999}{44\,551.063\,525} \approx 98.627\%$$

where  $\bar{\Phi}_i$  is the average fitness of the population after initialization and  $\bar{\Phi}_X$  is the average fitness of the population after applying the subtree crossover operator.

A reduction in the population's fitness standard deviation, from 76 814.062 197 to 776.701 997, is also seen. This decrease of around 98.989% indicates that the population's diversity has reduced.

$$\frac{\sigma_i - \sigma_X}{\sigma_i} = \frac{76\,814.062\,197 - 776.701\,997}{76\,814.062\,197} \approx 98.989\%$$

where  $\sigma_i$  is the standard deviation of the fitness of the population after initialization and  $\sigma_X$  is the standard deviation of the fitness of the population after applying the subtree crossover operator.

Diversity here is a measure of population's dispersion, and a decline in diversity may signal that the population is not converging towards a solution (too much diversity) or is converging prematurely (too little diversity).

In the following section, we discuss the mutation operator, which can be used to introduce diversity into the population, thereby preventing premature convergence.

#### 2.3.4.2 Mutation

Mutation, another crucial genetic operator, introduces new genetic material into the population, thus maintaining genetic diversity and preventing premature convergence to suboptimal solutions. In the context of GP, the mutation operator modifies a program in the population, while ensuring the resultant individual's syntactic correctness.

In tree-based GP, a common form of mutation is the **point mutation** [18, 61], which selects a random node from an individual and replaces it with a random primitive with the same arity. This operator is similar to the bit-flip mutation operator used on section 2.2.4.2 on page 11. As with bit-flip mutation, point mutation can also be applied with a certain probability to each node in an individual, meaning that more than one node can be mutated in a single individual.

Suppose we mutate all the individuals in the population resulting from the crossover operation in section 2.3.4.1 on page 24, and that exactly one node is mutated in each individual. Let the selected nodes be ♣ = sin in  $I_2$ , ♠ = 7 in  $I_3$ , ♠ = 5 in  $O_1$ , and ♦ = 2 in  $O_2$ . Then, a possible result of applying the point mutation operator can be:

$$M \left( \begin{bmatrix} I_2 \\ I_3 \\ O_1 \\ O_2 \end{bmatrix} \right) = M \left( \begin{bmatrix} 7 - (5 + \clubsuit(x)) \\ \spadesuit + 2 \\ \heartsuit \cdot 7 \\ x^{\diamondsuit} - (5 + \sin(x)) \end{bmatrix} \right) = \left( \begin{bmatrix} 7 - (5 + \clubsuit'(x)) \\ \spadesuit' + 2 \\ \heartsuit' \cdot 7 \\ x^{\diamondsuit'} - (5 + \sin(x)) \end{bmatrix} \right) = \left( \begin{bmatrix} 7 - (5 + \cos(x)) \\ 6 + 2 \\ 6 \cdot 7 \\ x^3 - (5 + \sin(x)) \end{bmatrix} \right)$$

Here, ♣', ♠', ♠', and ♦' are random primitives with the same arity as ♣, ♠, ♠, and ♦, respectively. That being, ♣' = cos, ♠' = 6, ♠' = 6, and ♦' = 3.

The fitness of the individuals in the population after applying the subtree mutation operator is then evaluated. The results of this fitness evaluation are shown in ?? on page ???. A summary of the fitness of the population is presented in ?? on page ??.

| Generation 1 |                       |               |
|--------------|-----------------------|---------------|
| Individual   | Program               | Fitness       |
| $M(I_2(x))$  | $7 - (5 + \cos(x))$   | 112.297 411   |
| $M(I_3(x))$  | $6 + 2$               | 296.910 273   |
| $M(O_1(x))$  | $6 \cdot 7$           | 2 609.386 088 |
| $M(O_2(x))$  | $x^3 - (5 + \sin(x))$ | 15.295 863    |

Table 2.17: Population after applying the node mutation operator.

|                    | <b>Fitness</b> | <b>Individual</b>    |
|--------------------|----------------|----------------------|
| Best               | 15.295 863     | $M(\mathbf{O}_2(x))$ |
| Worst              | 2 609.386 088  | $M(\mathbf{O}_1(x))$ |
| Average            |                | 758.472 409          |
| Standard deviation |                | 1 073.402 832        |

Table 2.18: Fitness summary of the population after applying the node mutation operator.

Just like the crossover operator, mutation can also significantly influence the fitness and diversity of the population. By generating new structures in the population, mutation can help prevent stagnation and maintain diversity, thus avoiding premature convergence to suboptimal solutions.

With this, we can conclude that after at the end of the generation, the population shows an improvement of 98.298% in fitness, and 98.603% in standard deviation.

$$\frac{\bar{\Phi}_i - \bar{\Phi}_M}{\bar{\Phi}_i} = \frac{(44\,551.063\,525 - 758.472\,409)}{44\,551.063\,525} \approx 98.298\%$$

$$\frac{\sigma_i - \sigma_M}{\sigma_i} = \frac{(76\,814.062\,197 - 1\,073.402\,832)}{76\,814.062\,197} \approx 98.603\%$$

fig. 2.10 shows the population after applying the node mutation operator. Two points should be clear from this figure. First, all individuals of the population are closer to the target function than the individuals in the initial population. Second, the new fittest individual is  $\mathbf{O}_2$ , this individual has a shape similar to the target function.

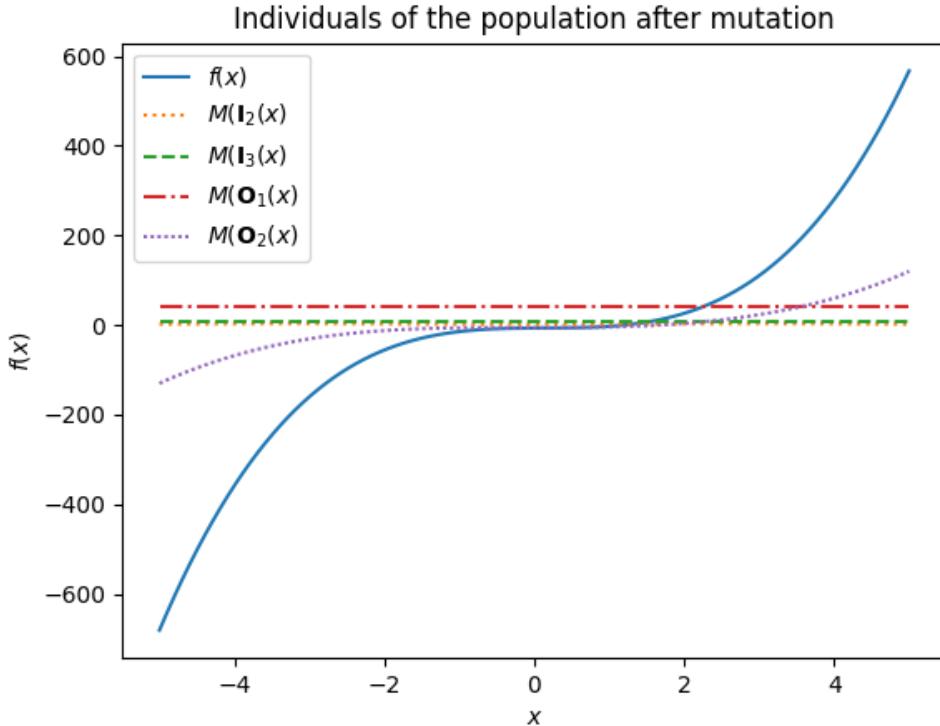


Figure 2.10: Population after applying the node mutation operator

In summary, mutation plays a pivotal role in the genetic programming process. It injects fresh genetic material into the population, thereby promoting diversity and ensuring the continual exploration of the search space. As demonstrated, mutation not only alters the structure of individuals but can also lead to significant enhancements in fitness. By tactfully combining crossover and mutation operations, genetic programming can efficiently traverse the vast landscape of possible solutions. This underscores the importance of maintaining a delicate balance between exploration (introducing new genetic structures) and exploitation (refining existing successful solutions).

## Chapter 3

# State of the Art: Relevant Work

This chapter delves into the current state of the art in genetic algorithm frameworks. While genetic algorithms themselves aren't new, their applications keep evolving<sup>1</sup> with technological advancements in programming languages and tools.

We'll spotlight five major frameworks: *Agile Artificial Intelligence in Pharo*, *DEAP*, *Jenetics*, *ECJ*, and *GeneticSharp*. Each section provides an overview of the respective framework, complete with code samples, showcasing their syntax and distinct features. This exploration aims to give readers a broad understanding of the array of tools in this domain.

Moreover, this review sets the context for our forthcoming contribution: a genetic algorithm framework crafted in Kotlin. To relate, listing C.2 on page 105 features the *Keen* framework's approach to the *OneMax* problem, akin to the examples herein.

While we strive for objectivity, we recognize that personal biases may color our perceptions. We don't position ourselves as experts in the covered frameworks or languages, and there's a possibility that the provided implementations could be optimized further. We invite readers to delve into these frameworks firsthand and shape their own conclusions.

For transparency, it's worth noting that this review is impartial. We haven't received any compensation from, nor are we affiliated with, any of the framework developers aside from Bergel's *Agile Artificial Intelligence in Pharo* book. This chapter reflects our individual insights and experiences.

### 3.1 The One Max Problem

For the purpose of illustrating the use of the different frameworks, we will use the *One Max problem* introduced on section 2.2.1 on page 6.

The *One Max problem* is a classic and straightforward optimization problem often used as a benchmark in the study of evolutionary algorithms and other heuristic search methods. It serves as a deceptively simple yet effective test of an algorithm's optimization ability.

Given a binary string of length  $n$ , the *One Max problem* is to find a binary string such that the sum of its bits (counting the number of ones) is maximized. In formal terms, if we denote the binary string as  $x = (x_1, x_2, \dots, x_n)$  where each  $x_i \in \{0, 1\}$  for all  $i = 1, 2, \dots, n$ , the *fitness function*  $\phi(x)$  to be maximized can be expressed as:

$$\phi(x) = \sum_{i=1}^n x_i \tag{3.1}$$

The function  $\phi(x)$  counts the number of ones in the string  $x$ . The maximum possible value of  $\phi(x)$  is  $n$ , which is achieved when all bits in the string are one. The *One Max problem* is an instance of a unimodal problem since there's only one local maximum which is also a global maximum.

---

<sup>1</sup>No pun intended.

It's important to note that despite its simplicity, the *One Max problem* does provide a non-trivial task for many search algorithms. For a binary string of length  $n$ , there are  $2^n$  possible solutions. For larger  $n$ , an exhaustive search of the solution space is not feasible, hence the need for efficient optimization algorithms.

Due to its characteristics, the *One Max problem* is often used to evaluate the performance of optimization algorithms especially genetic and evolutionary algorithms. It's particularly well-suited for genetic algorithms as the operations of crossover and mutation can directly change the number of ones in a binary string, thus impacting the fitness of a potential solution.

Despite the straightforward objective function, the *One Max problem* is invaluable in the study of heuristic search methods due to its accessibility, simplicity and the vastness of its search space, which permits the analysis and comparison of the performance of different optimization techniques.

## 3.2 Agile Artificial Intelligence in Pharo

Alexandre Bergel's “*Agile Artificial Intelligence in Pharo*” [29] delivers a comprehensive exploration of genetic algorithms, encapsulating their theory and application within the *Pharo* programming environment. This language, dynamic and reflective, finds its roots in *Smalltalk*. The source code of the framework is licensed under a *freeware license* and is available on *GitHub*.<sup>2</sup>

Bergel's tome not only introduces readers to genetic algorithms but also to neural networks and the concept of neuroevolution. The framework's design and the reasoning behind it are meticulously detailed, offering readers insights into its three main components: **genetic operators**, **selection operators**, and the **evolution engine**. Accompanying this detailed framework are test cases. These serve dual roles: exemplifying the framework's application and guiding enthusiasts in developing their own robust and extensible frameworks.

The book also provides utilities for the visualization of genetic algorithms and neural networks. These are implemented using *Roassal*, a visualization engine for *Pharo*. The engine is capable of rendering a variety of graphs, including directed and undirected graphs, trees, and more relevant to this document, a summary of the evolution fitness over time.

To showcase the framework's utility, the OMP problem resolution via a genetic algorithm is provided:

Listing 3.1– A simple genetic algorithm using Bergel's framework.

```

1 engine := GAEngine new.
2 engine random: (Random seed: 11).
3 engine populationSize: 20.
4 engine numberOfGenes: 20.
5 engine createGeneBlock: [:rand :index :ind |
6 (0 to: 1) atRandom: rand].
7 engine fitnessBlock: [:ind | ind count: [:each | each = 1]].
8 engine endIfFitnessIsAbove: 20.
9 engine run.
10 engine trace: 'Target fitness reached at generation '.
11 engine traceCr: engine logs last generationNumber.
12 engine trace: 'Best individual is: '.
13 engine traceCr: engine logs last fittestIndividual genes .
14 engine trace: 'with fitness: '.
15 engine traceCr: engine logs last bestFitness .

```

Breaking it down:

- 1 A new genetic algorithm engine is created.
- 2 The random seed is set to 11.
- 3-4 The population and number of genes are both set to 20.
- 5-6 The gene creation block is outlined for initial population generation, returning a random digit either 0 or 1.

<sup>2</sup><https://github.com/Apress/agile-ai-in-pharo/tree/master>

- 7 The fitness block is then detailed, here counting the number of 1s in an individual.
  - 8 The algorithm's termination condition is set, halting if an individual's fitness surpasses 20.
  - 9 The algorithm is then executed.
- 10-18 The algorithm's logs are then printed to the console. Note that the engine keeps a log of the evolution process.

While Bergel's framework, as presented in the book, stands as a clear and potent genetic algorithm tool for *Pharo*, its primary intent is instructional. As such, it may not rival the robustness of seasoned frameworks like DEAP or *Jenetics*.

### 3.3 Distributed Evolutionary Algorithms in Python (DEAP)

*Distributed Evolutionary Algorithms in Python* (DEAP) [44] is a powerful evolutionary computation framework designed for rapid prototyping and validation of concepts. It stands apart from many other evolutionary computation libraries due to its significant modularity and versatility, which enables the construction of a broad range of evolutionary algorithms, genetic algorithms, and even hybrid algorithms. DEAP is open-source and available under the *GNU Lesser General Public License v3.0* (LGPL-3.0) [49].

DEAP is structured around two primary components: the *Creators* and the *Toolbox*. The *Creators* module facilitates the generation of new classes integral to the genetic algorithm, such as individuals and populations. In contrast, the *Toolbox* serves as a comprehensive repository for various operators necessary in evolutionary algorithms, including the evaluation, selection, mutation, and crossover functions.

The following illustrates the use of DEAP to solve the OMP problem using a genetic algorithm:

Listing 3.2– A simple genetic algorithm using DEAP.

```

1 creator.create("FitnessMax", base.Fitness, weights=(1.0,))
2 creator.create("Individual", list, fitness=creator.FitnessMax)
3 toolbox = base.Toolbox()
4 toolbox.register("attr_bool", random.randint, 0, 1)
5 toolbox.register("individual", tools.initRepeat, creator.Individual, toolbox.attr_bool, n=
 ↵ 20)
6 toolbox.register("population", tools.initRepeat, list, toolbox.individual)
7 toolbox.register("evaluate", lambda i: (sum(i),))
8 toolbox.register("mate", tools.cxTwoPoint)
9 toolbox.register("mutate", tools.mutFlipBit, indpb=0.05)
10 toolbox.register("select", tools.selTournament, tournsize=3)
11 TARGET_FITNESS = 20
12 if __name__ == "__main__":
13 random.seed(11)
14 pop = toolbox.population(n=20)
15 hof = tools.HallOfFame(1)
16 stats = tools.Statistics(lambda i: i.fitness.values)
17 stats.register("max", max)
18 gen = 0
19 while True:
20 gen += 1
21 offspring = algorithms.varAnd(pop, toolbox, cxpb=0.5, mutpb=0.2)
22 fits = toolbox.map(toolbox.evaluate, offspring)
23 for fit, ind in zip(fits, offspring):
24 ind.fitness.values = fit
25 pop = toolbox.select(offspring, k=len(pop))
26 hof.update(pop)
27 record = stats.compile(pop)

```

```

28 if record['max'][0] >= TARGET_FITNESS:
29 break
30 print(f"Target fitness reached at generation {gen}.")
31 print(f"Best individual is: {''.join(map(str, hof[0]))}")
32 print(f"with fitness: {hof[0].fitness.values[0]}")

```

When executed, the program outputs the following:

```

Target fitness reached at generation 12.
Best individual is: 11111111111111111111
with fitness: 20.0

```

This example demonstrates the use of DEAP to implement a simple genetic algorithm, with the added functionality to stop evolution once a target fitness is achieved.

Here is a breakdown of the code:

- 1-2 DEAP uses a meta-factory to *dynamically* create user-defined classes. Here, we create two classes: `FitnessMax` for the fitness (single-objective, to be maximized) and `Individual` to represent an individual in the population. The second argument to `create` is the base class, meaning that `FitnessMax` is a subclass of `base.Fitness` and `Individual` is a subclass of `list`.
- 3 The `Toolbox` is created, it is used to store most of the functions and arguments required to perform the genetic algorithm.
- 4-5 We register two functions in the toolbox: `attr_bool` which generates a random binary number (0 or 1), and `individual` which creates a new individual using the `attr_bool` function. The individual consists of 20 binary numbers (genes).
- 6-7 We then register two more functions: `population` which creates a population of individuals, and `evaluate` which evaluates an individual's fitness as the sum of its genes.
- 8-10 We register three more functions in the toolbox: `mate` for performing *two-point crossover*, `mutate` with a *bit-flip mutator* with a 5% probability, and `select` for performing tournament selection with a tournament size of 3.
- 11 We set the target fitness to 20 (since we aim to maximize the sum of the genes, the maximum possible fitness is 20)
- 12-32 In the main section of the code, we seed the random number generator to ensure reproducibility, create a population of 20 individuals, and set up the *Hall of Fame* and a statistics object to keep track of the maximum fitness in the population.
- 19-29 A while loop is used to run the genetic algorithm until the target fitness is reached. Inside the loop:
  - 21-22 We apply crossover and mutation to the population using the `varAnd` function,<sup>3</sup> and then evaluate the fitness of the offspring
  - 23-24 We assign the newly computed fitness values to the individuals.
  - 25 We replace the old population with the selected individuals from the offspring.
  - 26-27 We update the Hall of Fame and compile the statistics.
  - 28-29 We check if the maximum fitness has reached the target fitness. If it has, we break the loop and the algorithm stops.
- 30-32 Finally, we print the results.

This example illustrates the key aspects of using DEAP: creating custom classes, setting up a toolbox, defining and registering functions, and manually controlling the loop of the genetic algorithm.

DEAP provides robust support for multi-objective algorithms and parallelization, which are common requirements in complex optimization problems. The library also includes a set of benchmark functions and examples to help users understand the various algorithms' behavior and performance.

<sup>3</sup>This function simply applies the variation operators to the population.

DEAP is widely regarded as one of the most comprehensive and cutting-edge genetic algorithm frameworks currently available, encompassing a wide range of algorithms, including GAs, GP, Evolutionary Strategies (ES), and more. It boasts a wealth of documentation and a robust community of users and contributors. However, certain facets of DEAP may pose challenges for users, as reflected in the preceding code example.

- **Toolbox Convention:** DEAP's verbose code and toolbox usage can confuse those new to evolutionary algorithms.
- **Flexibility vs. Usability:** DEAP offers flexibility but its dependence on code injection complicates static analysis and IDE integration.
- **Production Risks:** DEAP's code injection can introduce vulnerabilities if not handled properly.
- **Python's Typing:** The dynamic typing in Python, while flexible, can lead to runtime errors and harder-to-understand code.
- **Dependency on NumPy:** DEAP requires the NumPy library, introducing an additional dependency to manage.
- **Library Mastery:** Extending DEAP's capabilities demands a deep understanding of its architecture and often manual algorithm modifications.
- **Abbreviated Variables:** DEAP's use of abbreviated variable names, coupled with Python's keyword arguments, can hinder code interpretation without documentation.

Despite this, DEAP's flexibility and modularity have made it a popular choice among researchers and practitioners in the field of evolutionary computation.

### 3.4 Jenetics: Java Genetic Algorithm Library

*Jenetics* [61] is a robust EC library developed in *Java*. It is a comprehensive framework that provides a *wide range* of genetic algorithms and operators. The library is open-source and available under the *MIT* license [16].

*Jenetics* structure revolves around two main concepts: **Phenotype**<sup>4</sup> and **Engine**. The **Phenotype** is a representation of a single candidate solution to a given optimization problem. Meanwhile, the **Engine** is the core of the library, which controls the evolution process. It is responsible for the initialization of the population, the execution of the evolution, and the termination of the evolution once the termination condition is met (this uses a very similar approach to the one we presented in section 3.2 on page 30).

One thing that sets *Jenetics* apart from other libraries is the use of the *Java's Stream API* [58] to make a seamless integration between it and the **EvolutionStream** class used by the **Engine**. This means that the evolution has access to all the features provided by the Stream API, such as parallelization, filtering, and mapping.

Below, we demonstrate the use of *Jenetics* to solve the OMP with a genetic algorithm:

Listing 3.3– Solution to the OMP using *Jenetics*

```

1 public class OneMax {
2 public static void main(String[] args) {
3 RandomRegistry.random(new Random(11));
4 final var engine =
5 Engine.builder((Genotype<BitGene> gt) ->
6 gt.chromosome().as(BitChromosome.class).bitCount(),
7 BitChromosome.of(20, 0.5))
8 .maximizing()
9 .populationSize(20)
10 .alterers(new Mutator<>(0.05), new SinglePointCrossover<>(0.5))
11 .build();
12
13 Phenotype<BitGene, Integer> best = engine.stream()
```

<sup>4</sup>See definition A.18 on page 87

```

13 .limit(Limits.byFitnessThreshold(19))
14 .collect(EvolutionResult.toBestPhenotype()));
15 System.out.println("Target fitness reached at generation: " + best.generation());
16 System.out.println("Best individual is: " + best.genotype());
17 System.out.println("with fitness: " + best.fitness());
18 }
19 }
```

When executed, the program outputs the following:

```

Target fitness reached at generation: 40
Best individual is: [00001111|11111111|11111111]
with fitness: 20
```

This example demonstrates *Jenetics*' usage for implementing a straightforward genetic algorithm, with the added ability to stop evolution once steady fitness is achieved.

Here is an explanation of the code:

- 1-2 First, a class containing a `main` method is established. This forms the launching point of the program.
- 3 The `RandomRegistry` is then utilized to preset the random seed, a step that ensures consistency and replicability of program outputs.
- 4-11 The core configuration of the evolutionary engine occurs next, tailored specifically to the problem at hand.
  - 5-7 An `Engine` is instantiated using the `Engine.builder` method, requiring two arguments: a `Function` and a `Genotype`. The `Function` assesses the fitness of a `Genotype` by tallying the quantity of 1s in the `Genotype`. A `Genotype` is created via the `BitChromosome.of` method, which mandates the length of the chromosome and the probability of a 1 appearing within the chromosome. Here, `BitChromosome` is a distinct version of the `Chromosome` interface, used to depict a `Genotype` composed of `BitGenes`.
  - 8 The `maximizing` method signals that the objective is to boost fitness to its maximum possible value.
  - 9 The `populationSize` method sets the size of the evolutionary population.
  - 10 The `alterers` method sets the genetic operations to be used in the evolution. Here, the `Mutator` and `SinglePointCrossover` are selected. The `Mutator` behaves similarly to a *bit-flip mutation* operator in this context.
  - 11 Finally, the `build` method assembles the functional `Engine`.
- 12-14 Execution of the evolution process follows.
  - 12 The `stream` method generates an `EvolutionStream` from the `Engine`, allowing for control over the evolution process.
  - 13 The `limit` method sets the termination condition. The evolution halts once a `Phenotype` possessing a fitness **exceeding** 19 is located.
  - 14 Lastly, the `collect` method gathers the evolution's output, in this case, capturing the optimal `Phenotype` discovered.
- 15-17 The final stage involves printing the evolution results to the console for review and analysis.

This example showcases the key aspects of using *Jenetics*: creating genotypes, setting up an engine, and controlling the evolution process.

*Jenetics* provides extensive support for multi-objective algorithms and parallel execution, which are common necessities in intricate optimization problems.

Recognized as one of the most comprehensive and cutting-edge genetic algorithm libraries today, *Jenetics* receives wide-ranging acclaim. However, certain aspects of *Jenetics* could be challenging for its users.

- **Java Limitations:** *Jenetics* is hindered by Java's verbosity and complexity. As a Java library, *Jenetics* unavoidably incorporates some of Java's limitations, notably its verbosity and complexity.
- **Documentation Gaps:** The library's documentation is not exhaustive and sometimes outdated. The library's documentation could be more comprehensive. Currently, some examples are outdated or have redundant implementations.
- **Seed Replicability:** The RandomRegistry's claim on replicability conflicts with actual outcomes, indicating a documentation deficiency. The insufficient documentation is most evident in the use of the RandomRegistry to set the random seed, as seen in example line 3. The documentation claims this ensures the replicability of the program's output, but practical execution proves otherwise. More complete code samples and concrete use cases would ameliorate this issue.
- **Flexibility vs. Usability:** *Jenetics* offers adaptability but leans on builders and factories, sometimes obscuring the code. There is a delicate balance between the framework's flexibility and its usability. *Jenetics*' notable adaptability leans heavily on builders and factories, which can occasionally obfuscate the code.
- **Verbose Type Inference:** Java's type inference limitations can lead to verbose code, especially with classes like Phenotype. Java's lack of robust type inference can lead to verbosity, particularly evident when using classes like Phenotype requiring multiple type parameters.
- **Parallelization Approach:** *Jenetics* uses the Java Stream API for parallelization, a non-standard approach in evolutionary computation that may be tricky for novices. *Jenetics* relies on the Java Stream API for parallelization to maintain efficiency. However, this approach is not typical in the field of evolutionary computation, making it challenging for beginners. Furthermore, the use of the Stream API can result in difficult-to-debug code due to the execution mainly handled by Java's standard library.
- **Default Parallelization:** The library's default parallel operation can hamper performance on smaller tasks due to overhead. By default, *Jenetics* operates in parallel. This can detrimentally affect program performance when working on small populations or problems with fewer variables due to parallelization's overhead.
- **Complex Problem Handling:** Addressing intricate problems in *Jenetics* introduces multiple complexities in the code. Complex problem-solving with *Jenetics* can quickly complicate the code, introducing codecs, proxies, and the Problem interface.
- **Non-standard Features:** *Jenetics* relies heavily on features outside Java's standard library, posing challenges for beginners. *Jenetics* extensively employs features not found in Java's standard library, particularly immutable data, thereby steepening the learning curve for beginners.
- **Java Version Compatibility:** Compatibility with only newer Java versions restricts its usability, especially for many Android devices. *Jenetics* is compatible with newer versions of Java, potentially problematic for users unable to update their Java version. This issue is especially relevant for most Android devices, which do not support newer Java versions.
- **Visualization Gap:** The library lacks a comprehensive mechanism for visualizing the evolutionary process. There's a lack of a robust mechanism for visualizing the evolution process, a feature commonly found in other evolutionary computation libraries.
- **Type Safety:** *Jenetics* sometimes requires explicit type casting, hinting at a lack of full type safety. *Jenetics* isn't entirely type-safe, necessitating explicit casts via the as method.

Despite these shortcomings, *Jenetics* is a powerful and flexible library that can be used to solve a wide variety of optimization problems. The library is actively maintained, and it is one of the most popular evolutionary computation libraries available today.

### 3.5 ECJ: A Java-based Evolutionary Computation Research System

The *Evolutionary Computation in Java* (ECJ) [46] is a powerful and flexible framework for conducting research and experiments in the field of evolutionary computation. ECJ has been under active development for more than two decades, and during this period, it has grown into one of the most comprehensive open-source<sup>5</sup> libraries for evolutionary computation.

---

<sup>5</sup>No license is provided with the ECJ source code.

What sets ECJ apart from other libraries is its ability to handle a broad range of evolutionary computation paradigms. It offers support for genetic algorithms, genetic programming, multi-objective optimization, co-evolution, and many more. It also comes with built-in functionality for distributed computing, allowing researchers to harness the power of large-scale computing clusters for their experiments.

The ECJ library is designed with flexibility and extensibility in mind. It employs a design pattern that uses parameter files for configuration, thus enabling researchers to customize the algorithms according to their specific needs without having to modify the source code. The library is highly modular, and its components can be easily replaced or extended.

The following code sample demonstrates how to solve the *OneMax* problem using ECJ:<sup>6</sup>

Listing 3.4– ECJ’s solution to the OMP

```

1 public class OneMax extends Problem implements SimpleProblemForm {
2 @Override
3 public void evaluate(final EvolutionState state,
4 final Individual ind,
5 final int subpopulation,
6 final int threads) {
7 if (ind.evaluated) {
8 return;
9 }
10 if (!(ind instanceof BitVectorIndividual)) {
11 state.output.fatal("Individual must be a BitVectorIndividual")
12 }
13 int sum = 0;
14 // This is necessary to safe-cast ind to BitVectorIndividual
15 BitVectorIndividual ind2 = null;
16 if (ind instanceof BitVectorIndividual) {
17 ind2 = (BitVectorIndividual) ind;
18 }
19 if (ind2 != null) {
20 for (int x = 0; x < ind2.genome.length; x++) {
21 sum += (ind2.genome[x] ? 1 : 0);
22 }
23
24 if (!(ind2.fitness instanceof SimpleFitness)) {
25 state.output.fatal("Fitness must be a SimpleFitness")
26 }
27 ((SimpleFitness) ind2.fitness)
28 .setFitness(state,
29 /* fitness */ sum / (double) ind2.genome.length,
30 /* isIdeal */ sum == ind2.genome.length);
31 ind2.evaluated = true;
32 }
33 }
34 }
```

An explanation of the code:

- 1 The class `OneMax` extends `Problem` and implements `SimpleProblemForm`, which is ECJ’s interface for problems that can be solved with generational evolutionary algorithms.
- 2-6 The `evaluate` method is overridden from the `Problem` class. It is responsible for evaluating the fitness of an `Individual` (a candidate solution in the population). The arguments include the current state of the evolution, the individual to be

<sup>6</sup>We couldn’t find a way to set the random seed in ECJ, so the results are not reproducible.

evaluated, the subpopulation to which the individual belongs, and the number of the thread executing this method (useful in a multithreaded setting).

- 7-9 The method checks if the individual has already been evaluated. If it has, then the method immediately returns to avoid unnecessary computation.
- 10-12 If the individual is not an instance of `BitVectorIndividual` (which represents individuals whose genome consists of bits), a fatal error is reported. The OneMax problem assumes a bit string representation of individuals.
- 13-18 Variable `sum` is initialized to keep track of the total number of 1s in the individual's bit string representation. The individual is then safe-casted to `BitVectorIndividual`. This is necessary because the `ind` argument is of type `Individual`, but we need to work with its `BitVectorIndividual` specifics (such as its `genome` property).
- 20-22 If the casting is successful, a loop iterates through the genome (bit string) of the individual, incrementing `sum` for every bit set to 1.
- 24-26 If the fitness of the individual is not an instance of `SimpleFitness` (which represents a single floating-point fitness value), a fatal error is reported.
- 27-30 The individual's fitness is then set to the proportion of bits set to 1 in the bit string (`sum / (double) ind2.genome.length`). If all bits are set to 1 (i.e., `sum` equals the length of the genome), then the individual is marked as ideal.
- 31 Finally, `ind2.evaluated` is set to `true`, indicating that the individual has been evaluated.

To run the OneMax problem, we need to create a parameter file that specifies the problem, the evolutionary algorithm, and the parameters of the algorithm. The following is a sample parameter file for the OneMax problem:

Listing 3.5– Configuration file for the OMP

```

1 breedthreads = 1
2 evalthreads = 1
3 seed.0 = 11
4 eval.problem = ec.app.onemax.OneMax
5 pop.subpop.0.species.ind = ec.vector.BooleanVectorIndividual
6 pop.subpop.0.species.genome-size = 20
7 pop.subpop.0.species.fitness = ec.FitnessSimple
8 pop.subpop.0.size = 20
9 pop.subpop.0.species.pipe = ec.vector.breed.VectorMutationPipeline
10 pop.subpop.0.species.pipe.source.0 = ec.vector.breed.VectorCrossoverPipeline
11 pop.subpop.0.species.pipe.source.0.prob = 0.5
12 pop.subpop.0.species.pipe.source.0.source.0 = ec.select.TournamentSelection
13 pop.subpop.0.species.pipe.source.0.source.1 = ec.select.TournamentSelection
14 eval.problem.terminateFitness = 20

```

This is a parameter file for ECJ, which specifies various configuration settings for an evolutionary computation run.

- 1-2 `breedthreads` and `evalthreads` determine the number of threads to be used for breeding and evaluation operations, respectively. Both are set to 1, which means a single-threaded operation.
- 3 `seed.0` sets the initial seed for the random number generator. Different seeds will lead to different runs, even with identical configuration parameters.
- 4 `eval.problem` sets the problem to be solved, in this case, `ec.app.onemax.OneMax`, which refers to the OneMax problem class implemented earlier.
- 5-6 `pop.subpop.0.species.ind` sets the type of individual in the population. `ec.vector.BooleanVectorIndividual` means that each individual will be a Boolean vector, which is appropriate for the OneMax problem. `pop.subpop.0.species.genome-size` sets the length of the Boolean vector to 20.
- 7-8 `pop.subpop.0.species.fitness` sets the type of fitness to be used. `ec.FitnessSimple` represents a single floating-point fitness value. `pop.subpop.0.size` sets the population size to 20.

- 9 `pop.subpop.0.species.pipe` defines the pipeline for breeding new individuals. `ec.vector.breed.VectorMutationPipeline` means a mutation operation will be applied.
- 10 `pop.subpop.0.species.pipe.source.0` sets the source of individuals for the mutation operation to be a crossover operation (`ec.vector.breed.VectorCrossoverPipeline`), with a crossover probability of 0.5.
- 12-13 `pop.subpop.0.species.pipe.source.0.source.0` and `pop.subpop.0.species.pipe.source.0.source.1` set the source of individuals for the crossover operation to be tournament selection (`ec.select.TournamentSelection`).
- 14 `eval.problem.terminateFitness` sets the fitness level at which the evolutionary run should terminate. When an individual reaches a fitness of 20, the run will stop, implying that a perfect solution (all bits set to 1) has been found for the OneMax problem.

To run the OneMax problem, we need to execute the following command:

Listing 3.6– Running the OMP with ECJ

```
java -cp .
ec.Evolve -file .\ec\app\onemax\one_max.properties
```

This command will run the OneMax problem with the parameter file `one_max.properties` in the package `ec.app.onemax`. According to the official ECJ documentation, this command should be able to solve the OneMax problem, however, we were unable to get it to work. The following is the output of the command:

Listing 3.7– Output of the command in listing 3.6

```
Code omitted for brevity
Exception in thread "main" ec.util.ParamClassLoadException:
No class name provided.
PARAMETER: state
 at ec.util.ParameterDatabase.getInstanceForParameter(ParameterDatabase.java:493)
 at ec.Evolve.initialize(Evolve.java:479)
 at ec.Evolve.initialize(Evolve.java:412)
 at ec.Evolve.main(Evolve.java:758)
```

The error message indicates that the parameter `state` is missing. This parameter is required by ECJ, but is not specified in the parameter file. We tried to add the parameter to the file, but the error persisted. We also tried to run the OneMax problem with the parameter file provided by the ECJ documentation, but the error persisted. We were unable to find a solution to this problem.

While ECJ stands as one of the most comprehensive and sophisticated Evolutionary Computation (EC) frameworks available, it presents users with a daunting learning curve. We've identified several areas of concern that contribute to this complexity:

- **Verbose and obscure code:** The framework's verbosity hinders code comprehension. To illustrate, the `eval` method in the `OneMax` class spans 31 lines, yet only 3 of these lines (20-22) actually pertain to the OneMax problem itself—the rest are framework-related.
- **Complex configuration:** Setting up the framework involves numerous layers of boilerplate code, necessitating a deep understanding of the underlying concepts and terminology. Lines such as `pop.subpop.0.species.pipe.source.0.source.0` can be particularly opaque to newcomers.
- **Outdated documentation and implementation:** The `README.md` file has not been updated in 4 years, and the `OneMax` class equivalent was last refreshed 5 years ago. Even the most recent version (27) of the framework dates back 4 years, rendering much of the documentation and implementation obsolete.
- **Legacy Java syntax:** ECJ's reliance on older Java syntax, specifically the lack of generics, results in frequent casting and `instanceof` checks. This not only makes the code more brittle but also complicates understanding.

- **Exclusion from popular package managers:** The absence of ECJ from widely-used package managers like *Maven* or *JitPack* imposes additional burdens on integration with other projects, as manual download and compilation become necessary.
- **Limited IDE compatibility:** The design of ECJ emphasizes command line compilation and execution, undermining the utility of modern Integrated Development Environments (IDEs) and complicating debugging efforts.
- **Inconvenience for integration:** Rather than being crafted for use as a library, the framework is designed with the expectation of direct source code inclusion. This requirement to import source code into users' own projects increases the difficulty of integration.
- **Generic name complicates research:** The term “ECJ” is sufficiently common to cause confusion when seeking information on the framework. Queries such as “ECJ” or “ECJ Java” yield results concerning the *European Court of Justice* or the *Eclipse Compiler for Java*, respectively, rather than the intended framework.
- **Limited community and resources:** As of 2023, ECJ lacks a robust community of developers or users. The dearth of online resources like tutorials or Stack Overflow discussions compounds the challenges for new users seeking to leverage the framework effectively.
- **Non-utilization of modern Java features:** Beyond the lack of generics, the framework fails to harness modern Java features like lambda expressions, lists, or Optional types. These features, by enabling more concise and readable code, can significantly enhance error prevention.

In conclusion, the *Evolutionary Computation in Java* (ECJ) framework, while extensive and capable, poses considerable barriers to entry for users due to its complexity, outdated documentation, and heavy reliance on legacy *Java* syntax. Furthermore, despite its versatility in supporting various evolutionary computation paradigms and distributed computing, the steep learning curve, absence from popular package managers, and limited compatibility with modern IDEs make it challenging for newcomers and experienced developers alike. The verbose code, intricate configuration requirements, and limited use of modern *Java* features also contribute to the difficulty in understanding and integrating the ECJ into projects. Our exploration further exposed issues with the execution of sample problems, highlighting the need for updated documentation and maintenance. However, ECJ's modular design, extensibility, and breadth of capabilities maintain its status as a valuable tool for research in the field of evolutionary computation. Future efforts could focus on modernizing the framework, improving documentation, and fostering an active user community to mitigate the identified issues and enhance its usability.

### 3.6 GeneticSharp: Comprehensive Overview of a .NET Genetic Algorithm Library

*GeneticSharp* is a high-performance, extensible, cross-platform C# Genetic Algorithm library tailored for multi-threading. This open-source library, designed to streamline the integration of genetic algorithms into applications, is licensed under the *MIT License* [16].

*GeneticSharp* revolves around three foundational concepts: *Chromosome*, *Population*, and *GeneticAlgorithm*:

- *Chromosome* serves as the foundation for various chromosome types, responsible for gene storage and genetic operator management.
- *Population* maintains a collection of chromosomes undergoing evolution.
- *GeneticAlgorithm* acts as the algorithm's primary driver, encompassing its main loop.

Distinctively, *GeneticSharp* capitalizes on parallel computing, accelerating fitness evaluation, crossover, and mutation. Furthermore, its extension-oriented design simplifies the addition of new operators or further customizations to the genetic algorithm.

Consider the following example, which demonstrates solving the OMP using *GeneticSharp*:

Listing 3.8– Solving OMP with *GeneticSharp*

```

1 public sealed class BinaryChromosome : BinaryChromosomeBase {
2 public BinaryChromosome(int length) : base(length) {
3 CreateGenes();

```

```

4
5 }
6 public override IChromosome CreateNew() {
7 return new BinaryChromosome(Length);
8 }
9 }
10 public class OneMaxFitness : IFitness {
11 public double Evaluate(IChromosome chromosome) {
12 return chromosome.GetGenes().Count(gene => (int)gene.Value == 1);
13 }
14 }
15 public class ReproducibleRandom : RandomizationBase {
16 private static readonly object GlobalLock = new();
17 private static readonly ThreadLocal<Random?> ThreadRandom = new(NewRandom);
18 private static Random? Instance => ThreadRandom.Value;
19 private static Random NewRandom() {
20 lock (GlobalLock) {
21 return new Random(11);
22 }
23 }
24 public override int GetInt(int min, int max) {
25 Debug.Assert(Instance != null, nameof(Instance) + " != null");
26 return Instance.Next(min, max);
27 }
28 public override float GetFloat() {
29 Debug.Assert(Instance != null, "ReproducibleRandom.Instance != null");
30 return (float)Instance.NextDouble();
31 }
32 public override double GetDouble() {
33 Debug.Assert(Instance != null, "ReproducibleRandom.Instance != null");
34 return Instance.NextDouble();
35 }
36 const int chromosomeLength = 20;
37 const int populationSize = 20;
38 RandomizationProvider.Current = new ReproducibleRandom();
39 var selection = new EliteSelection();
40 var crossover = new UniformCrossover();
41 var mutation = new FlipBitMutation();
42 var fitness = new OneMaxFitness();
43 var chromosome = new BinaryChromosome(chromosomeLength);
44 var population = new Population(populationSize, populationSize, chromosome);
45 var ga = new GeneticAlgorithm(population, fitness, selection, crossover, mutation) {
46 Termination = new FitnessThresholdTermination(chromosomeLength)
47 };
48 ga.Start();
49 Console.WriteLine($"Target fitness reached at generation: {ga.GenerationsNumber}");
50 var bestChromosome = ga.BestChromosome as BinaryChromosome;
51 Console.WriteLine($"Best individual is: {bestChromosome}");
52 Console.WriteLine($"with fitness: {bestChromosome?.Fitness}");

```

Dissecting the code reveals the following:

- 1-8 The `BinaryChromosome` class is sealed<sup>7</sup> to inhibit subclassing and encapsulates a chromosome with binary genes. Sealing is an advisable practice here due to the constructor's invocation of the virtual `CreateGenes` method, thus eliminating potential ambiguities from subclass method overrides.
- 2-4 The constructor, accepting a length parameter, invokes the base constructor. Given that the base may call a virtual method, sealing thwarts unforeseen behaviors from subclasses unknowingly overriding it.
- 4-7 `CreateNew` method proffers a fresh `BinaryChromosome` instance retaining the original length.
- 9-13 `OneMaxFitness` class quantifies a chromosome's fitness.
- 10-12 `Evaluate` method tallies genes equating to 1 (equivalent to binary `true`), serving as the OMP's fitness metric.
- 14-35 The `ReproducibleRandom` class furnishes reproducibly random numbers, critical for consistent genetic algorithm outcomes across iterations.
- 15-17 A global lock alongside a thread-local `Random` instance (`ThreadRandom`) ensures synchronized seeding across threads for consistent randomness.
- 18-22 `NewRandom` method spawns a `Random` object seeded with 11, bolstered by the `lock` keyword for thread-safety.
- 23-34 Methods `GetInt`, `GetFloat`, and `GetDouble` yield values from the `Random` instance.
- 36-37 Constants pertinent to the genetic algorithm, such as chromosome length and population size, are delineated.
- 38 Randomization defaults to the `ReproducibleRandom` class.
- 39-44 Configuration lines dictate the genetic algorithm's components, encompassing selection (elite), crossover (uniform), mutation (flip bit), and the fitness function (`OneMaxFitness`).
- 45-47 The genesis population and genetic algorithm instance are instantiated.
- 46 The algorithm's cessation is predicated on a chromosome attaining peak fitness, tantamount to its length.
- 48 The genetic algorithm is set in motion.
- 49-52 Outputs include the generation count to attain target fitness, the paramount chromosome, and its corresponding fitness.

Despite its many advantages, *GeneticSharp* also has certain limitations:

- **Overwhelming verbosity:** The library's detailed nature can overshadow its functionality, especially in contrast to succinct frameworks like Jenetics.
- **Externalized fitness function:** The architecture demands that fitness functions be isolated in distinct classes. This design choice might make trivial problems seem more convoluted than when using, for example, higher-order functions.
- **Sparse documentation:** Compared to competitors like DEAP, the library lags in both instructional content and practical examples. Novices might find this shortage hampers their initial engagement with the library.
- **Parallelization trade-offs:** Incorporating parallel functionality amplifies the complexity of defining custom genetic operators. Although parallel processing boosts execution speed, developers need to grapple with the intricacies it introduces.
- **Advanced C# intricacies:** Features unique to advanced C# such as the `sealed` attribute can disorient beginners. New users might be deterred by such advanced constructs, especially without prior experience in C#.
- **Developer-centric focus:** *GeneticSharp* caters predominantly to application creation, potentially sidelining academic researchers. Scholars deeply entrenched in genetic algorithm studies might find the library's emphasis misaligned with their interests.
- **Budding community support:** The fledgling nature of the *GeneticSharp* community in 2023 could impede access to resources and prompt support. This nascent state might affect user engagement, library updates, and peer assistance.
- **Conventional algorithm scope:** The library's focus remains anchored to traditional genetic algorithms, omitting newer evolutionary algorithm derivations. Practitioners might find the lack of support for paradigms like genetic programming limiting.

---

<sup>7</sup>Details on definition A.21 on page 87.

In summary, *GeneticSharp* offers a dynamic, parallelized platform for crafting genetic algorithms in C#. Its customizability and developer-centric approach make it a compelling choice for those aiming to harness genetic algorithms within their software projects. Yet, users must be cognizant of its more intricate API, the nuances introduced by parallelization, and potential challenges arising from a smaller community and limited documentation. Ultimately, while *GeneticSharp* solidifies its position as a valuable tool within the .NET arena, its optimal utilization depends on aligning its capabilities with the user's specific requirements and familiarity with genetic algorithms.

### 3.7 Other Libraries

In the preceding sections, we detailed a select set of premier frameworks within EC. However, the scope of our research extended beyond this list to a wider array of libraries. This comprehensive survey was instrumental in shaping our proposed *Kotlin*-based EC framework. Through understanding the strengths and peculiarities of each library, we aimed to incorporate their best features while sidestepping prevalent pitfalls.

Below, we provide a concise overview of some additional frameworks:

- **EvolvingObjects** (EO) [47]: An object-oriented C++ framework. It offers various evolutionary algorithms and operators, including GAs, ES, and Particle Swarm Optimization (PSO). Notably, certain aspects, like GP, are not currently supported.
- **Inspyred** [50]: A Python-focused framework inspired by De Jong [15]. It clearly distinguishes between algorithmic computations and problem-specific ones. While it supports a range of evolutionary algorithms, GP is not among them.
- **Pyevolve**: A Python-based framework that provides a gamut of evolutionary algorithms, including GAs and GP. However, it is currently inactive.
- **PGAPack** [55]: Crafted in C, it is a parallel genetic algorithm library. It offers compatibility with *Fortran* and C++ and a myriad of parallel architectures, it also features a *Python* interface [56].
- **pagmo** [36]: A C++ library that prioritizes parallel optimization. It delivers a cohesive interface for various optimization algorithms and provides a *Python* interface [38].
- **easy\_ga** [45]: Developed in *Rust*, this framework simplifies GA prototyping, primarily focusing on traditional GAs.
- **genevo** [48]: Another *Rust* framework, it majorly supports classic GAs.
- **Evolutionary Computation Framework** (ECF) [32]: ECF is a C++ framework that provides a comprehensive set of evolutionary algorithms. Its depth rivals that of DEAP and ECJ. Nonetheless, it faces challenges like limited documentation and a challenging learning curve.

The breadth and capabilities of these libraries highlight the vast potential within the domain of genetic algorithms. Our exhaustive exploration empowers us to develop a *Kotlin*-based framework that amalgamates the strengths of each while pioneering unique features.

## Chapter 4

# The Keen Framework

### 4.1 Introduction

Within the expansive landscape of *evolutionary computation* (EC), a multitude of methodologies and algorithms have emerged, each demonstrating significant success in addressing complex optimization problems. Nevertheless, the practical application of these techniques often presents its own challenges, most notably, the extensive repetitive coding required and the absence of an intuitive, user-friendly platform. To address these challenges, this chapter introduces *Keen*, an innovative genetic algorithms framework developed using the *Kotlin* programming language.

As a comprehensive and adaptable framework, Keen embarks on an ambitious journey to promote the application and acceptance of evolutionary algorithms across various domains. This well-structured framework is currently designed to simplify the implementation process of *genetic algorithms* (GAs) and *genetic programming* (GP), with an emphasis on allowing extension to other evolutionary algorithms, thereby accelerating the pace of research and development in the EC field.

This chapter provides an in-depth examination of the *Keen framework*, illuminating its architecture, fundamental components, and the array of functionalities it offers. We explore the range of genetic operators within Keen, including various selection, mutation, and crossover techniques. A comprehensive account of the GAs and GP methods within *Keen's* repertoire will be provided, underscoring their distinctive attributes and potential use-cases. In addition, the chapter delves into the framework's parallelism capabilities, a feature that significantly boosts computational efficiency and scalability.

Beyond its existing features, the extensibility of the Keen framework will also be examined, demonstrating its readiness to incorporate novel algorithms and techniques. Keen is designed with a view to facilitate easy expansion and modification of its components, encouraging innovation and continuous progression, in tandem with advancements in the EC field.

The introduction of *Keen* marks a valuable contribution to both the *Kotlin* and AI communities, offering a robust, user-friendly platform for the development, testing, and deployment of evolutionary algorithms. We envision that this pioneering framework will encourage broader application of evolutionary algorithms, thus pushing the boundaries of artificial intelligence research and application.

### 4.2 Architecture

*Keen*, our sophisticated and flexible genetic programming library, organizes its architectural blueprint into five distinguishable modules: *Evolution Engine*, *Genetic Material*, *Genetic Operators*, *Utility*, and *Programs*.

The *Utility* module serves as the library's toolbox, providing various auxiliary classes and functions that the remaining modules can utilize. As its content is primarily supplementary, it won't be thoroughly examined within this document.

The *Genetic Material* module encapsulates the foundational elements defining the characteristics of our evolving entities or *Phenotypes*. Its core constituents are the *Phenotype* and *Genotype* classes, accompanied by the encompassing *Chromosome* and *Gene* hierarchies.

Within the *Genetic Operators* module, we define the different genetic operators that the *Evolution Engine* leverages to stimulate the evolutionary process. This module accommodates classes embodying crossover, mutation, and selection operators, systematically grouped into corresponding categories: **Crossover**, **Mutation**, and **Selection**.

The *Evolution Engine* module houses classes that construct the engine of evolution itself, along with essential classes promoting the smooth progression of the evolution process.

Finally, the nascent *Programs* module showcases genetic programming paradigms through a collection of programs developed under this concept. However, as it is in its preliminary stages, this document will not cover it in detail.

A majority of the *Keen* classes are parameterized by the type of data they handle and the gene type composing the population individuals, like an integer or an integer gene. This design choice lends *Keen* a wide range of flexibility, enabling users to tailor the genetic material for the evolution engine. Moreover, thanks to *Kotlin*'s proficient type inference, we can generally omit type parameters, thereby boosting code legibility.

*Keen* upholds the principle of immutability, rendering most of its classes immutable. This provides an assurance of robustness and predictability, as objects remain unaltered post-creation, enhancing parallelization by allowing shared memory use without the need for synchronization mechanisms.

Furthermore, *Keen* offers factory methods for most classes, fostering an intuitive and straightforward programming experience. It employs language-oriented programming techniques to form a domain-specific language (DSL), streamlining object creation with more readable code. This approach is evident in libraries such as *Kotlinx.html* [35], *Kotlin Telegram Bot* [34], and *Kotest* [51]. While we promote factory methods as the primary mode of object creation, the design caters to manual object creation, granting users greater control over the process when needed.

Here's an illustrative DSL example, where we create a *Genotype* for the *Room Scheduling* problem. Here, each *Chromosome* represents a meeting, composed of a single integer gene indicating the assigned room. The full code snippet can be found in listing C.3 on page 106.

Listing 4.1– Usage of the *Keen* Domain Specific Configuration Language (KDSCL) to create a *Genotype* for the *Room Scheduling* problem.

```
genotype { // We are creating a Genotype
 repeat(meetings.size) { // We create a Chromosome for each meeting
 chromosome { //
 ints { // We create a single integer gene
 size = 1 // The gene is a single integer
 // The gene can take values from 0 to the number of meetings
 range = meetings.indices.first to meetings.indices.last
 }
 }
 }
}
```

The approach we see here closely mirrors the use of configuration files in ECJ. However, as our DSL is defined entirely within *Kotlin*, it offers significant advantages. These include type safety, robust Integrated Development Environment (IDE) support, and the ability to leverage the full capabilities of the language in defining our genotypes.

In the given example, we employed the standard `repeat` function from the *Kotlin* library to create a number of chromosomes equal to the number of meetings. It is essential to note that this function is not part of our DSL but a standard feature provided by the language.

Furthermore, our approach enhances the readability of the code. Compared to using ECJ's configuration files, the DSL presents a more intelligible and cleaner interface. By defining the configurations in the same language and even within the same files as the rest of the code, we significantly improve code readability. This consolidation offers a more streamlined, unified development environment that facilitates easier understanding and manipulation of the codebase.

In the following sections, we will delve deeper into the pivotal classes within these modules and examine their functions and significance.

## 4.3 Genetic Algorithms

As we delve deeper into the intricate workings of the framework, it becomes imperative to explore its foundational components. While the theoretical underpinnings of Genetic Algorithms (GAs) have been exhaustively discussed in section 2.2 on page 6, this section aims to shed light on the actual implementation and design specifics of the GAs within our framework. Our exploration will be segmented into three primary components: the representation and structuring of the *genetic material*, the core mechanics of the *evolution engine*, and the crucial role of the *evolution listeners*. Each subsection will provide a granular understanding of how these elements function and interconnect, ensuring that the GAs are optimally tailored to meet the design goals of the framework.

### 4.3.1 Genetic Material

The genetic material stands at the heart of GAs, representing the problem domain's primary aspect. Consequently, it's essential to structure this material efficiently and flexibly.

Our approach is “gene-centric”. Rather than relying on indirect representations, the genetic material is depicted as a collection of genes. Such a representation bolsters the flexibility of the API design. For instance, the genetic material can manifest as a single gene, a collection of genes (referred to as a chromosome), or even as multiple collections of genes (genotype).

Furthermore, the genetic material is immutable. This immutability ensures thread safety and adheres to the “copy-on-write” principle, both of which are indispensable for crafting robust GAs.

**4.3.1.0.1 Gene** The gene stands as the fundamental unit of genetic material within our framework, representing the minutest unit that can undergo manipulation.

Fundamentally, each gene must be capable of: 1. *mutation*, 2. *reproduction*, and 3. *information storage*. To promote extensibility, genes are designed to handle minimal operations, passing most tasks to operators (refer to section 4.4 on page 49). This approach ensures the framework's adaptability across diverse genetic materials, including binary, integer, real, and custom types.

Thus, we suggest the following interface for gene implementation:

Listing 4.2– Gene interface

```
interface Gene<DNA, G: Gene<DNA, G>> : GeneticMaterial<DNA, G>,
 SelfReferential<G> {
 val dna: DNA
 fun mutate(): G
 fun withDna(dna: DNA): G
}
```

**4.3.1.0.2 Chromosome** A chromosome is defined as an iterable collection of genes. Its primary role is to offer a streamlined way to manipulate a group of genes. It's crucial to keep the chromosome's responsibilities minimal to foster adaptability across diverse genetic materials.

To this end, we suggest the following interface for each chromosome:

Listing 4.3– Chromosome interface

```
interface Chromosome<DNA, G : Gene<DNA, G>> : GeneticMaterial<DNA, G>,
 Iterable<G> {
 val genes: List<G>
 fun withGenes(genes: List<G>): Chromosome<DNA, G>

 interface Factory<DNA, G : Gene<DNA, G>> {
 fun make(): Chromosome<DNA, G>
 }
```

```
}
```

Incorporated within is the **Factory** interface, dedicated to the creation of new chromosomes. This is harnessed by the framework whenever there's a need to generate new chromosomes.

**4.3.1.0.3 Genotype** Similar to the chromosome, the genotype serves as an iterable collection of chromosomes. Though they share analogous responsibilities, the genotype operates on a broader spectrum. While many frameworks tend to merge the definitions of chromosomes and genotypes, distinguishing between them is paramount to our framework's adaptability. This distinction facilitates the simultaneous manipulation of multiple chromosomes, paving the way for more intricate genetic materials.

Utilizing parametric polymorphism, we negate the necessity for a hierarchical type relationship between genotypes and chromosomes. Consequently, the genotype can be represented by a concrete class, as demonstrated below:

Listing 4.4– Genotype class

```
class Genotype<DNA, G : Gene<DNA, G>>(val chromosomes: List<Chromosome<DNA, G>>) :
 GeneticMaterial<DNA, G>, Iterable<Chromosome<DNA, G>> {

 class Factory<DNA, G : Gene<DNA, G>> {
 fun make(): Genotype<DNA, G> { ... }
 }
}
```

Embedded within is the **Factory** class, designated for the generation of new genotypes.

**4.3.1.0.4 Phenotype** The phenotype epitomizes the expression of the genetic material. Serving as the evaluated manifestation of the genotype, it embodies the candidate solution. Fundamentally, the phenotype hinges on:

1. A *fitness* value, and
2. The associated *genotype*.

In representing individual entities within a population, it's imperative that a phenotype can be compared with its peers. In light of this, the structure for the phenotype is delineated as:

Listing 4.5– Phenotype class

```
class Phenotype<DNA, G : Gene<DNA, G>>(
 val genotype: Genotype<DNA, G>,
 val fitness: Double = Double.NaN
) : GeneticMaterial<DNA, G>, Comparable<Phenotype<DNA, G>> { ... }
```

### 4.3.2 Evolution Engine

The **evolution engine** serves as the framework's nucleus, orchestrating the evolution of the population. It encapsulates all functions essential for the evolutionary process. This engine integrates the fundamental structure of the evolutionary algorithms, invoking relevant functions from associated entities like the **genetic material** and **genetic operators**.

Specifically, the engine manages:

1. Population initialization;
2. Population evaluation;
3. Selection of individuals for the forthcoming generation;
4. Genetic operator application on chosen individuals;

5. Evaluation of the newly formed individuals;
6. Supplanting the old population with the new;
7. Iteration from step 3 until meeting termination criteria.

Furthermore, the engine offers hooks for both pre and post-processing steps related to the population and individuals. These hooks facilitate user-driven customization of the evolution trajectory. Although this feature remains outside this work's scope, its availability merits acknowledgment.

The engine's architecture is depicted in listing 4.6.

Listing 4.6– Evolution engine structure

```

1 class Engine<DNA, G : Gene<DNA, G>>(...) : Evolver<DNA, G> {
2 override fun evolve(): EvolutionResult<DNA, G> {
3 var evolution = EvolutionState.empty<DNA, G>()
4 var result = EvolutionResult(optimizer, evolution.population, generation)
5 while (limits.none { it(this) }) {
6 result = evolve(evolution)
7 evolution = result.next()
8 }
9 return result
10 }
11 fun evolve(start: EvolutionState<DNA, G>) = runBlocking {
12 val interceptedStart = interceptor.before(start)
13 val evolution = startEvolution(interceptedStart)
14 val evaluatedPopulation = evaluate(evolution)
15 val offspring = selectOffspring(evaluatedPopulation)
16 val survivors = selectSurvivors(evaluatedPopulation)
17 val alteredOffspring = alter(offspring, evolution)
18 val nextPopulation = survivors + alteredOffspring.population
19 val pop = evaluate(EvolutionState(nextPopulation, generation), true)
20 evolutionResult = EvolutionResult(optimizer, pop, ++generation)
21 val afterResult = interceptor.after(evolutionResult)
22 afterResult
23 }
24
25 class Builder<DNA, G : Gene<DNA, G>>(
26 private val fitnessFunction: (Genotype<DNA, G>) -> Double,
27 private val genotype: Genotype.Factory<DNA, G>,
28) {
29 fun build() = Engine(...)
30 ...
31 }
32 }
```

In the provided code, the function `runBlocking` harnesses *coroutines* to allow parallel computation.

It's worth noting that two distinct `evolve` functions exist:

- `evolve()` oversees the entire evolutionary procedure.
- `evolve(start: EvolutionState<DNA, G>)` orchestrates a singular iteration of the evolutionary process, commencing from a specified `EvolutionState`.

The supplementary `Builder` class streamlines the engine configuration process. Although its utilization is recommended for engine instantiation, it remains optional, ensuring flexibility for users.

Finally, the `Evolver` interface is designed to accommodate varying engine implementations, with the `Engine` class being the exclusive existing implementation to date.

**4.3.2.0.1 Termination Criteria** The algorithm employs a set of `Limit` objects to define its termination criteria. These objects contain the logic to determine when the algorithm should halt, thus permitting multiple criteria definitions without requiring engine-specific awareness of their details.

The structure of the `Limit` interface is shown in listing 4.7.

Listing 4.7– Limit interface

```
interface Limit {
 operator fun invoke(engine: Engine<*, *>): Boolean
}
```

Within this interface, the exclusive function is the `invoke` operator. This design lets the `Limit` object function as an invocable entity, as demonstrated in line 5 of listing 4.6 on the preceding page.

Currently, the framework incorporates four predefined termination criteria: 1. `GenerationCount`: halts after a designated number of generations. 2. `SteadyGenerations`: halts after a certain count of non-improving generations. 3. `TargetFitness`: ceases once a defined fitness value is attained. 4. `Matcher`: stops when a predetermined predicate is met.<sup>1</sup>

### 4.3.3 Evolution Listeners

The `Keen` framework introduces an `EvolutionListener` interface designed with an *observer pattern* to offer users insights into the evolution process in real-time. This interface provides hooks for various events in the evolution cycle, ranging from its commencement and culmination to the beginning and conclusion of each phase, including generation, evaluation, and selection, among others.

The primary objective of the `EvolutionListener` is to empower users to oversee the evolution process, leveraging this data for diverse purposes. Users can employ this interface to conduct a detailed analysis of the evolution process, generate comprehensive reports based on its results, or persistently store the best-performing individual of each generation.

To facilitate these functions, the interface features the following methods:

Listing 4.8– Evolution Listener Interface (some variables and functions omitted for brevity)

```
interface EvolutionListener<DNA, G : Gene<DNA, G>> {
 fun onEvolutionEnded() = Unit
 fun onGenerationStarted(generation: Int, population: Population<DNA, G>) = Unit
 fun onGenerationFinished(population: Population<DNA, G>) = Unit
 fun onInitializationStarted() = Unit
 fun onInitializationFinished() = Unit
 fun onEvaluationStarted() = Unit
 fun onEvaluationFinished() = Unit
 fun onOffspringSelectionStarted() = Unit
 fun onOffspringSelectionFinished() = Unit
 fun onSurvivorSelectionStarted() = Unit
 fun onSurvivorSelectionFinished() = Unit
 fun onAlterationStarted() = Unit
 fun onAlterationFinished() = Unit
 fun onEvolutionStart() = Unit
 fun onEvolutionFinished() = Unit
}
```

<sup>1</sup>Note that all criteria fundamentally use the `Matcher` class.

Within the *Keen* framework, several concrete implementations of this interface are available:

- **EvolutionPlotter**: Visualizes the best, worst, and average fitness throughout the generations in a plot format.
- **EvolutionPrinter**: Outputs essential evolution data every  $n$  generations, detailing aspects such as fitness metrics, the top-performing individual, and the progression of generations.
- **EvolutionSummary**: Prints a comprehensive summary post-evolution, encapsulating fitness statistics, leading individuals, generation count, time metrics for each evolution phase, and the evolution's total duration.
- **JsonSerializer**: Serializes and saves the population data of every generation as a JSON file, complemented by pertinent evolution details.

The implementation of this interface is a novel feature of the *Keen* framework, and it is not present in the frameworks that were used as a reference for this work.

#### 4.3.3.1 Records

The framework harnesses records to chronicle information pertaining to the evolution process.

**4.3.3.1.1 Generation Record** The `GenerationRecord` class embodies data of an individual generation, encapsulating each phase of the evolutionary journey within a generation record.

Listing 4.9– Generation Record Class (some variables and functions omitted for brevity)

```
@Serializable
data class GenerationRecord(val generation: Int) : AbstractTimedRecord() {
 val alteration = AlterationRecord()
 val evaluation = EvaluationRecord()
 val offspringSelection = SelectionRecord()
 val survivorSelection = SelectionRecord()
 val population = PopulationRecord()
 var steady: Int = ...
}
```

**4.3.3.1.2 Evolution Record** The `EvolutionRecord` class, while centered on the entire evolutionary process, primarily delegates data storage responsibilities to the `GenerationRecord` class.

Listing 4.10– Evolution Record Class (some variables and functions omitted for brevity)

```
@Serializable
data class EvolutionRecord<DNA, G : Gene<DNA, G>>(
 val generations: MutableList<GenerationRecord> = mutableListOf(),
) : AbstractTimedRecord() {
 val initialization = InitializationRecord()
}
```

## 4.4 Genetic Operators

Genetic operators are the driving force behind the evolution process in any genetic algorithm or genetic programming paradigm. These operators stimulate change in the population and guide the search towards optimal solutions. This section illuminates the fundamental genetic operators incorporated within *Keen*, categorized into *Selection*, *Mutation*, and *Crossover*.

*Selection* operators guide the evolutionary process by determining which individuals from the population will contribute to the next generation. These mechanisms often favor individuals that exhibit superior fitness, thereby promoting the inheritance of advantageous traits.

*Mutation* operators introduce randomness into the population by modifying individual genes or gene sequences. This mechanism ensures genetic diversity, aiding the population to explore a broader search space and escape local optima.

*Crossover*, also known as recombination, is another crucial genetic operator. It combines the genetic material from a set of parent individuals to generate offspring, simulating the biological process of sexual reproduction.

Each of these categories encompasses several techniques, providing *Keen* with a versatile repertoire of genetic operators. The subsequent subsections provide a comprehensive discussion on each of these operators, elucidating their working principles and application contexts.

Sure, here's a more streamlined version of your text:

#### 4.4.1 Word Guessing Problem

The **Word Guessing Problem** (WGP) serves as a foundational illustration of the implementation of genetic operators. At its core, the problem poses this challenge: evolve a population of strings to match a predefined target word. The metric of success or “fitness” for each individual string in this population is measured by the number of its characters that align with the target word.

We will put these operators to the test against a range of target words, each randomly generated and of varying lengths, ranging from 1 to 100 characters.

Delving into the details: (i) each gene in this context represents a non-nullable 16-bit Unicode character, and (ii) the search space, given the constraints, can be formulated as:

$$|S_{\text{WGP}}| = (2^{16} - 1)^n = 65535^n \quad (4.1)$$

Here,  $n$  denotes the length of the target word.

The cardinality of the search space, presented on a logarithmic scale, can be observed in fig. 4.1.

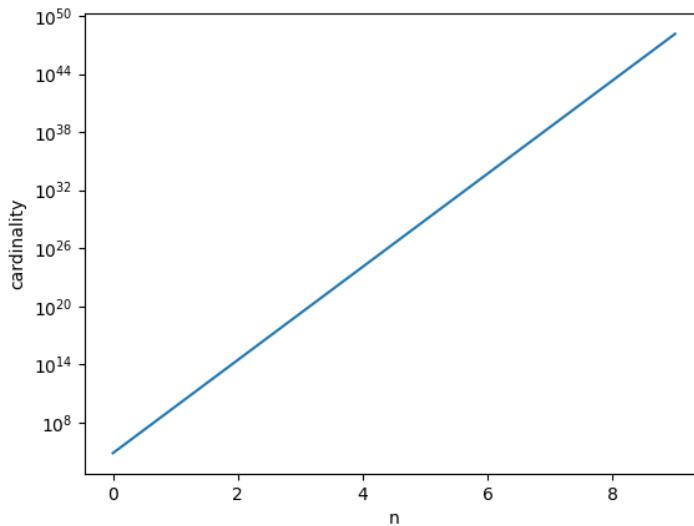


Figure 4.1: Search space cardinality for the WGP on a logarithmic scale.

The evident exponential growth of the search space in relation to the length of the target word emphasizes the impracticality of any exhaustive search strategies.

For the WGP, the fitness function remains straightforward. It necessitates a simple character comparison between the target word and the individual string:

$$\phi_{WGP}(i) = \sum_{j=0}^{n-1} \delta(i_j, t_j) \quad (4.2)$$

Here,  $i$  represents the individual string,  $t$  stands for the target word,  $n$  specifies the target word's length, and  $\delta$  is the *Kronecker delta function*, further detailed in definition A.13 on page 86.

#### 4.4.2 Selection

Building upon the concepts presented in definition 2.4 on page 9, the *selector operator* is mathematically represented as  $\Sigma : \mathbb{P} \times \mathbb{N} \times \dots \rightarrow \mathbb{P}$ . At its core, the selector operator processes a given population  $\mathbb{P}$ , selects  $n$  individuals based on specific criteria, and outputs a subset of the initial population. To ensure adaptability, the design challenge centers around establishing a versatile interface to cater to diverse selection strategies.

A promising approach consists of introducing an interface encompassing a method that requires the population and desired number of individuals as inputs. We can incorporate any supplementary parameters as properties of a specific selector object. This conceptualization can be defined as:

Listing 4.11– Selector interface

```
interface Selector<DNA, G : Gene<DNA, G>> {
 operator fun invoke(
 population: Population<DNA, G>,
 count: Int,
 optimizer: PhenotypeOptimizer<DNA, G>
): Population<DNA, G>
}
```

In this model, the `Selector` interface gets parameterized according to the `DNA` and `Gene` types. The incorporated `invoke` method explicitly mentions the population, the individual count, and an instance of the `PhenotypeOptimizer` class. Thanks to Kotlin's capacity for operator overloading, this framework allows direct function invocation through the selector object, depicted as `selector(...)`.<sup>2</sup>

We introduce an additional parameter, `PhenotypeOptimizer`, which signifies the optimization strategy employed to facilitate selection, be it maximization or minimization.<sup>3</sup>

**Remark.** *To add depth to our architecture, the Selector interface seamlessly integrates with the AbstractSelector abstract class. This integration ensures foundational functionalities for all selector types, while also allowing developers to design specialized selectors by extending this class.*

##### 4.4.2.1 Random Selector

The `RandomSelector` class acts as a selection strategy, assigning equal selection probabilities to every individual within a population. Its primary utility is to serve as a baseline for comparison with other selection methods.

<sup>2</sup>Syntactic sugar for `selector.invoke(...)`.

<sup>3</sup>Both these strategies - maximization and minimization - are integral components of the `Utility` module in `Keen`. Additionally, the `PhenotypeOptimizer` interface can be modified to support bespoke optimization techniques.

**Definition 4.1** (Random Selector). *The **random selector** operates under a uniform approach, ensuring every individual in the population receives the same selection probability. Formally, the RandomSelector is defined as:*

$$\Sigma_{\text{random}} : \mathbb{P} \times \mathbb{N} \rightarrow \mathbb{P}; (P, n) \mapsto \Sigma_{\text{random}}(P, n) \quad (4.3)$$

Each individual is then selected based on a uniform probability distribution:

$$\rho_i = \frac{1}{|P|} \quad (4.4)$$

Although the RandomSelector is not frequently mentioned in literature, its straightforward nature provides a valuable touchstone for assessment. For illustrative purposes, its performance against the WGP is detailed in table 4.1.

|                                            | Word length |        |         |        |        |         |
|--------------------------------------------|-------------|--------|---------|--------|--------|---------|
|                                            | 1           | 20     | 40      | 60     | 80     | 100     |
| Survivor selection time ( $\mu\text{s}$ )  | 0.023       | 0.022  | 0.021   | 0.023  | 0.023  | 0.022   |
| Offspring selection time ( $\mu\text{s}$ ) | 0.019       | 0.018  | 0.019   | 0.021  | 0.019  | 0.020   |
| Evolution time (s)                         | 0.873       | 2.216  | 3.315   | 4.771  | 6.075  | 7.318   |
| Total generations                          | 1 000       | 1 000  | 1 000   | 1 000  | 1 000  | 1 000   |
| Accuracy                                   | 0.0000%     | 0.017% | 0.0000% | 0.006% | 0.004% | 0.0000% |

Table 4.1: Performance of the RandomSelector class for the WGP for different word lengths. A single-point crossover with a crossover probability of 0.2 and a mutation probability of 0.06 was used. The population size was 500 and a limit of 1000 generations was used. The algorithm was run 3 times for each word length and the average performance is shown.

As anticipated, the random selector's performance is subpar since it does not consider the fitness of individuals. While included in the Keen framework for comparative analysis, its application in production environments is discouraged.

#### 4.4.2.2 Roulette Wheel Selector

The RouletteWheelSelector, commonly known as “fitness proportionate selection”, is a widely-used selection method in GAs. It allocates each individual in a population a segment of a roulette wheel, proportional to its fitness. Thus, individuals with higher fitness have a greater chance of selection.

**Definition 4.2** (Roulette Wheel Selector). *The **roulette wheel selector** ensures selection chances proportional to an individual's fitness. It's defined as:*

$$\Sigma_{\text{roulette}} : \mathbb{P} \times \mathbb{N} \times \{0, 1\}; (P, n, b) \mapsto \Sigma_{\text{roulette}}(P, n, b) \quad (4.5)$$

where  $P$  represents the population,  $n$  is the individuals' count to select, and  $b$  is a boolean for preceding selection with a sort. Let  $\phi_i$  be the fitness of the  $i^{\text{th}}$  individual and  $\phi'_i = \phi_i - \min \{\phi_{\min}, 0\}$  its adjusted fitness. The selection probability  $p_i$  for the  $i^{\text{th}}$  individual is:

$$\rho_i = \frac{\phi'_i}{\sum_{j=1}^{|P|} \phi'_j} \quad (4.6)$$

Selection is based on a random number between 0 and 1, selecting  $i$  if the summed probabilities up to  $i$  surpass this number.

**Remark.** The fitness adjustment,  $\phi'_i$ , ensures non-negative probabilities. However, it makes the least fit individual unselectable, with a zero probability.

This approach, while ensuring a selection chance for almost every individual, can face challenges. If few individuals have significantly higher fitness, they might dominate, reducing diversity over time. In the WGP, it thrives with diverse fitness values but may struggle when they converge. Experiments with WGP using this selector are summarized in ?? on page ??.

#### 4.4.2.3 Tournament Selector

The Tournament Selector is a selection operator that employs the widely-recognized tournament selection strategy found in evolutionary computation. At its core, this strategy involves randomly selecting a subset of individuals from the population and evaluating them based on their fitness. From this subset, the individual with the highest fitness is deemed the winner and becomes eligible for participation in the formation of the subsequent generation. The “tournament” process is iteratively carried out until the required number of eligible individuals is chosen.

**Definition 4.3** (Tournament Selector). *The **tournament selector** embodies the tournament selection approach and is formally defined as:*

$$\Sigma_{\text{tournament}} : \mathbb{P} \times \mathbb{N} \times \mathbb{N}; (P, n, ka) \mapsto \Sigma_{\text{tournament}}(P, n, k) \quad (4.7)$$

Herein,  $P$  represents the population,  $n$  stands for the count of individuals to be deemed eligible, and  $k$  pertains to the tournament or sample size.

The methodological sequence for selection is as follows:

1. A random subset of  $k$  individuals is culled from the population.
2. From this subset, the individual bearing the most superior fitness score is singled out.
3. Steps 1 and 2 are reiterated until the set quota of eligible individuals is reached.

**Remark.** The selection dynamic is profoundly influenced by the tournament size,  $k$ . Opting for a larger  $k$  leans towards elitism, predominantly favoring individuals with superior fitness scores. In contrast, a reduced  $k$  champions diversity, helping to deter the premature convergence of the genetic algorithm.

Table 4.2: Displayed above is an evaluation of the tournament selector’s efficacy within the Word Generation Problem (WGP) spanning varied word lengths and tournament dimensions. The methodology involved the utilization of a single-point crossover with a fixed 0.2 crossover probability, coupled with a 0.06 mutation rate. The chosen population featured 500 members with an evolutionary epoch threshold set at 1000 generations. The results presented are an averaged outcome from three distinct experimental runs.

For an exhaustive delve into the intricacies and theoretical frameworks surrounding the tournament selection modality, the reader is directed to Bäck et al.’s seminal paper [11].

#### 4.4.3 Mutation

Mutation, a cornerstone operator in evolutionary computation, plays a critical role in introducing genetic variance. By sporadically modifying parts of a solution representation (often called a chromosome or individual), mutation ensures the presence of a rich and diverse genetic material, which is essential for the robustness and adaptability of evolved solutions. While mutation is commonly associated with genetic algorithms, its significance spans across a multitude of evolutionary computation techniques, from genetic programming to evolutionary strategies and beyond. The method of introducing these mutations can vary significantly, tailored to the nature of the solution space and the specific requirements of the problem at hand. This section delves into various mutation strategies, elucidating their characteristics and applications:

Recalling what we saw in section 2.2.4.2 on page 11, a mutation operator can be defined as a function  $M : \mathbb{P} \times \mathbb{R} \times \dots \rightarrow \mathbb{P}$ . This operator picks individuals from the population with a probability,  $\mu$ , and modifies part of its genetic material.

Keen’s approach is similar to the one used for the selection operators. The following interface is proposed:

Listing 4.12 –

```
interface Mutator<DNA, G: Gene<DNA, G>> : Alterer<DNA, G> {
 override fun invoke(
 population: Population<DNA, G>,
 generation: Int,
```

```

): AltererResult<DNA, G>
fun mutatePhenotype(
 phenotype: Phenotype<DNA, G>,
)
fun mutateGenotype(
 genotype: Genotype<DNA, G>,
): MutatorResult<DNA, G, Genotype<DNA, G>>
fun mutateChromosome(
 chromosome: Chromosome<DNA, G>,
): MutatorResult<DNA, G, Chromosome<DNA, G>>
fun mutateGene(
 gene: G,
): MutatorResult<DNA, G, G>
}

```

#### 4.4.3.1 Random Mutator

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.3.2 Bit Flip Mutator

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information?

Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.3.3 Swap Mutator

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all

letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.3.4 Inversion Mutator

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.4 Crossover

##### 4.4.4.1 Combine Crossover

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information?

Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.4.2 Mean Crossover

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all

letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.4.3 Ordered Crossover (OX)

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.4.4 Partially Mapped Crossover (PMX)

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all

letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.4.5 Position Based Crossover (PBX)

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.4.4.6 Single-Point Crossover

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all

letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 4.5 Genetic Programming

### 4.5.1 Primitive Set

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives

you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 4.5.2 Genetic Operators

### 4.5.2.1 Subtree Crossover

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 4.5.2.2 Point Mutation

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

#### 4.5.2.3 Subtree Mutation

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information?

Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 4.6 Parallelism

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 4.7 Extensibility

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 4.8 Conclusion

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## Chapter 5

# Case Study: Real Function Optimization

### 5.1 Introduction

Real function optimization is a prevalent task in numerous fields, from *data science* and *machine learning* (ML) to *operations research* and *engineering*. It presents a common class of challenges that can be effectively addressed using GAs.

This chapter embarks on a practical exploration of *Keen*. We aim to illustrate the robust capabilities of *Keen* by employing it to solve various classic optimization problems, the details of which are provided in appendix B on page 89.

Please note that this chapter doesn't intend to delve into the formulation of these optimization problems; the discussion is primarily centered around how *Keen* can be leveraged as a solution tool. For a comprehensive understanding of *Keen*, its design, and its features, refer to chapter 4 on page 43.

The ensuing sections will navigate through the problem descriptions, the solutions employed using *Keen*, the corresponding results, and the consequent analysis. In the following sections, we will systematically explore and demonstrate the efficiency and versatility of *Keen* in tackling a range of optimization problems.

### 5.2 Problem Description

The primary task in this chapter revolves around the optimization of several real functions. These functions, which can be found in appendix B on page 89, are selected based on their complexity and their widespread use in the field of optimization. We aim to find the **global minimum** for each of these functions, a problem known as global optimization.

In the context of this case study, the search space is defined as the set of all possible solutions to the optimization problem. Since we are dealing with real-valued functions, the search space will be a subset of the set of real numbers,  $\mathbb{R}$ . The exact subset that forms the search space can vary depending on the function we are optimizing. For example, the *Cross-in-Tray* function has a search space of  $[-10, 10]^2$ , whereas the *Easom* function has a search space of  $[-100, 100]^2$ .

Given the nature of our functions and their respective search spaces, it is vital to understand some fundamental concepts related to sets, cardinalities, and functions. These concepts will not only help us better comprehend the vastness and complexity of the search space but will also lay the groundwork for the use of *Keen* in this context.

The following definitions, theorems, and corollaries will elucidate the necessary background.

**Definition 5.1** (Set cardinality inequality). *For any two sets A and B, if there exists an injective function  $f : A \rightarrow B$ , then  $|A| \leq |B|$ .*

**Theorem 5.1** (Schröder–Bernstein theorem). *Given two sets A and B, if there exist two injective functions  $f : A \rightarrow B$  and  $g : B \rightarrow A$ , then there exists a bijective function  $h : A \rightarrow B$ .*

The proof for theorem 5.1 is attributed to J. König [konigTheorieEnsembles1906].

**Corollary 5.1.1.** For any two sets  $A$  and  $B$ , if  $|A| \leq |B|$  and  $|B| \leq |A|$ , then  $|A| = |B|$ .

**Proof.** The conditions  $|A| \leq |B|$  and  $|B| \leq |A|$  imply that there exist injective functions  $f : A \rightarrow B$  and  $g : B \rightarrow A$ , respectively. By the Schröder–Bernstein Theorem (theorem 5.1 on the previous page), the existence of these injective functions guarantees a bijective function  $h : A \rightarrow B$ .

A bijective function is one that is both injective and surjective. This means that every element of  $A$  is mapped to a unique element in  $B$  and every element of  $B$  is the image of some element in  $A$ .

Therefore, there can't be more elements in  $A$  than in  $B$  (or vice versa), as this would contradict the surjectivity or the injectivity of the function  $h$ . Thus, by the definition of set cardinality (definition 5.1 on the preceding page), we conclude that  $|A| = |B|$ .  $\square$

**Theorem 5.2.** Let  $(x, y) \in \mathbb{R}^2$  with  $x \neq y$ . Then, the cardinality of the interval  $[x, y]$ , denoted as  $|[x, y]|$ , is the same as the cardinality of  $\mathbb{R}$ . Thus,  $|[x, y]|$  is uncountable.

**Proof.** Let us define a function  $f : [x, y] \rightarrow \mathbb{R}$  defined as  $f(z) = \tan\left(\frac{\pi(z-x)}{y-x} - \frac{\pi}{2}\right)$  which maps the interval  $[x, y]$  bijectively onto  $\mathbb{R}$ .

This means that there is an injective function  $f : [x, y] \rightarrow \mathbb{R}$  and an injective function  $g : \mathbb{R} \rightarrow [x, y]$ .

By the definition of cardinality inequality (definition 5.1 on the previous page), we conclude that  $|[x, y]| \leq |\mathbb{R}|$  and  $|\mathbb{R}| \leq |[x, y]|$ .

By theorem 5.1 on the preceding page, we conclude that  $|[x, y]| = |\mathbb{R}|$ .  $\square$

These results make it clear that, in most cases, the search space for our real function optimization problems will have an uncountable number of potential solutions. This vastness and complexity underline the necessity for robust and efficient optimization methods like those provided by Keen.

## 5.3 Solution

To solve this problem, we can use a GA with a double-valued chromosome. The chromosome's genes will represent the  $x_i$  values, and the fitness function will be the function we're trying to optimize.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 5.4 Results

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like "Huardest gefburn"? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense

like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 5.5 Conclusion

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.



# Chapter 6

## Case Study: Knapsack Problem

### 6.1 Introduction

The knapsack problem stands as a classic optimization dilemma, posing the task of determining the optimal combination of items with given weights and values while adhering to a weight constraint. Its practical relevance spans diverse fields, making it an essential study in the realm of optimization.

This chapter delves into the two prominent variants of the knapsack problem: the **unbounded** and the **0-1** knapsack. The former allows an infinite number of each item, whereas the latter restricts each item to a singular instance. Both versions are analyzed in depth, elucidating their inherent complexities and solutions.

### 6.2 Problem Description

The **Knapsack Problem** is a canonical combinatorial optimization problem. It involves selecting items, each characterized by a specific weight and value, to maximize the total value while adhering to a weight constraint.

The goal is to ascertain the optimal subset of items (maximize profit) for the knapsack, ensuring the total weight remains under the knapsack's capacity.

Two primary variants of the Knapsack Problem exist: **0-1 Knapsack** ( $K_{0/1}$ ) [4, 29, 31] and **Unbounded Knapsack** ( $K_*$ ) [12, 29].

#### 6.2.1 0-1 Knapsack Problem

In this variant, each item can be taken once or disregarded. This constraint can be expressed as  $x_i \in \{0, 1\}$ . The mathematical formulation is:

$$\begin{aligned} & \text{maximize} && \sum_{i=1}^n v_i x_i \\ & \text{subject to} && \sum_{i=1}^n w_i x_i \leq W \\ & && x_i \in \{0, 1\} \quad \forall i \in \{1, 2, \dots, n\} \end{aligned} \tag{6.1}$$

Analyzing the problem's search space, we note that the potential combinations of selected items equate to a size of  $2^n$ . Given that the **Subset Sum Problem**, to which this problem is reducible, is NP-hard,  $K_{0/1}$  inherits this complexity.

**6.2.1.0.1 Example:** Consider 8 items  $(w, v) = \{(11, 1), (21, 11), (31, 21), (33, 23), (43, 33), (53, 43), (55, 45), (65, 55)\}$ . For a knapsack with a capacity  $W = 110$ , the optimal selection consists of items 1, 3, 4, 5, and 6. This results in a cumulative value of 159 and a total weight of 109.

## 6.2.2 Unbounded Knapsack Problem

Here, there's no limit to the number of instances of each item that can be selected.

Formally, the problem can be expressed as:

$$\begin{aligned} & \text{maximize} && \sum_{i=1}^n v_i x_i \\ & \text{subject to} && \sum_{i=1}^n w_i x_i \leq W \\ & && x_i \in \mathbb{N} \quad \forall i \in \{1, 2, \dots, n\} \end{aligned} \tag{6.2}$$

It's easy to see that the search space is infinite, since there's no limit on the number of each item that can be selected. The problem is still NP-hard.

To evaluate the performance of the solution, we are going to use the benchmarks from [12].

## 6.3 Solution Strategies for Knapsack Problems

Given two distinct knapsack problem variants, our approach encompasses unique solutions tailored to each. We employ the *Keen* framework's built-in Genetic Algorithm (GA) capabilities for the K<sub>0/1</sub> problem and augment the *Keen* framework for the K<sub>\*</sub> problem.

### 6.3.1 0-1 Knapsack Problem

To solve the 0-1 Knapsack problem:

1. **Problem Representation:** We represent each item's inclusion in the knapsack as a binary string. This string is facilitated by the `BoolGene` class, while the collection of these genes is managed by the `BoolChromosome` class, essentially acting as a wrapper for the `BoolGene`.
2. **Item Representation:** Each item is captured as a `Pair` of integers, with the first element indicating the item's value and the second indicating its weight.
3. **Fitness Function Definition:** The core objective of the fitness function is to maximize the total value, ensuring the aggregated weight does not breach the knapsack's weight limit. Should the weight exceed the allowed capacity, a proportional penalty is applied to the fitness score.

The fitness function for this problem, implemented in Kotlin, is as follows:

Listing 6.1 – Fitness Function for the 0/1 Knapsack Problem via Keen

```
fun fitnessFn(genotype: Genotype<Boolean, BoolGene>): Double {
 val profit = (genotype.flatten() zip items).sumOf { (isInBag, item) ->
 if (isInBag) item.first else 0
 }
 val weight = (genotype.flatten() zip items).sumOf { (isInBag, item) ->
 if (isInBag) item.second else 0
 }
 val penalty = if (weight > MAX_WEIGHT) abs(weight - MAX_WEIGHT) else 0
 return (profit - penalty).toDouble()
}
```

## 6.4 Results

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 6.5 Conclusion

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## Chapter 7

# Case Study: Crash Reproduction

### 7.1 Introduction

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 7.2 Problem Description

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 7.3 Solution

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 7.4 Results

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 7.5 Conclusion

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all

letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

# Chapter 8

## Conclusions

### 8.1 Summary

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 8.2 Contributions

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

## 8.3 Future Work

### 8.3.1 Genetic Algorithms

#### 8.3.1.1 Genetic Operators

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no

information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 8.3.2 Genetic Programming

#### 8.3.2.1 Primitive Set

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 8.3.2.2 Genetic Operators

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 8.3.3 Multi-Objective Evolution

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 8.3.4 Neuroevolution

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 8.3.5 Coevolution

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### 8.3.6 Evolution Strategy

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no

information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

### **8.3.7 Other evolutionary algorithms**

#### **8.3.7.1 Ant Colony Optimization**

#### **8.3.7.2 Artificial Immune Systems**

#### **8.3.7.3 Differential Evolution**

#### **8.3.7.4 Estimation of Distribution Algorithms**

#### **8.3.7.5 Evolutionary Programming**

#### **8.3.7.6 Grammatical Evolution**

#### **8.3.7.7 Particle Swarm Optimization**

### **8.3.8 Crash Reproduction**

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

This is the second paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

And after the second paragraph follows the third paragraph. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

After this fourth paragraph, we start a new paragraph sequence. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.



# Appendix A

## Glossary

In this appendix we present a glossary of terms used throughout this document that may be unfamiliar to the reader and are not defined in the main text.

### A

**Definition A.1** (Alteration). *See section 2.2.4 on page 9*

**Definition A.2** (Alterer). *See definition 2.5 on page 9.*

**Definition A.3** (Arity). *The number of arguments a function takes, or the number of children a node has in a tree.*

### C

**Definition A.4** (Chromosome). *Representation of a single column of genetic information of a candidate solution to a given optimization problem.*

*Formally, a chromosome is a vector  $c = (g_1, g_2, \dots, g_n)$ , where  $g_i$  is a gene (see definition A.8 on the next page).*

### E

**Definition A.5** (Elitism). *In evolutionary computation, elitism refers to a strategy wherein the top-performing individuals from a population are given a higher probability of being selected for the next generation. While this doesn't guarantee their direct transfer, it increases the likelihood of retaining the best solutions in subsequent generations, ensuring that the quality of the population does not degrade.*

**Definition A.6** (Ephemeral Constant). *A constant that is randomly generated at the start of the program and remains constant throughout the execution of the program.*

*This is used to represent constant values in the program.*

**Definition A.7** (Evolutionary computation). *Family of algorithms for global optimization inspired by the process of natural selection.*

*This typically involves processes mimicking natural selection, mutation, recombination, and survival of the fittest.*

*The solutions to a problem are encoded as a set of “individuals” in a “population”.*

*Over multiple generations, these individuals are selected and modified (via genetic operators like crossover and mutation) in order to find better solutions.*

## G

**Definition A.8** (Gene). *Representation of a single component of a candidate solution to a given optimization problem. Formally, for a multi-dimensional function  $f$ , a gene is an element  $g$  in the domain of  $f$ .*

**Definition A.9** (Generation). *Number of iterations performed by an evolutionary algorithm.*

**Definition A.10** (Genetic Diversity). *In evolutionary computation, diversity refers to the degree of variation or difference in the genetic representation of individuals within a population. Maintaining diversity is essential for several reasons:*

1. **Exploration vs. Exploitation:** A diverse population can explore various regions of the solution space, ensuring that the algorithm doesn't focus solely on one area. This balance between exploration (searching new areas) and exploitation (optimizing known good areas) is fundamental in evolutionary computation.
2. **Preventing Premature Convergence:** Without adequate diversity, the population may converge too quickly to a suboptimal solution, known as a local optimum. By maintaining diversity, the population has a better chance of discovering the global optimum.
3. **Adaptability:** A diverse population can better adapt to changing environments or requirements, making it more resilient against dynamic problems.

Diversity can be measured in several ways, including genetic distance metrics, fitness-based measures, or phenotypic variance. To maintain or introduce diversity, techniques like mutation, crossover variations, immigration, and diversity preservation strategies (like fitness sharing or crowding) are employed.

**Definition A.11** (Genotype). *Representation of the full genetic information of a candidate solution to a given optimization problem.*

*Formally, a genotype is a matrix  $\mathbf{G} = (\mathbf{c}_1, \mathbf{c}_2, \dots, \mathbf{c}_n)$ , where  $\mathbf{c}_i$  is a chromosome (see definition A.4 on the preceding page).*

## I

**Definition A.12** (Individual). *A candidate solution to a given optimization problem.*

*Formally, an individual is a pair  $(\mathbf{G}, \mathbf{f})$ , where  $\mathbf{G}$  is the genotype (see definition A.11) and  $\mathbf{f}$  is the fitness value of the individual.*

## K

**Definition A.13** (Kronecker delta function). *Kronecker delta function is a function of two variables, usually integers, which is 1 if they are equal, and 0 otherwise. Formally:*

$$\delta_{ij} = \begin{cases} 1 & \text{if } i = j \\ 0 & \text{if } i \neq j \end{cases} \quad (\text{A.1})$$

**M**

**Definition A.14** (Metaheuristics). *Problem-independent algorithmic method that yields a sufficiently good solution within reasonable time for an optimization problem, especially for complex problems where an exact solution is not crucial.*

**Definition A.15** (Multimodal function). *A multimodal function is a function that has multiple local maxima and/or multiple local minima within a given domain or interval. In other words, it has several peaks and troughs. The term "multi" in "multimodal" signifies the presence of multiple modes or peaks in the function.*

*Mathematically, if  $f$  is a multimodal function in an interval  $[a, b]$ , then there exist multiple points  $c_1, c_2, \dots, c_n$  in  $[a, b]$  such that  $f$  has local maxima and/or minima at these points.*

*Multimodal functions can be more challenging for optimization algorithms because the presence of multiple local optima can trap optimization techniques in suboptimal solutions, preventing them from finding the global optimum. This complexity often necessitates more sophisticated or stochastic optimization techniques, like simulated annealing or genetic algorithms, to effectively explore the search space.*

**Definition A.16** (Mutator). *See definition 2.7 on page 12.*

**P**

**Definition A.17** (Parameter optimization). *Optimization problem where the solution is a set of parameters that optimize a given function.*

**Definition A.18** (Phenotype). *Same as definition A.12 on the preceding page.*

**Definition A.19** (Population). *Set of candidate solutions to a given optimization problem.*

**Definition A.20** (Program induction). *Inference of an algorithm or program featuring recursive calls or repetition control structures, starting from information that is known to be incomplete, called the evidence, such as positive and negative I/O examples or clausal constraints.*

**S**

**Definition A.21** (Sealed class). *A sealed class or interface is a type of class or interface that restricts its subclassing or implementation to a limited set of classes, usually defined within the same module or file. This ensures tighter control over inheritance, allowing developers to dictate where and how a class or interface can be extended or implemented.*

**Definition A.22** (Search space). *Set of all candidate solutions to a given optimization problem.*

**Definition A.23** (Selector). *See definition 2.4 on page 9.*

**U**

**Definition A.24** (Unimodal function). *A unimodal function is a function that, within a given domain or interval, has only one local maximum and one local minimum, which can also be the global maximum and minimum respectively. In other words, the function increases to a certain point and then decreases, or vice versa. This single peak or trough is the “uni” in “unimodal”.*

*Mathematically speaking, if  $f$  is a unimodal function in the interval  $[a, b]$ , then there exists some point  $c$  in  $[a, b]$  such that:*

1.  $f(x)$  is increasing on  $[a, c]$  and decreasing on  $[c, b]$ , or
2.  $f(x)$  is decreasing on  $[a, c]$  and increasing on  $[c, b]$ .

**V**

**Definition A.25** (Variadic function). *Function that accepts a variable number of arguments.*

## Appendix B

# Test Functions for Optimization

This appendix contains the test functions used in the numerical experiments in chapter 5 on page 65.

### B.1 Ackley Function


In the field of optimization, especially within evolutionary algorithms and swarm intelligence, the **Ackley function** serves as a prevalent benchmark function. Named after *David H. Ackley*, who introduced it during his research,<sup>1</sup> this function is particularly challenging for optimization algorithms due to its property of possessing a large number of local minima, despite having a single global minimum. This trait can often cause such algorithms to become entrapped in local minima.

**Definition B.1** (Ackley Function). *The Ackley Function, denoted as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is mathematically expressed as:*


$$f(x, y) = -20 e^{-0.2\sqrt{0.5(x^2+y^2)}} - e^{0.5 [\cos(2\pi x)+\cos(2\pi y)]} + e + 20 \quad (\text{B.1})$$

*This function is evaluated within the range  $x, y \in [-5, 5]$ .*

The global minimum of the Ackley function is located at  $f(0, 0) = 0$ . Visualizations of the Ackley function are depicted as a contour plot and a surface plot in fig. B.1.

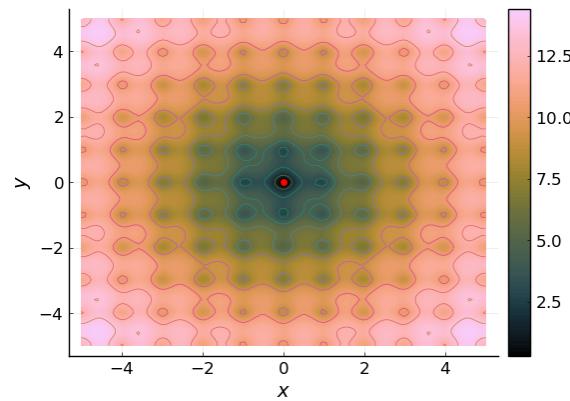

(a) Contour plot of the Ackley Function

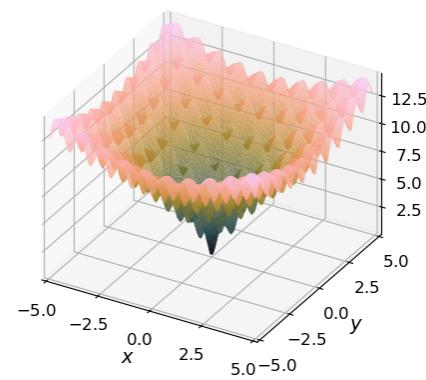

(b) Surface plot of the Ackley Function

Figure B.1: Illustrations of the Ackley Function with the global minimum indicated by a red dot.

<sup>1</sup>Ackley, D. H. (1987) "A connectionist machine for genetic hillclimbing", Kluwer Academic Publishers, Boston MA.

## B.2 Beale Function


Unveiled by Beale in 1958<sup>2</sup>, the Beale function is recognized for its multimodal characteristics and sharp peaks that define the domain's corners.

**Definition B.2** (Beale Function). *The **Beale Function**, symbolized as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is expressed by the equation:*


$$f(x, y) = (1.5 - x + xy)^2 + (2.25 - x + xy^2)^2 + (2.625 - x + xy^3)^2 \quad (\text{B.2})$$

*It's evaluated within the domain  $x, y \in [-4.5, 4.5]$ .*

The global minimum of the Beale function is found at  $f(3, 0.5) = 0$ . Both contour and surface plots of the Beale function are depicted in fig. B.2.

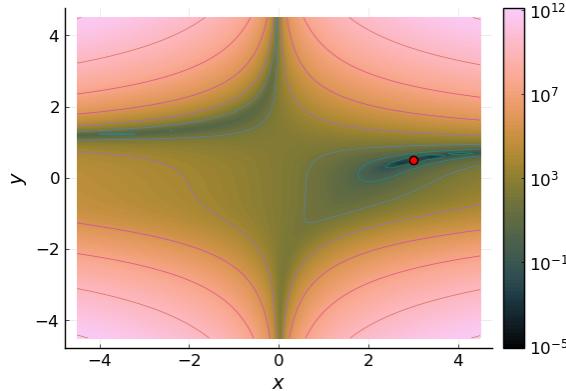

(a) Contour plot of the Beale Function

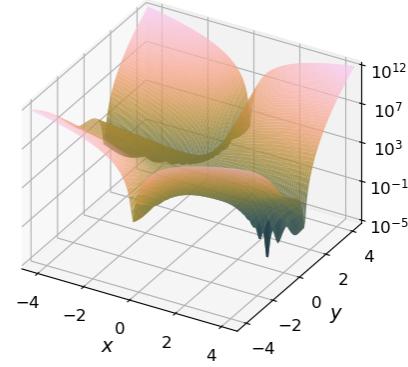

(b) Surface plot of the Beale Function

Figure B.2: Visual representation of the Beale Function

## B.3 Booth Function

The Booth function is a quadratic test problem used in the optimization field, specifically tailored for algorithms that handle two-dimensional search spaces.

**Definition B.3** (Booth Function). *The **Booth function**,  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is defined as:*

$$f(x, y) = (x + 2y - 7)^2 + (2x + y - 5)^2 \quad (\text{B.3})$$

*where:*

- $x, y \in \mathbb{R}$  represent the decision variables.

The global minimum of the Booth function is  $f(1, 3) = 0$ . The function is usually constrained to the square  $[-10, 10]^2$ . A contour plot and a surface plot of the Booth function are illustrated in fig. B.3 on the facing page.

## B.4 Bukin Function N.6

The **Bukin function N.6**, a two-dimensional benchmark problem, is renowned for its inherent complexity and frequent utilization in assessing optimization algorithms. Notable for a sharply defined, deep valley, the Bukin function N.6 presents distinct hurdles for optimization techniques owing to its abrupt discontinuity and non-differentiability at  $x = 0$ .

<sup>2</sup>Beale, E. M. (1958). "On an Iterative Method for Finding a Local Minimum of a Function of More than One Variable".

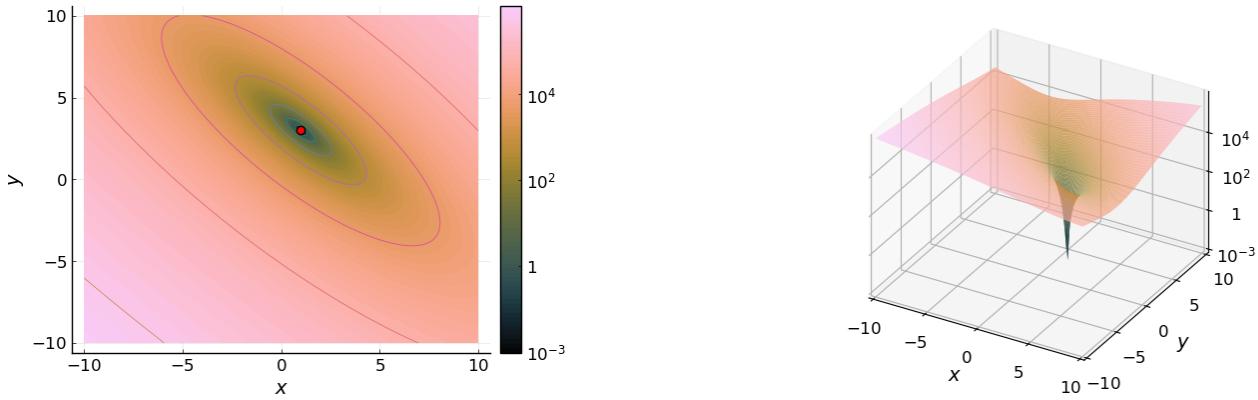



Figure B.3: Booth Function

**Definition B.4** (Bukin Function N.6). *The **Bukin function N.6**, given by  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is mathematically represented as:*

$$f(x, y) = 100\sqrt{|y - 0.01x^2|} + 0.01|x + 10| \quad (\text{B.4})$$

*The decision variables,  $x, y \in \mathbb{R}$ , typically have the prescribed domains:  $-15 \leq x \leq -5$  and  $-3 \leq y \leq 3$  respectively.*

The function attains its global minimum at  $(x, y) = (-10, 1)$ , yielding a value of zero. The Bukin function N.6, due to its unique characteristics, offers a striking visualization. A profound ridge, extending diagonally across the domain, forms a distinguishing feature. The contour and surface plots illustrating the Bukin function N.6 are presented in fig. B.4.

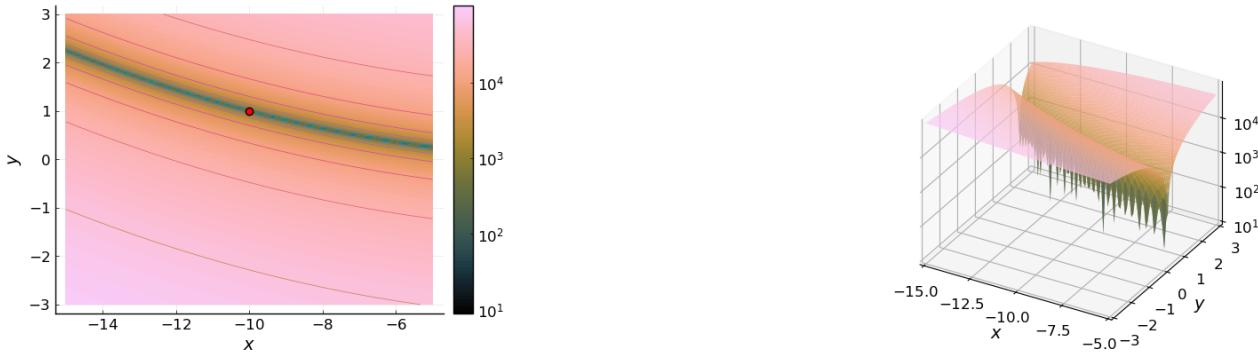

(a) Contour plot of Bukin function N.6

(b) Surface plot of Bukin function N.6

Figure B.4: Contour and Surface Plots of Bukin Function N.6

## B.5 The Cross-in-Tray Function

The Cross-in-Tray function, known for its utility in testing optimization algorithms, poses a challenge due to its numerous local minima and four identical global minima, thereby making it an effective benchmark for evaluating an algorithm's capability to escape local optima and locate global optima.


**Definition B.5** (Cross-in-Tray Function). *The Cross-in-Tray Function, denoted as a mapping from  $\mathbb{R}^2 \rightarrow \mathbb{R}$ , is formally defined as:*

$$f(x, y) = -0.0001 \left[ \left| \sin(x) \sin(y) \exp \left( \left| 100 - \frac{\sqrt{x^2 + y^2}}{\pi} \right| \right) \right| + 1 \right]^{0.1} \quad (\text{B.5})$$

This function is usually evaluated over the domain  $-10 \leq x, y \leq 10$ .

This function exhibits four identical global minima located at  $(\pm 1.34941, \pm 1.34941)$ , with each of these points having the function value of  $f(x, y) = -2.06261$ .

In fig. B.5, contour and surface plots are presented to provide a visual understanding of the function's intricate topology.

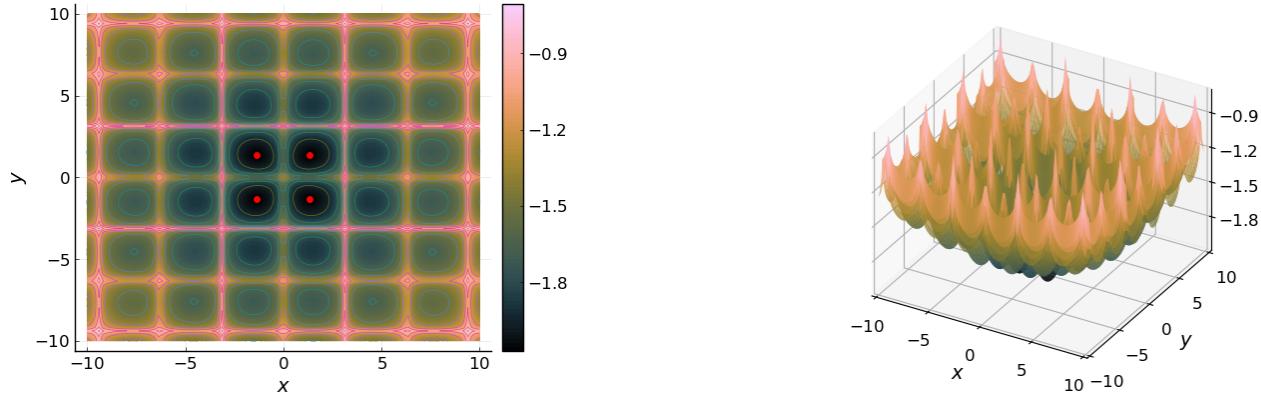

(a) Contour plot showcasing the complex landscape of the Cross-in-Tray function. The red dot denotes the location of the global minimum.

(b) Surface plot providing a 3D representation of the Cross-in-Tray function, enhancing the visualization of its global and local minima.

Figure B.5: Contour and surface plots illustrating the topological complexity of the Cross-in-Tray function

## B.6 Easom Function

The **Easom function** is a well-known unimodal benchmark function employed in the evaluation of optimization algorithms. It gains its name from Charles Easom and is distinctively recognized by its 'needle'-like global minimum. This feature presents a demanding task for optimization algorithms due to its confined optimal search space.

**Definition B.6** (Easom Function). *The Easom function, defined for  $f : [-100, 100]^2 \rightarrow \mathbb{R}$ , is formally expressed as:*

$$f(x, y) = -\cos(x) \cos(y) \exp(-((x - \pi)^2 + (y - \pi)^2)) \quad (\text{B.6})$$


Here,  $x$  and  $y$  constitute the decision variables.

The global minimum of the Easom function is situated at the coordinates  $f(\pi, \pi) = -1$ .


The intricate structure and narrow optimal space of the Easom function are clearly revealed in its contour and surface plots.

## B.7 Eggholder Function


The **Eggholder function** is a widely-used non-convex function in the field of optimization, particularly for benchmarking optimization algorithms. The function is notorious for its multitude of local minima, presenting a complex search space that challenges the robustness and capability of an optimization algorithm to locate the global minimum.

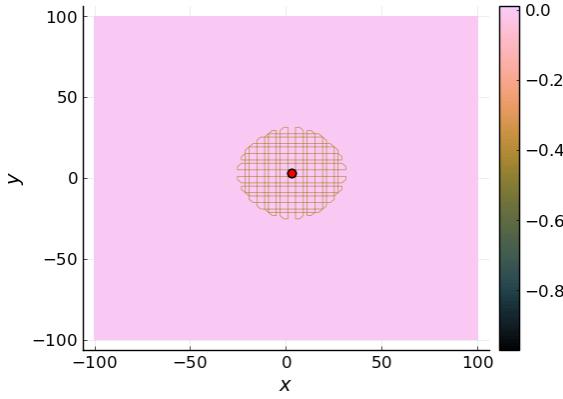


(a) Contour plot of the Easom function with the global minimum represented by the red dot

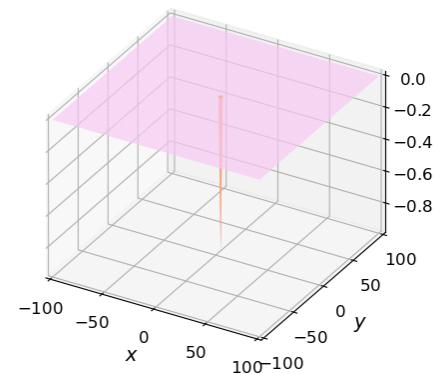

(b) Surface plot of the Easom function

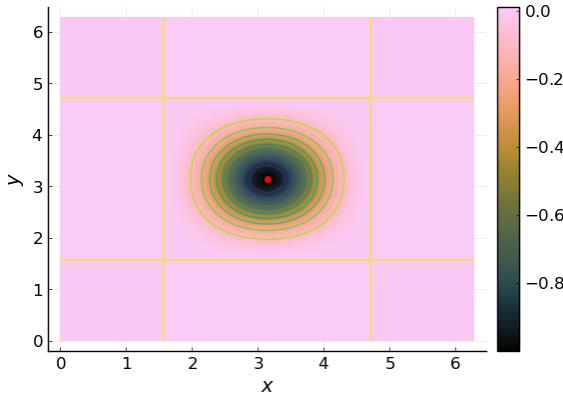

(c) Contour plot of the Easom function in the vicinity of the global minimum,  $[0, 2\pi]$ .

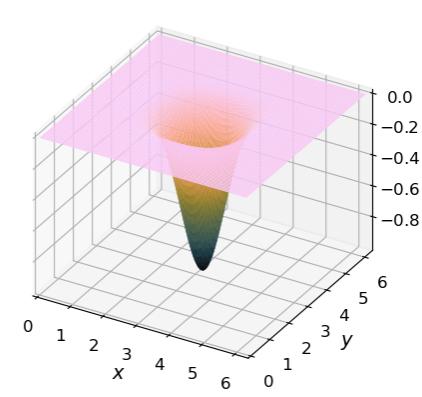

(d) Surface plot of the Easom function in the vicinity of the global minimum,  $[0, 2\pi]$ .

Figure B.6: Contour and surface visualizations of the Easom function

**Definition B.7 (Eggholder Function).** Formally, the **Eggholder Function** is represented as a mapping  $\mathbb{R}^2 \rightarrow \mathbb{R}$ , and is mathematically defined as:

$$f(x, y) = -(y + 47) \sin \left( \sqrt{\left| \frac{x}{2} + (y + 47) \right|} \right) - x \sin \left( \sqrt{|x - (y + 47)|} \right) \quad (\text{B.7})$$

where the typical domain for evaluation spans  $-512 \leq x, y \leq 512$ .

The Eggholder function's global minimum resides at  $(512, 404.2319)$ , delivering a function value of  $f(x, y) = -959.6407$ .

Visual representations of the function can enhance understanding of its complexity. Figure fig. B.7 on the next page offers both contour and surface plots of the Eggholder function.

## B.8 Goldstein-Price Function

The **Goldstein-Price function**, believed to be proposed by individuals named Goldstein and Price, is a challenging multimodal function recognized for its landscape densely populated with local minima. This function serves as a standard benchmark in the field of optimization, testing the efficacy of various algorithms. The precise origins of this function, however, remain elusive in academic literature.

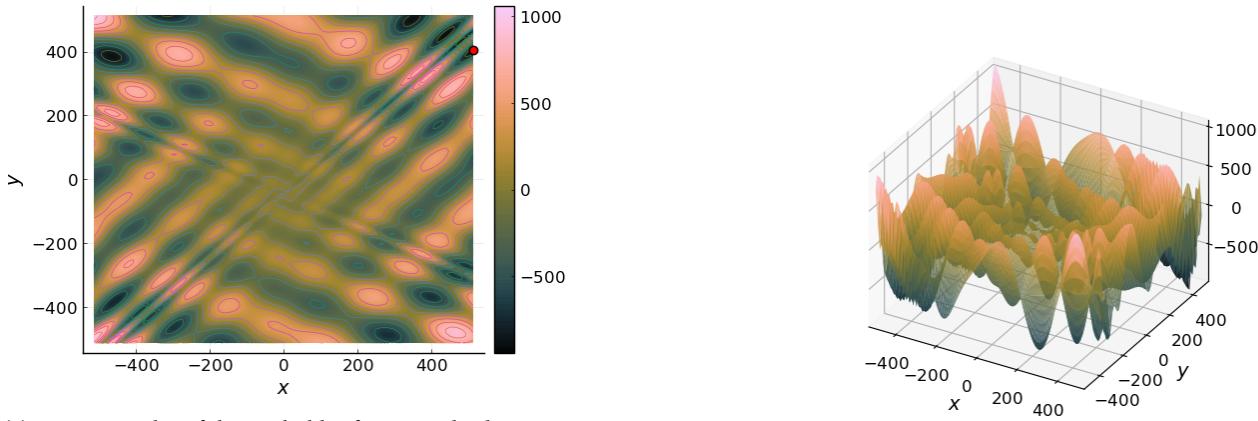


Figure B.7: Contour and surface visualizations of the Eggholder function, showcasing its intricate topology

**Definition B.8** (Goldstein-Price Function). *The Goldstein-Price function, denoted as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is formally articulated as follows:*

$$f(x, y) = [1 + (x + y + 1)^2 \cdot (19 - 14x + 3x^2 - 14y + 6xy + 3y^2)] \cdot [30 + (2x - 3y)^2 \cdot (18 - 32x + 12x^2 + 48y - 36xy + 27y^2)] \quad (\text{B.8})$$

The function's global minimum is located at  $f(x^*, y^*) = 3$  with  $(x^*, y^*) = (0, -1)$ . Evaluations of the Goldstein-Price function are typically performed within the range  $x, y \in [-2, 2]$ .

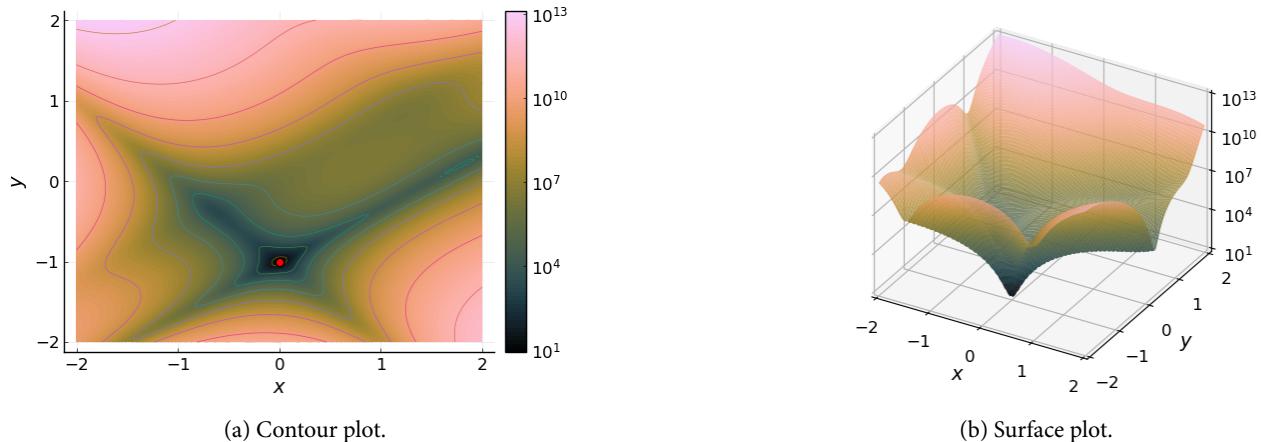


Figure B.8: Visual representations of the Goldstein-Price function

## B.9 Himmelblau's Function

The **Himmelblau's function**, attributed to David Mautner Himmelblau,<sup>3</sup> is a significant benchmark function in the realm of optimization, renowned for its complex multi-modal nature. Himmelblau, an American engineer, made substantial contributions to systems engineering and optimization theory.

<sup>3</sup>Himmelblau, D. (1972). "Applied Nonlinear Programming". McGraw-Hill. ISBN 0-07-028921-2.


**Definition B.9** (Himmelblau's Function). *The Himmelblau's function, symbolized as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is formally described as:*

$$f(x, y) = (x^2 + y - 11)^2 + (x + y^2 - 7)^2 \quad (\text{B.9})$$


Here,  $x, y \in \mathbb{R}$  are the decision variables, with the domains  $\{x \mid -10 \leq x \leq 10\}$  and  $\{y \mid -10 \leq y \leq 10\}$ .

Distinguished by its four minima, located at  $(3, 2)$ ,  $(-2.805118, 3.131312)$ ,  $(-3.779310, -3.283186)$ , and  $(3.584428, -1.848126)$ , all roughly equating to zero, this function showcases its complexity.

Figure B.9 portrays the multi-modal landscape of Himmelblau's function through contour and surface plots, underlining its inherent intricacy, and as such, its utility in the evaluation of optimization techniques.

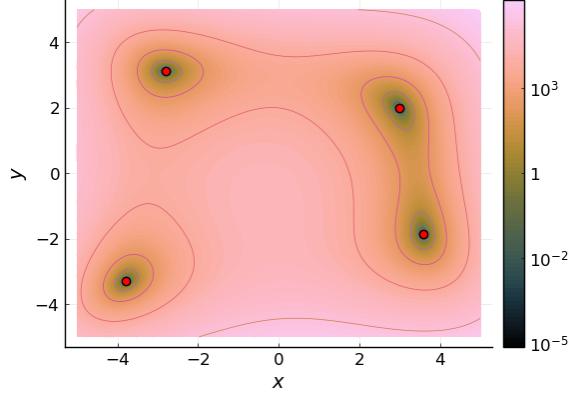

(a) Contour plot of Himmelblau's function, the minima are signified by the red dots

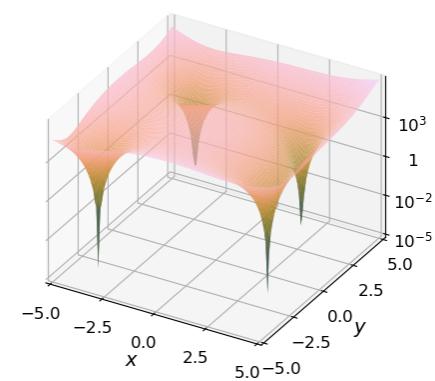

(b) Surface plot of Himmelblau's function

Figure B.9: The detailed multi-modal structure of Himmelblau's function illustrated through contour and surface plots

## B.10 Hölder Table Function

The **Hölder Table function** is a two-dimensional real-valued function employed in various branches of mathematical analysis. Due to its intriguing properties and complex topography, it serves as a valuable tool for function approximation and numerical analysis studies.

**Definition B.10** (Hölder Table function). *The Hölder Table function, designated as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is described by the equation*

$$f(x, y) = - \left| \sin(x) \cos(y) \exp \left( \left| 1 - \frac{\sqrt{x^2 + y^2}}{\pi} \right| \right) \right| \quad (\text{B.10})$$

This function is defined for  $-10 \leq x, y \leq 10$ .

The Hölder Table function peaks globally at  $f(x^*, y^*) = 19.2085$  for  $x^* = \pm 8.05502$  and  $y^* = \pm 9.66459$ . Its intricately structured landscape can be vividly illustrated through contour and surface plots, as depicted in fig. B.10 on the following page.

## B.11 Lévi Function N.13

The **Lévi function N.13** is a noteworthy two-dimensional function frequently employed in the field of optimization algorithms for performance testing. Its complex, sinuous landscape, teeming with numerous local minima, presents a significant challenge to optimization procedures.

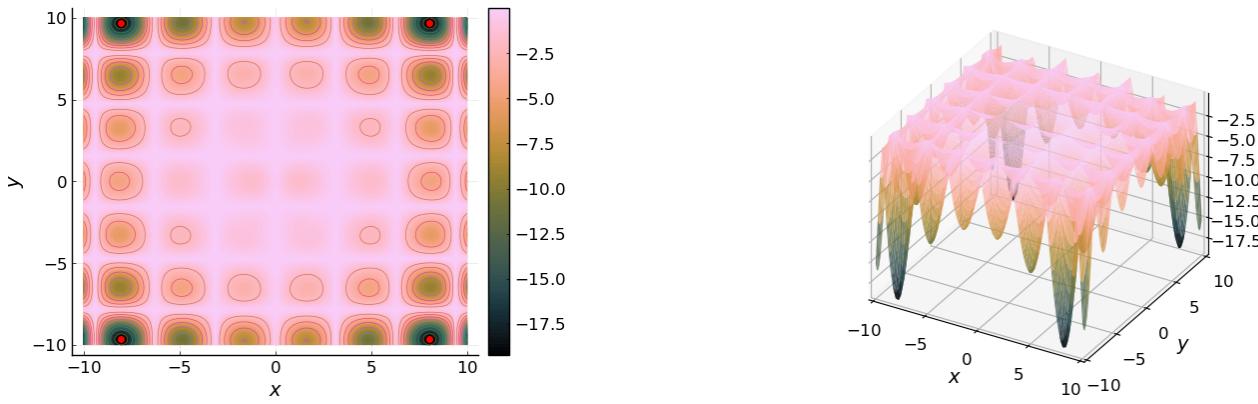


Figure B.10: The Complex Topography of the Hölder Table Function: Contour and Surface Representations

**Definition B.11** (Lévi Function N.13). *The Lévi function N.13, denoted as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is formally defined as follows:*

$$f(x, y) = \sin^2(3\pi x) + (x - 1)^2 \cdot (1 + \sin^2(3\pi y)) + (y - 1)^2 \cdot (1 + \sin^2(2\pi y)) \quad (\text{B.11})$$

where  $x, y \in \mathbb{R}$  are the decision variables.

The Lévi function N.13 finds its global minimum at  $f(1, 1) = 0$ . The complex topology of this function is visually captured in the contour and surface plots shown in Figure B.11.

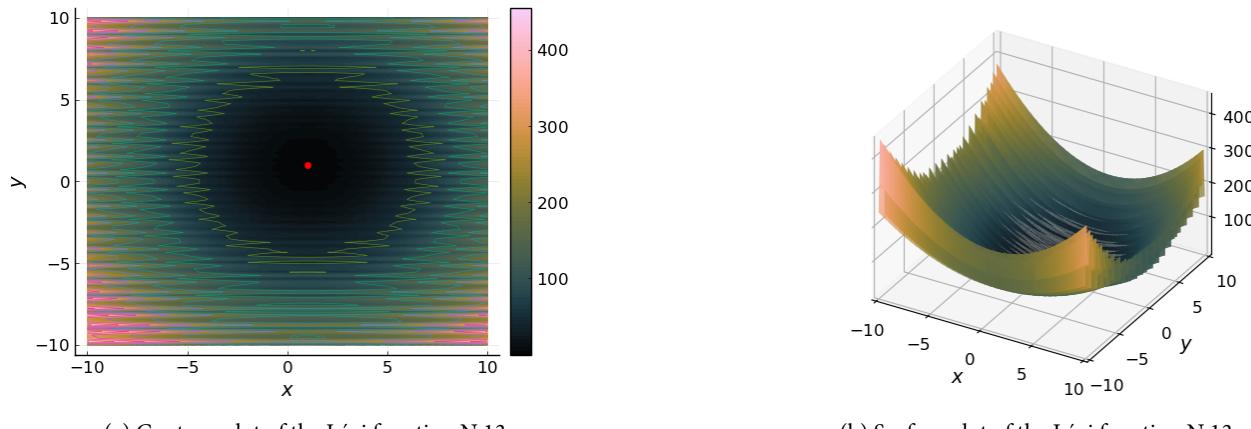


Figure B.11: Contour and Surface Representations of the Lévi Function N.13

## B.12 Matyas Function

The **Matyas function**, known for its simplicity and convex nature, is a standard test problem in the field of optimization algorithms. Despite its apparent simplicity, it provides invaluable insights into an algorithm's performance and behavior.


**Definition B.12** (Matyas Function). *The **Matyas function**, denoted as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is formulated as:*

$$f(x, y) = 0.26(x^2 + y^2) - 0.48xy \quad (\text{B.12})$$


where:

- $x, y \in \mathbb{R}$  denote the decision variables.

The Matyas function reaches its global minimum at the origin, with  $f(0, 0) = 0$ . The contour and surface visualizations of the Matyas function, offering perspectives on its topographical attributes, are presented in fig. B.12.

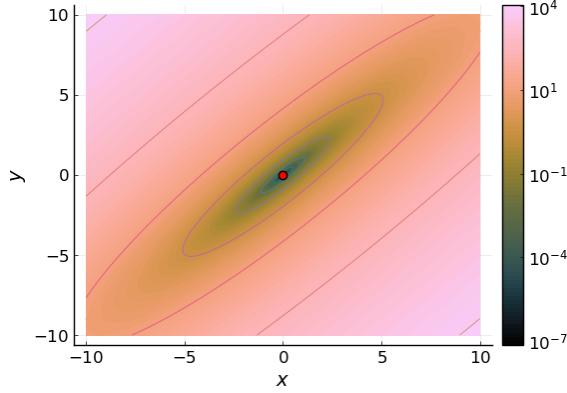

(a) Contour plot of the Matyas function with a red dot indicating the global minimum

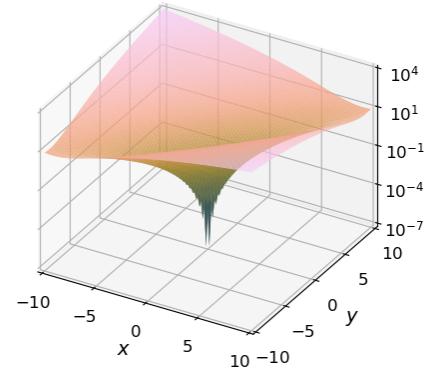

(b) Surface plot of the Matyas function

Figure B.12: Contour and Surface Visualizations of the Matyas Function

## B.13 McCormick Function

The field of optimization research frequently employs the **McCormick function** as an insightful benchmark function. This function owes its name to the researcher, Garth P. McCormick, who first employed it in his seminal study on factorable nonconvex programs.<sup>4</sup> The McCormick function is renowned for its oscillatory properties and its complex landscape featuring a single global minimum amidst numerous local minima. This complex landscape can pose a significant challenge to optimization algorithms, as they risk being ensnared in the local minima.

**Definition B.13** (McCormick Function). *The **McCormick Function**, symbolized as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is expressed mathematically as follows:*

$$f(x, y) = \sin(x + y) + (x - y)^2 - 1.5x + 2.5y + 1 \quad (\text{B.13})$$

*The McCormick function is typically evaluated within the range  $x, y \in [-1.5, 4]$  and  $[-3, 4]$  respectively.*


The global minimum of the McCormick function is found at  $f(-0.54719, -1.54719) \approx -1.9133$ . Visualizations of the McCormick function in the form of a contour plot and a surface plot are provided in fig. B.13 on the following page.

## B.14 Rastrigin Function


The Rastrigin function, first proposed by Rastrigin in 1974<sup>5</sup>, is a prominent non-convex function utilized as a benchmark for optimization algorithms. This function is a classic example of non-linear multimodal optimization problems, known for their

<sup>4</sup>McCormick, Garth P. "Computability of Global Solutions to Factorable Nonconvex Programs: Part I — Convex Underestimating Problems." Mathematical Programming 10, no. 1 (December 1976): 147–75. <https://doi.org/10.1007/BF01580665>.

<sup>5</sup>Rastrigin, L. A. (1974). "Systems of extremal control." Mir, Moscow.

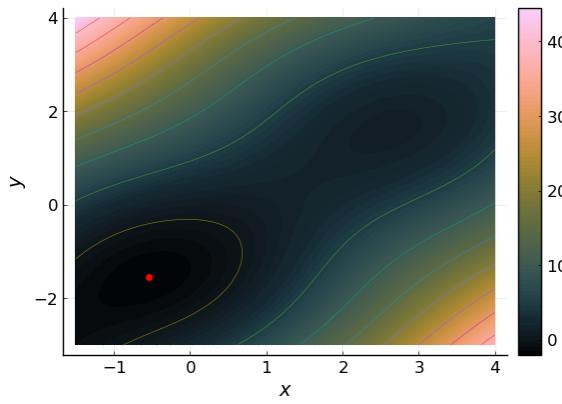

(a) Contour plot of the McCormick Function. The location of the global minimum is designated by a red dot.

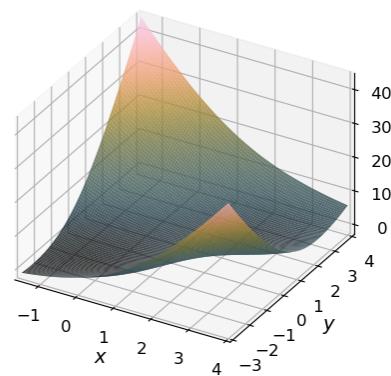

(b) Surface plot of the McCormick Function

Figure B.13: Visual representations of the McCormick Function.

complexity due to the abundance of local minima.

**Definition B.14** (Rastrigin Function). *The Rastrigin function, denoted as  $f : \mathbb{R}^n \rightarrow \mathbb{R}$ , is formulated as:*


$$f(\mathbf{x}) = An + \sum_{i=1}^n [\mathbf{x}_i^2 - A \cos(2\pi\mathbf{x}_i)] \quad (\text{B.14})$$

Here,


- $n$  is the number of dimensions.
- $\mathbf{x}$  is a vector composed of  $n$  real numbers.
- $A$  is a constant, typically set to 10.

The global minimum of the Rastrigin function is situated at  $\mathbf{x}^* = (0, \dots, 0)$ , with  $f(\mathbf{x}^*) = 0$ . It's particularly challenging due to its numerous local minima, distributed regularly throughout the search space. The function is predominantly evaluated within the hypercube  $\mathbf{x} \in [-5.12, 5.12]^n$ .

Visualizations of the Rastrigin function for  $n = 2$  are presented in fig. B.14, showcasing both the contour plot and the 3D surface plot.

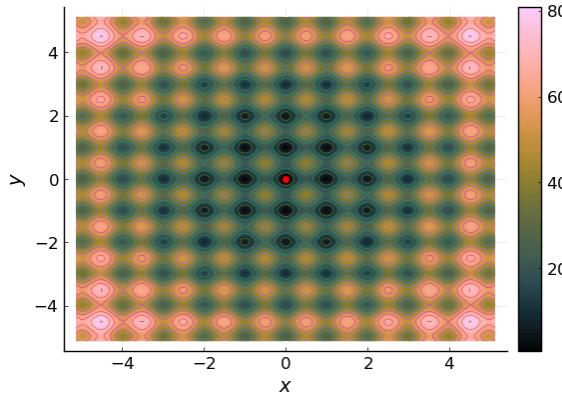

(a) Contour plot of the Rastrigin Function.

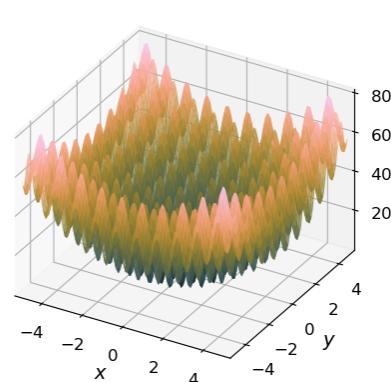

(b) 3D surface plot of the Rastrigin Function.

Figure B.14: Visualizations of the Rastrigin Function for  $n = 2$ , with the global minimum marked by a red dot.

## B.15 The Rosenbrock Function

Introduced by Howard H. Rosenbrock in 1960<sup>6</sup>, the Rosenbrock function is a non-convex function that serves as a benchmark for optimization algorithms. Despite its simplicity, it poses a challenge due to its characteristic landscape, a long, narrow, parabolic-shaped flat valley. While finding the valley is relatively simple, converging to the global minimum within it is notably difficult.


**Definition B.15** (Rosenbrock function). *The Rosenbrock function, denoted as  $f : \mathbb{R}^n \rightarrow \mathbb{R}$ , is defined by the following equation:*

$$f(\mathbf{x}) = \sum_{i=1}^{n-1} [100(\mathbf{x}_{i+1} - \mathbf{x}_i^2)^2 + (1 - \mathbf{x}_i)^2] \quad (\text{B.15})$$


In this equation:

- $n$  is the number of dimensions.
- $\mathbf{x}$  is a vector composed of  $n$  real numbers.

The Rosenbrock function's global minimum is at  $f(\mathbf{x}^*) = 0$ , corresponding to the point  $\mathbf{x}^* = (1, \dots, 1)$ . To illustrate the function's behavior for  $n = 2$ , fig. B.15 presents a contour plot and a surface plot.

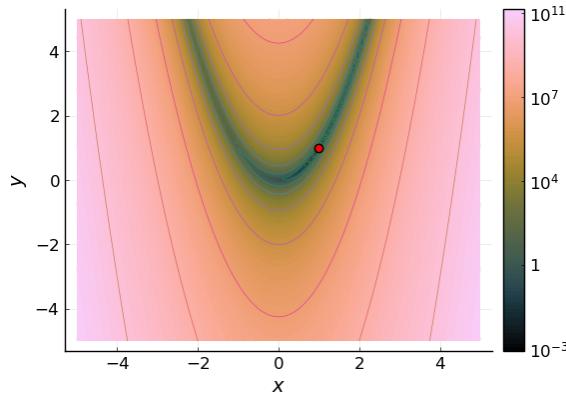

(a) Contour plot of the Rosenbrock function.

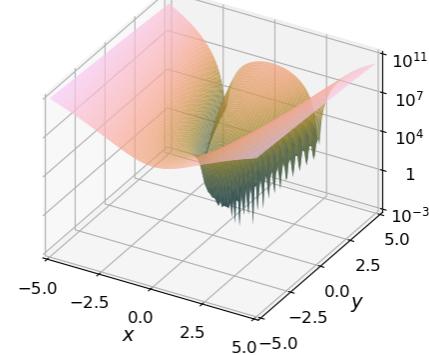

(b) Surface plot of the Rosenbrock function.

Figure B.15: Rosenbrock Function for  $n = 2$ , the red dot indicates the global minimum.

## B.16 Schaffer Function N.2

The **Schaffer Function N.2** is a well-established mathematical function frequently used in the realm of algorithm testing. It serves as a performance benchmark for a wide array of optimization algorithms, particularly those grounded in evolutionary computation and swarm intelligence principles.

**Definition B.16** (Schaffer Function N.2). *The Schaffer Function N.2 is defined over a two-dimensional domain, mapping  $\mathbb{R}^2$  to  $\mathbb{R}$ . The function, denoted as  $f(\mathbf{x})$ , is expressed as follows:*


$$f(\mathbf{x}) = 0.5 + \frac{\sin^2(\sqrt{x_1^2 + x_2^2}) - 0.5}{(1.0 + 0.001 \cdot (x_1^2 + x_2^2))^2}$$

Here,  $\mathbf{x} = (x_1, x_2)$  represents a point in the two-dimensional domain, with  $x_1, x_2$  each ranging within the interval [-100, 100].


<sup>6</sup>Rosenbrock, H.H. (1960). "An automatic method for finding the greatest or least value of a function". The Computer Journal. 3 (3): 175-184. doi:10.1093/comjnl/3.3.175. ISSN 0010-4620.

The Schaffer Function N.2 achieves its global minimum at  $f(0, 0) = 0$ . A visual exploration of this function can be enhanced by both contour and surface plots, providing a clearer understanding of its global minimum and topological characteristics.

fig. B.17 illustrate the *Schaffer Function N.2*.

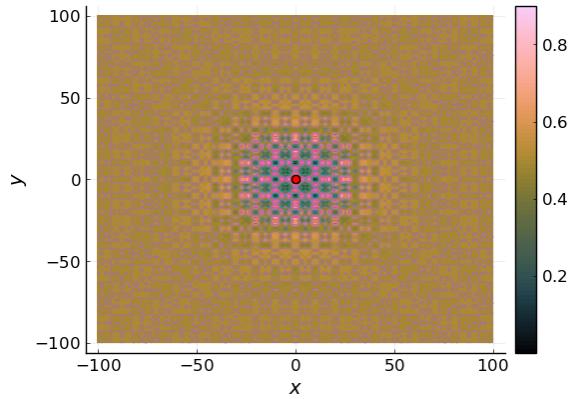


(a) Contour plot of the Schaffer Function N.2

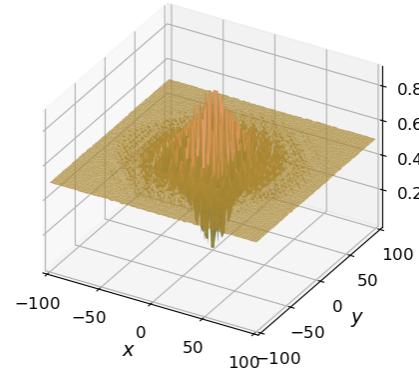


(b) Surface plot of the Schaffer Function N.2

Figure B.16: a

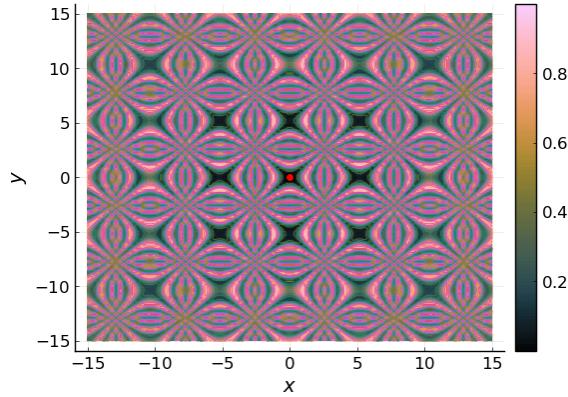

(a) Close-up contour plot of the Schaffer Function N.2 in the vicinity of the global minimum.

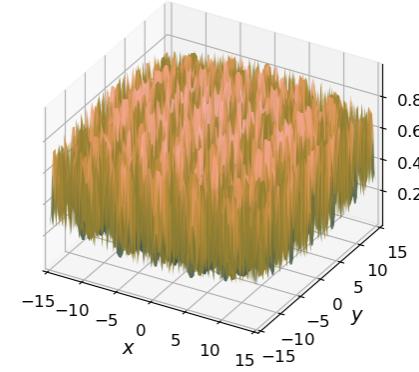

(b) Close-up surface plot of the Schaffer Function N.2 in the vicinity of the global minimum.

Figure B.17: Visualization of the Schaffer Function N.2. The contour and surface plots illustrate the function's topology, with the global minimum denoted by a red dot. The close-up contour and surface plots provide a more precise view of the global minimum and the immediate surroundings.

## B.17 Schaffer Function N.4

The **Schaffer Function N.4** is a mathematical function used as a performance test problem for optimization algorithms. It is particularly suited for testing algorithms that need to optimize complex, non-linear problems with many local minima.

**Definition B.17** (Schaffer Function N.4). *Schaffer Function N.4 is defined as follows:  
For  $x \in \mathbb{R}^2$ , the function is given by:*


$$f(x) = 0.5 + \frac{\cos^2(\sin(|x^2 - y^2|)) - 0.5}{[1 + 0.001(x^2 + y^2)]^2}$$

Where:


- $x$  and  $y$  are decision variables.
- The function has four global minima of 0.292579, located at  $0, \pm 1.25313$  and  $\pm 1.25313, 0$ .

The characteristic feature of Schaffer N.4 is its landscape with several local minima and four global minima. This structure poses a significant challenge to optimization algorithms, especially those prone to being trapped in local minima.


Figure B.18 provides a visualization of the Schaffer Function N.4. The contour and surface plots show the function's topology, with the red dots indicating the locations of the global minima. The close-up contour and surface plots offer a detailed view of the global minima and their immediate surroundings, highlighting the intricacy of the function's landscape.

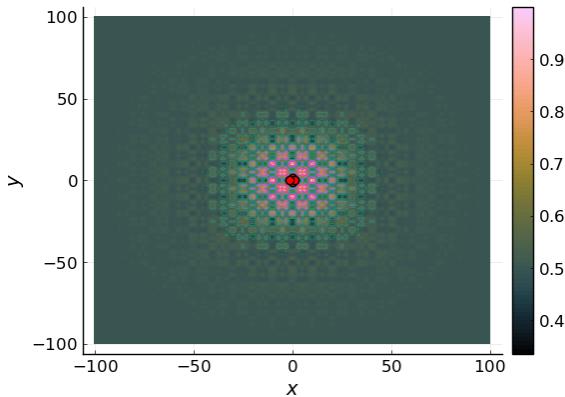


(a) Contour plot of the Schaffer Function N.4

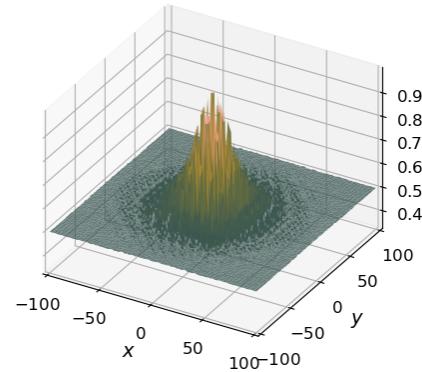

(b) Surface plot of the Schaffer Function N.4

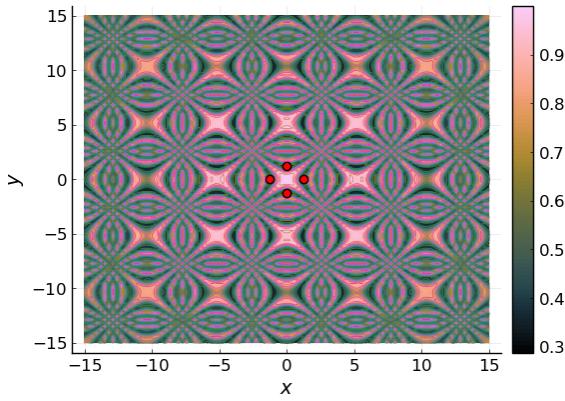

(c) Close-up contour plot of the Schaffer Function N.4 in the vicinity of the global minimum.

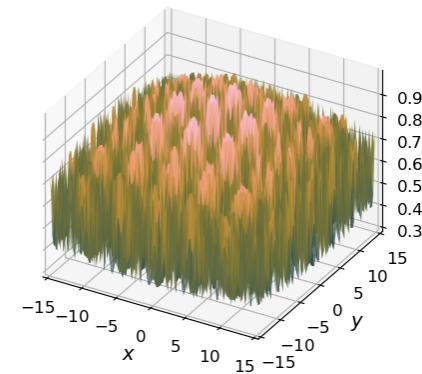

(d) Close-up surface plot of the Schaffer Function N.4 in the vicinity of the global minimum.

Figure B.18: Visualization of the Schaffer Function N.4. The contour and surface plots illustrate the function's topology, with the global minimum denoted by a red dot. The close-up contour and surface plots provide a more precise view of the global minimum and the immediate surroundings.

## B.18 The Sphere Function

The sphere function serves as a prominent benchmark problem in the realm of optimization algorithms. This convex function's simplicity and well-defined nature make it ideal for gauging the performance of such algorithms.


**Definition B.18** (Sphere Function). *The **sphere function**, denoted as  $f : \mathbb{R}^n \rightarrow \mathbb{R}$ , is formally described as:*

$$f(\mathbf{x}) = \sum_{i=1}^n \mathbf{x}_i^2 \quad (\text{B.16})$$


Herein:

- $n \in \mathbb{N}$  signifies the number of dimensions.
- $\mathbf{x}_i \in \mathbb{R}$  represents the  $i$ -th element of the vector  $\mathbf{x}$ .

The global minimum of the sphere function occurs at  $f(\mathbf{x}^*) = 0$  with the input vector  $\mathbf{x}^* = (0, \dots, 0)$ . The contour and surface plots showcasing the behavior of the sphere function for a two-dimensional input ( $n = 2$ ) are illustrated in fig. B.19.

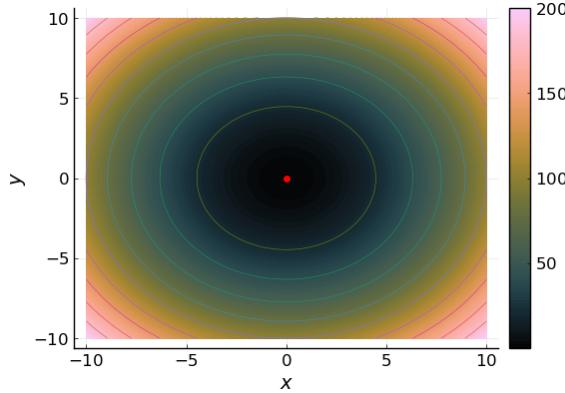

(a) Contour plot of the Sphere Function.

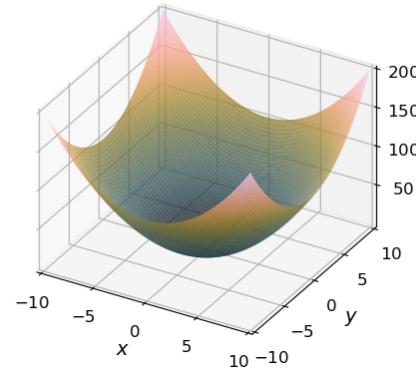

(b) Surface plot of the Sphere Function.

Figure B.19: Visual Representation of the Sphere Function with  $n = 2$

## B.19 Styblinski-Tang function


The **Styblinski-Tang function** is a non-convex function used as a performance test problem for optimization algorithms. This function is known for its complex and intricate landscape, presenting numerous local minima that pose challenges to optimization algorithms.

**Definition B.19** (Styblinski-Tang function). *The Styblinski-Tang function is defined in two dimensions, with the variables  $x$  and  $y$ .*

$$f(\mathbf{x}) = \frac{1}{2} \sum_{i=1}^n (\mathbf{x}_i^4 - 16\mathbf{x}_i^2 + 5\mathbf{x}_i) \quad (\text{B.17})$$

where  $x$  and  $y$  are any real numbers.

The intriguing properties of this function have made it a common benchmark in the study of algorithm performance, particularly in the field of evolutionary computation and swarm intelligence.

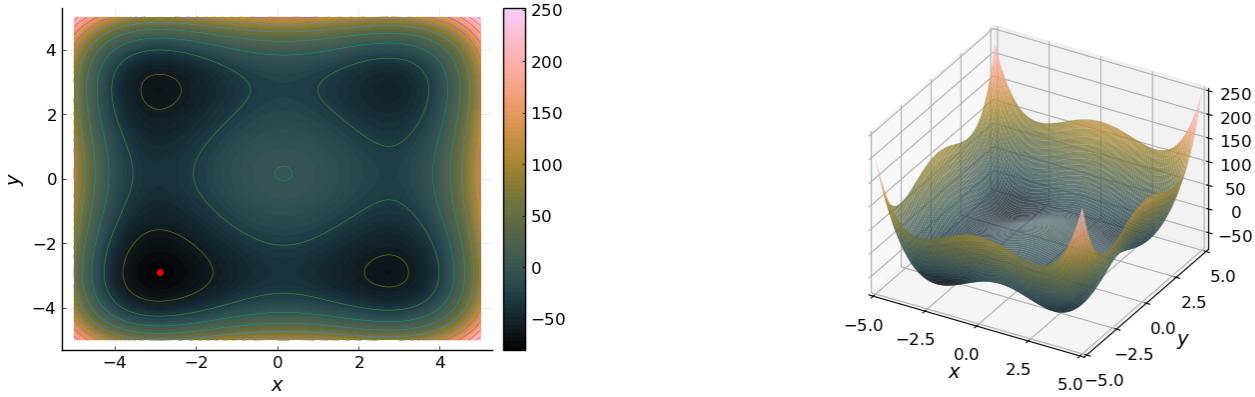

(a) Contour plot of the Styblinski-Tang function. The intricate patterns show the complex landscape of the function. The red dot signifies the global minimum.

(b) Three-dimensional surface plot of the Styblinski-Tang function. The plot illustrates the numerous local minima and the complex topography of the function.

Figure B.20: Visualizations of the Styblinski-Tang function.

## B.20 Three-Hump Camel Function


The **Three-Hump Camel function**, colloquially termed as the camel-back function, serves as a standard benchmark in the optimization algorithms testing landscape. This two-dimensional function earns its name from the characteristic tri-modal hump visual pattern it presents in a three-dimensional space, bearing resemblance to a camel's back.

**Definition B.20** (Three-Hump Camel Function). *The Three-Hump Camel function, depicted as  $f : \mathbb{R}^2 \rightarrow \mathbb{R}$ , is formally expressed as:*

$$f(x, y) = 2x^2 - 1.05x^4 + \frac{x^6}{6} + xy + y^2 \quad (\text{B.18})$$

where  $-5 \leq x \leq 5$  and  $-5 \leq y \leq 5$ .

The Three-Hump Camel function exhibits its global minimum at the origin,  $f(0, 0) = 0$ . Although its form appears straightforward, the function's multiple local optima pose considerable challenges for optimization algorithms, making it an excellent test case.

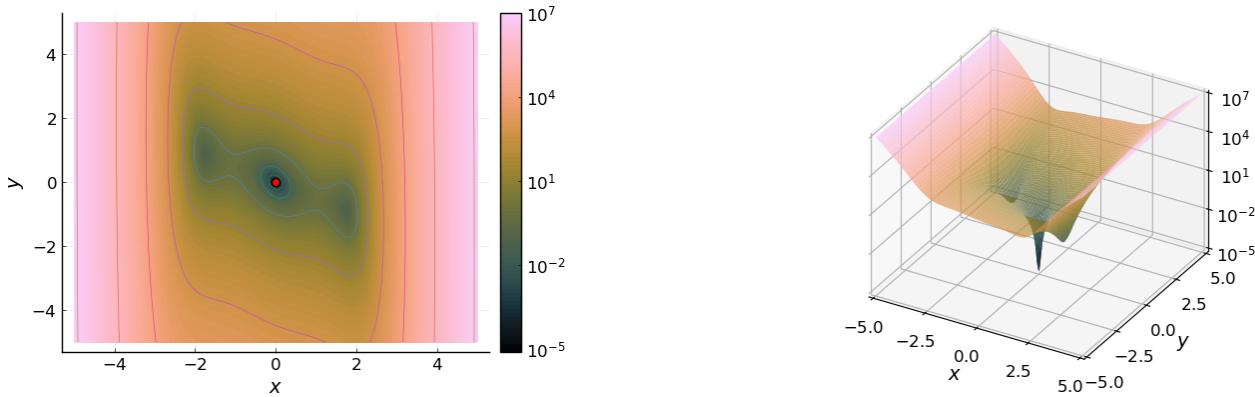

(a) Contour plot of the Three-Hump Camel function. The red dot signifies the global minimum.

(b) Surface plot showcasing the characteristic tri-modal humps of the Three-Hump Camel function.

Figure B.21: Contour and surface visualizations of the Three-Hump Camel function



# Appendix C

## Additional Listings

This appendix contains additional listings of the source code used in this thesis that are not essential to the understanding of the thesis. The listings are included here for completeness.

Listing C.1– Calculation of  $|\mathbb{T}_{\leq 5}(\mathcal{T}, \mathcal{F})|$  for  $\mathcal{T} = \{x, c\}$  and the set  $\mathcal{F} = \{+, -, \times, /, \sin, \cos, \text{pow}\}$  using the *Julia* programming language.

```
arities = [2, 2, 2, 2, 1, 1, 2] # A({+, -, ×, ÷, sin, cos, pow}) = {2, 2, 2, 2, 1, 1, 2}
terminals_size = 8 # |T| = |{x, 1, 2, 3, 4, 5, 6, 7}| = 8
|T_{≤h}|
t_leq(h::Int)::Int128 = if h == 0 # |T| if h = 0
 terminals_size
else # (∑_{h=0}^{h-1} ∑_{f ∈ F} |T_h|^{A(f)}) + |T| if h > 0
 c_sum = terminals_size
 for i = 0:h - 1
 c_sum = c_sum + sum(t(i)) .^ arities
 end
 c_sum
end
|T_h|
t(h::Int)::Int128 = if h == 0 # |T| if h = 0
 terminals_size
else # ∑_{f ∈ F} |T_{h-1}|^{A(f)} if h > 0
 sum(t(h - 1)) .^ arities
end
res = t_leq(5) # |T_{≤5}(T, F)|
```

Listing C.2– Minimal implementation of the *One Max* problem using the *Keen* framework.

```
fun main() {
 Core.random = Random(11)
 val result = engine(
 { gt: Genotype<Boolean, BoolGene> -> gt.flatten().count { it }.toDouble() },
 genotype { chromosome { booleans { size = 20; truesProbability = 0.5 } } })
 populationSize = 20
 selector = TournamentSelector(sampleSize = 3)
 alterers = listOf(
```

```

 BitFlipMutator(probability = 0.03),
 SinglePointCrossover(probability = 0.2)
)
 limits = listOf(TargetFitness(20.0))
}.evolve()
println("Target fitness reached at generation ${result.generation}")
println("Best individual is ${result.best.genotype}")
println("with fitness ${result.best.fitness}")
}

```

Listing C.3– Room Scheduling problem using the *Keen* framework.

```

data class Meeting(val start: Int, val end: Int)

private val meetings =
 listOf(
 Meeting(1, 3),
 Meeting(2, 3),
 Meeting(5, 6),
 Meeting(7, 9),
 Meeting(4, 7),
 Meeting(8, 10),
 Meeting(2, 7),
 Meeting(3, 4),
 Meeting(1, 5),
 Meeting(3, 6),
 Meeting(4, 5)
)

private fun fitnessFn(genotype: Genotype<Int, IntGene>): Double {
 // Create a map to represent the rooms, where the key is the room number and the value
 // is a list of meetings in that room.
 val rooms = meetings.groupBy {
 genotype.chromosomes[meetings.indexOf(it)].genes[0].dna
 }
 // Calculate the number of conflicts in each room.
 val conflicts = rooms.values.sumOf { meetingList ->
 val table = IntArray(10) // Create an array to represent the time slots in a day.
 meetingList.forEach { meeting ->
 // Increment the time slots for each meeting.
 for (i in meeting.start until meeting.end) {
 table[i]++
 }
 }
 // Count the number of time slots with more than one meeting.
 table.count { it > 1 }
 }
 // The fitness score is the number of rooms used plus the number of conflicts.
 // We add 1 to the number of rooms used to avoid a fitness score of 0.
 return rooms.size.toDouble() + conflicts
}

```

```
fun main() {
 // Create a genetic algorithm engine with the fitness function and genotype for the
 // problem.
 val engine = engine(::fitnessFn, genotype {
 repeat(meetings.size) {
 chromosome {
 ints { size = 1; range = meetings.indices.first to meetings.indices.last }
 }
 }
 }) {
 // Set the parameters for the genetic algorithm.
 populationSize = 100
 optimizer = FitnessMinimizer()
 alterers = listOf(Mutator(0.06), SinglePointCrossover(0.2))
 limits = listOf(SteadyGenerations(20), GenerationCount(100))
 listeners = listOf(EvolutionSummary(), EvolutionPlotter())
 }
 // Evolve the population and get the best result.
 val result = engine.evolve()
 // Print the statistics of the genetic algorithm.
 println(engine.listeners.first())
 // Create a schedule based on the best genotype.
 val schedule = mutableListOf(result.best.genotype.size) { mutableListOf<Meeting>() }
 meetings.forEachIndexed { index, meeting ->
 val room = result.best.genotype.chromosomes[index].genes[0].dna
 schedule[room].add(meeting)
 }
 // Print the schedule for each room.
 schedule.forEachIndexed { index, room ->
 println("Room $index: $room")
 }
 // Display a plot of the fitness values over time.
 (engine.listeners.last() as EvolutionPlotter).displayFitness()
}
```



# Bibliography

- [1] A. M. Turing. "I.—COMPUTING MACHINERY AND INTELLIGENCE". In: *Mind* LIX.236 (Oct. 1, 1950), pp. 433–460. ISSN: 1460-2113, 0026-4423. doi: [10.1093/mind/LIX.236.433](https://doi.org/10.1093/mind/LIX.236.433). URL: <https://academic.oup.com/mind/article/LIX/236/433/986238> (visited on 06/10/2023).
- [2] H. H. Rosenbrock. "An Automatic Method for Finding the Greatest or Least Value of a Function". In: *The Computer Journal* 3.3 (Mar. 1, 1960), pp. 175–184. ISSN: 0010-4620, 1460-2067. doi: [10.1093/comjnl/3.3.175](https://doi.org/10.1093/comjnl/3.3.175). URL: <https://academic.oup.com/comjnl/article-lookup/doi/10.1093/comjnl/3.3.175> (visited on 07/04/2023).
- [3] Nils Aall Barricelli. "Numerical Testing of Evolution Theories: Part I Theoretical Introduction and Basic Tests". In: *Acta Biotheoretica* 16.1-2 (Mar. 1962), pp. 69–98. ISSN: 0001-5342, 1572-8358. doi: [10.1007/BF01556771](https://doi.org/10.1007/BF01556771). URL: <http://link.springer.com/10.1007/BF01556771> (visited on 06/10/2023).
- [4] Sartaj Sahni. "Approximate Algorithms for the 0/1 Knapsack Problem". In: *Journal of the ACM (JACM)* 22.1 (1975), pp. 115–124.
- [5] John H. Holland. *Adaptation in Natural and Artificial Systems: An Introductory Analysis with Applications to Biology, Control, and Artificial Intelligence*. 1st MIT Press ed. Complex Adaptive Systems. Cambridge, Mass: MIT Press, 1992. 211 pp. ISBN: 978-0-262-08213-6 978-0-262-58111-0.
- [6] John R. Koza. *Genetic Programming. 1: On the Programming of Computers by Means of Natural Selection*. Complex Adaptive Systems. Cambridge, Mass.: MIT Press, 1992. 819 pp. ISBN: 978-0-262-52791-0.
- [7] Peter J Angeline and Jordan B Pollack. "The Evolutionary Induction of Subroutines". In: *Proceedings of the Fourteenth Annual Conference of the Cognitive Science Society*. Bloomington, Indiana, 1992, pp. 236–241.
- [8] John R. Koza. *Genetic Programming II: Automatic Discovery of Reusable Programs*. Complex Adaptive Systems. Cambridge, Mass: MIT Press, 1994. 746 pp. ISBN: 978-0-262-11189-8.
- [9] Peter J. Angeline. "Genetic Programming and Emergent Intelligence". In: *Advances in Genetic Programming*. Advances in Genetic Programming 1. Cambridge (Mass.) London: MIT press, 1994, pp. 75–97. ISBN: 978-0-262-11188-1.
- [10] J.P. Rosca and D.H. Ballard. "Learning by Adapting Representations in Genetic Programming". In: *Proceedings of the First IEEE Conference on Evolutionary Computation. IEEE World Congress on Computational Intelligence*. First IEEE Conference on Evolutionary Computation. IEEE World Congress on Computational Intelligence. Orlando, FL, USA: IEEE, 1994, pp. 407–412. ISBN: 978-0-7803-1899-1. doi: [10.1109/ICEC.1994.349916](https://doi.org/10.1109/ICEC.1994.349916). URL: <http://ieeexplore.ieee.org/document/349916/> (visited on 06/23/2023).
- [11] Tobias Bickle and Lothar Thiele. "A Mathematical Analysis of Tournament Selection." In: *ICGA* 95 (1995), pp. 9–15.
- [12] R. Andonov, V. Poirriez, and S. Rajopadhye. "Unbounded Knapsack Problem: Dynamic Programming Revisited". In: *European Journal of Operational Research* 123.2 (June 2000), pp. 394–407. ISSN: 03772217. doi: [10.1016/S0377-2217\(99\)00265-9](https://doi.org/10.1016/S0377-2217(99)00265-9). URL: <https://linkinghub.elsevier.com/retrieve/pii/S0377221799002659> (visited on 08/09/2023).
- [13] W. B. Langdon and Riccardo Poli. *Foundations of Genetic Programming*. Berlin ; New York: Springer, 2002. 260 pp. ISBN: 978-3-540-42451-2.
- [14] Kalyanmoy Deb, Pawan Zope, and Abhishek Jain. "Distributed Computing of Pareto-Optimal Solutions with Evolutionary Algorithms". In: *Evolutionary Multi-Criterion Optimization*. Ed. by Carlos M. Fonseca et al. Lecture Notes in Computer Science. Berlin, Heidelberg: Springer, 2003, pp. 534–549. ISBN: 978-3-540-36970-7. doi: [10.1007/3-540-36970-8\\_38](https://doi.org/10.1007/3-540-36970-8_38).

- [15] Kenneth A. De Jong. *Evolutionary Computation: A Unified Approach*. 2006. ISBN: 978-0-262-25598-1. URL: <https://ieeexplore.ieee.org/servlet/opac?bknumber=6267245>.
- [16] *The MIT License*. Open Source Initiative. Oct. 31, 2006. URL: <https://opensource.org/license/mit/> (visited on 07/26/2023).
- [17] Dipankar Dasgupta et al. “A Comparison of Multiobjective Evolutionary Algorithms with Informed Initialization and Kuhn-Munkres Algorithm for the Sailor Assignment Problem”. In: *Proceedings of the 10th Annual Conference Companion on Genetic and Evolutionary Computation*. GECCO ’08. New York, NY, USA: Association for Computing Machinery, July 12, 2008, pp. 2129–2134. ISBN: 978-1-60558-131-6. doi: [10.1145/1388969.1389035](https://doi.org/10.1145/1388969.1389035). URL: <https://doi.org/10.1145/1388969.1389035> (visited on 08/13/2023).
- [18] Riccardo Poli et al. *A Field Guide to Genetic Programming*. [Morrisville, NC: Lulu Press], 2008. 233 pp. ISBN: 978-1-4092-0073-4.
- [19] Lucas de P. Veronese and Renato A. Krohling. “Differential Evolution Algorithm on the GPU with C-CUDA”. In: *IEEE Congress on Evolutionary Computation*. IEEE Congress on Evolutionary Computation. July 2010, pp. 1–7. doi: [10.1109/CEC.2010.5586219](https://doi.org/10.1109/CEC.2010.5586219).
- [20] Travis Desell et al. “An Analysis of Massively Distributed Evolutionary Algorithms”. In: *IEEE Congress on Evolutionary Computation*. IEEE Congress on Evolutionary Computation. July 2010, pp. 1–8. doi: [10.1109/CEC.2010.5586073](https://doi.org/10.1109/CEC.2010.5586073).
- [21] Thé Van Luong, Nouredine Melab, and El-Ghazali Talbi. “GPU-based Island Model for Evolutionary Algorithms”. In: *Proceedings of the 12th Annual Conference on Genetic and Evolutionary Computation*. GECCO ’10. New York, NY, USA: Association for Computing Machinery, July 7, 2010, pp. 1089–1096. ISBN: 978-1-4503-0072-8. doi: [10.1145/1830483.1830685](https://doi.org/10.1145/1830483.1830685). URL: <https://doi.org/10.1145/1830483.1830685> (visited on 08/08/2023).
- [22] Thé Van Luong, Nouredine Melab, and El-Ghazali Talbi. “Parallel Hybrid Evolutionary Algorithms on GPU”. In: *IEEE Congress on Evolutionary Computation*. IEEE Congress on Evolutionary Computation. July 2010, pp. 1–8. doi: [10.1109/CEC.2010.5586403](https://doi.org/10.1109/CEC.2010.5586403).
- [23] Xinjie Yu and Mitsuo Gen. *Introduction to Evolutionary Algorithms*. Decision Engineering. London ; New York: Springer, 2010. 418 pp. ISBN: 978-1-84996-128-8 978-1-84996-129-5.
- [24] Daniel Shiffman. *The Nature of Code*. Version 1.0, generated December 6, 2012. s.l.: Selbstverl., 2012. 498 pp. ISBN: 978-0-9859308-0-6.
- [25] Mateusz Guzek et al. “Multi-Objective Evolutionary Algorithms for Energy-Aware Scheduling on Distributed Computing Systems”. In: *Applied Soft Computing* 24 (Nov. 1, 2014), pp. 432–446. ISSN: 1568-4946. doi: [10.1016/j.asoc.2014.07.010](https://doi.org/10.1016/j.asoc.2014.07.010). URL: <https://www.sciencedirect.com/science/article/pii/S1568494614003408> (visited on 08/08/2023).
- [26] Paweł Liskowski et al. “Comparison of Semantic-aware Selection Methods in Genetic Programming”. In: *Proceedings of the Companion Publication of the 2015 Annual Conference on Genetic and Evolutionary Computation*. GECCO ’15: Genetic and Evolutionary Computation Conference. Madrid Spain: ACM, July 11, 2015, pp. 1301–1307. ISBN: 978-1-4503-3488-4. doi: [10.1145/2739482.2768505](https://doi.org/10.1145/2739482.2768505). URL: <https://dl.acm.org/doi/10.1145/2739482.2768505> (visited on 06/21/2023).
- [27] Clara Schmitt et al. “Half a Billion Simulations: Evolutionary Algorithms and Distributed Computing for Calibrating the Simpoplocal Geographical Model”. In: *Environment and Planning B: Planning and Design* 42.2 (Apr. 1, 2015), pp. 300–315. ISSN: 0265-8135. doi: [10.1068/b130064p](https://doi.org/10.1068/b130064p). URL: <https://doi.org/10.1068/b130064p> (visited on 08/08/2023).
- [28] Sergii Yaroshko and Svitlana Yaroshko. “Multithreaded Evolutionary Computing”. In: *2019 IEEE 2nd Ukraine Conference on Electrical and Computer Engineering (UKRCON)*. 2019 IEEE 2nd Ukraine Conference on Electrical and Computer Engineering (UKRCON). July 2019, pp. 1041–1045. doi: [10.1109/UKRCON.2019.8879863](https://doi.org/10.1109/UKRCON.2019.8879863).
- [29] Alexandre Bergel. *Agile Artificial Intelligence in Pharo: Implementing Neural Networks, Genetic Algorithms, and Neuroevolution*. For Professionals by Professionals. New York: Apress, 2020. 386 pp. ISBN: 978-1-4842-5384-7 978-1-4842-5383-0.
- [30] Alexandre Bergel and Ignacio Slater Muñoz. “Beacon: Automated Test Generation for Stack-Trace Reproduction Using Genetic Algorithms”. In: *2021 IEEE/ACM 14th International Workshop on Search-Based Software Testing (SBST)*. 2021 IEEE/ACM 14th International Workshop on Search-Based Software Testing (SBST). Madrid, Spain: IEEE, May 2021, pp. 1–7. ISBN: 978-1-66544-571-9. doi: [10.1109/SBST52555.2021.00007](https://doi.org/10.1109/SBST52555.2021.00007). URL: <https://ieeexplore.ieee.org/document/9476241/> (visited on 06/07/2023).

- [31] Zhengyuan Wang, Hui Zhang, and Yali Li. "Fast Polynomial Time Approximate Solution for 0-1 Knapsack Problem". In: **Computational Intelligence and Neuroscience** 2022 (Oct. 22, 2022), e1266529. ISSN: 1687-5265. DOI: [10.1155/2022/1266529](https://doi.org/10.1155/2022/1266529). URL: <https://www.hindawi.com/journals/cin/2022/1266529/> (visited on 08/09/2023).
- [32] djakobovic. **ECF - Evolutionary Computation Framework**. Mar. 13, 2023. URL: <https://github.com/djakobovic/ECF> (visited on 08/09/2023).
- [33] Diego Giacomelli. **GeneticSharp**. June 7, 2023. URL: <https://github.com/giacomelli/GeneticSharp> (visited on 06/08/2023).
- [34] **Kotlin Telegram Bot**. Kotlin Telegram Bot, Aug. 3, 2023. URL: <https://github.com/kotlin-telegram-bot/kotlin-telegram-bot> (visited on 08/03/2023).
- [35] **Kotlinx.Html**. Kotlin, Aug. 3, 2023. URL: <https://github.com/Kotlin/kotlinx.html> (visited on 08/03/2023).
- [36] **Pagmo**. European Space Agency, Aug. 8, 2023. URL: <https://github.com/esa/pagmo2> (visited on 08/09/2023).
- [37] Christian S. Perone. **Perone/Pyevolve**. May 23, 2023. URL: <https://github.com/perone/Pyevolve> (visited on 06/08/2023).
- [38] **Pygmo**. European Space Agency, June 4, 2023. URL: <https://github.com/esa/pygmo2> (visited on 06/08/2023).
- [39] **The Latest Programming Languages Statistics & Trends For 2023 • GITNUX**. Feb. 1, 2023. URL: <https://blog.gitnux.com/programming-languages-statistics/> (visited on 07/21/2023).
- [40] **Android's Kotlin-first Approach**. Android Developers. URL: <https://developer.android.com/kotlin/first> (visited on 07/21/2023).
- [41] **Calling Java from Kotlin | Kotlin**. Kotlin Help. URL: <https://kotlinlang.org/docs/java-interop.html> (visited on 07/21/2023).
- [42] **Calling Kotlin from Java | Kotlin**. Kotlin Help. URL: <https://kotlinlang.org/docs/java-to-kotlin-interop.html> (visited on 07/21/2023).
- [43] Fort Collins. "A Comparison of Genetic Sequencing Operators". In: (), p. 8.
- [44] **DEAP Documentation — DEAP 1.3.3 Documentation**. URL: <https://deap.readthedocs.io/en/master/> (visited on 06/08/2023).
- [45] **Easy\_ga/Src at Main · RubenRubioM/Easy\_ga**. GitHub. URL: [https://github.com/RubenRubioM/easy\\_ga](https://github.com/RubenRubioM/easy_ga) (visited on 06/13/2023).
- [46] **ECJ**. URL: <https://cs.gmu.edu/~eclab/projects/ecj/> (visited on 06/08/2023).
- [47] **EvolvingObjects: Welcome to Evolving Objects**. URL: <https://eodev.sourceforge.net/eo/doc/html/index.html> (visited on 06/08/2023).
- [48] **Genevo - Rust**. URL: <https://docs.rs/genevo/latest/genevo/index.html> (visited on 06/13/2023).
- [49] **GNU Lesser General Public License v3.0 - GNU Project - Free Software Foundation**. URL: <https://www.gnu.org/licenses/lgpl-3.0.en.html> (visited on 07/26/2023).
- [50] **Inspyred: Bio-inspired Algorithms in Python — Inspyred 1.0.1 Documentation**. URL: <https://aarongarrett.github.io/inspyred/> (visited on 06/08/2023).
- [51] **Kotest | Kotest**. URL: <https://kotest.io/> (visited on 08/03/2023).
- [52] **Kotlin Programming Language**. Kotlin. URL: <https://kotlinlang.org/> (visited on 07/21/2023).
- [53] **Kotlin-Java Interop Guide**. Android Developers. URL: <https://developer.android.com/kotlin/interop> (visited on 07/21/2023).
- [54] **One Max Problem — DEAP 1.3.3 Documentation**. URL: [https://deap.readthedocs.io/en/master/examples/ga\\_onemax.html](https://deap.readthedocs.io/en/master/examples/ga_onemax.html) (visited on 06/11/2023).
- [55] **Schlatterbeck/Pgapack: Parallel Genetic Algorithm Library Originally by David Levine from Argonne National Laboratory**. URL: <https://github.com/schlatterbeck/pgapack/tree/master> (visited on 08/09/2023).
- [56] **Schlatterbeck/Pgapyp: Python Wrapper for Pgapack, the Parallel Genetic Algorithm Library**. URL: <https://github.com/schlatterbeck/pgapyp> (visited on 08/09/2023).
- [57] Ignacio Slater Muñoz. **Keen | Kotlin Genetic Algorithm Framework**. URL: <https://github.com/r8vnhill/keen>.

- [58] **Stream (Java Platform SE 8)**. URL: <https://docs.oracle.com/javase/8/docs/api/java/util/stream/Stream.html> (visited on 07/26/2023).
- [59] **The Top Programming Languages**. The State of the Octoverse. URL: <https://octoverse.github.com/2022/top-programming-languages> (visited on 07/21/2023).
- [60] **Type-Safe Builders | Kotlin**. Kotlin Help. URL: <https://kotlinlang.org/docs/type-safe-builders.html> (visited on 07/31/2023).
- [61] Franz Wilhelmstötter. **Jenetics: Java Genetic Algorithm Library**. jenetics.io. URL: <https://jenetics.io/> (visited on 06/08/2023).