Official Statistics in R with pxweb

by Måns Magnusson and Leo Lahti

Abstract The pxweb package provides an interface from R to statistical databases published through the PxWeb API. PxWeb is used by national, regional, and international statistical organizations to disseminate official statistics in multidimensional tables. The package supports discovery of API resources, construction and validation of queries, retrieval and parsing of data and metadata, conversion to standard R data structures, extraction of comments, and citation of retrieved data. This article introduces the motivation and design of the pxweb R package, show the use of both PxWeb API version 1 and version 2, and provides a reproducible case study using official statistics.

1 Introduction

Open data science workflows rely heavily on algorithmic tools for data retrieval. Automating data discovery, retrieval, integration, and citation gives users more time for analysis and interpretation. It also supports reproducible research (Gandrud, 2013; Boettiger et al., 2015) by making data acquisition explicit and repeatable.

Official statistics are a particularly important type of public data (United Nations General Assembly, 2014). National statistical institutes (NSI) and international agencies publish large amounts of data in a vast number of areas, such as demography, economics, health, infrastructure, climate, to name a few (United Nations General Assembly, 2014; World Bank, 2026). Such data are often multidimensional, geographically detailed, and updated over long time periods. During the last decade such data has become increasingly available through open web-based application programming interfaces (API). Opening statistical resources through public web APIs is, however, only the first step to enable use of statistical data. Users also need software that can bridge the gap between online statistical databases and analysis in statistical programming environments such as R.

There are many dedicated software packages that simplify and automate analysis workflows. They take into account variations in raw data formats, access details, metadata conventions, and typical use cases so that users can avoid repetitive programming tasks and reduce the risk of processing errors (Groves and Lyberg, 2010). In R, several packages support programmatic data retrieval in different ways, from specific sources (Lahti et al., 2017; Arel-Bundock, 2026), broader compiled sources such as economic and financial time-series data (Reinhart, 2024), generic data sources (Szöcs et al., 2020; Caro and Biecek, 2017), or specific statistical standards, such as the SDMX data standard (Blondel et al., 2025).

The **pxweb** package (Magnusson et al., 2026) fills a complementary role: it provides a general R interface to databases exposed through the PxWeb application programming interface (API) (Statistics Sweden and Statistics Norway, 2026a). The package can navigate PxWeb resources, fetch metadata, construct and validate queries, retrieve data, and convert responses into standard R data structures. The package includes 46 API catalogue entries and supports versions 1 and 2 of the PxWeb API (Statistics Sweden and Statistics Norway, 2026a).

Data citation is another motivation for the package. Data reuse should document source organizations, accessed resources, version information, and retrieval times where possible (Parsons et al., 2019). The **pxweb** package helps standardize and streamline this process for PxWeb data by collecting source information from the API and data objects and by encouraging users to cite both the retrieved data and the software used to retrieve them for full reproducibility.

The **pxweb** package was first released on CRAN in 2014 and was substantially upgraded in 2018 and 2026. Recent development in 2026 has added support for the PxWeb API version 2, including table search, `JSON-stat2` responses, v2 metadata, codelists, value sets, aggregation helpers, and observation status comments. Here we introduce the use of

(Magnusson et al., 2026) version 1.0.0. [1] The current package is part of the rOpenGov open data science project (Lahti et al., 2013).

1.1 PxWeb and PC-Axis

PxWeb is a web application and API for disseminating PC-Axis-type statistical data (Statistics Sweden and Statistics Norway, 2026a). PC-Axis data are data files typically organized as multidimensional tables with dimensions such as region, time, sex, age, indicator, or content. The PX software family (including both PC-Axis and PxWeb) is used by a large number of NSIs, e.g. Statistics Sweden, Statistics Finland, and Statistics Norway to name a few (Statistics Sweden, 2026; Statistics Finland, 2026; Statistics Norway, 2026). PxWeb exposes data and metadata through hypertext transfer protocol (HTTP) endpoints that can be accessed programmatically.

The PX file format stores metadata and data in a single file. Statistics Sweden describes PX as a standard format for statistics files used by many statistical offices and as the basis for tools such as PxWin, PxWeb, and PxEdit (Statistics Sweden, 2026). PxWeb extends this file-oriented tradition to online dissemination by publishing statistical tables through web interfaces (Statistics Sweden and Statistics Norway, 2026a).

Recently, PxWeb API version 2 emerged as a joint Statistics Sweden and Statistics Norway project initiated in January 2024 because the older PxWeb version 1 interface had become difficult to develop further and user needs were changing. Public test versions appeared in 2024, followed by a PxWebApi v2 release in September 2025 and a PxWeb 2 release in October 2025. The new API modernizes the infrastructure through GET URL support, JSON-stat2 output, improved filtering, language handling, and richer metadata access (Statistics Sweden and Statistics Norway, 2026c,b,d).

From the perspective of an R user, PxWeb APIs have three important parts. First, a table query must be constructed from table metadata. Second, the data response has to be retrieved and converted into an analysis-ready format in R. Third, the downloaded data should be easy to cite to facilitate provenance and reproducibility. The **pxweb** package handles all three parts for the R user.

The **pxweb** package is solely designed for PxWeb APIs, while packages such as **pxR** focus on parsing PC-Axis files (Bellosta et al., 2025). This distinction is important because API access requires metadata discovery, query construction, request validation, and response parsing rather than only local file import.

Since PxWeb installations are configured by individual providers, such as NSIs, API version support and request limits are server-level properties rather than package-level constants. The **pxweb** package therefore collects available configuration metadata, including version 1 and 2 `config` responses, and uses this information when validating requests, making calls, and splitting large downloads.

1.2 Related software

The R ecosystem contains several packages for accessing official statistics and other public data. However, these tools differ in the publication systems and data models they work with. Table 1 summarizes the main distinctions. Provider-specific packages, such as **eurostat** (Lahti et al., 2017) and **WDI** (Arel-Bundock, 2026), provide convenient access to individual statistical sources. Broader data-retrieval packages, such as **pdfetch** (Reinhart, 2024), **webchem** (Szöcs et al., 2020), and **intsvy** (Caro and Biecek, 2017), support data collection in specific areas, such as finance, chemistry, and education. The **rsdmx** package supports the Statistical Data and Metadata eXchange (SDMX) standard, which is an important alternative standard for statistical data exchange (Blondel et al., 2025; Willekens, 2023). In Python, pxwebpy provides access to PxWeb API version 2 (Furne, 2026).

[1] The package is now version 0.19.2 at CRAN. Version 1.0.0 will be released on CRAN to accompany publication of this article. Then also this footnote will be removed.

In this landscape, **pxweb** focus on PxWeb APIs. It provides a common interface for (1) discovering databases and tables, (2) inspecting metadata, (3) constructing valid queries, (4) respecting server limits, (5) retrieving data, and (6) retaining comments and citation information across statistical organisations that publish through PxWeb APIs. This makes **pxweb** complementary to existing tools. The contribution of **pxweb** is to support the common case where official statistics are distributed through PxWeb APIs and where users need a general, metadata-aware, and reproducible interface from R.

Software type	Packages	Relation to **pxweb**
Provider-specific data clients	**eurostat**, **WDI**	Focus on one data provider or data family
Generic data retrieval tools	**pdfetch**, **webchem**, **intsvy**	Retrieve broad data sources but do not target PxWeb APIs
PX/PC-Axis file tools	**pxR**	Work with local `.px` files
SDMX clients	**rsdmx**	Access data via the alternative SDMX standard.
Python PxWeb API client	pxwebpy	Accesses PxWeb API version 2 from Python
Downstream domain packages	**geofi** (Kainu et al., 2026)	Specialized workflows on top of official-data access

Table 1: Related software to **pxweb**.

2 The pxweb package

The **pxweb** package is designed for R users who need to retrieve official statistics reproducibly from R without writing specific HTTP requests. Its core design goal is to provide a stable R workflow across PxWeb APIs while preserving metadata where it affects query construction, codelists, comments, and citation. The package is licensed under the BSD-2-Clause (aka FreeBSD) license, consistent with common practice for research software (Morin et al., 2012).

Version 1.0.0 described here exports 39 functions, but the main workflow uses a smaller set of recommended functions. The central workflow is built around the `pxweb_get()` function, which retrieves hierarchy levels, table metadata, or table data depending on the supplied PxWeb version, URL and query. The helper `pxweb_get_data()` wraps the same workflow and returns a `data.frame`. Additional methods, such as `as.data.frame()`, integrate the outputs directly with **tidyverse** workflows (Wickham et al., 2019), allowing users to move from data retrieval to tidy data analysis (Wickham, 2014). Query construction is handled by `pxweb_query()` together with query construction helper functions `pxweb_all()`, `pxweb_latest()`, and `pxweb_aggregation()`. Table 2 summarises the main user-facing functions and methods by their role in the recommended workflow.

Workflow part	Recommended functions and methods
Search and discovery	`pxweb_search()`, `pxweb_interactive()`, `pxweb_api_catalogue()`
Metadata	`pxweb_get()`, `pxweb_codelists()`
Query	`pxweb_query()`, `pxweb_validate_query_with_metadata()`, `pxweb_all()`, `pxweb_latest()`, `pxweb_aggregation()`, `pxweb_valueset()`
Retrieval	`pxweb_get()`, `pxweb_get_data()`
Conversion	`as.data.frame()`
Comments and citation	`pxweb_data_comments()`, `pxweb_cite()`

Table 2: Recommended **pxweb** functions and methods.

Internally, the package represents API URLs, metadata, data, comments, and query objects with S3 classes. This allows common operations to behave consistently across API versions. The package uses **httr** for HTTP requests and **jsonlite** for JSON parsing (Wickham,

2026; Ooms, 2014). Table 3 summarizes the main object classes used in ordinary workflows.

Class	Role and common methods
`pxweb`	Represents an API endpoint created from a URL; printed with `print()`
`pxweb_metadata`	Stores table metadata and selected version 2 metadata; inspected with `as.data.frame()` and `pxweb_codelists()`, and used by `pxweb_validate_query_with_metadata()`
`pxweb_query`	Represents selections to send to the API; created with `pxweb_query()` and converted to JSON with `pxweb_query_as_json()`. For simple selections, `pxweb_query_as_rcode()` prints an R list of value codes; it does not preserve codelist selections.
`pxweb_data`, `pxweb_data_v2`	Represent retrieved table data for API versions 1 and 2; created by `pxweb_get()`, converted with `as.data.frame()` or `as.matrix()`, and cited with `pxweb_cite()`
`pxweb_data_comments`	Collects dataset, dimension, value, and observation comments from `pxweb_data_comments()`; printed or converted to a `data.frame` for inspection and reporting

Table 3: Main S3 object classes used by **pxweb** in ordinary data-access workflows.

The API catalogue is a practical layer on top of the API functionality. It stores provider URL templates, available languages, version paths, aliases, and citation metadata. Users can rely on the catalogue for common APIs or pass explicit PxWeb URLs for APIs that are not already part of the package. The current catalogue contains 46 entries covering national, regional, and international statistical resources. The complete list is given in the appendix (Table 4). At the time of writing, the catalogue entries point mainly to version 1 API paths. Version 2 APIs can also be used by passing explicit PxWeb URLs.

A central implementation detail is that user-supplied URLs are first converted into a `pxweb` object. The constructor (1) parses the URL, (2) detects whether the endpoint belongs to PxWeb API version 1 or 2, (3) retrieves provider configuration metadata, and (4) stores call history in a temporary cache. Provider configuration is normalised into a common internal representation with the number of calls allowed per time window, the length of that time window, and the maximum number of downloadable values or cells. This lets the same retrieval workflow use version 1 `?config` responses and version 2 `/config` responses through the same interface.

Support for PxWeb API version 2 is expressed in the same workflow as version 1. Version 2 tables use separate metadata and data URL endpoints and return JSON-stat2 by default (Statistics Sweden and Statistics Norway, 2026a). The **pxweb** package (1) detects v2 URLs, (2) builds the corresponding data URL, (3) constructs the v2 query body, and (4) adds query parameters for codelists and output values when needed. This keeps the user workflow similar across API versions, even though the underlying URL and request details differ.

For data requests, `pxweb_get()` first fetch table metadata, then adds mandatory variables (if needed), validates the query against the metadata, and computes any required download batches before making data requests. Version 1 tables are queried with the table URL and a JSON request body, whereas version 2 tables use the corresponding `/tables/{id}/data` URL with version-specific query parameters. The returned data objects are parsed into package-specific S3 objects.

Large queries of statistical tables can exceed server-side limits. This makes it hard for individual user. They need to download the data in multiple batches by partitioning the original query in smaller pieces, download each query, and then combine them into one dataset. The `pxweb` package handles this automatically when the query can be split within the provider's limit. This procedure can be viewed as a greedy multidimensional query-partitioning heuristic. Given the provider's maximum downloadable size, the algorithm first identifies splittable dimensions from the table metadata. Time variables can be split, and so can variables marked as eliminable in the provider metadata, meaning that the API

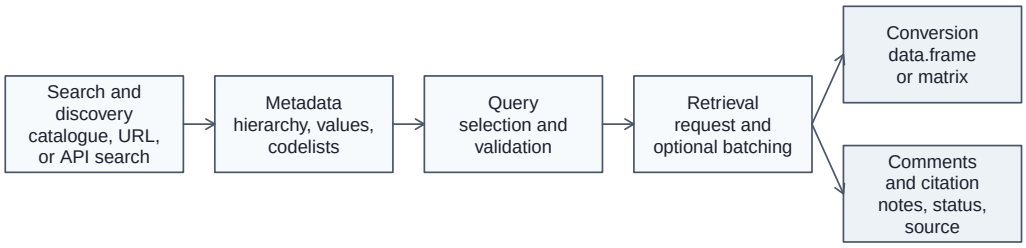


Figure 1: Main **pxweb** workflow. After retrieval, the same data object can be converted for analysis or used to extract comments and generate a citation (or both).

allows them to be omitted or partitioned. Content variables and top or bottom selections are kept intact because they affect the meaning or ordering of the returned values. The partitioning procedure then evaluates candidate orderings of the splittable dimensions and, for each ordering, greedily chooses the largest dimension chunks that keep each subquery below the provider limit. The ordering with the smallest resulting number of batches is then used to download the query. For the typical case of fewer than seven splittable dimensions, all orderings are evaluated. Otherwise, a random sample of orderings is used to keep computation bounded.

The `pxweb` package follows common software engineering practices, including version control, automated tests, API fixtures, continuous integration, and test workflows for selected APIs (Perez-Riverol et al., 2016). The default local test suite uses mocked and offline-safe tests, and live tests run in continuous integration (CI) on GitHub.

2.1 Functionality

The package supports the full workflow shown in Figure 1: search and discovery, metadata inspection, query construction, retrieval, conversion, comments, and citation.

For released versions, installation from CRAN follows the standard procedure in R.

```
install.packages("pxweb")
library("pxweb")
```

Search and discovery start either from the bundled API catalogue, for PxWeb API version 1, from an explicit URL, or, for PxWeb API version 2, from table search. The following example searches Statistics Sweden's PxWeb API version 2 for a population table.

```
search_results <- pxweb_search(
  query = "population marital status",
  api_url = "https://statistikdatabasen.scb.se/api/v2",
  lang = "en",
  page_size = 5
)

print(search_results[, c("id", "label")], row.names = FALSE, right = FALSE)
```

```
 id      label
 TAB638  Population by region, marital status, age and sex.  Year 1968-2024
 TAB5557 Population by region, marital status, age and sex. Year 2025
 TAB2819 Mean population by region, marital status, age and sex. Year 2006-2024
 TAB6759 Mean population by region, marital status, age and sex.  Year 2025
 TAB6570 Population per region by marital status and sex. Year 2010-2025
```

The results include population tables for 1968–2024 and for 2025. We select `TAB638` for the longer period by matching its ID, rather than relying on the order of the results, and extract the table metadata URL.

```
url <- search_results$metadata_url[search_results$id == "TAB638"]
```

Metadata are retrieved with `pxweb_get()` when no query is supplied. The returned metadata object describes the table dimensions, values, labels, and version-specific metadata needed for query validation and data retrieval. Version 2 APIs may also expose aggregation codelists and value sets, which can be inspected with `pxweb_codelists()`.

```
meta <- pxweb_get(url)
age_codelists <- pxweb_codelists(meta, variable = "Alder")
age_codelists[, c("id", "type", "label")]
```

```
              id        type                           label
1 agg_Ålder10årJ Aggregation             ´10-year intervals
2   agg_Ålder5år Aggregation               5-year intervals
3   vs_Ålder1årA    Valueset        Age, 1 year age classes
4   vs_ÅlderTotA    Valueset Age, total, all presented ages
```

In this example the English metadata endpoint returns English labels, while the `id` values remain identifiers that are passed unchanged to query helper functions. The five-year age aggregation can therefore be selected from the metadata and stored as an object before query construction.

Queries can be written as named R lists and converted to `pxweb_query` objects when needed. For codelists, the returned `id` column is passed to aggregation or value-set helpers. Query helper functions express common selection patterns such as "all values", "the latest time period", top or bottom selections, aggregations, and value sets. Queries are validated against the metadata of the table before calling the PxWeb API.

```
age_5_year_id <- age_codelists$id[age_codelists$label == "5-year intervals"]

query <- list(
  Region = "00",
  Civilstand = "OG",
  Alder = pxweb_aggregation(age_5_year_id),
  Kon = c("1", "2"),
  ContentsCode = "BE0101N1",
  Tid = pxweb_latest()
)

px_query <- pxweb_query(query)
```

Retrieval is handled by `pxweb_get()`. Users who want a `data.frame` directly can instead use `pxweb_get_data()`. The same workflow handles version 1 and version 2 URLs, constructs the appropriate request body, and splits large supported queries into batches when needed.

```
px_data <- pxweb_get(url, query = query)
```

Conversion methods turn PxWeb responses into standard R objects. Users can choose whether column names and variable values use provider `label` or `code`.

```
px_df <- as.data.frame(
  px_data,
  column.name.type = "code",
  variable.value.type = "code"
)
```

Finally, PxWeb responses may include comments, notes, or status information. The **pxweb** package enable access to these through `pxweb_data_comments()`, with support for both version 1 comments and version 2 dataset notes, dimension notes, value notes, and observation status comments. Citation support is provided by `pxweb_cite()`, which prints citation information for the retrieved data source and the **pxweb** package itself.

```
comments <- pxweb_data_comments(px_data)
pxweb_cite(px_data)
```

3 Case study

We illustrate the package with a Statistics Sweden population table that is both familiar official statistics and technically useful for showing large queries. The example uses Statistics Sweden's PxWeb API version 2 table search to locate table `TAB638`, "Population by region, marital status, age and sex. Year 1968–2024". Exact results can change if Statistics Sweden changes table metadata, values, or provider-side configuration.

```
library("pxweb")

search_results <- pxweb_search(
  query = "population marital status",
  api_url = "https://statistikdatabasen.scb.se/api/v2",
  lang = "en",
  page_size = 5
)

metadata_url <- search_results$metadata_url[search_results$id == "TAB638"]
```

We use a large but manageable subset of the table: all 21 Swedish counties, all marital-status categories, single-year ages from 0 to 100+, both sexes, the population count content variable, and all years from 1968 to 2024. These codes can all be accessed with the metadata object.

```
px_metadata <- pxweb_get(metadata_url)
px_metadata

PXWEB METADATA
Population by region, marital status, age and sex.  Year 1968-2024
variables:
 [[1]] Region: region
 [[2]] Civilstand: marital status
 [[3]] Alder: age
 [[4]] Kon: sex
 [[5]] ContentsCode: observations
 [[6]] Tid: year
```

The metadata object contains the labels returned by the provider. With `lang = "en"` in the search call, the selected metadata URL also requests English labels. The marital-status code with a non-ASCII character is written with a Unicode escape in the source below.

```
years <- as.character(1968:2024)
ages <- c(as.character(0:99), "100+")
county_codes <- c(
  "01", "03", "04", "05", "06", "07", "08", "09", "10", "12", "13",
  "14", "17", "18", "19", "20", "21", "22", "23", "24", "25"
)
```

```
query <- list(
  Region = county_codes,
  Civilstand = c("OG", "G", "SK", "\u00c4NKL"),
  Alder = ages,
  Kon = c("1", "2"),
  ContentsCode = "BE0101N1",
  Tid = years
)

pxq <- pxweb_query(query)
pxq

PXWEB QUERY
query:
 [[1]] Region (item):
   01, 03, 04, 05, 06, 07, ...
 [[2]] Civilstand (item):
   OG, G, SK, ÄNKL
 [[3]] Alder (item):
   0, 1, 2, 3, 4, 5, 6, 7, ...
 [[4]] Kon (item):
   1, 2
 [[5]] ContentsCode (item):
   BE0101N1
 [[6]] Tid (item):
   1968, 1969, 1970, 1971, ...
```

The complete table is much larger than a typical interactive API request. Its dimensions contain 312 region codes, four marital-status categories, 102 age categories, two sex categories, two content variables, and 57 years. Downloading the full table would imply more than 29 million cells. Statistics Sweden's PxWeb API version 2 configuration currently limits a single data response to 150,000 data cells. Our subset contains 967,176 cells, which is above the limit. Calling `pxweb_get()` validates the query, splits it into seven batches, downloads the pieces, and combines them into one `pxweb_data_v2` object. Seven is the minimum possible number of data requests for this subset, since six responses of 150,000 cells could not cover all cells.

```
px_data <- pxweb_get(metadata_url, query = pxq)

Downloading large query (in 7 batches):
|======================================================================| 100%
```

Comments, notes, and observation statuses can be extracted from the downloaded object. The same call returns an empty comments data frame for responses without comments. The output below shows two comments.

```
comments <- pxweb_data_comments(px_data)
comments_df <- as.data.frame(comments, stringsAsFactors = FALSE)
comments_df[, c("comment_type", "comment")]

    comment_type    comment
1    obs_comment    Heby municipality changed county affiliation from Upps ...
2 column_comment    The period 1968-1998 is reported according to the regi ...
```

The downloaded object can then be converted directly to a standard `data.frame` for analysis.

```
population <- as.data.frame(
  px_data,
  column.name.type = "code",
  variable.value.type = "code"
)

dim(population)

[1] 967176      7
```

For reproducibility, we can simply cite the downloaded data object.

```
pxweb_cite(px_data)

Statistics Sweden (2026). "Population by region, marital status, age,
sex and year." [Data accessed 2026-09-01 14:21:25 using pxweb R
package 1.0.0],
<https://statistikdatabasen.scb.se/api/v2/tables/TAB638/data>.
```

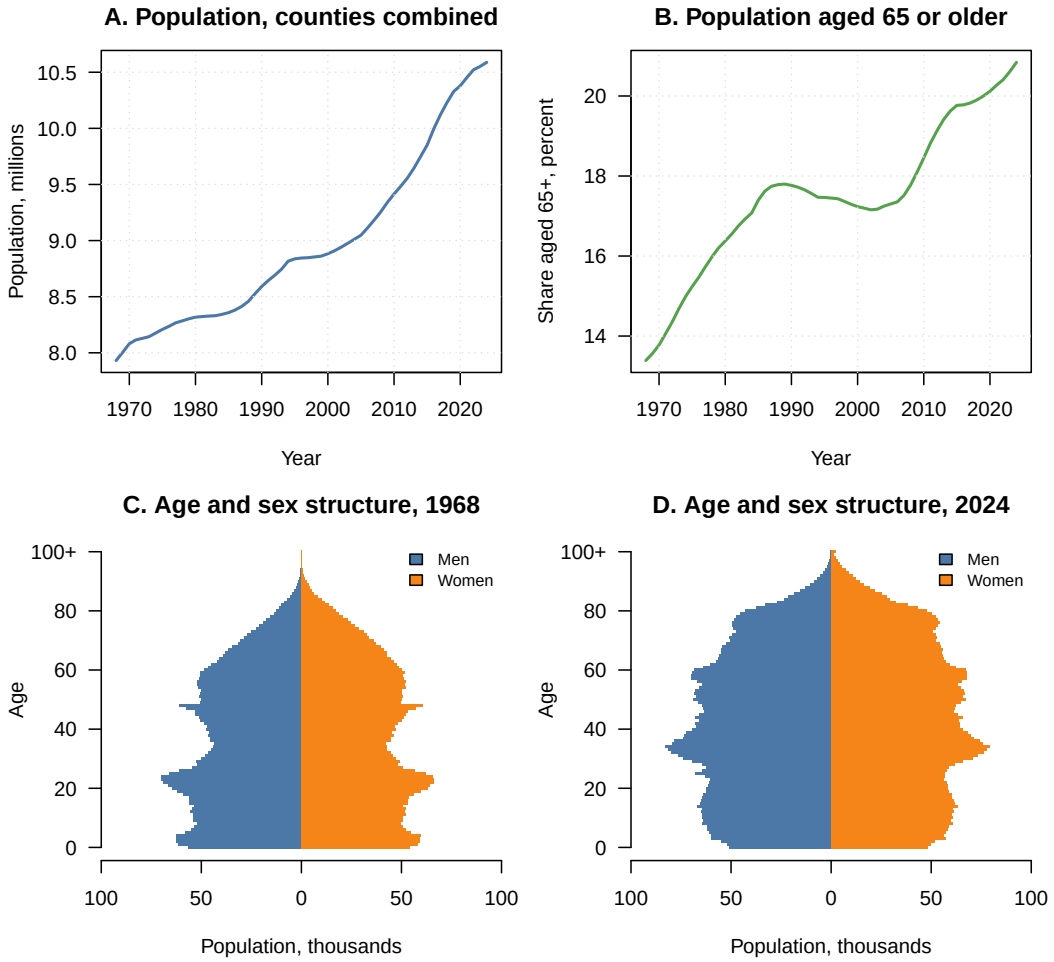


Figure 2: Population development in Sweden based on Statistics Sweden table `TAB638`. The data are downloaded at county level for all years from 1968 to 2024, all single-year age groups from 0 to 100+, both sexes, and all marital-status categories. The request contains 967,176 cells and is split by **pxweb** into seven API calls before being combined for analysis.

Figure 2 shows that the Swedish population grew from 7.93 million in 1968 to 10.59 million in 2024. Over the same period, the share aged 65 or older rose from 13.4% to 20.8%.

The two population pyramids use the same horizontal scale to compare age and sex structure across the two years. This is a very simple example of an analysis being facilitated by **pxweb**.

4 Discussion

The **pxweb** package provides access to official statistics shared through PxWeb APIs. It supports the full workflow from API discovery and metadata inspection to query construction, retrieval, conversion, comments, codelists, and citation. In doing so, it helps users move from interactive table browsing to scripted, transparent, and reproducible statistical workflows following the tidy data principles (Wickham, 2014; Wickham et al., 2019).

The package has matured through active development since its first CRAN release in 2014 and now includes support for PxWeb API version 2. As an indication of use at the time of writing, CRAN download logs report 116,164 downloads between January 2014 and June 2026 (CRAN logs, 2026). The CRAN package index lists **BFS** (Luginbuhl, 2026) and **PxWebApiData** (Langsrud and Bruusgaard, 2026) as packages that import **pxweb**. For example, the `PxData()` function in **PxWebApiData** uses **pxweb** to retrieve data, including queries that require multiple downloads.

The **pxweb** package has also been cited in research using official-statistics data, for instance in work on electronic gambling machines and socioeconomic status (Raisamo et al., 2019), income-inequality data construction (Solt, 2020), trends in youth violence and mortality (Tanskanen et al., 2026; Hakkarainen et al., 2026), radiation-dose modeling after the Chernobyl nuclear power plant accident (Tondel et al., 2025), and programmatic access to open statistical data for population studies (Willekens, 2023).

However, PxWeb installations differ across data providers, with different server-side query limits and rate limits, and APIs can change independently of the **pxweb** package. These issues motivate the package's emphasis on provider config handling, metadata validation, and request splitting.

More broadly, **pxweb** contributes to the open data science ecosystem (Lahti, 2018) by making official statistics easier to retrieve, document, and reuse in R. The package does not replace data provider documentation, but it gives researchers, public-sector analysts, educators, and R users more broadly a common programmatic interface to a widely used dissemination infrastructure.

5 Appendix: Bundled API catalogue

Entry	Provider	Language
web.dzs.hr	Croatian Bureau of Statistics	en
andmed.stat.ee	Estonia – official statistics	en, et
statistika.tai.ee	Estonian Health Statistics and Health Research Database	en
tilastot.etk.fi	Finnish Centre for Pensions	en
tilastot.tela.fi	Finnish Pension Alliance statistics	en
trafi2.stat.fi	Finnish Transport Safety Agency	en, sv, fi
px.web.ined.fr	Generations and Gender Contextual Database	en
pc-axis.geostat.ge	Geostat Statistics Database	en
stat.hel.fi	Helsingin seudun aluesarjat -tilastotietokanta	fi
pxweb.irena.org	International Renewable Energy Agency	en
www6.poderjudicial.es	Judicial statistics, Spain	es
data.stat.gov.lv	Latvia – official statistics	en, lv
statistika.spkc.gov.lv	Latvian Health Statistics Database	en
statistik.linkoping.se	Linkoping municipality in Sweden	sv
statdb.luke.fi	LUKE Natural Resources Institute Finland	en, fi, sv
pxweb.nhwstat.org	Nordic Health and Welfare Statistics	en
pxweb.nordicstatistics.org	Nordic Statistics Database	en
openstat.psa.gov.ph	Philippine Statistics Authority OpenSTAT	en
www.grande-region.lu	Portail statistique de la Grande Region	fr, de
pxweb.stat.si	SiStat Database	sl
bank.stat.gl	Statbank Greenland	en, kl, da
makstat.stat.gov.mk	State Statistical Office of the Republic of Macedonia	en, mk
pxweb.asub.ax	Statistics Aland	en, sv
statbank.hagstova.fo	Statistics Faroe Islands	en, fo
statfin.stat.fi	Statistics Finland	en, fi, sv
px.hagstofa.is	Statistics Iceland	en, is
askdata.rks-gov.net	Statistics Kosovo	en
etab.llv.li	Statistics Liechtenstein	en
statbank.statistica.md	Statistics Moldova	en, ro
api.scb.se	Statistics Sweden	en, sv
www.pxweb.bfs.admin.ch	Statistics Switzerland	en, de, fr
m02-http-pxwebb.login.sundsvall.se	Sundsvall municipality in Sweden	sv
statistik.tillvaxtanalys.se	Swedish Agency for Growth Policy Analysis	sv
statistik.csn.se	Swedish Board of Student Finance	sv
pxexternal.energimyndigheten.se	Swedish Energy Agency	en
skogsstatistik.slu.se	Swedish University of Agricultural Sciences forest statistics	en
fohm-app.folkhalsomyndigheten.se	The Public Health Agency of Sweden	sv
statistik.sjv.se	The Swedish Agricultural Agency	sv
pxweb.skogsstyrelsen.se	The Swedish Forest Agency	en
statistik.konj.se	The Swedish National Institute of Economic Research	en, sv
prognos.konj.se	Swedish National Institute of Economic Research, forecast database	sv
w3.unece.org	United Nations Economic Commission for Europe	en
statistik.vasteras.se	Vasteras municipality in Sweden	sv
pxweb2022.vgregion.se	Vastra Gotaland Region in Sweden	sv
vero2.stat.fi	Verohallinto – Finnish Tax Administration	en, fi, sv
visitfinland.stat.fi	Visit Finland (Rudolf service)	fi

Table 4: Bundled PxWeb API catalogue entries in **pxweb**. The table lists the catalogue key, provider description, and available languages.

6 Acknowledgments

We are grateful to all package contributors and Pyry Kantanen and Jeba Akewak for technical assistance. The work has been supported by the Research Council of Finland (decision 372345 to LL), and is part of rOpenGov.

References

V. Arel-Bundock. *WDI: World Development Indicators and Other World Bank Data*, 2026. URL https://CRAN.R-project.org/package=WDI. R package version 2.8.0. [p1, 2]

C. J. G. Bellosta, F. J. Viciana, O. P. Lamigueiro, and E. T. Manzanera. *pxR: PC-Axis with R*, 2025. URL https://CRAN.R-project.org/package=pxR. R package version 0.42.8. [p2]

E. Blondel, M. Stigler, and E. Persson. *rsdmx: Tools for Reading SDMX Data and Metadata*, 2025. URL https://CRAN.R-project.org/package=rsdmx. R package version 0.6-5. [p1, 2]

C. Boettiger, S. Chamberlain, E. Hart, and K. Ram. Building software, building community: Lessons from the rOpenSci project. *Journal of Open Research Software*, 3(1):e8, November 2015. doi: 10.5334/jors.bu. [p1]

D. H. Caro and P. Biecek. intsvy: An R package for analyzing international large-scale assessment data. *Journal of Statistical Software*, 81(7):1–44, 2017. doi: 10.18637/jss.v081.i07. [p1, 2]

CRAN logs. Total downloads for the pxweb package, 2026. URL https://cranlogs.r-pkg.org/downloads/total/2014-01-01:2026-06-30/pxweb. Accessed 2026-06-30. [p10]

S. Furne. *pxwebpy: Client Library for the PxWeb API to Easily Load Data into a DataFrame*, 2026. URL https://pypi.org/project/pxwebpy/. Python package version 0.6.0. [p2]

C. Gandrud. *Reproducible Research with R and RStudio*. Chapman & Hall/CRC, July 2013. URL https://doi.org/10.1201/b15100. [p1]

R. M. Groves and L. Lyberg. Total survey error: Past, present, and future. *Public Opinion Quarterly*, 74(5):849–879, 01 2010. ISSN 0033-362X. doi: 10.1093/poq/nfq065. URL https://doi.org/10.1093/poq/nfq065. [p1]

P. Hakkarainen, P. Kantanen, K. Kataja, J. Kivivuori, L. Lahti, T. Pitkänen, S. Rönkä, and A. Seppänen. Näkökulmia nuorten itsemurha-, huume- ja väkivaltakuolemiin: Sosiaalinen kuolemansyyntutkimus ja epätoivokuolemat. *Yhteiskuntapolitiikka*, 91(2):149–157, 2026. URL https://urn.fi/URN:NBN:fi-fe2026041527646. [p10]

M. Kainu, J. Lehtomäki, J. Parkkinen, J. Miettinen, P. Kantanen, S. Vesanen, and L. Lahti. *geofi: Access Finnish Geospatial Data*, 2026. URL https://github.com/rOpenGov/geofi. R package version 1.2.1. [p3]

L. Lahti. Open data science. In *Advances in Intelligent Data Analysis XVII*, volume 11191 of *Lecture Notes in Computer Science*, pages 31–39. Springer-Verlag, 2018. doi: 10.1007/978-3-030-01768-2_3. [p10]

L. Lahti, J. Parkkinen, J. Lehtomäki, and M. Kainu. rOpenGov: Open source ecosystem for computational social sciences and digital humanities. Int'l Conf. on Machine Learning - ICML/MLOSS Open Source Software workshop, December 2013. URL http://ropengov.github.io. [p2]

L. Lahti, J. Huovari, M. Kainu, and P. Biecek. Retrieval and analysis of Eurostat open data with the eurostat package. *The R Journal*, 9(1):385–392, 2017. doi: 10.32614/RJ-2017-019. URL https://journal.r-project.org/archive/2017/RJ-2017-019/index.html. [p1, 2]

Ø. Langsrud and J. Bruusgaard. *PxWebApiData: PX-Web Data by API*, 2026. URL https://CRAN.R-project.org/package=PxWebApiData. R package version 2.0.0. [p10]

F. Luginbuhl. *BFS: Get Data from the Swiss Federal Statistical Office*, 2026. URL https://CRAN.R-project.org/package=BFS. R package version 0.7.2. [p10]

M. Magnusson, M. Kainu, J. Huovari, and L. Lahti. *pxweb: R Interface to PXWEB APIs*, 2026. URL https://doi.org/10.32614/CRAN.package.pxweb. R package version 1.0.0. [p1, 2]

A. Morin, J. Urban, and P. Sliz. A quick guide to software licensing for the scientist-programmer. *PLoS Computational Biology*, 8(7):e1002598, 2012. doi: 10.1371/journal.pcbi.1002598. [p3]

J. Ooms. The jsonlite package: A practical and consistent mapping between JSON data and R objects. *arXiv:1403.2805 [stat.CO]*, 2014. URL http://arxiv.org/abs/1403.2805. [p4]

M. A. Parsons, R. E. Duerr, and M. B. Jones. The history and future of data citation in practice. *Data Science Journal*, 18:52, Nov 2019. ISSN 1683-1470. doi: 10.5334/dsj-2019-052. URL https://doi.org/10.5334/dsj-2019-052. [p1]

Y. Perez-Riverol, L. Gatto, R. Wang, T. Sachsenberg, J. Uszkoreit, F. da Veiga Leprevost, C. Fufezan, T. Ternent, S. J. Eglen, D. S. Katz, T. J. Pollard, A. Konovalov, R. M. Flight, K. Blin, and J. A. Vizcaíno. Ten simple rules for taking advantage of Git and GitHub. *PLoS Computational Biology*, 12(7):e1004947, July 2016. doi: 10.1371/journal.pcbi.1004947. [p5]

S. Raisamo, A. Toikka, J. Selin, and M. Heiskanen. The density of electronic gambling machines and area-level socioeconomic status in finland: A country with a legal monopoly on gambling and a decentralised system of EGMs. *BMC Public Health*, 19(1):1198, 2019. doi: 10.1186/s12889-019-7535-1. [p10]

A. Reinhart. *pdfetch: Fetch Economic and Financial Time Series Data from Public Sources*, 2024. URL https://CRAN.R-project.org/package=pdfetch. R package version 0.3.3. [p1, 2]

F. Solt. Measuring income inequality across countries and over time: The standardized world income inequality database. *Social Science Quarterly*, 101(3):1183–1199, May 2020. doi: 10.1111/ssqu.12795. URL https://doi.org/10.1111/ssqu.12795. [p10]

Statistics Finland. Px suite, 2026. URL https://stat.fi/en/services/statistical-data-services/statistical-databases/px-suite. Accessed 2026-06-30. [p2]

Statistics Norway. Public APIs, 2026. URL https://www.ssb.no/en/api/pxwebapi. Accessed 2026-06-30. [p2]

Statistics Sweden. Statistical programs for PX files, 2026. URL https://www.scb.se/en/services/statistical-programs-for-px-files/. Accessed 2026-06-30. [p2]

Statistics Sweden and Statistics Norway. What is PxWeb?, 2026a. URL https://www.pxtools.net/PxWeb2/project/introduction/. PxTools documentation. Accessed 2026-06-30. [p1, 2, 4]

Statistics Sweden and Statistics Norway. PxWeb 2 plans, 2026b. URL https://www.pxtools.net/PxWeb2/project/plans/. PxTools documentation. Accessed 2026-08-30. [p2]

Statistics Sweden and Statistics Norway. The project new interface for PxWeb, 2026c. URL https://www.pxtools.net/PxWeb2/project/process/. PxTools documentation. Accessed 2026-08-30. [p2]

Statistics Sweden and Statistics Norway. PxWebApi 2 user guide, 2026d. URL https://www.pxtools.net/PxWebApi/documentation/user-guide/. PxTools documentation. Accessed 2026-08-30. [p2]

E. Szöcs, T. Stirling, E. R. Scott, A. Scharmüller, and R. B. Schäfer. webchem: An R package to retrieve chemical information from the web. *Journal of Statistical Software*, 93(13):1–17, 2020. doi: 10.18637/jss.v093.i13. [p1, 2]

M. Tanskanen, A. Beuker, K. Suonpää, K. Haapakangas, and J. Kivivuori. Nuorten vakavan väkivallan kehitystrendit eri osoittimien valossa: Toistettava menetelmä avoimien tilastotietokantojen analyysiin. *Kriminologia*, 7(1):1–19, 2026. doi: 10.54332/krim.161322. URL https://doi.org/10.54332/krim.161322. [p10]

M. Tondel, K. Gabrysch, C. Rääf, and M. Isaksson. A model for estimating radiation doses and population cancer risk in sweden after the Chernobyl nuclear power plant accident in 1986. Technical report, Uppsala University, 2025. URL https://doi.org/10.33063/diva-544175. [p10]

United Nations General Assembly. Fundamental principles of official statistics. Resolution A/RES/68/261, 2014. URL https://docs.un.org/en/A/RES/68/261. Adopted by the General Assembly on 29 January 2014. [p1]

H. Wickham. Tidy data. *Journal of Statistical Software*, 59(10):1–23, 2014. doi: 10.18637/jss.v059.i10. [p3, 10]

H. Wickham. *httr: Tools for Working with URLs and HTTP*, 2026. URL https://CRAN.R-project.org/package=httr. R package version 1.4.8. [p3]

H. Wickham, M. Averick, J. Bryan, W. Chang, L. D. McGowan, R. François, G. Grolemund, A. Hayes, L. Henry, J. Hester, M. Kuhn, T. L. Pedersen, E. Miller, S. M. Bache, K. Müller, J. Ooms, D. Robinson, D. P. Seidel, V. Spinu, K. Takahashi, D. Vaughan, C. Wilke, K. Woo, and H. Yutani. Welcome to the tidyverse. *Journal of Open Source Software*, 4(43):1686, 2019. doi: 10.21105/joss.01686. [p3, 10]

F. Willekens. Programmatic access to open statistical data for population studies: The SDMX standard. *Demographic Research*, 49(40):1117–1162, 2023. doi: 10.4054/DemRes.2023.49.40. [p2, 10]

World Bank. World development indicators, 2026. URL https://datatopics.worldbank.org/world-development-indicators/. Accessed 2026-06-30. [p1]

Måns Magnusson
Department of Statistics
Uppsala University
Sweden
mons.magnusson@gmail.com

Leo Lahti
Department of Computing
University of Turku
Finland
leo.lahti@iki.fi