Clientlibs

Assignment 25

Problem Statement :

1. Render a page on publish/dispatcher server with components having styles and scripts
   This is the custom made form component its being rendered on publish instance ,and this has the style scripts defined in the clientlib

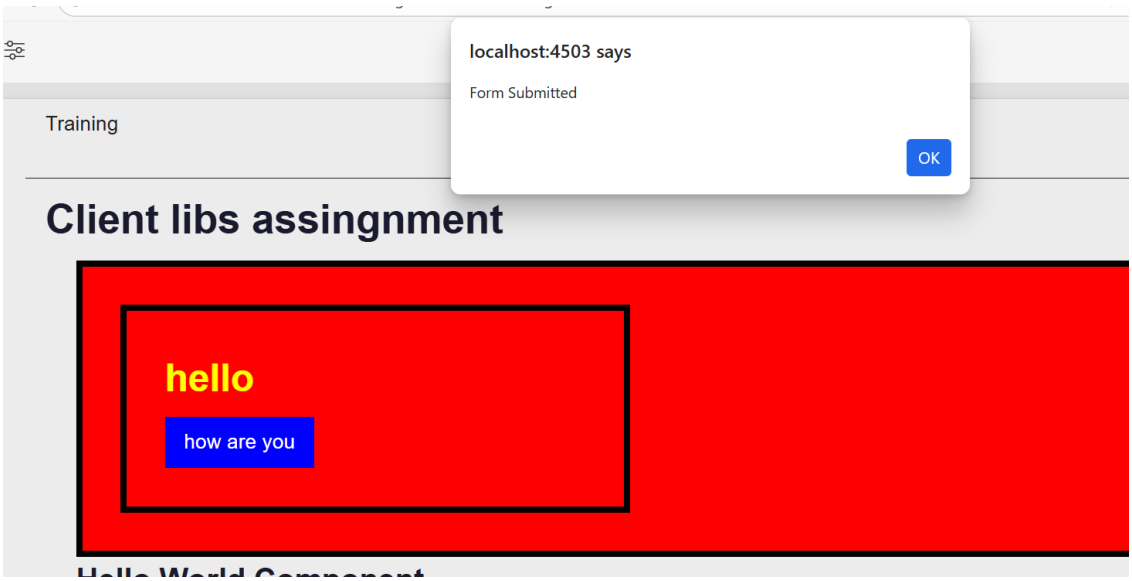

2. Create a basic form component Add a styles.css file under /clientlib/css (include styles like backgroundcolor, font-family, etc) Add a btnstyles.css file under /clientlib/css/form/button Add a formstyles.css file under /clientlib/css/form

   Folder structure of this component

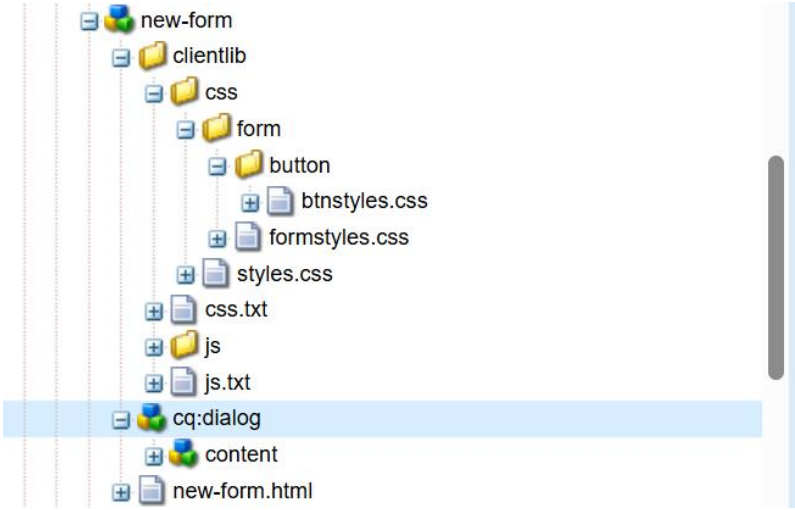

Formstyles.css

```
.new-form {
    padding: 20px;
    border: 1px solid #ccc;
    background-color: #ffffff;
    width: 400px;
}
```

Btnstyles.css

```
.new-button {
    background-color: blue;
    color: white;
    padding: 8px 15px;
    border: none;
    cursor: pointer;
}
```

Styles.css

```
.new-form {
    background-color: blue;
    border: 5px solid black
    padding: 30px !important;
}
.new-form h2 {
    color: yellow;
    font-size: 30px;
}
```

Css.txt

```
#base=css
styles.css
form/formstyles.css
form/button/btnstyles.css
```

Form.js

```
document.addEventListener("DOMContentLoaded", function() {

    const btn = document.querySelector(".new-button");

    if(btn){
        btn.addEventListener("click", function(e){
            e.preventDefault();
            alert("Form Submitted");
        });
    }

});
```

Js.txt

```
#base=js
form.js
```

New-form.html

```
<sly data-sly-use.clientlib="/libs/granite/sightly/templates/clientlib.html"
     data-sly-call="${clientlib.all @ categories='training.newform'}"/>
<div class="new-form">
    <h2>${properties.formTitle}</h2>
    <form method="post" action="#">
        <div>
            <button class="new-button" type="submit">
                ${properties.buttonText}
            </button>
        </div>
    </form>
</div>
```

Properties of clientlib

	Name	Type	Value	Protected	Mandatory	Multiple	Auto Created
1	allowProxy	Boolean	true	false	false	false	false
2	categories	String[]	training.n…	false	false	true	false
3	jcr:created	Date	2026-02-…	true	false	false	true
4	jcr:createdBy	String	admin	true	false	false	true
5	jcr:primaryType	Name	cq:Client…	true	true	false	true

Component in output

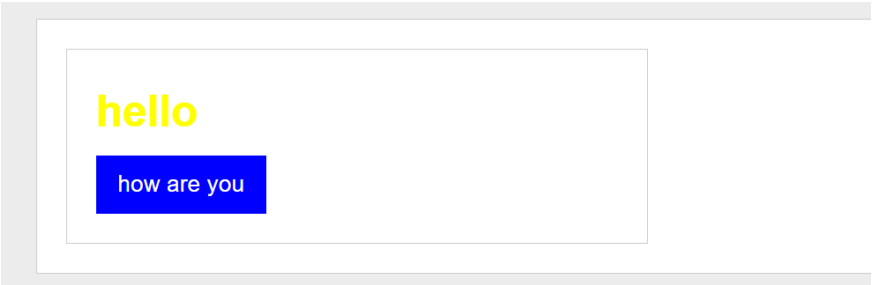

Component dialog

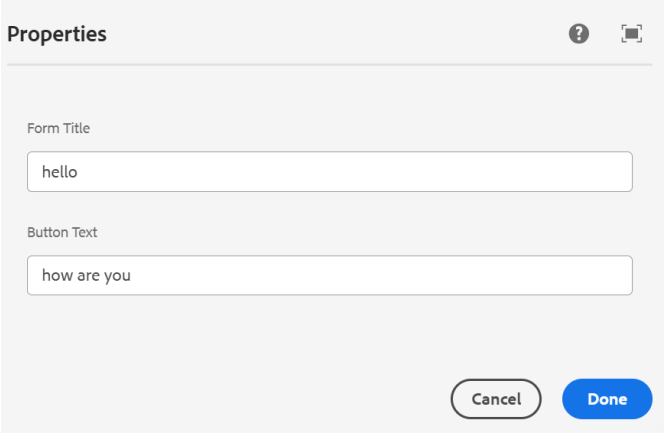

3. Create clientlibs that will be applied on the site

Inside clientlib-base , base.txt is defined as

```
body {
    font-family: "Courier New", monospace !important;
    background-color: #f0f8ff !important;   /* light blue background */
}

h1, h2, h3 {
    color: darkred !important;
}
```

This is inside css of training.site

```
.new-form {
    border: 3px dashed green !important;
}
```

Now my site looks like this (background has a light blue color and .new-form has a dashed green border)

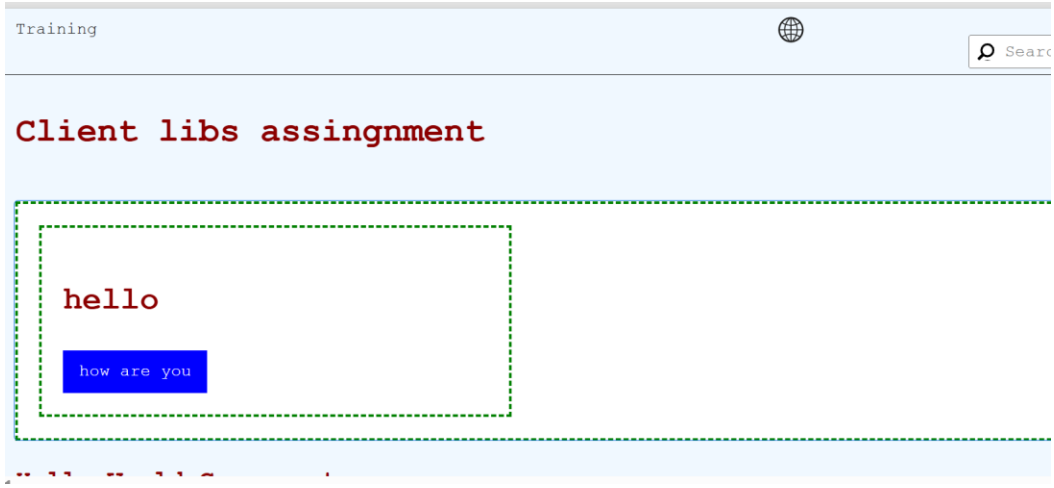

4. Create: myproject.base myproject.site myproject.author myproject.components.button Ensure: site depends on base button depends on site author loads only on author

my project.base(name of project is training)

Properties | Access Control | Replication | Console | Build Info

	Name	Type	Value	Protected
1	categories	String[]	training.base	false
2	jcr:primaryType	Name	cq:ClientLibraryFolder	true
3	jcr:createdBy	String	admin	true
4	jcr:created	Date	2026-02-20T19:41:57.935+05:30	true

Myproject.site(here site depends on base)

	Name	Type	Value	Protected	M
1	categories	String[]	training.site	false	fal
2	dependencies	String[]	training.base	false	fal
3	jcr:primaryType	Name	cq:ClientLibraryFolder	true	tru
4	jcr:createdBy	String	admin	true	fal
5	jcr:created	Date	2026-02-20T19:41:57.951+05:30	true	fal

Myproject.author(Loads only for author as its channel is author)

	Name	Type	Value	Protected	Man
1	categories	String[]	training.author	false	false
2	jcr:primaryType	Name	cq:ClientLibraryFolder	true	true
3	channels	String	author	false	false
4	jcr:createdBy	String	admin	true	false
5	jcr:created	Date	2026-02-20T19:41:57.929+05:30	true	false

Myproject.components.button(here button depends on site)

Properties | Access Control | Replication | Console | Build Info

	Name	Type	Value	Protected	Mandatory	Multiple
1	dependencies	String[]	training.site	false	false	true
2	categories	String[]	training.components.button	false	false	true
3	jcr:primaryType	Name	cq:ClientLibraryFolder	true	true	false
4	jcr:createdBy	String	admin	true	false	false
5	jcr:created	Date	2026-02-20T19:41:57.938+05:30	true	false	false

5. Create a button component Add styles and scripts (add a variable in script file var button = "Submit My Data") Create a basic form component with button Fetch button text from button component and assign the text to form component button (no default text in my-button component)

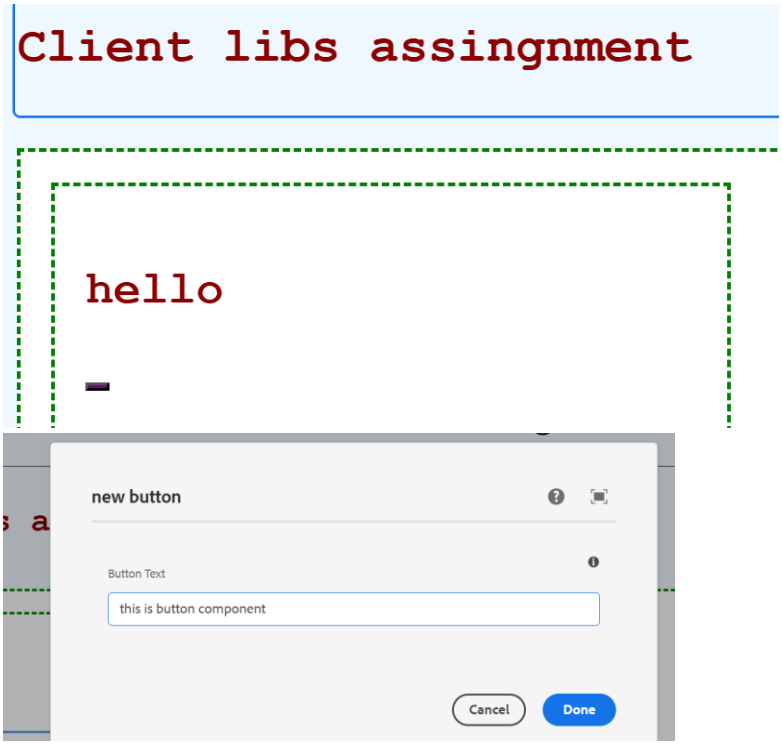

Figure below shows my-button inside newform

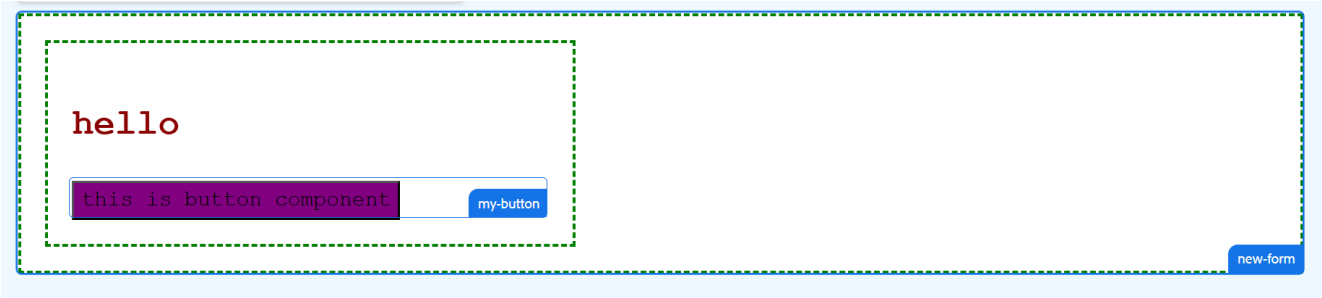

Changed the new-form.html for this

```
<sly data-sly-use.clientlib="/libs/granite/sightly/templates/clientlib.html"
     data-sly-call="${clientlib.all @ categories='training.newform'}"/>
<div class="new-form">
    <h2>${properties.formTitle}</h2>
    <form method="post" action="#">
        <div>
           <sly data-sly-resource="${'my-button' @ resourceType='training/components/my-button'}"/>
        </div>
    </form>
</div>
```

My-button structure




```
<sly data-sly-use.clientlib="/libs/granite/sightly/templates/clientlib.html"
     data-sly-call="${clientlib.all @ categories='training.components.button'}"/>

<button class="training-button">
    ${properties.buttonText}
</button>
```