


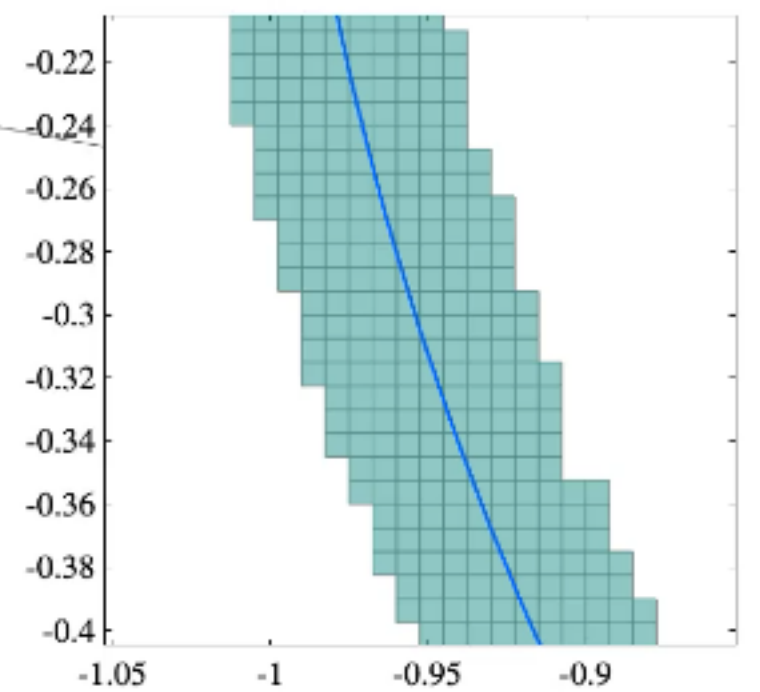
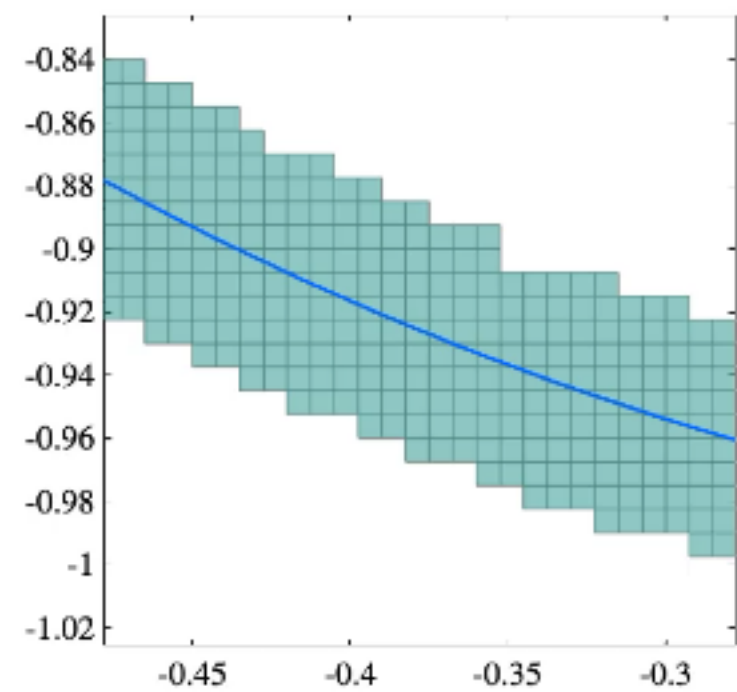







MICROSCALE FILAMENT BREAKUP





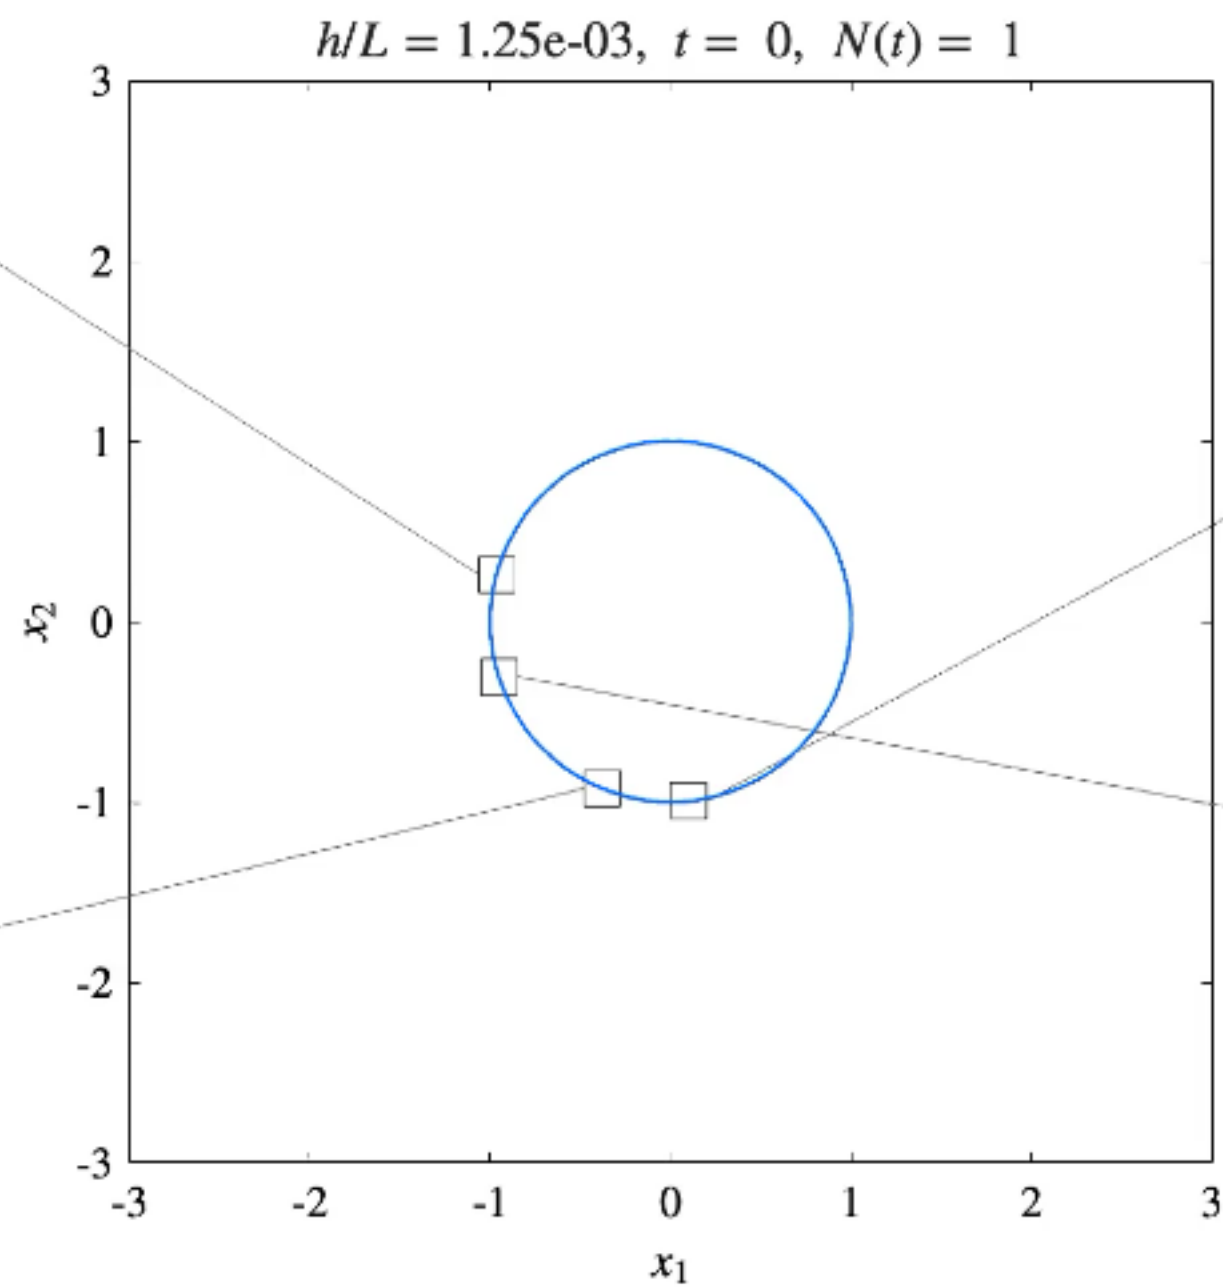


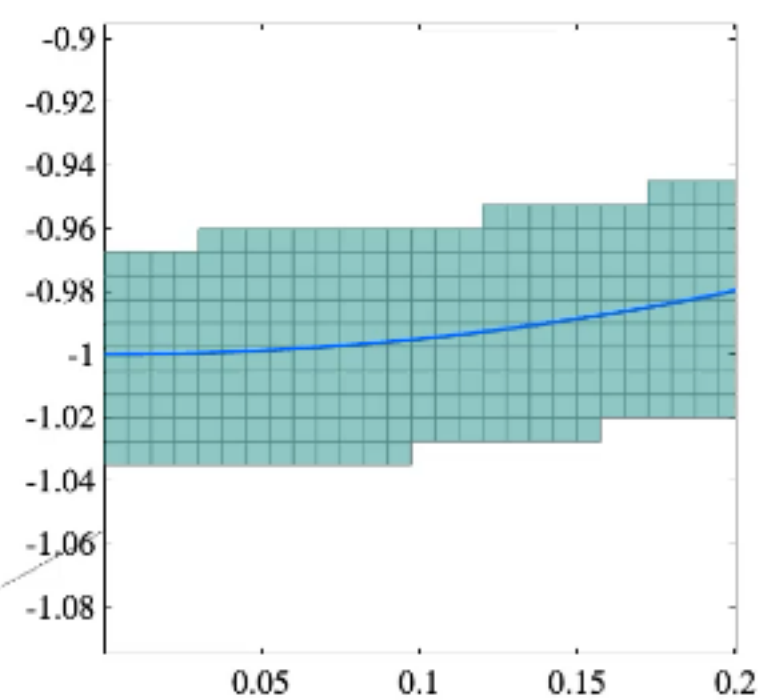


SATELLITE INTERFACE DYNAMICS. As filament widths collapse, the MTS algorithm computes the geometry & topology of filament breakup through interface surgery, generating microscale satellites detached from the primary interface.

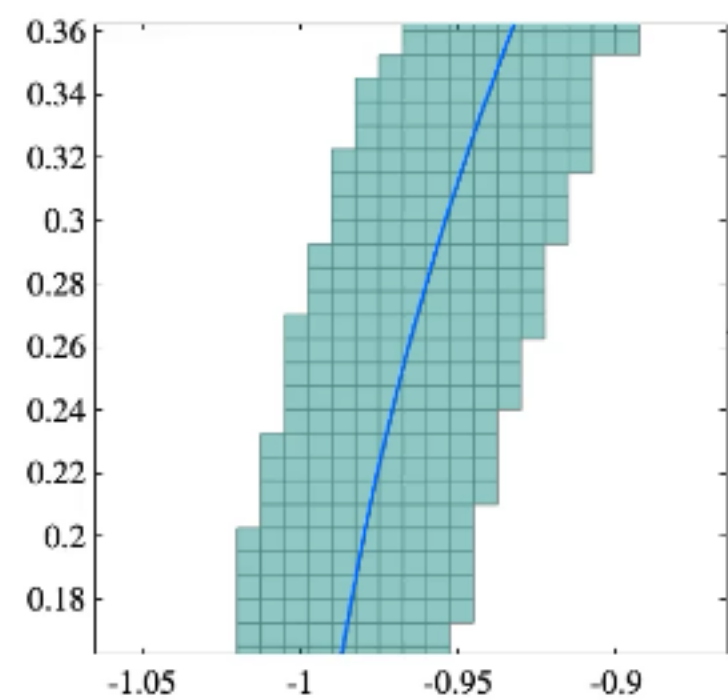

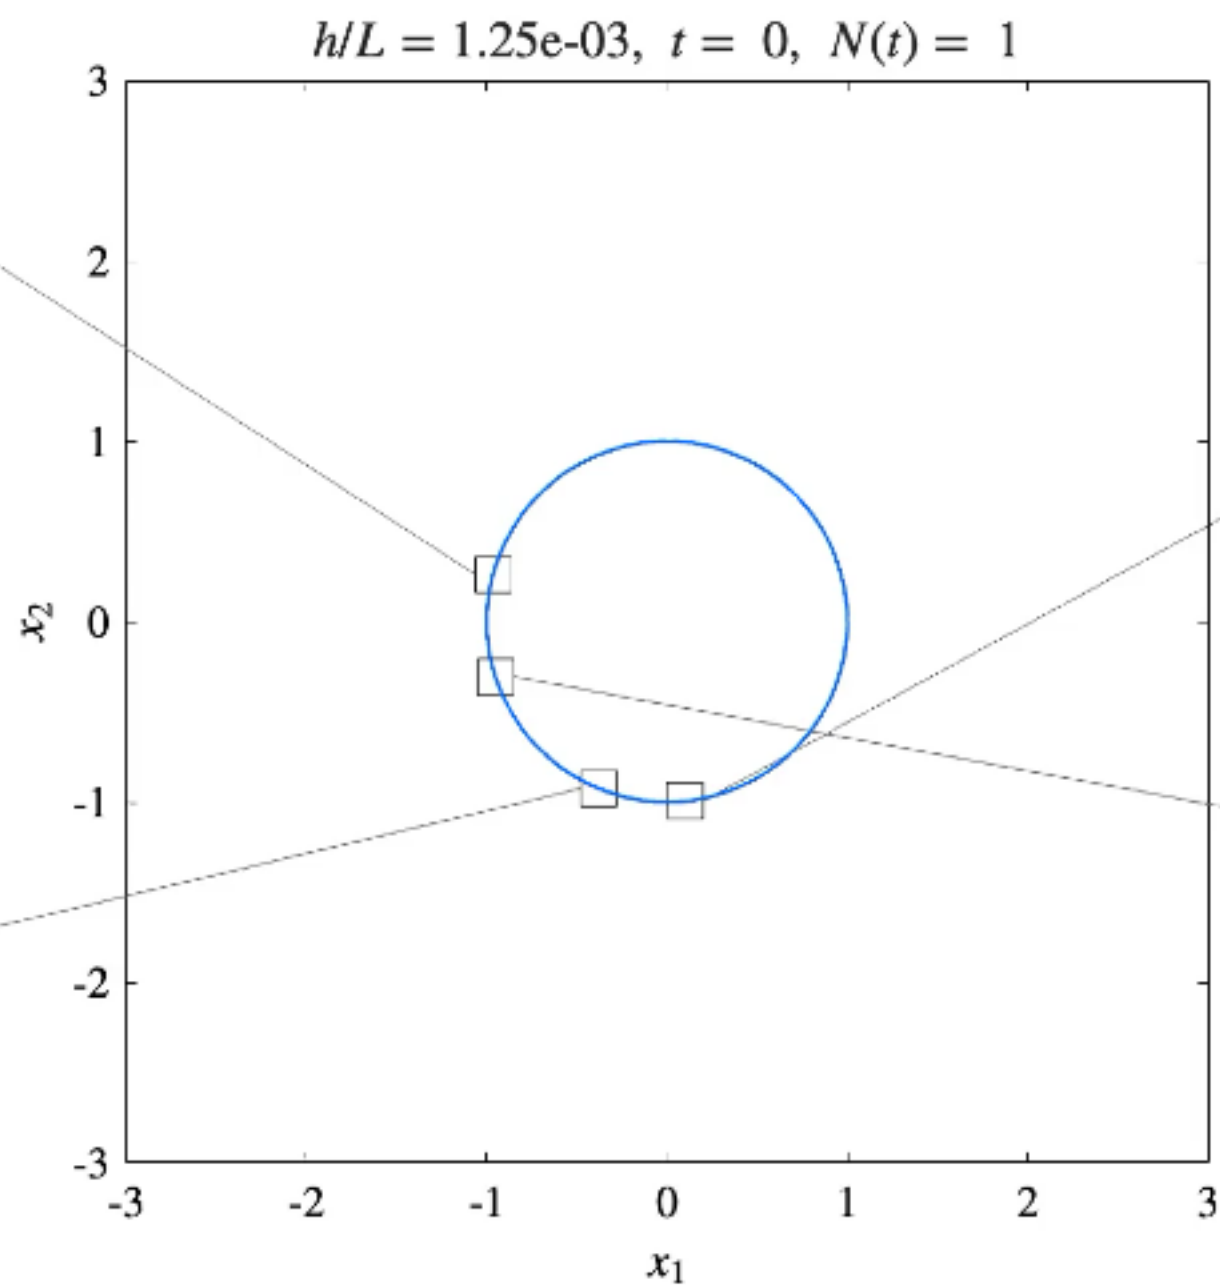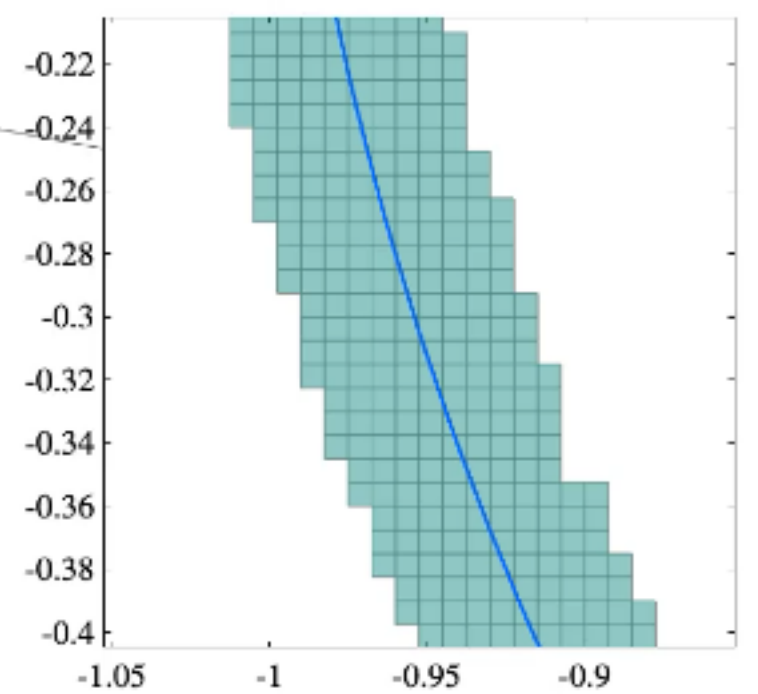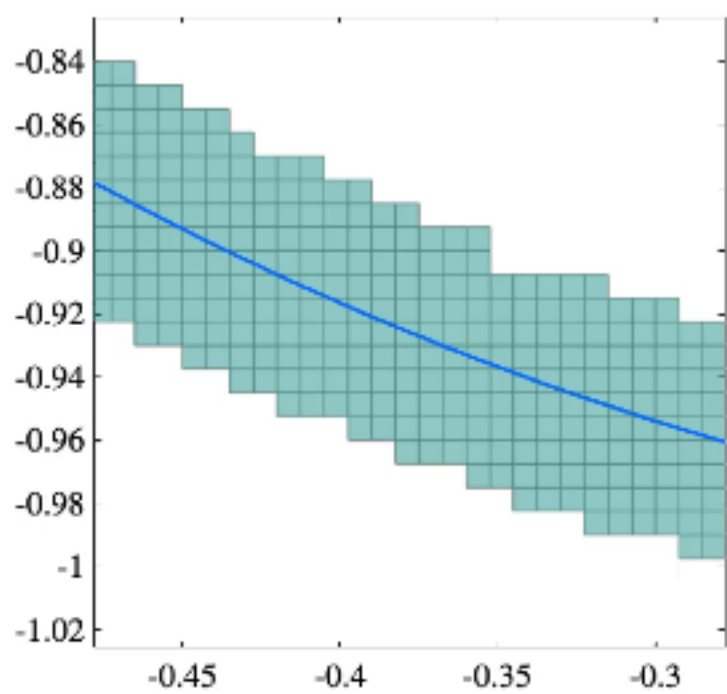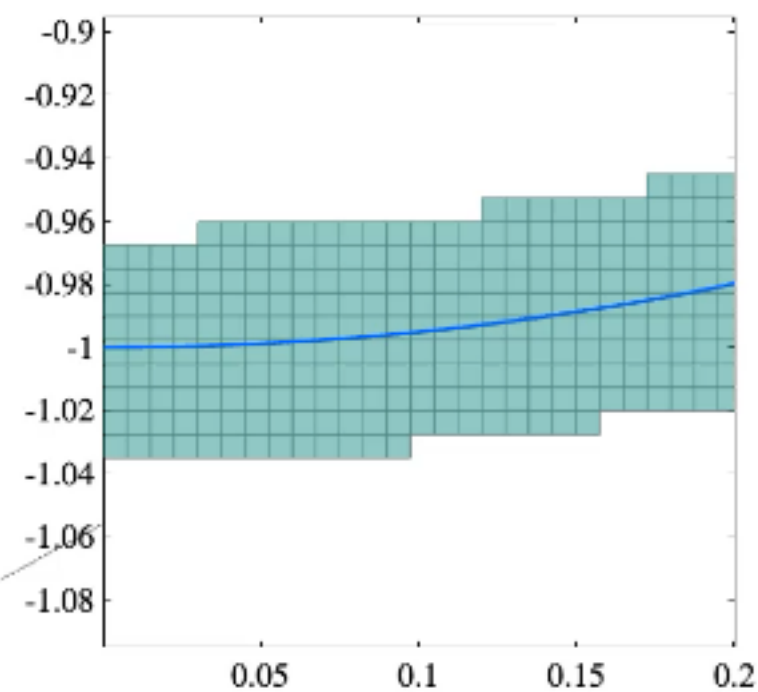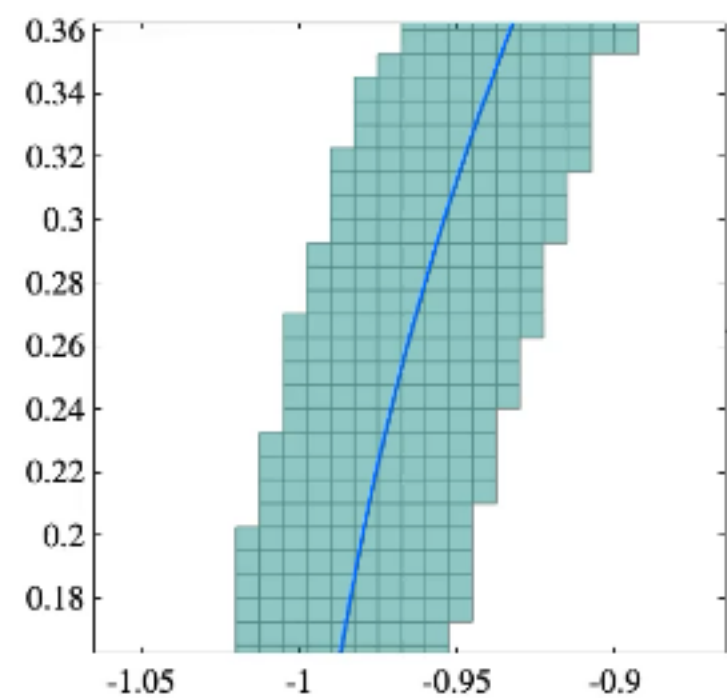

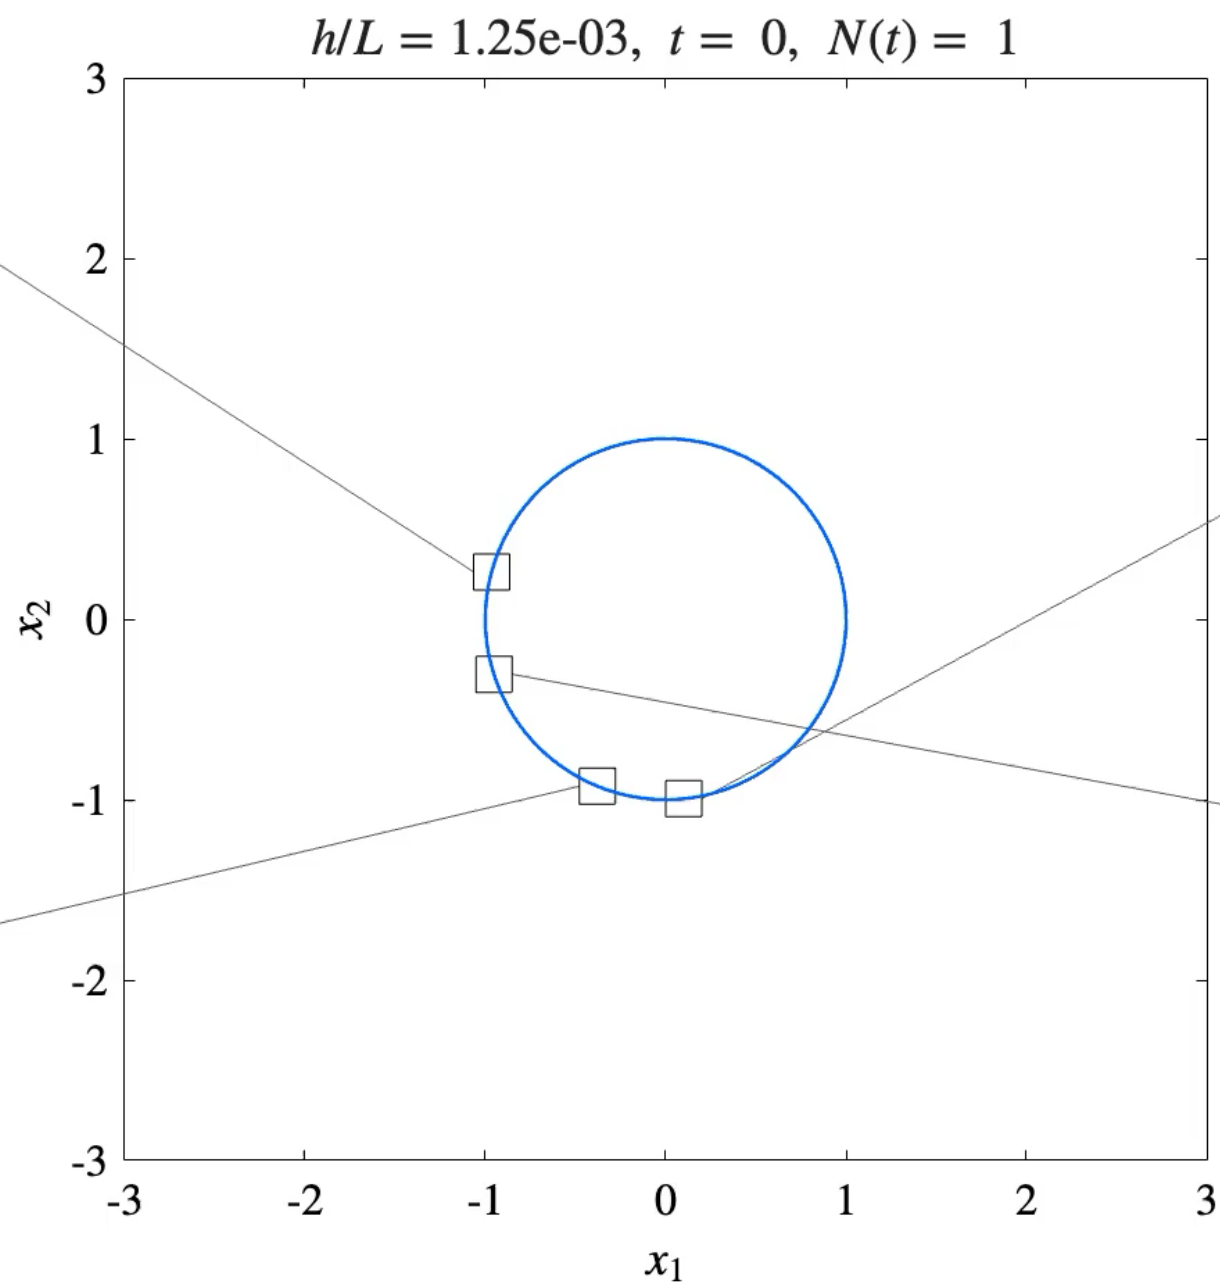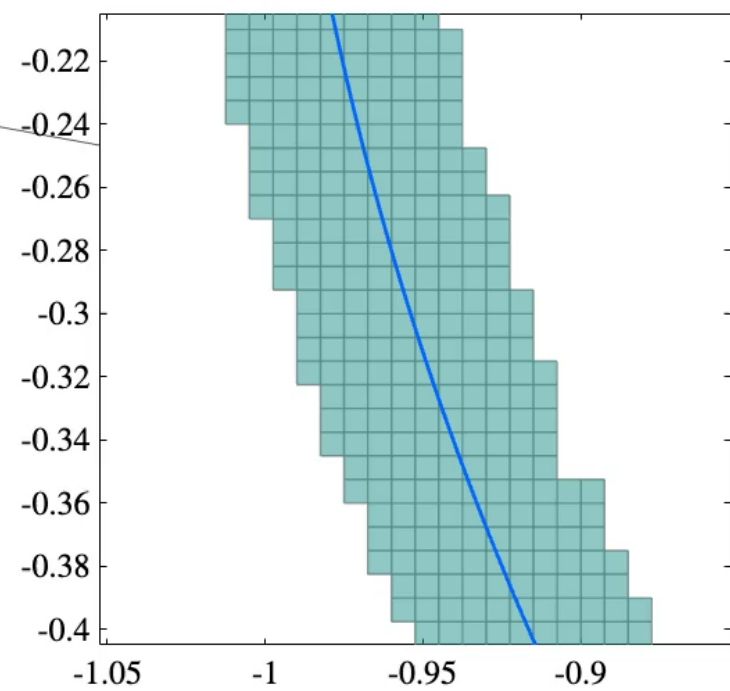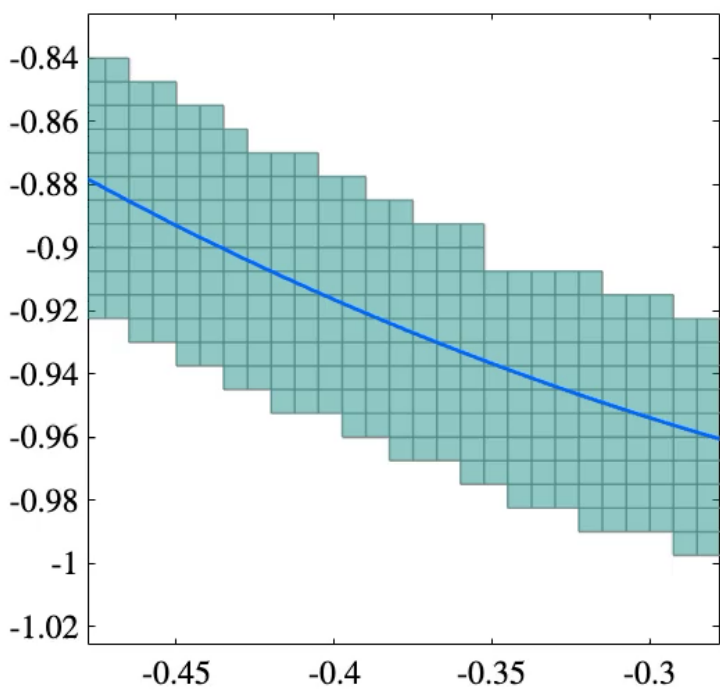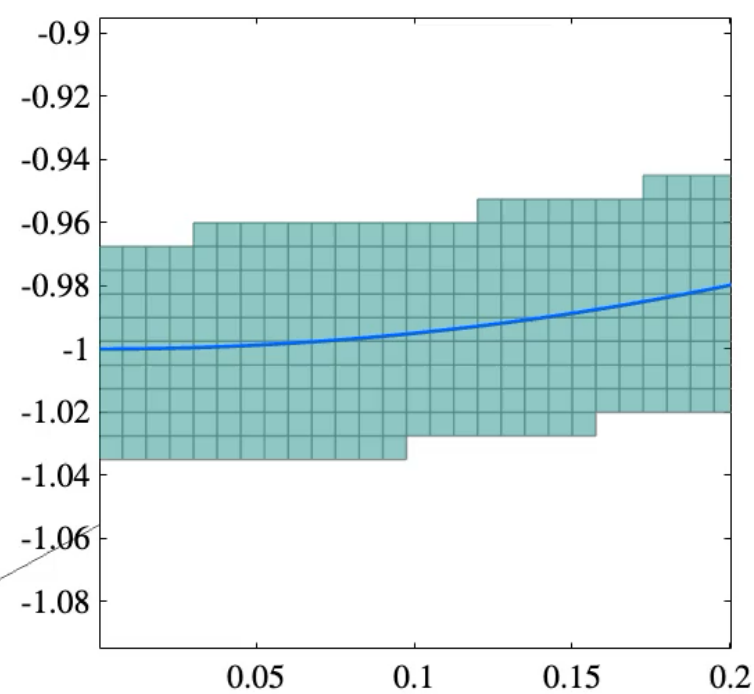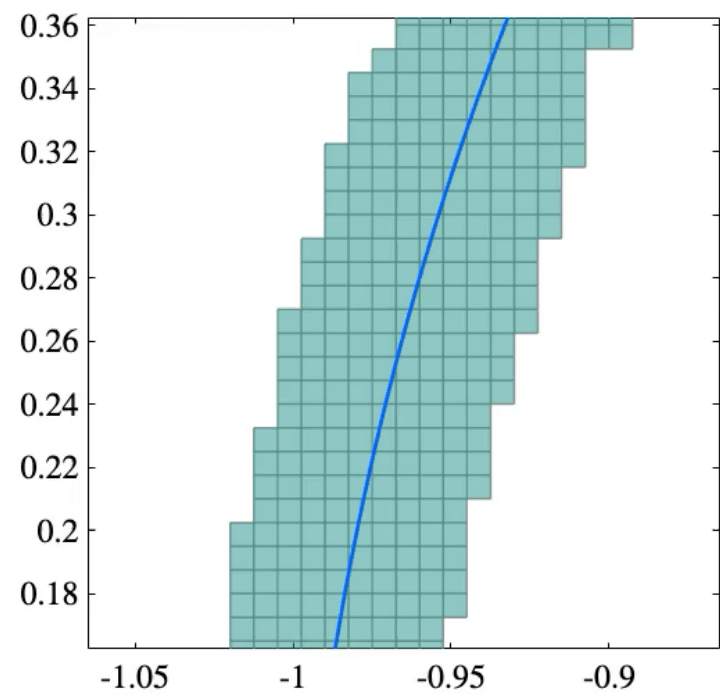

MICROSCALE FILAMENT BREAKUP

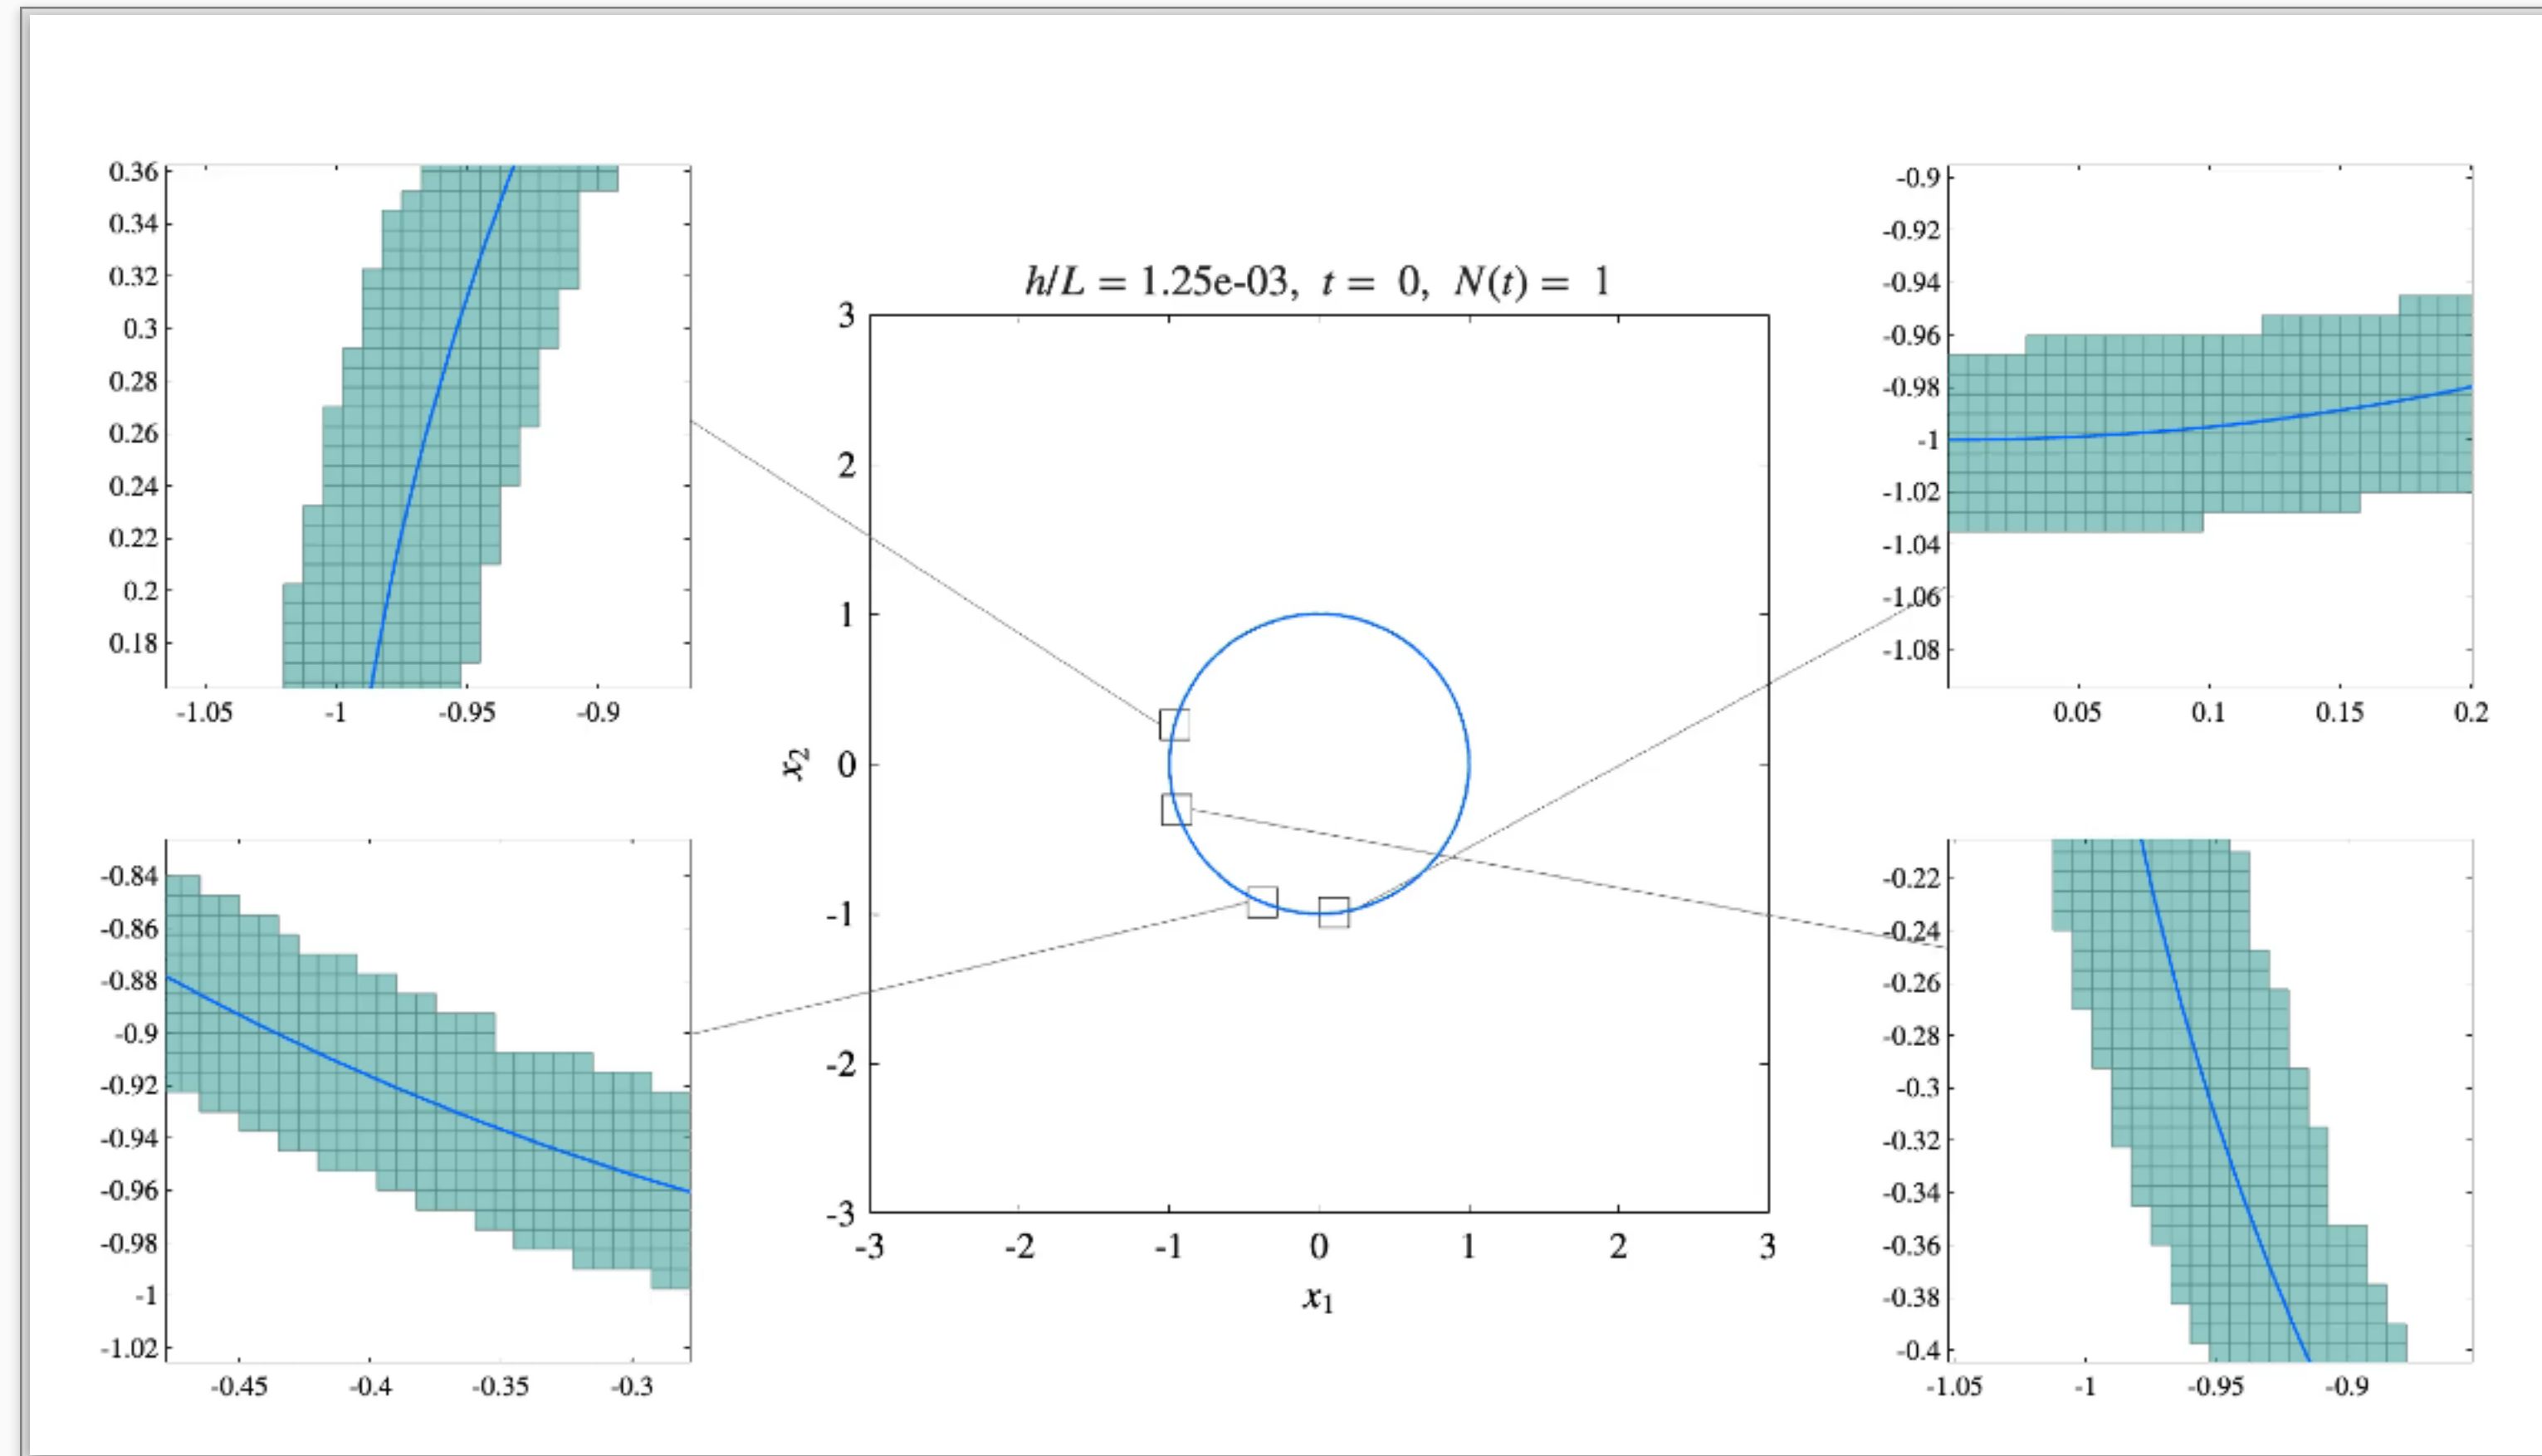

SATELLITE INTERFACE DYNAMICS. As filament widths collapse, the MTS algorithm computes the geometry & topology of filament breakup through interface surgery, generating microscale satellites detached from the primary interface.

SATELLITE INTERFACES AFTER REVERSAL

After reversal, the remnants of filament breakup localize at the material origins of the topological transitions.

