


operating system Architectures →

①

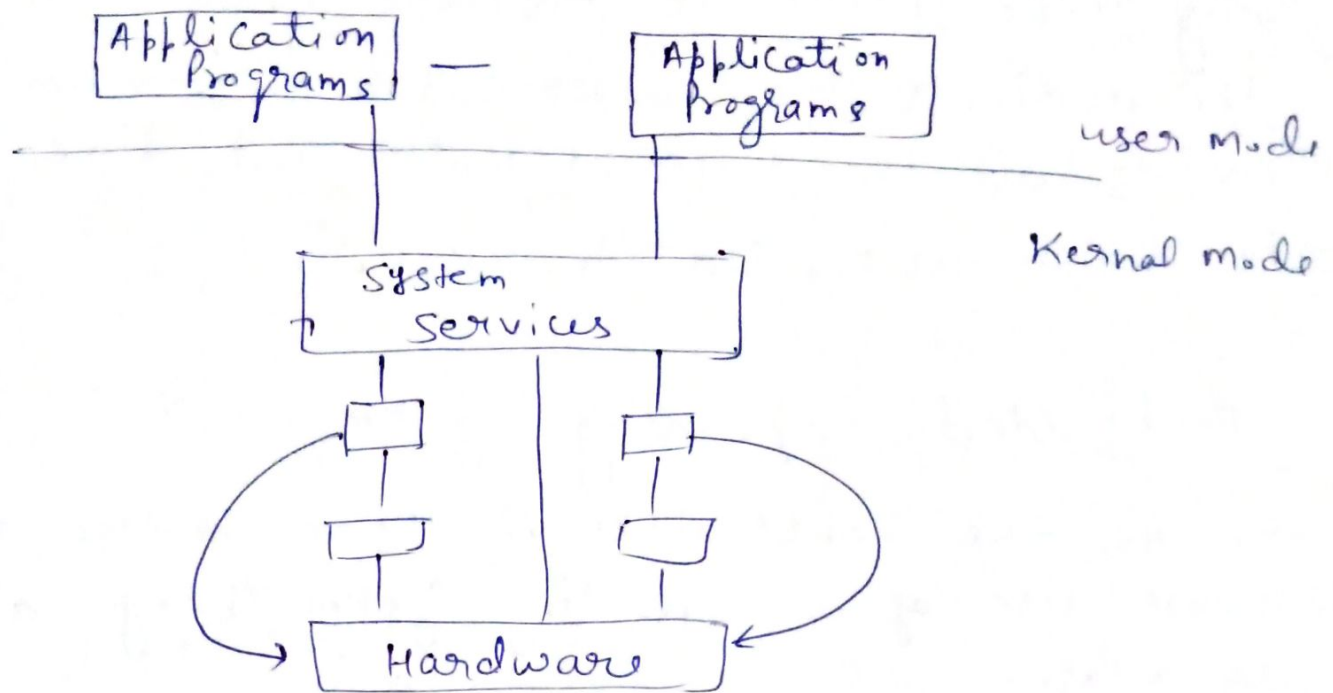


Monolithic operating system

→

② In this case the OS is just one piece of code composed of different modules. One module calls the other in one or more ways. Here more the modules, more will be the interconnections and more complex the software becomes.


② Layered
Operating
System →

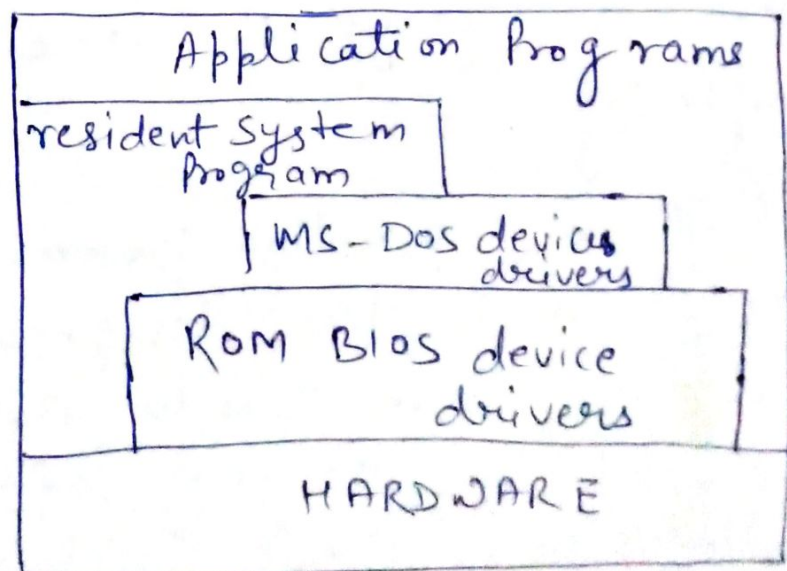

(3)

→ This is better approach compared to a Monolithic OS. A system call goes directly to each individual layer. Here an application can access the BIOS or even the hardware

(3) Client-Server operating system

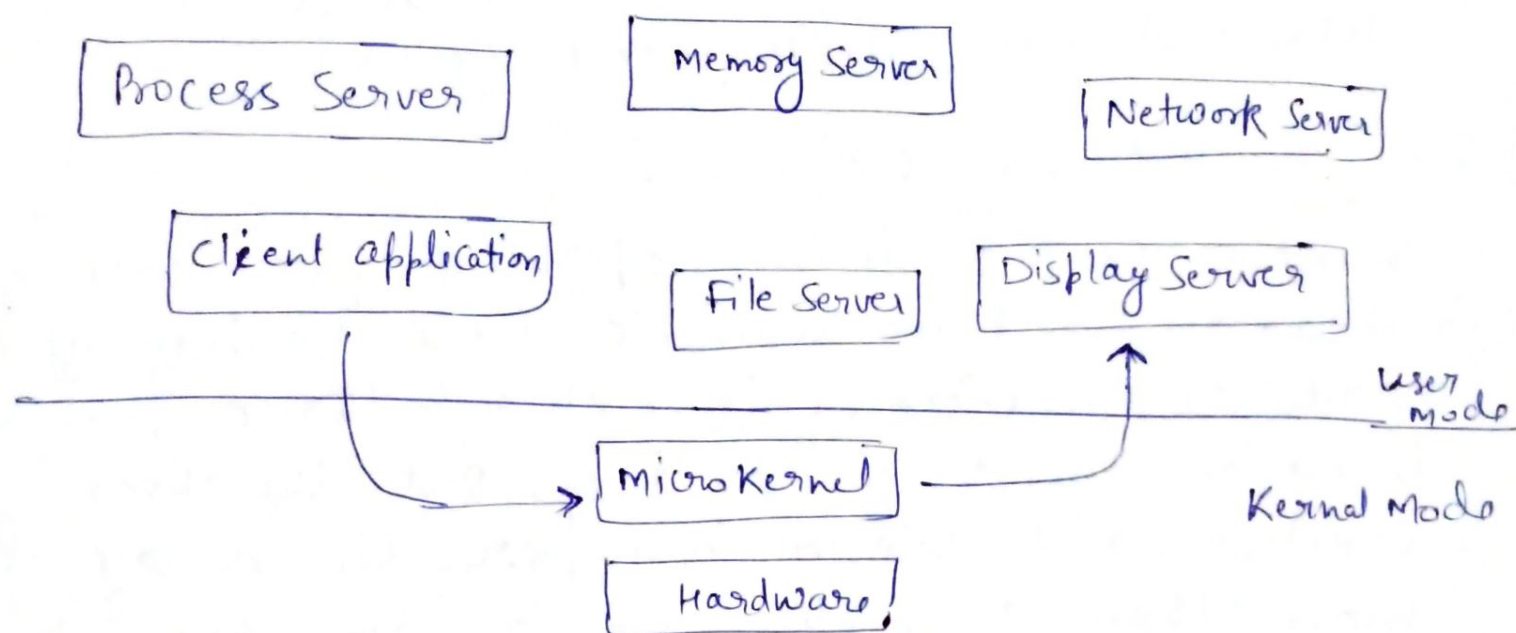

→ The basics of OS limited to a strict minimum (scheduler and synchronization primitive) and all other functionality is on another level implemented as system threads or tasks.

Some of the Popular RTOSs are

(1) QNX RTOS v 6.1 → The QNX RTOS v 6.1 has a client-server based architecture. QNX adopts the approach of implementing an OS with a 10 Kbytes micro-kernel surrounded by a team of optional processes that provide