

Examining correlates of female-limited polymorphism using MCMCglmm (incl. diagnostics)

Beatriz Willink

Rachel Blow

May 2020

Set your working directory to the parent directory containing all of your MCMC analyses

```
knitr::opts_knit$set(root.dir = '..' )
```

1) Read in data

Call the “ape” package for reading trees

```
require(ape)
```

Read in tree samples file

```
tres <- read.nexus("MCMCglmm/sample.2100.trees")
length(tres)
```

```
## [1] 2100
```

Read in data from literature

```
isch_dat <- read.csv("MCMCglmm/ischnura_distribution.csv")
```

Get list of countries by ISO code

```
ischISO <- unique(unlist(c(strsplit(as.character(isch_dat$Countries), split = ","))))
```

Calculate area for all countries with Ischnura species using .shp files (maps downloaded from GADM.org)

```
require(raster)
x <- shapefile('MCMCglmm/maps/countries.shp')
area <- vector(length = length(ischISO))

for (i in 1:length(ischISO)){
  area[i] <- raster::area(x[which(x$ISO == paste0(ischISO[i])),,])/1000000
}
```

Get area for all states/provinces/territories in Australia, Brazil, Canada, China, India, Russia, and US


```

Range <- vector()
for (j in 1:length(isch_dat$Taxon)){
  divs <- unlist(c(strsplit(as.character(isch_dat$Countries[j]), split = ","),
    strsplit(paste0(isch_dat$Other_division[j]), split = ",")))
  ar <- 0
  for (i in divs){
    temp <- area.dat$area[which(area.dat$division == paste0(i))]
    ar <- ar + temp
  }
  Range[j] <- ar
}

isch_dat <- cbind(isch_dat[2:5],Range)

```

I. ezoin is endemic of Ogasawara islands in Japan, according to IUCN the estimated extent of occurrence is 258 km²

```

isch_dat$Range[which(isch_dat$Taxon == "Ischnura_ezoin")] <- 258

```

Call the “geiger” package for “name.check” function

```

require(geiger)

```

Check that species names from literature data match species names in tree file

```

Taxa <- data.frame(Taxon = unique(isch_dat$Taxon))
rownames(Taxa) <- Taxa$Taxon
name.check(tres[[1]], Taxa)

```

```

## [1] "OK"

```

Call the “MCMCglmm” package for creating MCMC objects

```

require(MCMCglmm)

```

Calculate inverted relatedness matrix

```

inv.phylo <- inverseA(tres[[1]], nodes="TIPS",scale=TRUE)

```

2) Analysis

Run 1

Set prior

```

prior.1 <- list(B = list(mu = c(0,0), V = diag(2) * (1 + pi^2/3)),
  G=list(G1=list(V=1,nu=1000,alpha.mu=rep(0,1),alpha.V=diag(1))),
  R = list(V = 1, fix = 1))

```

Start run

```
m1.bin.start <- MCMCglmm(FemState.bin ~ Range,
                        random = ~ Taxon,
                        rcov = ~ units,
                        ginverse=list(Taxon=inv.phylo$Ainv),
                        family = "categorical", data = isch_dat,
                        prior = prior.1, pl=TRUE,slice=TRUE,
                        nitt=2000, burnin=0, thin=1,verbose = F)
```

Loop over multiple trees, saving the last iteration of 10,000 iterations for each tree -100

```
m1.bin.multiplyMCMC <- m1.bin.start

for(i in 1:length(tres)){
  IN.tree <- inverseA(tres[[i]],nodes="TIPS")
  start <- list(Liab = m1.bin.multiplyMCMC$Liab[1,],
               R=list(R1=matrix(ncol=1,nrow=1,m1.bin.multiplyMCMC$VCV[1,2])),
               G=list(G1=matrix(ncol=1,nrow=1,m1.bin.multiplyMCMC$VCV[1,1])))


  m1.bin.multiplyMCMC <- MCMCglmm(FemState.bin ~ Range,
                                  random = ~ Taxon,
                                  rcov = ~ units,
                                  ginverse=list(Taxon=inv.phylo$Ainv),
                                  family = "categorical", data = isch_dat, prior = prior.1,
                                  pl=TRUE,slice=TRUE, nitt=10000, thin=1,
                                  burnin=9999, start=start, verbose=F)

  if(i>100){
    m1.bin.start$VCV[i-100,] <- m1.bin.multiplyMCMC$VCV[1,]
    m1.bin.start$Sol[i-100,] <- m1.bin.multiplyMCMC$Sol[1,]
    m1.bin.start$Liab[i-100,] <- m1.bin.multiplyMCMC$Liab[1,]
  }
}
```


Visual check:

```
plot(m1.bin.start)
```


Trace of (Intercept)

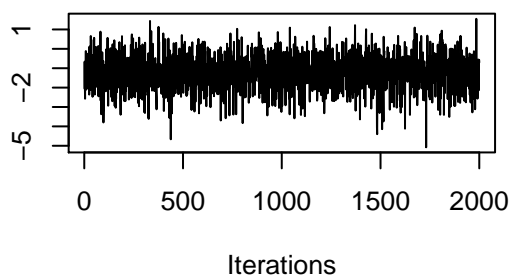


Density of (Intercept)




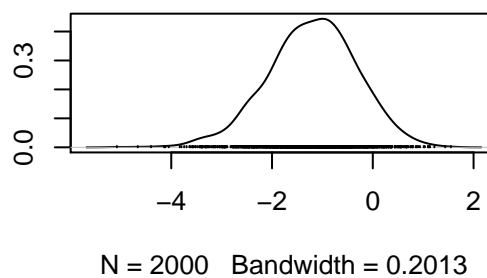


Trace of Range

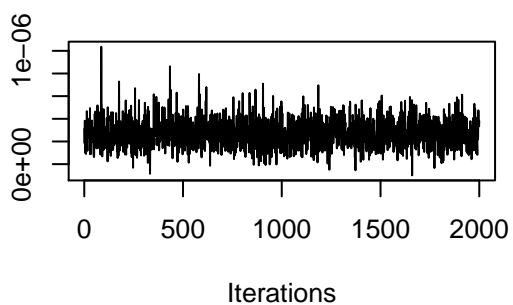

Density of Range

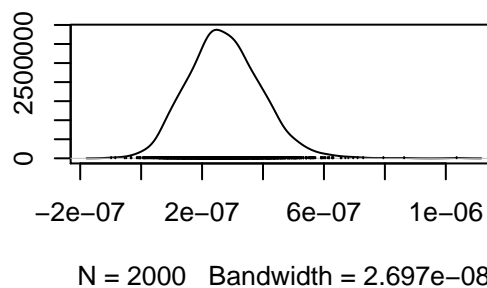

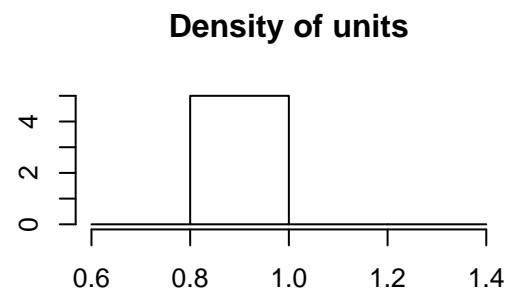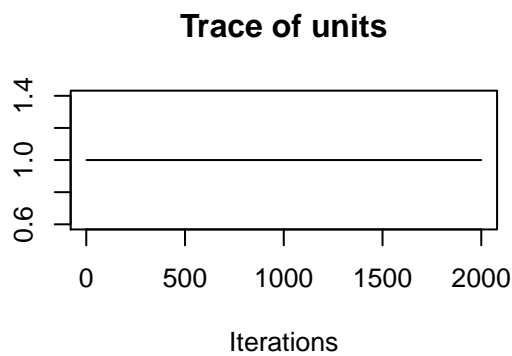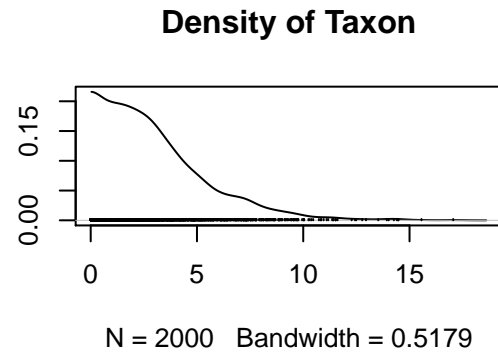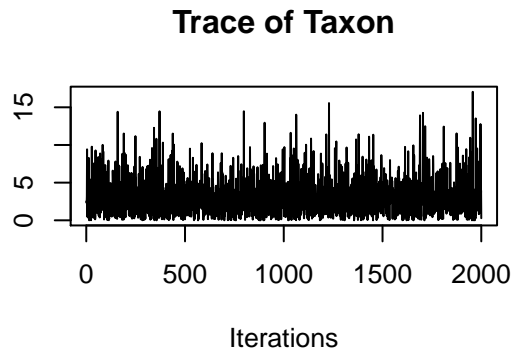

Summary:

```
summary(m1.bin.start)
```

```
##
## Iterations = 1:2000
## Thinning interval = 1
## Sample size = 2000
##
## DIC: 39.05248
##
## G-structure: ~Taxon
##
##      post.mean 1-95% CI u-95% CI eff.samp
## Taxon      3.061 2.291e-06   7.926     2000
##
## R-structure: ~units
##
##      post.mean 1-95% CI u-95% CI eff.samp
## units         1         1         1         0
##
## Location effects: FemState.bin ~ Range
##
##      post.mean 1-95% CI u-95% CI eff.samp pMCMC
## (Intercept) -1.204e+00 -2.777e+00 6.792e-01   1798 0.159
## Range       2.741e-07 5.878e-08 5.104e-07   1696 0.012 *
```

```
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

Hypothesis test: what is the posterior probability that the probability of polymorphism does not increase with distribution range

```
PMCMC <- sum(m1.bin.start$Sol[, 'Range'] <= 0)/length((m1.bin.start$Sol[, 'Range'] <= 0))
PMCMC
```

```
## [1] 0.006
```

Posterior mean and HPD interval for the effect of an increase of 1 million Km2 on the probability of being polymorphic

```
PM <- plogis(mean(m1.bin.start$Sol[,1]) + mean(m1.bin.start$Sol[,2])* 1e6) -
      plogis(mean(m1.bin.start$Sol[,1]))
PM
```

```
## [1] 0.05219694
```

```
lwr <- plogis(mean(m1.bin.start$Sol[,1]) + HPDinterval(m1.bin.start$Sol[,2])[1]* 1e6) -
      plogis(mean(m1.bin.start$Sol[,1]))
lwr
```

```
## [1] 0.01060018
```

```
upr <- plogis(mean(m1.bin.start$Sol[,1]) + HPDinterval(m1.bin.start$Sol[,2])[2]* 1e6) -
      plogis(mean(m1.bin.start$Sol[,1]))
upr
```

```
## [1] 0.102488
```

Obtain estimate using “predict” function

```
Pred <- predict.MCMCglmm(object = m1.bin.start, newdata = isch_dat, type = "response",
                        interval = "confidence")
HPDinterval(m1.bin.start$Sol[,2])
```

```
##           lower           upper
## var1 5.87781e-08 5.104282e-07
## attr(,"Probability")
## [1] 0.95
```

Make the fitted data frame

```
Pdat <- cbind(isch_dat, Pred)

for(i in 1:nrow(Pdat)){
  if(Pdat$FemState.bin[i] == "P"){
    Pdat$P[i] <- 1
  }
  else {Pdat$P[i] <- 0}
}
```

Run 2

Start run

```
m2.bin.start <- MCMCglmm(FemState.bin ~ Range,
                        random = ~ Taxon,
                        rcov = ~ units,
                        ginverse=list(Taxon=inv.phylo$Ainv),
                        family = "categorical", data = isch_dat,
                        prior = prior.1, pl=TRUE,slice=TRUE,
                        nitt=2000, burnin=0, thin=1,verbose = F)
```

Loop over multiple trees, saving the last iteration of 10,000 iterations for each tree -100

```
m2.bin.multiplyMCMC <- m2.bin.start

for(i in 1:length(tres)){
  IN.tree <- inverseA(tres[[i]],nodes="TIPS")
  start <- list(Liab = m2.bin.multiplyMCMC$Liab[1,],
               R=list(R1=matrix(ncol=1,nrow=1,m2.bin.multiplyMCMC$VCV[1,2])),
               G=list(G1=matrix(ncol=1,nrow=1,m2.bin.multiplyMCMC$VCV[1,1])))

  m2.bin.multiplyMCMC <- MCMCglmm(FemState.bin ~ Range,
                                  random = ~ Taxon,
                                  rcov = ~ units,
                                  ginverse=list(Taxon=inv.phylo$Ainv),
                                  family = "categorical", data = isch_dat, prior = prior.1,
                                  pl=TRUE,slice=TRUE, nitt=10000, thin=1,
                                  burnin=9999, start=start, verbose=F)

  if(i>100){
    m2.bin.start$VCV[i-100,]<- m2.bin.multiplyMCMC$VCV[1,]
    m2.bin.start$Sol[i-100,]<- m2.bin.multiplyMCMC$Sol[1,]
    m2.bin.start$Liab[i-100,]<- m2.bin.multiplyMCMC$Liab[1,]
  }
}
```

Put them into a list

```
mh.list <- mcmc.list(m1.bin.start$Sol, m2.bin.start$Sol)
```

3) Plotting


Call “ggplot2” for plotting, “wesanderson” for colour scheme and “scales” for formatting axis scales

```
require(ggplot2)
require(wesanderson)
require(scales)
```

Plot probability of polymorphism against range size


```
p1 <- ggplot(data = Pdat, aes(x=Range, y = fit))+
  geom_line(size=1, show.legend = NA, color = "black")+
  theme_bw(base_size = 12)+
  geom_ribbon(aes(ymax = upr, ymin = lwr, x = Range), fill = "black", color=NA,
    alpha = 0.1)+
  geom_point(data = Pdat, aes(color = FemState.bin, fill = FemState.bin, y = P),
    alpha = 0.7 , size = 4, show.legend = FALSE )+
  ylab(label = "Probability of female polymorphism")+
  xlab(label=c(expression("Range size in millions of" ~km^2))) +
  scale_color_manual(breaks = c("M", "P"),
    values = c("grey60", "black")) +
  scale_fill_manual(breaks = c("M", "P"),
    values = c("grey60", "black")) +
  scale_x_continuous(labels = number_format(scale = 1e-6))
  theme(panel.grid.major = element_blank(), panel.grid.minor = element_blank())
```

p1

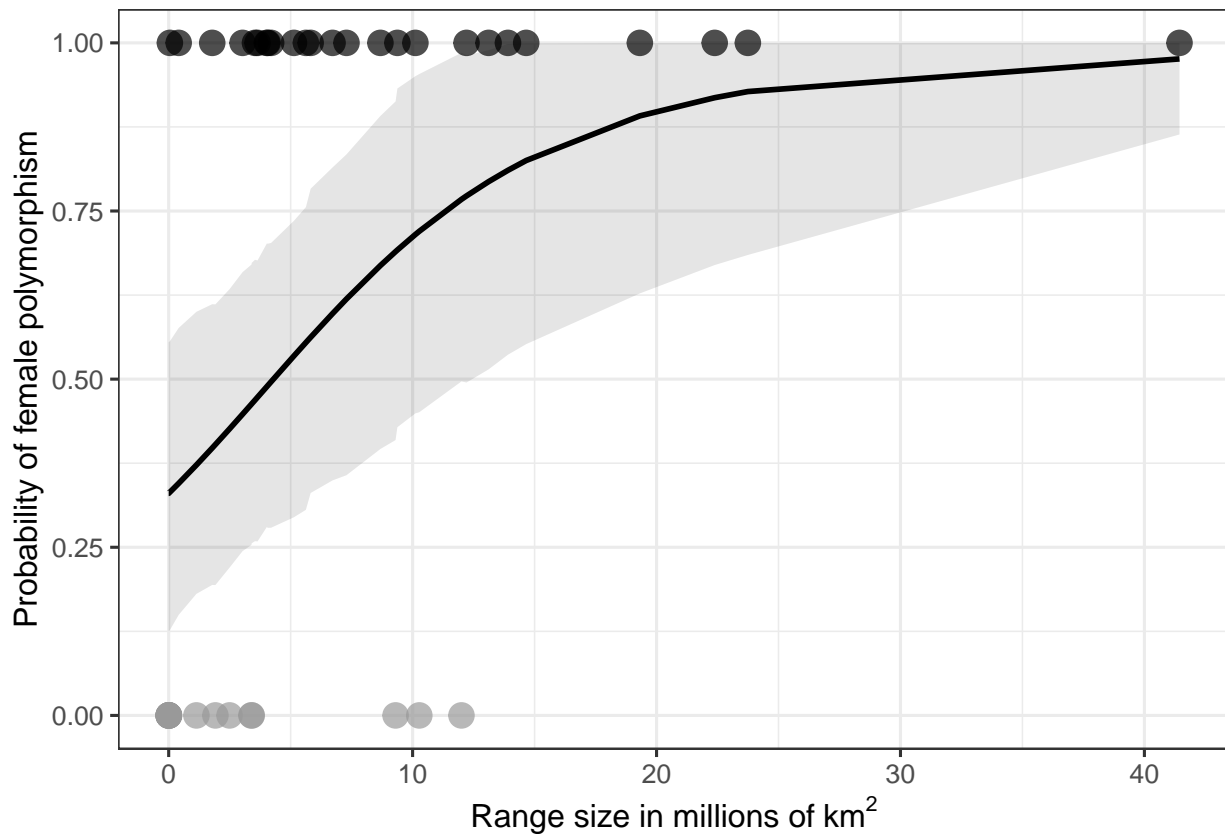

Monomorphic: light grey

Polymorphic: dark grey

Call plotting packages

```
require(gridExtra)
require(gtable)
require(ggtree)
```

Plot range size per species and probability of polymorphism against range size

```
tre1 <- read.nexus(file = "StarBEAST2/summary.tree")
range_dat <- data.frame(Species = isch_dat[,1], State = isch_dat[,3], Range = isch_dat$Range)

for (i in 1:length(range_dat$Species)){
  if (range_dat$Range[i] < 100000){
    range_dat$Range[i] <- 100000
  }
}
p <- ggtree(tre1)
```


```
## Warning: `data_frame()` is deprecated as of tibble 1.1.0.
## Please use `tibble()` instead.
## This warning is displayed once every 8 hours.
## Call `lifecycle::last_warnings()` to see where this warning was generated.
```

```
p2 <- facet_plot(p, panel="Geographic range size", data=range_dat, geom=geom_segment, mapping = aes(x=0

gt = ggplot_gtable(ggplot_build(p2))
gt$layout$1[grepl('panel-1', gt$layout$name)]
```

```
## [1] 5
```

```
gt$widths[5] = 0.5*gt$widths[5]
lay <- rbind(c(1,1,2,2,2))
Fig5 <- grid.arrange(gt, p1, ncol = 2, layout_matrix = lay)
```

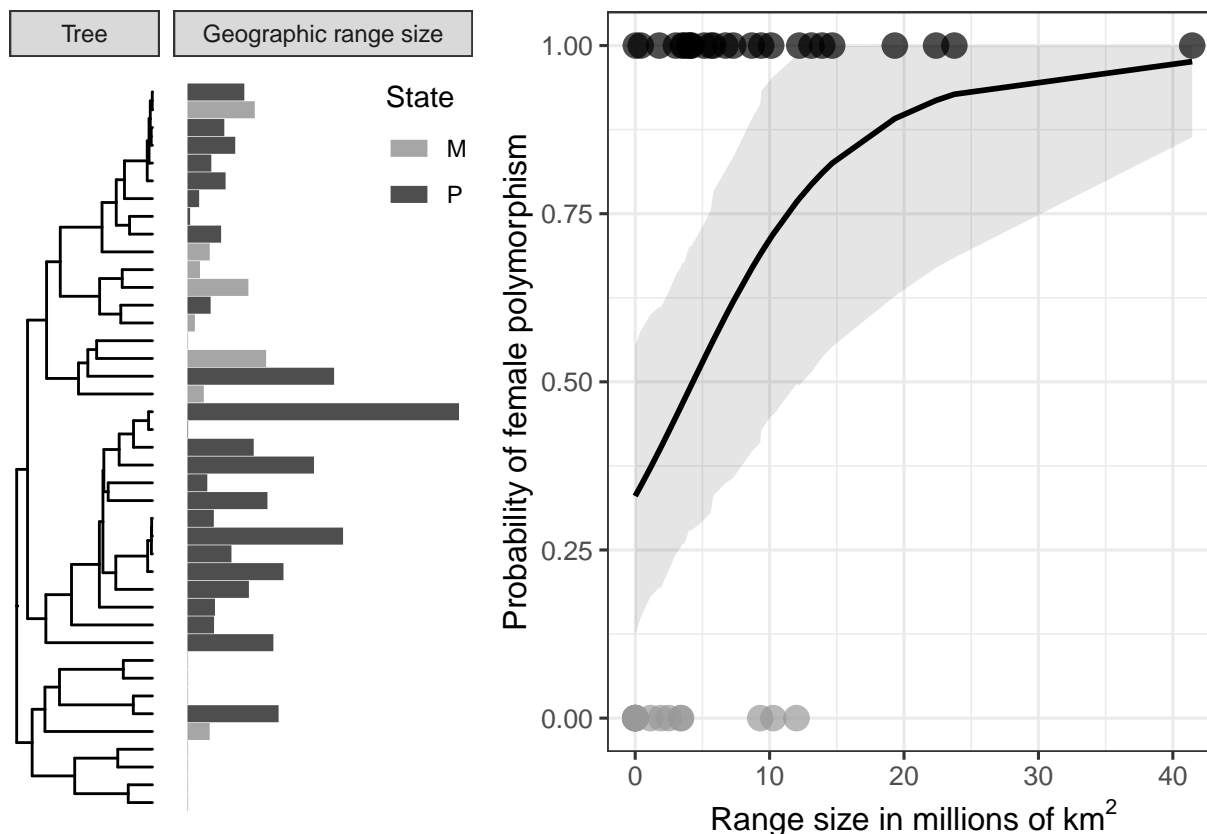

Save plot as a PDF

```
ggsave("Fig5.pdf", plot = Fig5, device = NULL, path = "Figures",
       scale = 1, width = 7, height = 5, dpi = 600, limitsize = TRUE,
       units = "in")
```

Diagnostics

a) Gelman-Rubin statistic

Gelman-rubin diagnostic of convergence

```
GR <- gelman.diag(mh.list, confidence = 0.95, transform=TRUE, autoburnin=FALSE,
                  multivariate=T)
GR
```

```
## Potential scale reduction factors:
##
##           Point est. Upper C.I.
## (Intercept)          1          1
## Range                1          1
##
## Multivariate psrf
##
## 1
```

b) Autocorrelation


Calculate autocorrelation between draws

```
diag(autocorr(m1.bin.start$Sol)[2, , ])
```

```
## (Intercept)      Range  
## 0.002841675 0.034992859
```

Present autocorrelation in plot form

```
autocorr.plot(m1.bin.start$Sol)
```

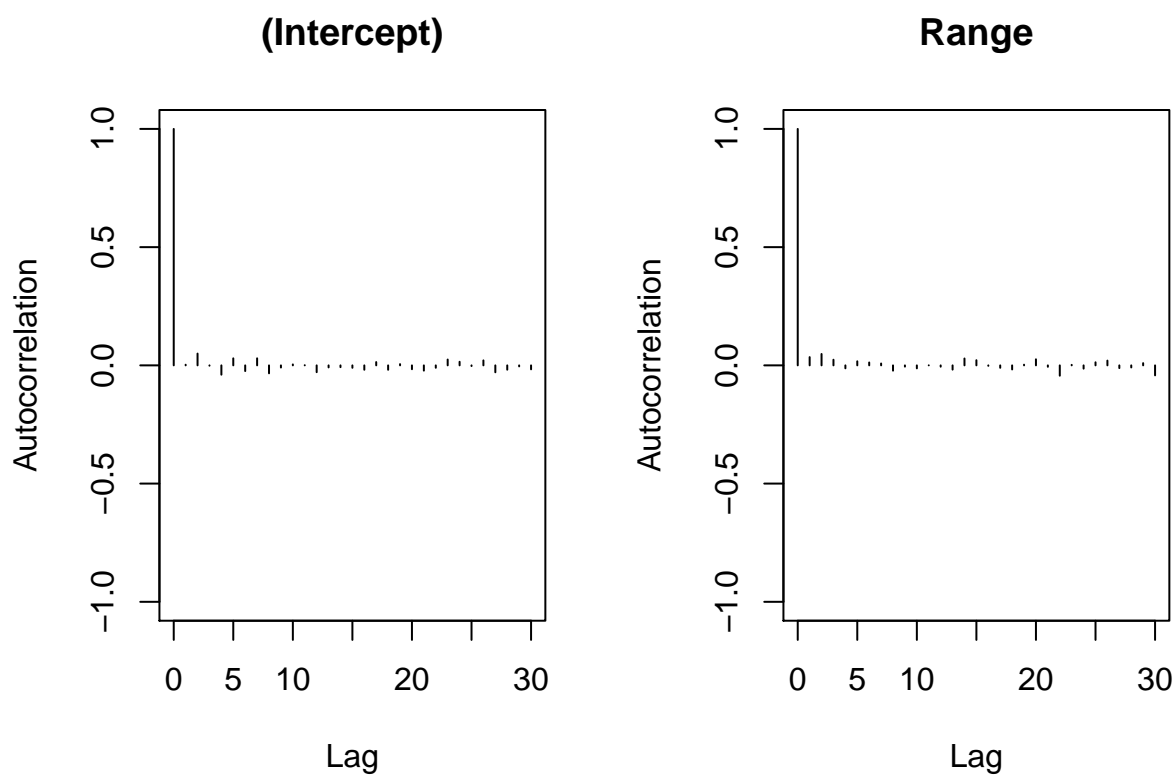

c) Effective sample size

Calculate effective sample size

```
effectiveSize(m1.bin.start$Sol)
```

```
## (Intercept)      Range  
## 1797.837 1695.826
```

d) Visual diagnostic of trace convergence and mixing

Prepare data for plotting multiple traces


```
colnames(m1.bin.start$Sol)[1] <- "Intercept"

for (i in 1:length(colnames(m1.bin.start$Sol))) {
  for (j in 1:2) {
    temp <- eval(parse(text=paste("m", j, ".bin.start$Sol[,", i, "]", sep = "")))
    assign(paste("trace_", "mcmc", j, colnames(m1.bin.start$Sol)[i], sep = ""), temp)
  }
}

temp_list = mcmc.list()
for (i in 1:length(colnames(m1.bin.start$Sol))) {
  for (j in 1:2) {
    temp_list[[j]] <- eval(parse(text=paste("trace_mcmc", j,
                                             colnames(m1.bin.start$Sol)[i], sep = "")))
    assign(paste("trace_", colnames(m1.bin.start$Sol)[i], sep = ""), temp_list)
  }
}
```

Plot traces

```
ylabs <- c("Intercept", "Slope")
par(mfrow=c(1,2))
for (i in 1:2) {
  temp <- eval(parse(text=paste("trace_", colnames(m1.bin.start$Sol)[i], sep = "")))
  traceplot(temp, col = rainbow(3, start=0.2, end=0.9), ylab = ylabs[i], cex.lab=1.5, cex.axis=1.5)
}
```

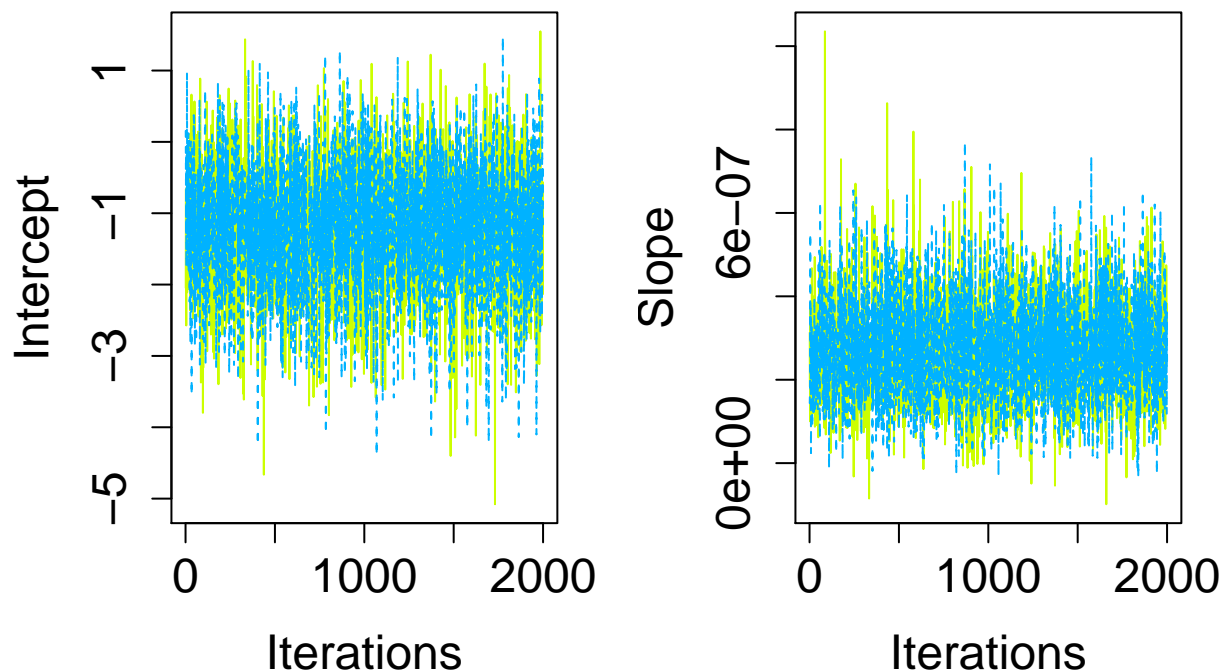

Prepare data for plotting multiple density curves

```
colnames(m2.bin.start$Sol)[1] <- "Intercept"

reshaping <- function(x) {
  y <- rbind(t(x))
  result <- setNames(as.data.frame.table(y), c("variable", "run", "value"))
}

for (i in 1:2){
  temp <- eval(parse(text=paste("m", i, ".bin.start$Sol", sep = "")))
  reshape <- reshaping(temp)
  reshape$run <- as.factor(rep(i, nrow(reshape)))
  assign(paste("reshape", i, sep = ""), reshape)
}


plot_df <- rbind(reshape1, reshape2)
```

Plot by each parameter

```
p <- ggplot(plot_df, aes(x= value, fill = run, colour = run)) +
  geom_density(alpha = 0.1) +
  theme_bw(base_size = 12)+
  theme(legend.position = "none", strip.text.x = element_text(size = 6),
        panel.grid.major = element_blank(), panel.grid.minor = element_blank())+
  labs(x="Parameter value", y = "Density") +
```

```
facet_wrap(~variable, scales = "free", ncol = 3, nrow = 5)
```

p

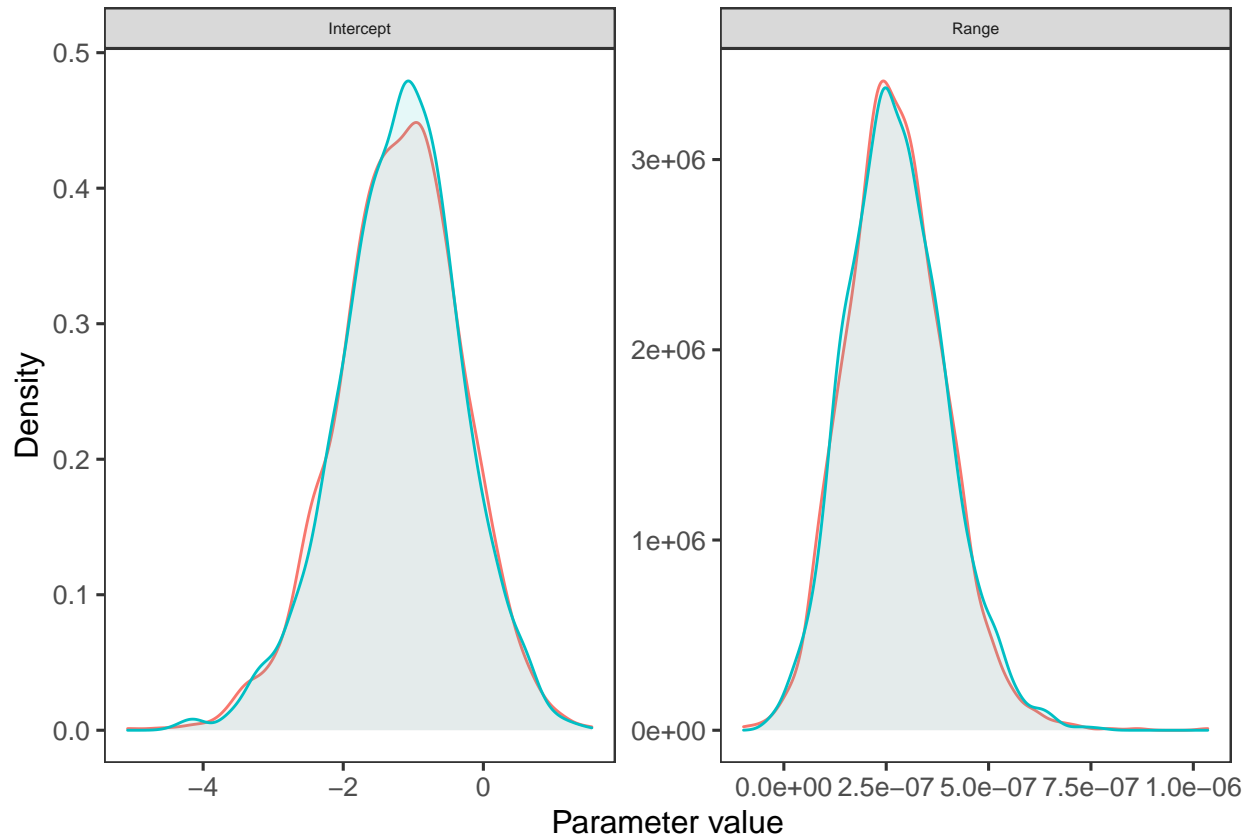

Run with log

Start run

```
m3.bin.start <- MCMCglmm(FemState.bin ~ log(Range),
  random = ~ Taxon,
  rcov = ~ units,
  ginverse=list(Taxon=inv.phylo$Ainv),
  family = "categorical", data = isch_dat,
  prior = prior.1, pl=TRUE,slice=TRUE,
  nitt=2000, burnin=0, thin=1,verbose = F)
```

Loop over multiple trees, saving the last iteration of 10,000 iterations for each tree -100

```
m3.bin.multiplyMCMC <- m3.bin.start

for(i in 1:length(tres)){
  IN.tree <- inverseA(tres[[i]],nodes="TIPS")
  start <- list(Liab = m3.bin.multiplyMCMC$Liab[1,],
    R=list(R1=matrix(ncol=1,nrow=1,m3.bin.multiplyMCMC$VCV[1,2])),
```

```

G=list(G1=matrix(ncol=1,nrow=1,m3.bin.multiplyMCMC$VCV[1,1]))

m3.bin.multiplyMCMC <- MCMCglmm(FemState.bin ~ log(Range),
                                random = ~ Taxon,
                                rcov = ~ units,
                                ginverse=list(Taxon=inv.phylo$Ainv),
                                family = "categorical", data = isch_dat, prior = prior.1,
                                pl=TRUE,slice=TRUE, nitt=10000, thin=1,
                                burnin=9999, start=start, verbose=F)

if(i>100){
  m3.bin.start$VCV[i-100,]<- m3.bin.multiplyMCMC$VCV[1,]
  m3.bin.start$Sol[i-100,]<- m3.bin.multiplyMCMC$Sol[1,]
  m3.bin.start$Liab[i-100,]<- m3.bin.multiplyMCMC$Liab[1,]
}
}

```

Hypothesis test: what is the posterior probability that the probability of polymorphism does not increase with distribution range

```

PMCMC <- sum(m3.bin.start$Sol[,2] <= 0)/length((m3.bin.start$Sol[,2] <= 0))
PMCMC

```

```
## [1] 0.016
```

Posterior mean and HPD interval for the effect of an increase of 1 million Km2 on the probability of being polymorphic

```

PM <- plogis(mean(m3.bin.start$Sol[,1]) + mean(m3.bin.start$Sol[,2])) -
  plogis(mean(m3.bin.start$Sol[,1]))
PM

```

```
## [1] 0.01123298
```

```

lwr <- plogis(mean(m3.bin.start$Sol[,1]) + HPDinterval(m3.bin.start$Sol[,2])[1]) -
  plogis(mean(m3.bin.start$Sol[,1]))
lwr

```

```
## [1] 0.00131038
```

```

upr <- plogis(mean(m3.bin.start$Sol[,1]) + HPDinterval(m3.bin.start$Sol[,2])[2]) -
  plogis(mean(m3.bin.start$Sol[,1]))
upr

```

```
## [1] 0.02339728
```

Obtain estimate using “predict” function

```

Pred3 <- predict.MCMCglmm(object = m3.bin.start, newdata = isch_dat, type = "response",
                           interval = "confidence")
HPDinterval(m3.bin.start$Sol[,2])

```



```
##           lower      upper
## var1 0.03686882 0.5225617
## attr("Probability")
## [1] 0.95
```

Make the fitted data frame

```
Pdat3 <- cbind(isch_dat, Pred3)

for(i in 1:nrow(Pdat3)){
  if(Pdat3$FemState.bin[i] == "P"){
    Pdat3$P[i] <- 1
  }
  else {Pdat3$P[i] <- 0}
}
```

Plot

```
p3 <- ggplot(data = Pdat3, aes(x=Range, y = fit))+
  geom_line(size=1, show.legend = NA, color = "black")+
  theme_bw(base_size = 12)+
  geom_ribbon(aes(ymax = upr, ymin = lwr, x = Range), fill = "black", color=NA,
    alpha = 0.1)+
  geom_point(data = Pdat3, aes(color = FemState.bin, fill = FemState.bin, y = P),
    alpha = 0.7 , size = 4, show.legend = FALSE )+
  ylab(label = "Probability of female polymorphism")+
  xlab(label=c(expression("Range size in millions of" ~km^2))) +
  scale_color_manual(breaks = c("M", "P"),
    values = c("grey60", "black")) +
  scale_fill_manual(breaks = c("M", "P"),
    values = c("grey60", "black")) +
  scale_x_continuous(labels = number_format(scale = 1e-6))
theme(panel.grid.major = element_blank(), panel.grid.minor = element_blank())
```

```
## List of 2
## $ panel.grid.major: list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## $ panel.grid.minor: list()
## ..- attr(*, "class")= chr [1:2] "element_blank" "element"
## - attr(*, "class")= chr [1:2] "theme" "gg"
## - attr(*, "complete")= logi FALSE
## - attr(*, "validate")= logi TRUE
```

