


Proactive (Periodic) Sender sends with fixed rate τ
 - Need Markov model to track

λ - Arrival rate (nowhere)
 τ - Periodic rate
 v - Service rate

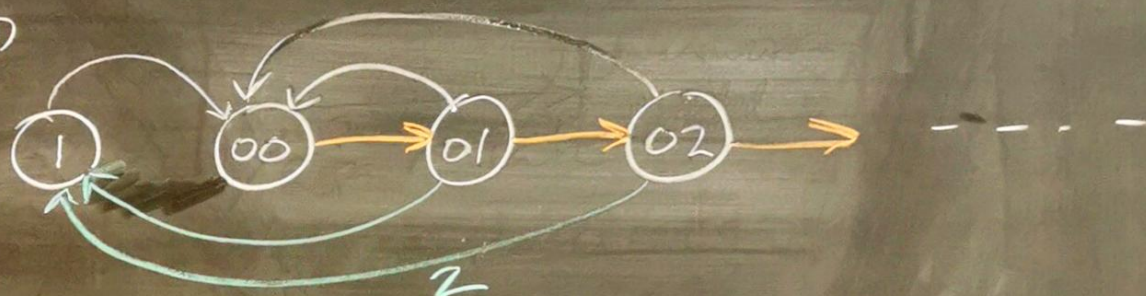


1: Matching State 1st 0: MM 2nd 0: Packets in transit
 00: MM but not send

- lowest mmPr $\rightarrow \lambda / (\lambda + \tau)$ as $v \rightarrow \infty$

τ always dictates lowest mmPr. Even if network is fast

Note Slide 10: Deterministic worse than exp delays.
 For Reactive and eventfull.

Only Periodic available in windfarm,

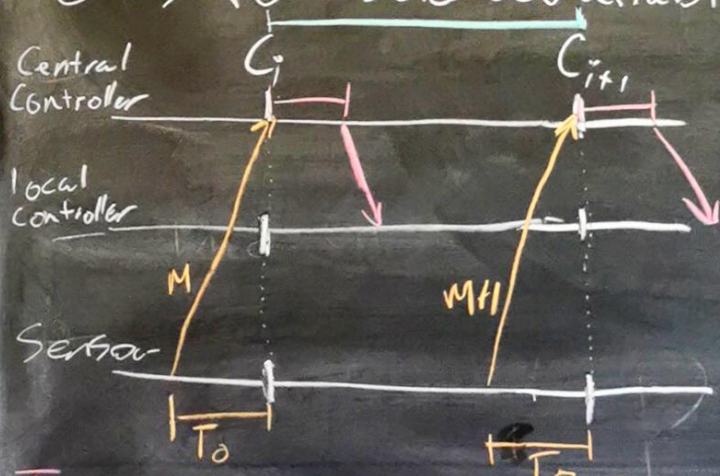

$T_{compute}$
 T_s - Control Period = $\frac{1}{\tau}$
 offset

GOAL: Find optimal T_0

large T_0 MSG Arrives but old

Small T_0 MSG not Arrive before
 Computation

Simulations very expensive run
 for every T_0 .

Therefore Model (Markov)