

**Laxmi Charitable Trust's**  
**Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce**  
**Department of Information Technology (B.Sc.I.T Semester V)**  
**Applied Business Analytics**

Task – 2

|                              |                                   |
|------------------------------|-----------------------------------|
| Roll No.: T018               | Name: Radhika Mali                |
| Class: TYIT                  | Batch: 1                          |
| Date of Assignment: 31/07/26 | Date/Time of Submission: 31/07/26 |

**Perform following questions using Retail.csv**

Q.1 Write a Python program to:

Count the number of products in each Product Category.

Find the category with the highest sales.

Display the result using a bar chart.

```
import pandas as pd
import matplotlib.pyplot as plt

# Load dataset
df = pd.read_csv("Retail_sales - Retail_sales.csv")

# Count products in each Product Category
product_count = df["Product Category"].value_counts()
print("Number of Products in Each Category:")
print(product_count)


# Total sales by Product Category
category_sales = df.groupby("Product Category")["Sales Revenue (USD)"].sum()

# Category with highest sales
highest_category = category_sales.idxmax()
print("\nCategory with Highest Sales:", highest_category)

# Bar Chart
plt.figure(figsize=(8,5))
category_sales.plot(kind="bar")
plt.title("Sales Revenue by Product Category")
plt.xlabel("Product Category")
plt.ylabel("Sales Revenue (USD)")
plt.xticks(rotation=45)
plt.show()
```

```
Number of Products in Each Category:
Product Category
Furniture      9503
Electronics   8041
Clothing       6608
Groceries      5848
Name: count, dtype: int64

Category with Highest Sales: Electronics
```

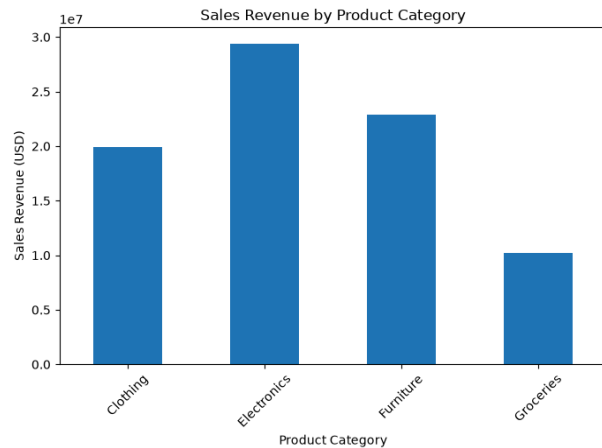

Q.2 Write a Python program to:  
 Calculate the total Sales Revenue for each Store ID.  
 Find the best-performing store.  
 Find the least-performing store.  
 Display the result using a horizontal bar chart.

```
# Total Sales Revenue by Store ID
store_sales = df.groupby("Store ID")["Sales Revenue (USD)"].sum()

print("Total Sales Revenue for Each Store:")
print(store_sales)


# Best-performing Store
print("\nBest-performing Store:", store_sales.idxmax())

# Least-performing Store
print("Least-performing Store:", store_sales.idxmin())

# Horizontal Bar Chart
plt.figure(figsize=(8,6))
store_sales.plot(kind="barh")
plt.title("Sales Revenue by Store ID")
plt.xlabel("Sales Revenue (USD)")
plt.ylabel("Store ID")
plt.show()
```

```
Total Sales Revenue for Each Store:
Store ID
Spearsland    82485287.78
Name: Sales Revenue (USD), dtype: float64
```

```
Best-performing Store: Spearsland
Least-performing Store: Spearsland
```

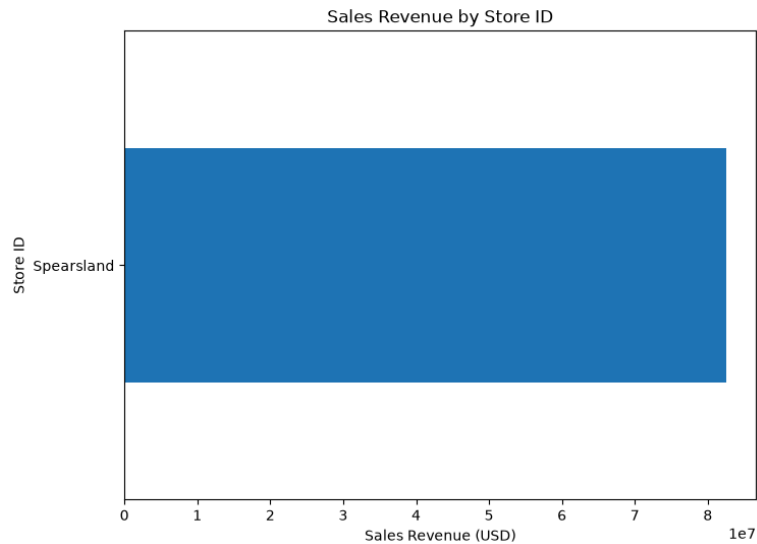

Q.3 Write a Python program to:  
 Calculate total Sales Revenue for each Store Location.  
 Identify the location with the highest sales.  
 Plot the results using a bar chart.

```
# Total Sales Revenue by Store Location
location_sales = df.groupby("Store Location")["Sales Revenue (USD)"].sum()


print("Sales Revenue by Store Location:")
print(location_sales)

# Highest Sales Location
print("\nLocation with Highest Sales:", location_sales.idxmax())

# Bar Chart
plt.figure(figsize=(8,5))
location_sales.plot(kind="bar")
plt.title("Sales Revenue by Store Location")
plt.xlabel("Store Location")
plt.ylabel("Sales Revenue (USD)")
plt.xticks(rotation=45)
plt.show()
```

```
Sales Revenue by Store Location:
Store Location
Afghanistan      329511.22
Albania          296929.47
Algeria          292690.46
American Samoa   308614.68
Andorra          199063.87
...
Wallis and Futuna 323061.14
Western Sahara   426248.78
Yemen           369518.90
Zambia          307427.30
Zimbabwe        305188.53
Name: Sales Revenue (USD), Length: 243, dtype: float64

Location with Highest Sales: Congo
```

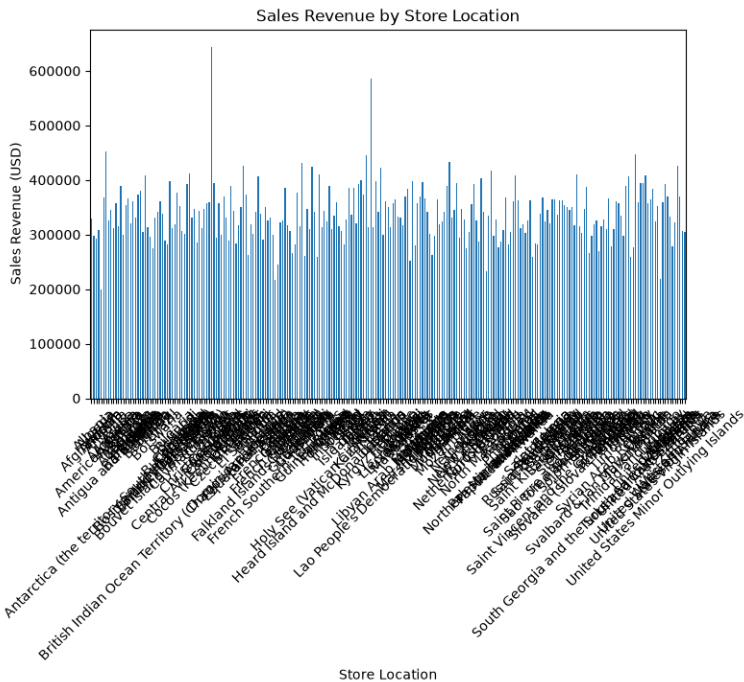

Q.4 Calculate the following descriptive statistics for the Units Sold column:

Mean

Median

Mode

Minimum

Maximum

Range

Variance

Standard Deviation

```
units = df["Units Sold"]

print("Mean:", units.mean())
print("Median:", units.median())
print("Mode:", units.mode()[0])
print("Minimum:", units.min())
print("Maximum:", units.max())
print("Range:", units.max() - units.min())
print("Variance:", units.var())
print("Standard Deviation:", units.std())
```

```
Mean: 6.161966666666666
Median: 6.0
Mode: 7
Minimum: 0
Maximum: 56
Range: 56
Variance: 11.048501748947187
Standard Deviation: 3.323928661831837
```

## Perform following operations on Netflix.csv

Q.1 Create a Box Plot for the Release Year column.


Identify: Minimum value, Maximum value, Median, Presence of outliers

**Code:**

```
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
df = pd.read_csv("Netflix - Netflix.csv")
# Box Plot
plt.figure(figsize=(8, 5))
sns.boxplot(x=df["release_year"])
plt.title("Box Plot of Release Year")
plt.xlabel("Release Year")
plt.show()
```

✓ 0.1s

**Output:**

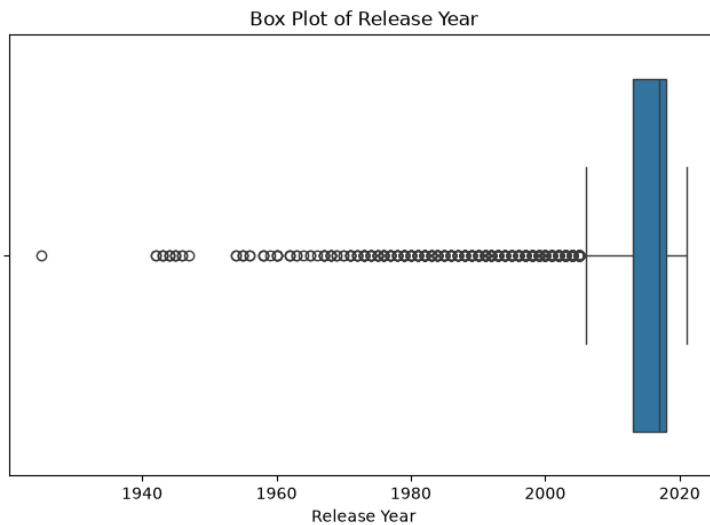

Q.2 Filter only Movies from the dataset.

Extract the numerical value from the Duration column (e.g., 90 min → 90).

Calculate: Mean, Median, Mode, Variance, Standard Deviation, for movie duration.

### Code & Output:

```
# Minimum, Maximum and Median
print("Minimum Value :", df["release_year"].min())
print("Maximum Value :", df["release_year"].max())
print("Median :", df["release_year"].median())
```

✓ 0.0s

Minimum Value : 1925

Maximum Value : 2021

Median : 2017.0

```
# Outliers using IQR
Q1 = df["release_year"].quantile(0.25)
Q3 = df["release_year"].quantile(0.75)
IQR = Q3 - Q1
lower = Q1 - 1.5 * IQR
upper = Q3 + 1.5 * IQR
outliers = df[(df["release_year"] < lower) |
              (df["release_year"] > upper)]
print("Number of Outliers :", len(outliers))
print("Outliers are present :", len(outliers) > 0)
```

✓ 0.0s

Number of Outliers : 745

Outliers are present : True