


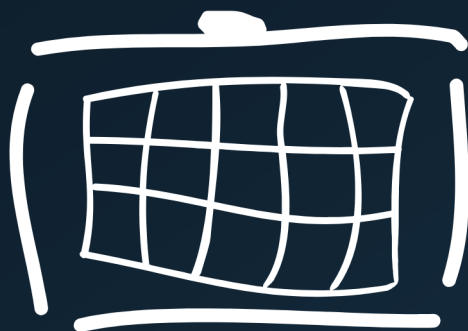

Radiator

CONFIGURATION GUIDE

Entra ID configuration guide

Date: 2026-08-26

Important notice

Before proceeding with this configuration guide, you must first complete the Microsoft Entra ID application creation process. This includes creating an app registration, configuring API permissions, generating client secrets, and handling the MFA exclusion.


Please refer to the [Microsoft Entra ID App creation for Radiator Policy Server authentication](#) before continuing.

Example configuration setup

Radiator offers various Entra ID example configurations that demonstrate authentication with Microsoft Entra ID and optionally MFA support in the [public radiator-radconfs repository](#).

A good starting point is the `entra-auth-mfa` configuration, which authenticates against Microsoft Entra ID with MFA support, or `entra-ad`, which does not include MFA support.

To get a working configuration, download the configuration zip from the radiator-radconfs repository and import it from the GUI by selecting **Files > Import (.zip)**

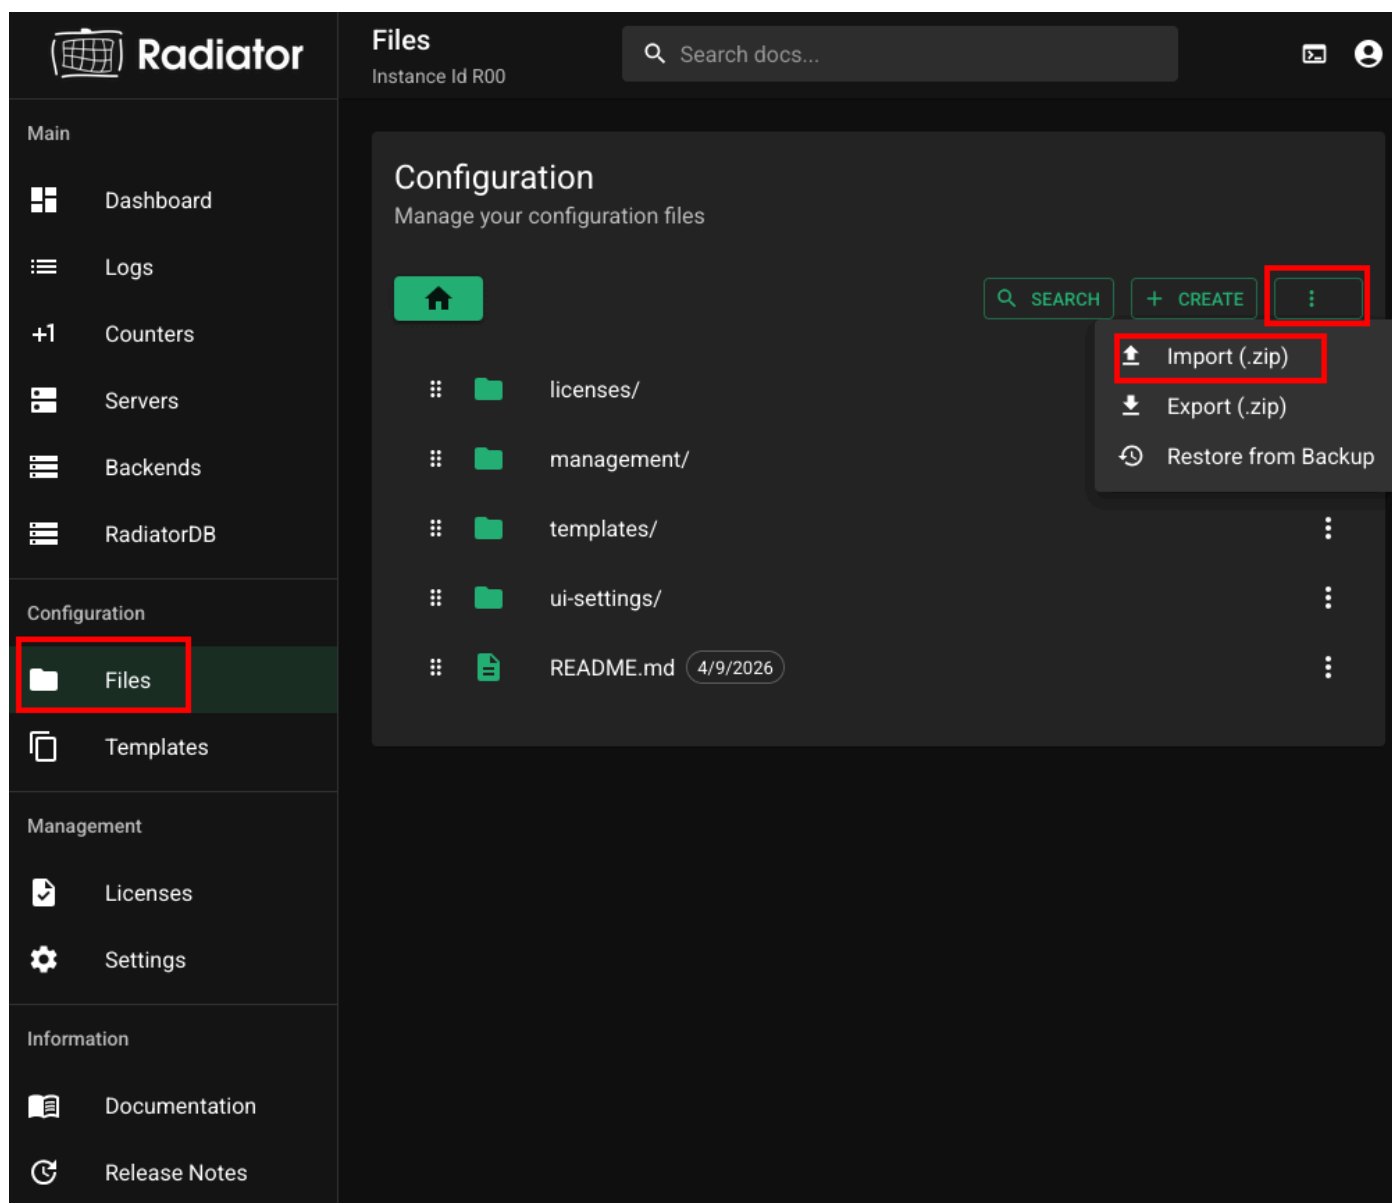

Please note that the imported configuration contains placeholder values that must be replaced with your actual Entra ID application information (covered in the following sections).

Service principal creation for MFA usage

Microsoft Entra ID requires a service principal with appropriate permissions to handle MFA notifications. With the PowerShell script below, you can create a new client secret for Microsoft's Entra ID MFA Notification Client. Make a note of this secret; it must be added to the Radiator configuration so that Radiator is allowed to use the MFA notification service (covered in the next section).

Run this PowerShell script to create the required secret (running this script requires global admin rights):

```
Connect-MgGraph -Scopes 'Application.ReadWrite.All'
# Get ID of 'Entra ID MFA Notification Client' Service Principal
$servicePrincipalId = (Get-MgServicePrincipal -Filter "appid eq '981f26a1-7f43-403b-a875-f8b09b8cd720'").Id

$params = @{
    passwordCredential = @{
        displayName = "My Application MFA"
    }
}

# Create Client Secret onto client
$secret = Add-MgServicePrincipalPassword -ServicePrincipalId $servicePrincipalId -BodyParameter $params
Write-Output $secret
```

Record the secret's value for use in Radiator Policy Server configuration.

Updating the example configuration

After completing the previous steps as well as the [Microsoft Entra ID App creation for Radiator Policy Server authentication](#) guide, you will need to modify the example configuration from the first step to match your specific Entra ID application details. This can be done from the GUI by selecting **Entra details** on the left side panel and filling in the fields (see below). The MFA specific field is only shown if the starting point was `entra-auth-mfa` configuration.

The screenshot shows the Radiator GUI with the 'Entra details' configuration page. The left sidebar has 'Entra details' highlighted. The main area shows a template editor for '25_pipeline-entra-credentials.radconf'. The 'Template Configuration' section has three fields: 'TENANT ID' (Microsoft Entra Directory ID), 'APPLICATION ID' (Application (client) ID), and 'APPLICATION SECRET' (Application secret). Each field has a description and a 'SAVE' button.

1. Replace **TENANT ID** with the Directory (tenant) ID. The Directory (tenant) ID is shown on the application Overview page:

The screenshot shows the 'Overview' page for an application named 'msgr-app'. The left sidebar contains navigation links: Overview, Quickstart, Integration assistant, Diagnose and solve problems, Manage, Branding & properties, Authentication, Certificates & secrets, Token configuration, API permissions, Expose an API, App roles, Owners, Roles and administrators, and Manifest. The main content area has tabs for 'Delete', 'Endpoints', and 'Preview features'. Below these is a message: 'Got a second? We would love your feedback on Microsoft identity platform (previously Azure AD for developer).'. The 'Essentials' section displays the following information:

Property	Value	Property	Value
Display name	msgr-app	Client credentials	0 certificate, 1 secret
Application (client) ID	f9a	Redirect URIs	Add a Redirect URI
Object ID	912	Application ID URI	Add an Application ID URI
Directory (tenant) ID	795	Managed application in L...	msgr-app
Supported account types	My organization only		

Below the Essentials section is a message: 'Starting June 30th, 2020 we will no longer add any new features to Azure Active Directory Authentication Library (ADAL) and Azure Active Directory Graph. We will continue to provide technical support and security updates but we will no longer provide feature updates. Applications will need to be upgraded to Microsoft Authentication Library (MSAL) and Microsoft Graph. Learn more'. At the bottom, there are links for 'Get Started' and 'Documentation', followed by the heading 'Build your application with the Microsoft identity platform' and a paragraph describing the platform.

2. Replace **APPLICATION ID** with the Application (client) ID. The Application (client) ID is shown on the application Overview page:

This screenshot is identical to the one above, showing the 'Overview' page for 'msgr-app'. The 'Essentials' section displays the same information as before:

Property	Value	Property	Value
Display name	msgr-app	Client credentials	0 certificate, 1 secret
Application (client) ID	f9a	Redirect URIs	Add a Redirect URI
Object ID	912	Application ID URI	Add an Application ID URI
Directory (tenant) ID	795	Managed application in L...	msgr-app
Supported account types	My organization only		

The rest of the page, including the sidebar, navigation tabs, and footer, is identical to the previous screenshot.

3. Replace `APPLICATION SECRET` with the secret. The secret is shown on the application Certificates & secrets page right after creation:

msg-app | Certificates & secrets

Search < > Got feedback?

Overview
Quickstart
Integration assistant
Diagnose and solve problems

Manage

Branding & properties
Authentication
Certificates & secrets
Token configuration
API permissions
Expose an API
App roles
Owners
Roles and administrators
Manifest

Support + Troubleshooting
New support request

Credentials enable confidential applications to identify themselves to the authentication service when receiving tokens at a web addressable location (using an HTTPS scheme). For a higher level of assurance, we recommend using a certificate (instead of a client secret) as a credential.

Application registration certificates, secrets and federated credentials can be found in the tabs below.

Certificates (0) **Client secrets (1)** Federated credentials (0)

A secret string that the application uses to prove its identity when requesting a token. Also can be referred to as application password.

+ New client secret

Description	Expires	Value ⓘ	Secret ID
Password uploaded on Wed Aug 13 2025	11/11/2025	_lu*****	3456f126-ac09-46a5-b3c1-51ad2f681598

4. If shown, replace `MFA PROVISIONING SECRET` with the secret you created in the service principal creation section.
5. Save the configuration file by pressing **Save**

When doing changes on the GUI, new configuration is automatically taken into use.


Testing

You can test the Entra ID authentication using the Radiator test client on the CLI with this command:

```
/opt/radiator/server/bin/radiator-client --auth-port 1812 --acct-port 1813 --secret mysecret --user <user@entra-domain.com> --password <password> --timeout 120
```

Note: Replace `mysecret` with your configured RADIUS client secret, and use actual user credentials from your Entra ID tenant.

After running the test command, you should receive an MFA notification on your authenticator app:

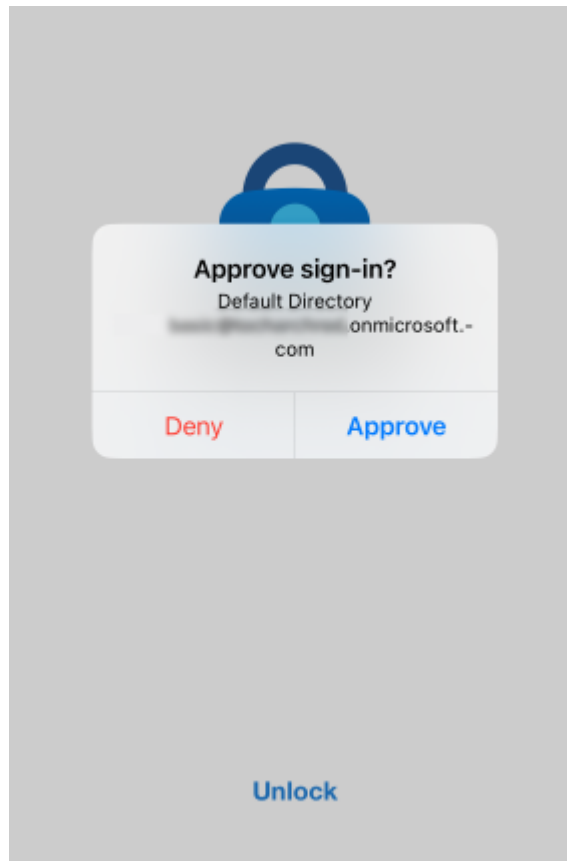

MFA response options:

- **Accept the MFA** - Access will be granted and authentication succeeds
- **Reject the MFA** - Access will be denied and authentication fails
- **No response** - The request will time out after the specified duration

The `--timeout 120` parameter allows sufficient time for users to respond to MFA prompts on their mobile devices.