EAP TLS Entra ID configuration guide

Imporant notice

Before proceeding with this configuration guide, you must first complete the Microsoft Entra ID application creation process. This includes creating an app registration, configuring API permissions, and generating client secrets.

Please refer to the Microsoft Entra ID App creation for Radiator Policy Server authentication before continuing.

Example configuration setup

The Radiator installation includes an Entra ID example configuration that demonstrates authentication with Microsoft Entra ID and MFA support, which is a good starting point. To copy the example configuration as the working configuration, run these commands in your terminal:

```
# Navigate to the Radiator configuration directory
cd /var/lib/radiator/

# Copy all Entra ID example files to your working configuration
cp -R /opt/radiator/server/doc/example-configurations/eap-tls-entra-authz/*
.
```

Please note that the copied configuration contains placeholder values that must be replaced with your actual Entra ID application information (covered in the following sections).

Updating the example configuration

After completing previous steps as well as the 'Microsoft Entra ID App creation for Radiator Policy Server authentication' guide, you will need to modify the example configuration from the first step to match your specific Entra ID application details. Start by opening `/var/lib/radiator/30_backends-entra.conf`:

```
sudo vi /var/lib/radiator/30_backends-entra.conf
```

In `30_backends-entra.conf`, locate the http backend named "MS_CLIENT_CREDENTIALS" and navigate to `authentication oauth2` block which looks something like this:

```
authentication oauth2 {
    token-url "https://login.microsoftonline.com/<Directory (tenant)
ID>/oauth2/v2.0/token";
    client "<Application (client) ID>";
    secret "<Application secret>";
    # Entra ID client credentials flow scope is always this
```

```
        scope "https://graph.microsoft.com/.default";
    }
```

In the authentication block, update the following values:

1. In token-url, replace `<Directory (tenant) ID>` with the Directory (tenant) ID. The Directory (tenant) ID is shown on the application Overview page:

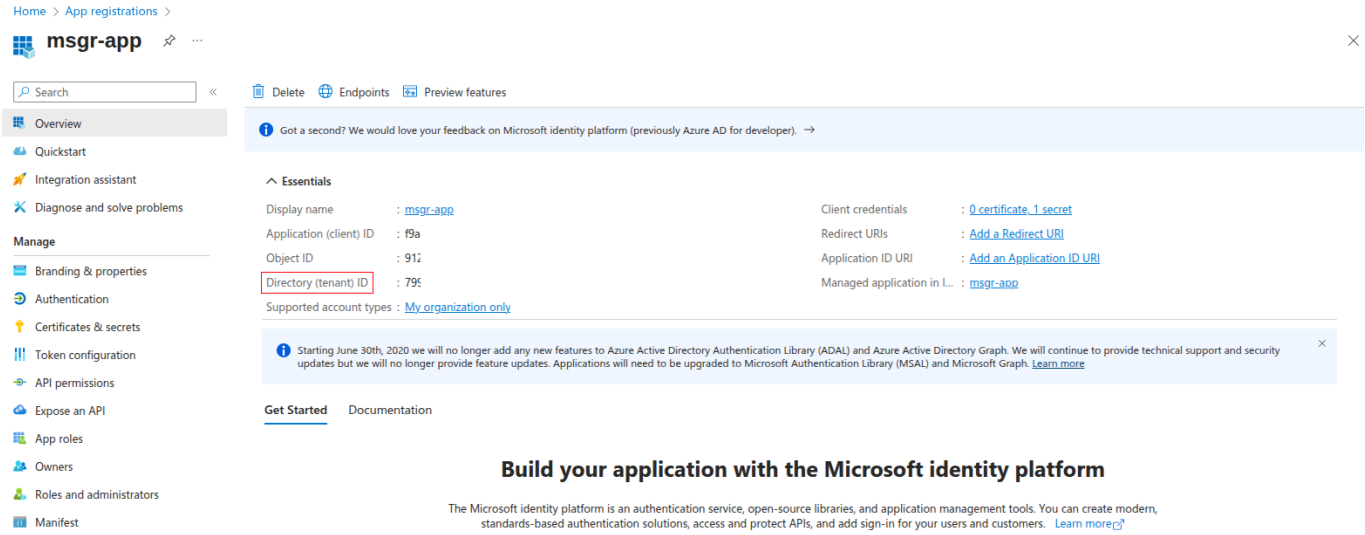

2. In client, replace `<Application (client) ID>` with the Application (client) ID. The Application (client) ID is shown on the application Overview page:

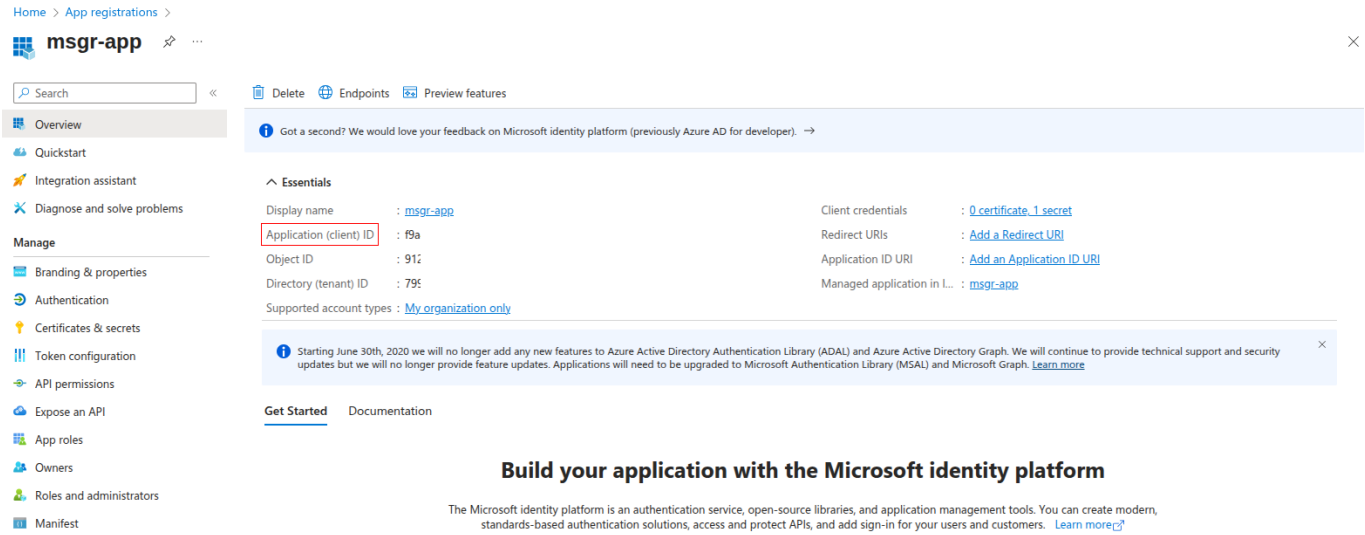

3. In secret, replace `<Application secret>` with the secret. The secret is shown on the application Overview page:

policy-server-configuration-3

4. Save the configuration file.

After completing all configuration updates, restart Radiator Policy Server:

```
sudo systemctl restart radiator-server
```

Testing

You can test the Entra ID authentication using the Radiator test client with this command:

```
/opt/radiator/server/bin/radiator-client --auth-port 1812 --acct-port 1813
--secret mysecret --user <user@entra-domain.com> --password <password> --
timeout 120
```

Note: Replace `mysecret` with your configured RADIUS client secret, and use actual user credentials from your Entra ID tenant.

After running the test command, you should receive an MFA notification on your authenticator app:

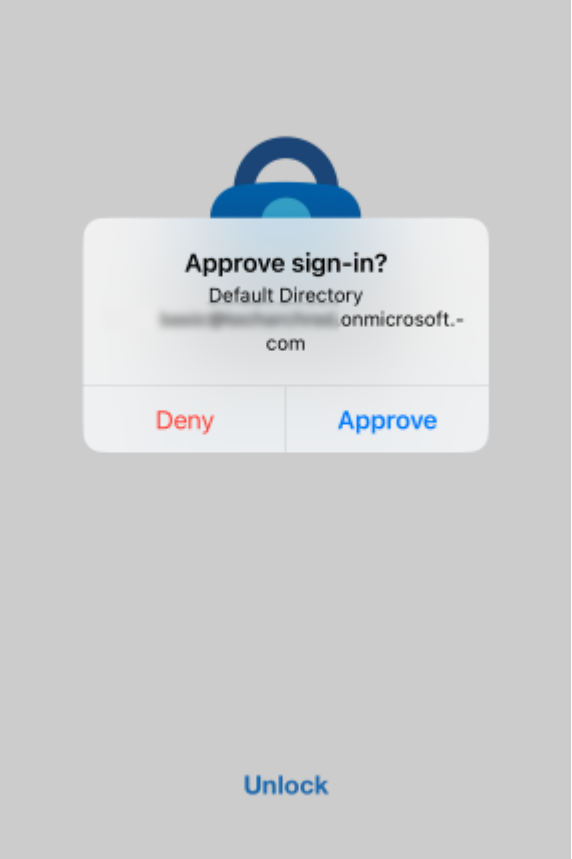

MFA response options:

- **Accept the MFA** - Access will be granted and authentication succeeds
- **Reject the MFA** - Access will be denied and authentication fails
- **No response** - The request will timeout after the specified duration

The `--timeout 120` parameter allows sufficient time for users to respond to MFA prompts on their mobile devices.

UI

This configuration example has Radiator 10 GUI activated:

- Management UI is open to all IP addresses, protected by username and password or API key, configured in `/var/lib/radiator/management/` directory
- Use https://YOUR-IP-ADDRESS:8443/ to access
- Default username: *admin* and password: *ChangeThisPassword!*

Please note that Users and Clients cannot be added from the UI in this use case