



1.Insert (Create)

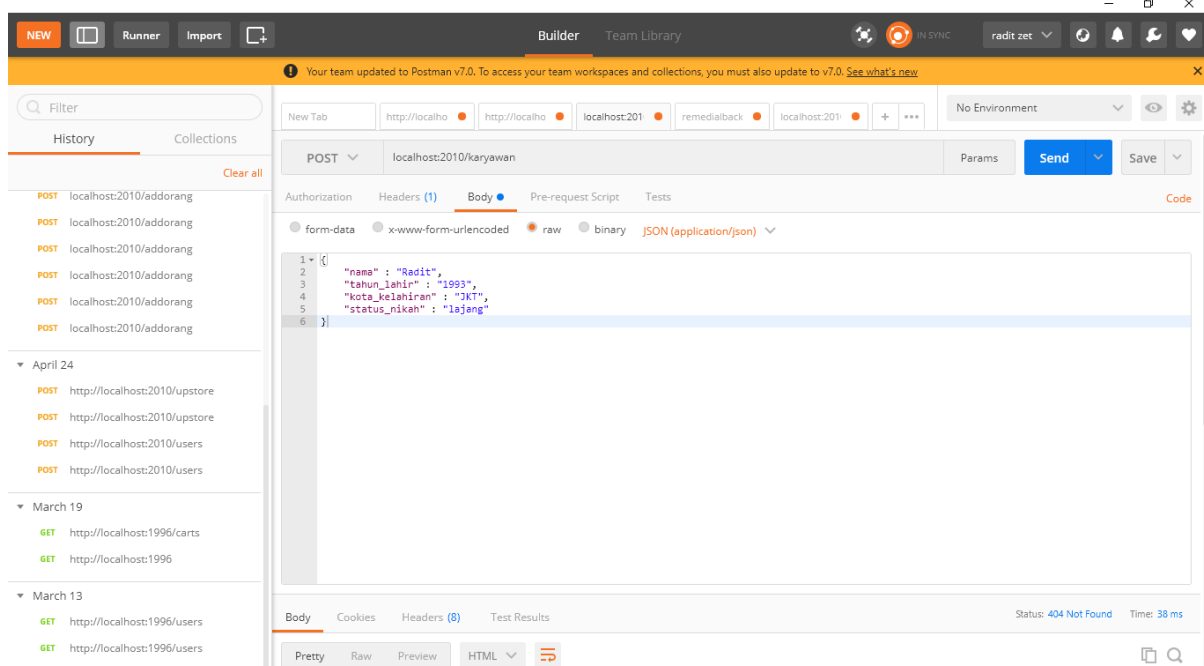

2. Select (Read)

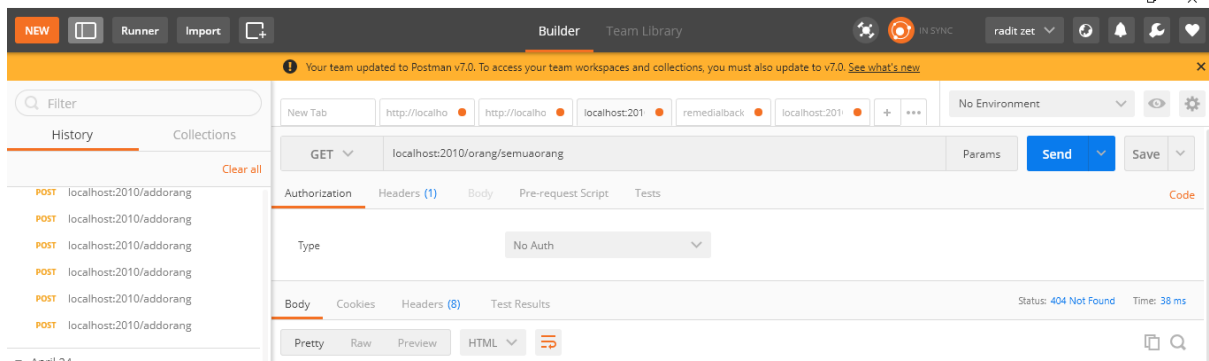

3.Edit(Update)

The screenshot displays the Postman application interface. At the top, a notification bar states: "Your team updated to Postman v7.0. To access your team workspaces and collections, you must also update to v7.0. [See what's new](#)".

The left sidebar shows the "History" tab with a list of recent requests:

- POST localhost:2010/addorang
- POST localhost:2010/addorang
- POST localhost:2010/addorang
- POST localhost:2010/addorang
- POST localhost:2010/addorang
- POST localhost:2010/addorang

Below the history, requests are grouped by date:

- April 24**
 - POST http://localhost:2010/upstore
 - POST http://localhost:2010/upstore
 - POST http://localhost:2010/users
 - POST http://localhost:2010/users
- March 19**
 - GET http://localhost:1996/carts
 - GET http://localhost:1996
- March 13**
 - GET http://localhost:1996/users
 - GET http://localhost:1996/users

The main workspace shows a PATCH request to `localhost:2010/orang/orgId`. The "Body" tab is selected, showing a JSON payload:

```
1 {
2   "name": "Radit",
3   "tahun_lahir": "1993",
4   "kota_kelahiran": "JKT",
5   "status_nikah": "lajang"
6 }
```

The interface includes tabs for "Authorization", "Headers (1)", "Body", "Pre-request Script", and "Tests". The "Body" tab is currently active, and the "JSON (application/json)" format is selected.

4.Delete(Delete)

