

stmconditionallox package description

Copyright © 2019 DLR FA STM
v20191210

Martin Rädcl

December 10, 2019

These are definitions for conditional lists of float objects for `stm latex` . It creates commands that only create lists in case the float object type is really used in the document. It is build upon the [totalcount](#) package.

Contents

1. Usage	1
1.1. Commands	1
1.2. Options	2
2. Example	2
2.1. Figures	2
2.2. Table	2
A. The code	3
A.1. <code>stmconditionallox.sty</code>	3

List of Figures

1. Example figure	3
-----------------------------	---

List of Tables

1. Example table	3
----------------------------	---

1. Usage

1.1. Commands

There are standard $\text{L}\text{T}\text{E}\text{X}$ commands to create lists of float objects:

- `\listoffigures`
- `\listoftables`

Additionally it is possible to create a list of code listings with a macro from the [listings](#) package.

- `\lstlistoflistings`

The latter is currently only tested for the `stmlistings` package, which is based on `listings`. Please check the functionality carefully in case another package, e.g. `minted` is used.

By using this package a set of new commands is created:

- `\conditionallistoffigures`
- `\conditionallistoftables`
- `\conditionallistoflistings`

If these are used, the lists are only created, in case the specified float environments are really used in your document. Thus, it allows the creation of a standard preamble.

To properly create the lists, three compilation runs are required.

1.2. Options

Option *loadlistings* Set whether to load the [listings](#) package.

```
\usepackage[loadlistings=true]{stmglossaries}
```

`loadlistings=true` is the default and loads the package. It is used in case `loadlistings=false` is not set explicitly.

In case `loadlistings=false` is set, the command `\conditionallistoflistings` is not defined.

Option *newpage* Set whether to create a new page after each list.

```
\usepackage[newpage=true]{stmglossaries}
```

`newpage=true` is the default and creates a new page. It is used in case `newpage=false` is not set explicitly.

2. Example

This section contains examples.

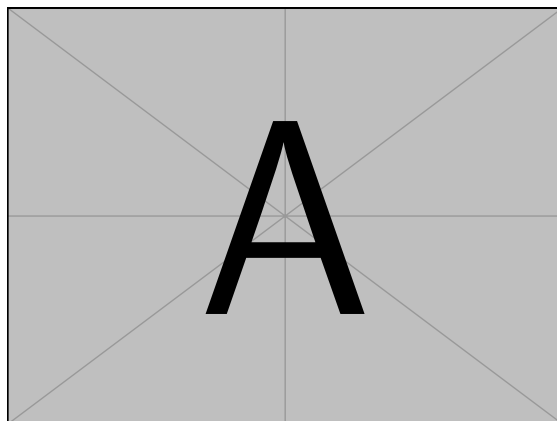


Figure 1: Example figure

2.1. Figures

This is an example figure.

2.2. Table

This is an example table.

Column 1	Column 2
----------	----------

Table 1: Example table

A. The code

A.1. stmconditionallox.sty

```
1 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
2 % Header %
3 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
4 %
5 % These are definitions for the
6 % conditional creation of lists of
7 % - Figures
8 % - Tables
9 % - Listings
10 % Based upon the totalcount package:
11 %   https://ctan.org/pkg/totalcount
12 %
13 % Usage
14 %   - Preamble:
15 %     - \usepackage{stmconditionallox}
16 %
17 % Revisions: 2019-10-27 Martin Raedel <martin.raedel@dlr.de>
18 %               Initial draft
19 %
20 % Contact:   Martin Raedel, martin.raedel@dlr.de
21 %             DLR Composite Structures and Adaptive Systems
22 %
23 %             __/|__
24 %             /_/_/_/
25 %             www.dlr.de/fa/en | / DLR
26 %
27 % Copyright (C) 2019-... DLR Composite Structures and
28 %             Adaptive Systems
29 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
30 % Content %
31 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
32
33 % Declare that this style file requires at least LaTeX
34 %   version 2e.
35 \NeedsTeXFormat{LaTeX2e}
36
37 % Provide the name of your page, the date it was last updated
38 %   , and a comment about what it's used for
```

```

37 \ProvidesPackage{stmconditionallox}[2019/10/27 STMs custom
    LaTeX conditional list of definitions]
38
39 % -----
40 % Options
41 % -----
42
43 % Options package
44 \@ifpackageloaded{kvoptions}{\RequirePackage{kvoptions}}%
45
46 % Option group
47 \SetupKeyvalOptions{%
48     family=stmconditionallox,%
49     prefix=stmconditionallox@,%
50     setkeys=\kvsetkeys,%
51 }
52
53 % Load listing package for conditional list of listings
54 \DeclareBoolOption[true]{loadlistings}
55
56 % New page for LoX
57 \DeclareBoolOption[true]{newpage}
58
59 % Process options
60 \ProcessKeyvalOptions{stmconditionallox}
61
62 % -----
63 % Package
64 % -----
65
66 \ifstmconditionallox@loadlistings
67     \@ifpackageloaded{listings}{\%
68         \RequirePackage{listings}
69     }
70 \fi
71
72 \@ifpackageloaded{listings}{\%
73     \RequirePackage[figure,table,lstlisting]{totalcount}%
74 }{\%
75     \RequirePackage[figure,table]{totalcount}%
76 }
77
78 % -----
79 % Modules

```

```

80 % -----
81
82 % http://tex.stackexchange.com/a/297655/44634
83 % Erzeugt aufgrund von longtabu in dlrsecondpage ein leeres
    Tabellenverzeichnis
84 \newcommand\conditionallistoffigures{%
85     \iftotalfigures\listoffigures\fi\
        ifstmconditionallox@newpage\newpage\fi%
86 }
87
88 \newcommand\conditionallistoftables{%
89     \iftotaltables\listoftables\fi\ifstmconditionallox@newpage\
        newpage\fi%
90 }
91
92 \@ifpackageloaded{listings}{%
93     \newcommand\conditionallistoflistings{%
94         \iftotalallstlistings\lstlistoflistings\fi\
            ifstmconditionallox@newpage\newpage\fi%
95     }%
96 }{}
97
98 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
99 % That's it %
100 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
101
102 % Finally, we'll use \endinput to indicate that LaTeX can
    stop reading this file. LaTeX will ignore anything after
    this line.
103 \endinput

```