# stmconditionallox package description

**Copyright © 2026 DLR SY STM**

**v20260226**

Martin Rädel

2026-02-26

These are definitions for conditional lists of float objects for `stmlatex`. It creates commands that only create lists in case the float object type is really used in the document. It is build upon the totalcount package.

## Contents

**List of Figures** 1

**List of Tables** 1

**1. Usage** 1
1.1. Commands . . . 1
1.2. Options . . . 2

**2. Example** 2
2.1. Figures . . . 2
2.2. Table . . . 2

**A. The code** 3
A.1. `stmconditionallox.sty` . . . 3

## List of Figures

1. Example figure . . . 3

## List of Tables

1. Example table . . . 3

# 1. Usage

## 1.1. Commands

There are standard LaTeXcommands to create lists of float objects:

- `\listoffigures`
- `\listoftables`

Additionally it is possible to create a list of code listings with a macro from the listings package.

- `\lstlistoflistings`

The latter is currently only tested for the `stmlistings` package, which is based on `listings`. Please check the functionality carefully in case another package, e.g. `minted` is used.

By using this package a set of new commands is created:

- `\conditionallistoffigures`
- `\conditionallistoftables`
- `\conditionallistoflistings`

If these are used, the lists are only created, in case the specified float environments are really used in your document. Thus, it allows the creation of a standard preamble.

To properly create the lists, three compilation runs are required.

## 1.2. Options

**Option *loadlistings*** Set whether to load the listings package.

```
\usepackage[loadlistings=true]{stmglossaries}
```

`loadlistings=true` is the default and loads the package. It is used in case `loadlistings=false` is not set explicitly.

In case `loadlistings=false` is set, the command `\conditionallistoflistings` is not defined.

**Option *newpage*** Set whether to create a new page after each list.

```
\usepackage[newpage=true]{stmglossaries}
```

`newpage=true` is the default and creates a new page. It is used in case `newpage=false` is not set explicitly.

# 2. Example

This section contains examples.

## 2.1. Figures

This is an example figure.

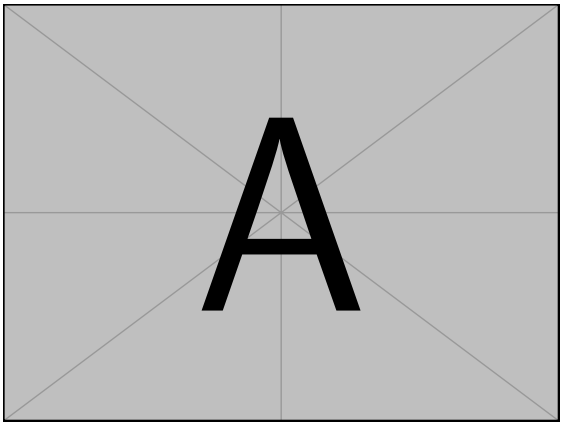



Figure 1: Example figure

## 2.2. Table

This is an example table.

| Column 1 | Column 2 |
|---|---|

Table 1: Example table

# A. The code

## A.1. stmconditionallox.sty

```
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% Header                              %
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%
% These are definitions for the
% conditional creation of lists of
% - Figures
% - Tables
% - Listings
% Based upon the totalcount package:
%   https://ctan.org/pkg/totalcount
%
% Usage
%  - Preamble:
%    - \usepackage{stmconditionallox}
%
% Revisions: 2019-10-27 Martin Raedel <martin.raedel@dlr.de>
%                       Initial draft
%
% Contact:   Martin Raedel,  martin.raedel@dlr.de
%            DLR Lightweight Systems
%
%                                 __/|__
%                                /_/_/_/
%            www.dlr.de/sy/en      |/ DLR
%
% Copyright (C) 2019-... DLR Lightweight Systems
%
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% Content                             %
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

% Declare that this style file requires at least LaTeX version 2e.
\NeedsTeXFormat{LaTeX2e}

% Provide the name of your page, the date it was last updated, and a
    comment about what it's used for
\ProvidesPackage{stmconditionallox}[2023/02/12 STMs custom LaTeX
    conditional list of definitions]

```

```
% ---------------------------
% Options
% ---------------------------

% Options package
\@ifpackageloaded{kvoptions}{}{\RequirePackage{kvoptions}}%

% Option group
\SetupKeyvalOptions{%
  family=stmconditionallox,%
  prefix=stmconditionallox@,%
  setkeys=\kvsetkeys,%
}

% Load listing package for conditional list of listings
\DeclareBoolOption[true]{loadlistings}

% New page for LoX
\DeclareBoolOption[true]{newpage}

% Process options
\ProcessKeyvalOptions{stmconditionallox}

% ---------------------------
% Package
% ---------------------------

\ifstmconditionallox@loadlistings
  \@ifpackageloaded{listings}{}{%
    \RequirePackage{listings}
  }
\fi

\@ifpackageloaded{listings}{%
  \RequirePackage[figure,table,lstlisting]{totalcount}%
}{%
  \RequirePackage[figure,table]{totalcount}%
}

% ---------------------------
% Modules
% ---------------------------

% http://tex.stackexchange.com/a/297655/44634
```

```
% Erzeugt aufgrund von longtabu in dlrsecondpage ein leeres Tabellenverzeichnis
\newcommand\conditionallistoffigures{%
  \iftotalfigures\listoffigures\fi\ifstmconditionallox@newpage\newpage\fi%
}

\newcommand\conditionallistoftables{%
  \iftotaltables\listoftables\fi\ifstmconditionallox@newpage\newpage\fi%
}

\@ifpackageloaded{listings}{%
  \newcommand\conditionallistoflistings{%
    \iftotallstlistings\lstlistoflistings\fi\ifstmconditionallox@newpage\newpage\fi%
  }%
}{}

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% That's it                          %
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%

% Finally, we'll use \endinput to indicate that LaTeX can stop reading this file. LaTeX will ignore anything after this line.
\endinput
```