



School of  
Engineering

**Bachelor's thesis**  
**Information Science**

Design and Implementation of an Alternative to SSH

---

**Authors**

---

Raphael Emberger

---

**Date**

---

May 28, 2019

# Abstract

# Preface

The [Secure Shell \(SSH\)](#) protocol ([Moorer 1971](#), [Bider & Baushke 2012](#), [Baushke 2017](#), [Bider 2018a,b](#)) is a system that allows a user to log in on a remote machine and perform tasks on that remote machine via a [Command Line Interface \(CLI\)](#). [SSH](#) is widely known and used in everyday tasks. However: It is now over twelve years old in its current form. One of the problems with [SSH](#) is its complexity, both in the initial phase when key material is exchanged, but also later, for example because the server must always decide whether to return a character that has been sent to it or not (echo).

The goal of this work is a radically simplified protocol, which in its functions is similar to [SSH](#) (N.B. the similarity concerns the functions, not necessarily the protocol details). I develop the protocol, as well as a client and a server - all in [the Go/Golang programming language \(Go\)](#). I demonstrate that the software can replace [SSH](#) by showing that it can handle several common use cases, among them:

- Interactive session
- Rsync with my solution as transport protocol

This bachelor thesis was proposed by Dr. Stephan Neuhaus ([Neuhaus 2018](#)) and aroused my interest as it is a challenge in the domain of information security and will produce a palpable result.

On this note I would like to thank [Zurich University of Applied Sciences \(ZHAW\)](#) for granting me the opportunity to do my Bachelors thesis here and Dr. Stephan Neuhaus for helping me along the way of this Bachelors thesis.

As an additional remark, I would like to point out that the team for this Bachelors thesis originally consisted of two people, but after some months of uncertainty, Mr Schwarz decided to opt out of the project as he said he underestimated the workload from the modules he booked on top of the Bachelors thesis. This happened halfway through the project and had great impact on the project itself. The rest of this project was finished by me, Raphael Emberger.

## DECLARATION OF ORIGINALITY

### Bachelor's Thesis at the School of Engineering

By submitting this Bachelor's thesis, the undersigned student confirms that this thesis is his/her own work and was written without the help of a third party. (Group works: the performance of the other group members are not considered as third party).

The student declares that all sources in the text (including Internet pages) and appendices have been correctly disclosed. This means that there has been no plagiarism, i.e. no sections of the Bachelor thesis have been partially or wholly taken from other texts and represented as the student's own work or included without being correctly referenced.

Any misconduct will be dealt with according to paragraphs 39 and 40 of the General Academic Regulations for Bachelor's and Master's Degree courses at the Zurich University of Applied Sciences (Rahmenprüfungsordnung ZHAW (RPO)) and subject to the provisions for disciplinary action stipulated in the University regulations.

City, Date:

Signature:

.....

.....

.....

.....

The original signed and dated document (no copies) must be included after the title sheet in the ZHAW version of all Bachelor thesis submitted.

# Contents

<b>1. Introduction</b>	<b>7</b>
1.1. Initial Position . . . . .	7
1.1.1. OpenSSH . . . . .	7
1.1.2. Telnet . . . . .	7
1.1.3. Berkeley r-commands . . . . .	7
1.2. Task . . . . .	8
<b>2. Design</b>	<b>9</b>
2.1. Implementation Language . . . . .	9
2.2. Secure Connection . . . . .	9
2.3. Authentication via PAM . . . . .	9
2.4. Authentication via Keys . . . . .	10
2.5. User Data Querying . . . . .	11
2.6. Login Accounting . . . . .	11
2.6.1. Login Accounting with PAM . . . . .	12
2.7. Terminal Mode . . . . .	12
2.8. Pseudoterminal . . . . .	13
2.9. Privilege Separation . . . . .	15
2.10. Flow of Action . . . . .	15
2.10.1. Old Design . . . . .	17
2.10.2. New Design . . . . .	17
<b>3. Implementation</b>	<b>20</b>
3.1. Secure Connection . . . . .	20
3.2. Authentication via PAM . . . . .	20
3.3. Authentication via Keys . . . . .	20
3.4. User Data Querying . . . . .	21
3.5. Login Accounting . . . . .	21
3.6. Terminal Mode . . . . .	21
3.7. Pseudoterminal . . . . .	21
3.8. Service Hosting . . . . .	22
3.9. Problems . . . . .	22
3.9.1. Forking . . . . .	22
<b>4. Results</b>	<b>24</b>
<b>5. Discussion And Prospects</b>	<b>25</b>
<b>6. Index</b>	<b>26</b>
6.1. Bibliography . . . . .	26
6.2. Glossary . . . . .	29
6.3. List of Figures . . . . .	31
6.4. List of Tables . . . . .	32
6.5. List of Listings . . . . .	33
6.6. Acronym Glossary . . . . .	34
<b>A. Appendix</b>	<b>35</b>
A.1. Project Management . . . . .	35
A.1.1. Official Statement of Tasks . . . . .	35
A.1.2. Project Plan . . . . .	38

---

A.1.3. Meeting Minutes . . . . .	42
A.2. Others . . . . .	61

# 1. Introduction

## 1.1. Initial Position

There was no thesis done on this subject that could have been used as reference. There are however several software projects that deal with a similar problem.

### 1.1.1. OpenSSH

The most noteworthy work to mention is of course **SSH** itself. **OpenSSH** (1999) is the name of the open source project which provides millions of administrators and developers with the ability to securely connect to a remote host. It replaces the up until then widely used protocols like **telnet(1)** (1994)(see 1.1.2) and **rlogin(1)** (1999)/**rsh(1)** (1999)(see 1.1.3).

**SSH** uses an own protocol to secure the communication channel between two peers and has earned itself a spot on the low end of the **port** table: It occupies **port 22**.

**SSHs'** features can be used very flexibly: After it builds up a secure connection between a client and a server, it can be used to remotely login and use a **terminal** on that machine. It can also forward traffic on local ports to the remote host through the secure channel. This is also used by third party programs such as **rsync(1)** (2018).

When it comes to the log in procedure itself, **SSH** allows for standard user log in using the **Application Programming Interface (API)** of the **Pluggable Authentication Modules (PAMs)**. Another feature is whitelisting of clients via their public keys, which stops intrusion attempts via hijacked user-password-credentials.

After a secure connection could be established, there are multiple possibilities to use the opened channel. One is to forward the **Graphical User Interface (GUI)** of a remote program to the client. Another one is to use this channel to tunnel more connections through it: For example can the traffic of an application which uses a specific **port** be forwarded to the remote host. This can obscure and secure this traffic between the host and the server.

### 1.1.2. Telnet

**Telnet**(C. Stephen 1969, Postel & Reynolds 1983) is an old (1969) and deprecated communication protocol which doesn't feature any security. However, in other implementations, **Telnet Secure (TELNETS)** was proposed, which features encryption over the communication channel. **Telnet** still has 23 as its very own **port** assigned to it.

#### Go-Telnet

**Go-Telnet**(Krempeaux 2016) is a **TELNETS** supporting client-server-application which has been implemented in **Go**.

### 1.1.3. Berkeley r-commands

The Berkley r-commands are a set of commands to do certain tasks on remote hosts. Those tasks are similar to their counterparts without a leading "r".

- **rlogin(1)** (1999)

This command connects to the host and performs a **login(1)** (2012) command, which includes authentication and if successful, spawning a user **shell**.

- *rsh(1)* (1999)  
rsh spawns a *shell* without the log in process.
- *rexec(1)* (1996)  
With this command, the user can log in to a remote machine and execute one command.
- *rcp(1)* (1999)  
Using this command gives the user the ability to copy from and to a remote host.
- *rwho(1)* (1996)  
This command tells the user what users are currently logged in on the remote machine.
- *rstat(1)* (1996)  
rstat displays file system information from remote hosts.
- *ruptime(1)* (1996)  
With this command, the user can see the uptime, number of logged in users and current work load of the remote machine.

## 1.2. Task

The official formulation of the tasks can be found in the appendix [A.1.1](#).

The objective of this thesis is as follows:

- Design and implementation of a client-server protocol that can manage interactive sessions.
- Design and implementation of a privilege-separation architecture on the server side that allows safe dropping of privileges once a client establishes a connection.

For a passing grade (4.0), the work must contain at least the following:

- In the thesis, an introduction to the problem and why the envisaged solution will solve it.
- In the thesis, a survey of related work in the area.
- In the thesis, a detailed design of the solution.
- In the thesis, an evaluation of the performance of the implemented solution.
- In the software, a privilege-separation architecture.

Incorporating the following components will improve the grade:

- In the related work section of the thesis, a comparison of all the related work with the envisaged solution, outlining why the envisaged solution is better.
- In the thesis, a detailed analysis of the security of the solution, including possible attacks and defenses.
- Use of [Transport Layer Security \(TLS\)](#) as the transport layer.
- A proof-of-concept client that can handle interactive sessions.
- A proof-of-concept client that works as a transport for `rsync`.

This thesis has been worded with technically literate readers in mind. However: For core concepts and special terms, a glossary can be found at [6](#). Used acronyms are listed in [6.5](#).



## 2. Design

### 2.1. Implementation Language

In the beginning of the project, Dr Neuhaus suggested the use of [Go](#) as a modern low-level language over interpreted languages for considerations of security. He emphasized that the use of other low-level languages (like [the C programming language \(C\)](#) or [the C++ programming language \(C++\)](#)) was permissible. In the end the project was implemented in [Go](#) as suggested.

However, this lead to a few problems in the implementation process (See [3.9](#)).

### 2.2. Secure Connection

When building an application that communicates via the network, certain security measures are mandatory to ensure a secure communication. If such measures are not taken, the communication between the client and the server can be fully read and even altered by a third party. To prevent this, the communication can be encrypted with [TLS](#) (originally known as [Secure Sockets Layer \(SSL\)](#)). Today's state-of-the-art is [TLS 1.3](#) ([Rescorla 2018](#)).

When connecting, the client checks the server [X.509](#)-certificate of the server to authenticate the peer. Optionally, the client can also authenticate himself to the server. After this, the two start an encrypted channel by for example using the [Diffie-Hellman key exchange](#) or letting the server decrypt a random secret that has been encrypted with the servers public key. After this, every message can be transferred between client and server in an encrypted way.

Explanations about the implementation can be found in [3.1](#).

### 2.3. Authentication via PAM

For authentication of users on Linux systems, [PAM](#) exists. It provides a clean separation between a program and the sensitive part of authentication. [PAM](#) operates using transactions, which represent a link to a [PAM](#) context. Using this transaction, an application can do various actions regarding account management, authentication or session management. To initialize such a context and transaction, an application has to call the [pam\\_start\(3\)](#) ([2016](#)) function.

```
1 #include <security/pam_appl.h>
2
3 struct pam_message {
4     int msg_style;
5     const char *msg;
6 };
7
8 struct pam_response {
9     char *resp;
10    int resp_retcode;
11 };
12
13 struct pam_conv {
14     int (*conv)(int num_msg, const struct pam_message **msg,
15                 struct pam_response **resp, void *appdata_ptr);
16     void *appdata_ptr;
17 };
18 int pam_start(const char *service_name, const char *user, const struct
19              pam_conv *pam_conversation, pam_handle_t **pamh);
```

Listing 2.1: Initializing a PAM context

Similarly, the created context has to be terminated with `pam_end(3)` (2016)

```
1 #include <security/pam_appl.h>
2
3 int pam_end(pam_handle_t *pamh, int pam_status);
```

Listing 2.2: Terminating a PAM context

After creating a context, the application can prepare the transaction with `pam_set_item(3)` (2016) and `pam_get_item(3)` (2016). Using those function, fields like PAM\_RUSER and PAM\_RHOST, which together (PAM\_RUSER@PAM\_RHOST) represent the requesting user (remote or local). If in any of the prior or later steps any errors occur, the corresponding error message can be received with `pam_strerror(3)` (2016).

```
1 #include <security/pam_appl.h>
2
3 int pam_get_item(const pam_handle_t *pamh, int item_type, const void **item);
4 int pam_set_item(pam_handle_t *pamh, int item_type, const void *item);
5 const char *pam_strerror(pam_handle_t *pamh, int errnum);
```

Listing 2.3: PAM functions

Now that the transaction has been appropriately prepared, the application can request to authenticate a user via `pam_authenticate(3)` (2016):

```
1 #include <security/pam_appl.h>
2
3 int pam_authenticate(pam_handle_t *pamh, int flags);
```

Listing 2.4: PAM authentication

Now PAM uses the `pam_conv` struct given in `pam_start(3)` (2016) that points to a function to interactively ask the application to authenticate the user. The application can then ask the user for the user name if not provided already and the password. After successful authentication, the function returns PAM\_SUCCESS and the application should call `pam_setcred(3)` (2016) to establish and maintain the credentials of the logged in user.

```
1 #include <security/pam_appl.h>
2
3 int pam_setcred(pam_handle_t *pamh, int flags);
```

Listing 2.5: PAM credential setting

Now the application can do other PAM related actions like session management (see 2.6.1). To finish, the application terminates the context properly and all associated memory gets invalidated.

The implementation differs from this approach slightly. See 3.2.

## 2.4. Authentication via Keys

A user can also authenticate himself without a password but instead using public key cryptography. For this, a user has to create a key pair consisting of a private and a public key. Before the actual authentication, a hashed version of the public key has to be stored on the server.

When starting an authentication, the user sends his public key to the server, which compares its hash with the stored keys that are deemed permissible for authentication. If it matches, the server encrypts a random secret (with high entropy) with the public key to the user. The user decrypts the message with his private key and sends it back to the server. If the returned secret matches the original secret, the user proved that he is the legitimate owner of the public key.

This authentication is sufficiently secure from third parties which do not have access to the private key of the user, as it can prove the authenticity of a user.

The implementation of this feature also differs from the original design, as can be read in 3.3).

## 2.5. User Data Querying

To spawn the default `shell` of a user, the path to said `shell` is required. This and other information can be found inside the `/etc/passwd` file. The file holds information about a users login-`shell`, password hash, groups, user information, `User ID (UID)`, `Group ID (GID)` and home directory. to spawn a `shell`, the first and the last of these pieces of information are substantial to successfully login a user. To query such data, `Unix` offers `getpwnam(3)/getpwuid(3)` (2019), which doesn't just read the `passwd` file, but also draws information about users from other sources, if they exist. This has been used in the implementation phase (see 3.4):

```

1  #include <sys/types.h>
2  #include <pwd.h>
3
4  struct passwd {
5      char *pw_name; /* username */
6      char *pw_passwd; /* user password */
7      uid_t pw_uid; /* user ID */
8      gid_t pw_gid; /* group ID */
9      char *pw_gecos; /* user information */
10     char *pw_dir; /* home directory */
11     char *pw_shell; /* shell program */
12 };
13
14 struct passwd *getpwnam(const char *name);
15 struct passwd *getpwuid(uid_t uid);

```

Listing 2.6: Definition of `passwd` and `getpwnam(3)/getpwuid(3)` (2019)

## 2.6. Login Accounting

When a user logs into a `Unix` machine, a session and a timestamp gets created.

For this, the two files `/var/run/utmp` and `/var/log/wtmp` provide the appropriate storage. The `utmpx API` offers appropriate functions. The `utmpx` struct represents a single entry in those files:

```

1  #define _GNU_SOURCE
2  /* Without _GNU_SOURCE the two field names below are prepended by "__" */
3  struct exit_status {
4      short e_termination; /* Process termination status (signal) */
5      short e_exit; /* Process exit status */
6  };
7  #define __UT_LINESIZE 32
8  #define __UT_NAMESIZE 32
9  #define __UT_HOSTSIZE 256
10 struct utmpx {
11     short ut_type; /* Type of record */
12     pid_t ut_pid; /* PID of login process */
13     char ut_line[__UT_LINESIZE]; /* Terminal device name */
14     char ut_id[4]; /* Suffix from terminal name, or ID field from
15                    inittab(5) */
16     char ut_user[__UT_NAMESIZE]; /* Username */
17     char ut_host[__UT_HOSTSIZE]; /* Hostname for remote login, or kernel
18                    version for run-level messages */
19     struct exit_status ut_exit; /* Exit status of process marked as
20                    DEAD_PROCESS (not filled in by init(8) on Linux) */
21     long ut_session; /* Session ID */
22     struct timeval ut_tv; /* Time when entry was made */
23     int32_t ut_addr_v6[4]; /* IP address of remote host (IPv4 address uses
24                    just ut_addr_v6[0], with other elements set to 0) */

```

```

21  char __unused[20];    /* Reserved for future use */
22  };

```

Listing 2.7: Definition of the utmpx structure (Kerrisk 2010, p.819)

On login, a record has to be written to the utmp file to indicate that the user logged in. If there is already a record for the active terminal, then the entry has to be updated, otherwise a new entry has to be appended. A call to `pututxline(3)` (2017) should suffice in performing these steps properly. The application has to set the `ut_type` field of the utmpx struct to `USER_PROCESS` to mark a user login.

Similarly to the utmp update after login, the application has to report to the utmpx API that the session ended. This procedure consists of almost the same actions as the one after login, with exception of `ut_user` being zeroed out and `ut_type` being set to `DEAD_PROCESS` (Kerrisk 2010, p.828).

A program can also query the utmp file with the according getters.

```

1  #include <utmp.h>
2
3  struct utmp *getutent(void);
4  struct utmp *getutid(const struct utmp *ut);
5  struct utmp *getutline(const struct utmp *ut);
6
7  struct utmp *pututline(const struct utmp *ut);

```

Listing 2.8: utmpx API functions

### 2.6.1. Login Accounting with PAM

PAM supports binding login accounting to its own session functions `pam_open_session(3)` (2016) and `pam_close_session(3)` (2016):

```

1  #include <security/pam_appl.h>
2
3  int pam_open_session(pam_handle_t *pamh, int flags);
4  int pam_close_session(pam_handle_t *pamh, int flags);

```

Listing 2.9: PAM session management

## 2.7. Terminal Mode

The client expects to send all its input directly to the shell without prior interpretation. To achieve this, the client-side terminal has to be set from the default cooked- into the raw-mode (Kerrisk 2010, p.1309). This sends each key stroke to the server-side shell as is. After the termination of the session, the original cooked-mode has to be restored to ensure operation as per usual.

## 2.8. Pseudoterminal

**pseudoterminals (ptys)** are an **Inter-Process-Communication (IPC)** mechanism that help solving the problem of how two remote programs can communicate as if they were directly connected via a **terminal** (see figure 2.1).

A **shell** expects to be connected to a full fledged **teletype (tty)**(or a **tty** emulator). To check whether it is inside such an environment, it uses **isatty(3)** (2019) on the **file descriptor (fd)** it is connected to. Therefore the **fd** it is connected to should behave like a real **terminal**. This is where **ptys** come into play. To do this, two files are created: The **pseudoterminal master (ptm)**

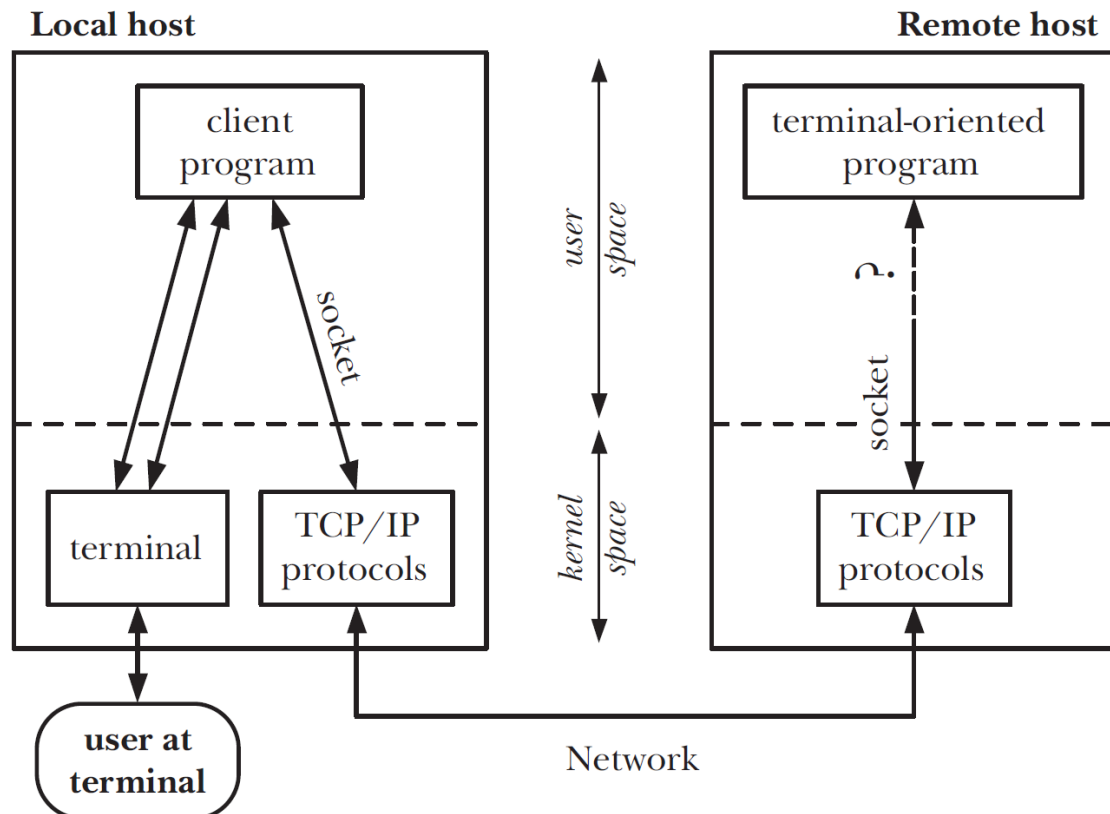


Figure 2.1.: How to operate a **tty**-oriented program over a network?(Kerrisk 2010, p.1376)

and the corresponding **pseudoterminal slave (pts)**(see figure 2.2). **Linux** provides a **pty** generator at **/dev/ptmx**, which creates a **ptm** and a **pts**. This works by simply opening the **/dev/ptmx** file using **posix\_openpt(3)** (2017). After this, a program has to grant the **pts** file ownership and permissions with **grantpt(3)** (2017), unlock it with **unlockpt(3)** (2017) and retrieve its file name with **ptsname(3)** (2017):

```

1 #define _XOPEN_SOURCE 500
2 #include <stdlib.h>
3
4 int posix_openpt(int flags);
5 int grantpt(int fd);
6 int unlockpt(int fd);
7 char *ptsname(int fd);

```

Listing 2.10: **pty** related **Linux API** functions

With the **pty** properly set up, a child bound to the **pts** side will assume it is connected to a **terminal** and also behave as such. This mechanism is key to running a **shell** and forwarding all

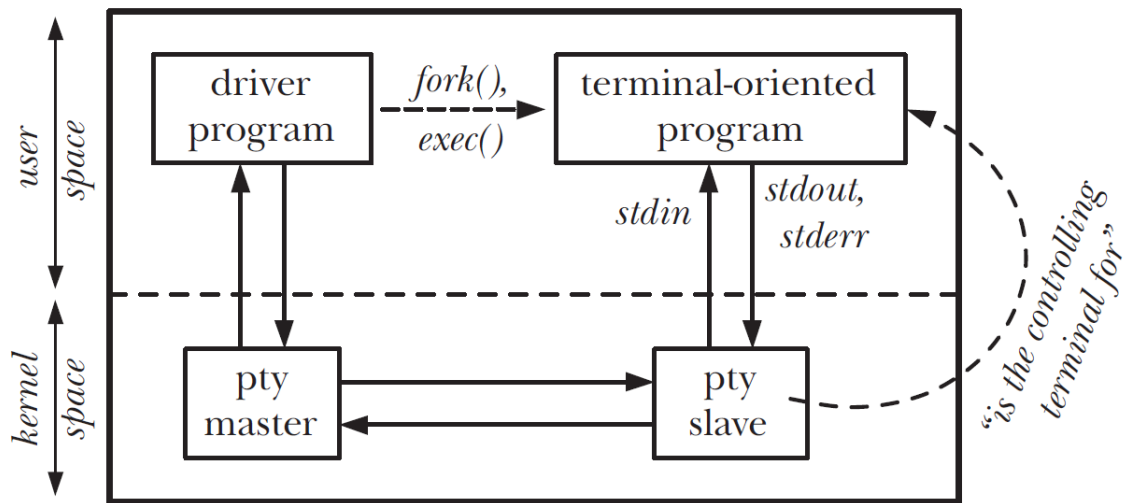


Figure 2.2.: Two programs communicating via a pty (Kerrisk 2010, p.1377)

traffic between a remote client and the shell. In case of SSH and the objective of this thesis, the layout looks like in figure 2.3.

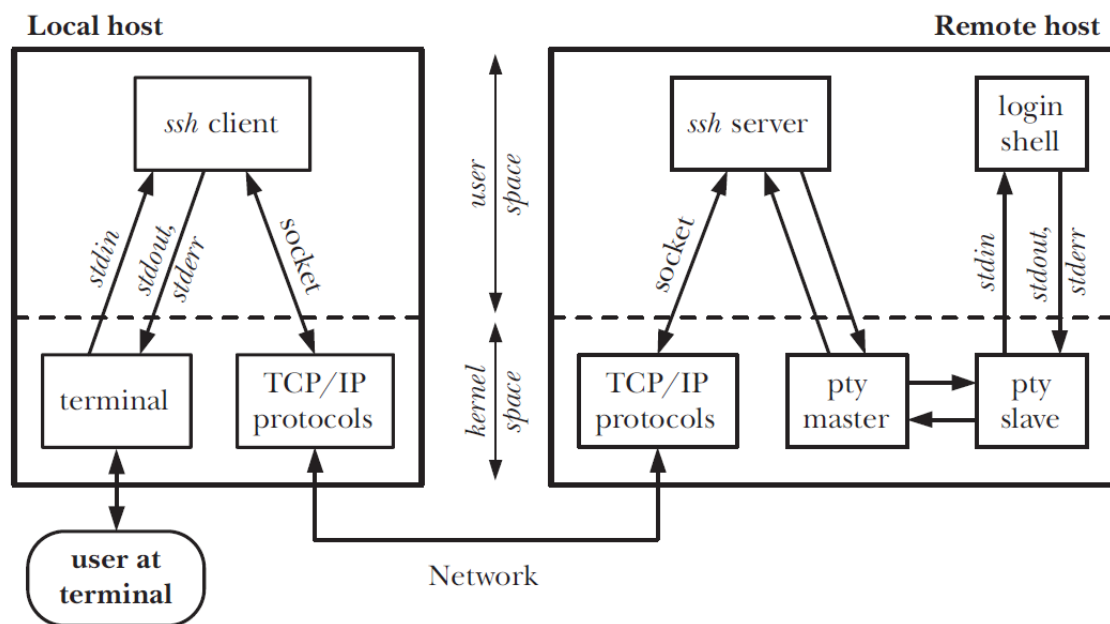


Figure 2.3.: How ssh uses a pty (Kerrisk 2010, p.1378)

## 2.9. Privilege Separation

Allowing a user to log in as any user, the authenticating process has to have `root` rights. However: After performing the authentication procedure and after successfully finishing the latter, a `shell` will be spawned for the user to interact with. This implies that without dropping the privilege of the process down to the appropriate privileges of the logged in user, the `shell` would run with `root` rights, which is a privilege escalation and not permissible.

Linux provides `setuid(2)` (2019) to set the owning user of a process and therefore also changing its permissions. Unless the user is `root`, the process' owner cannot be changed.

In comparison: SSH chains the authentication of a user between an unprivileged child process that forwards the information between the two processes (see figure 2.4) - thereby putting a privilege separation in place.

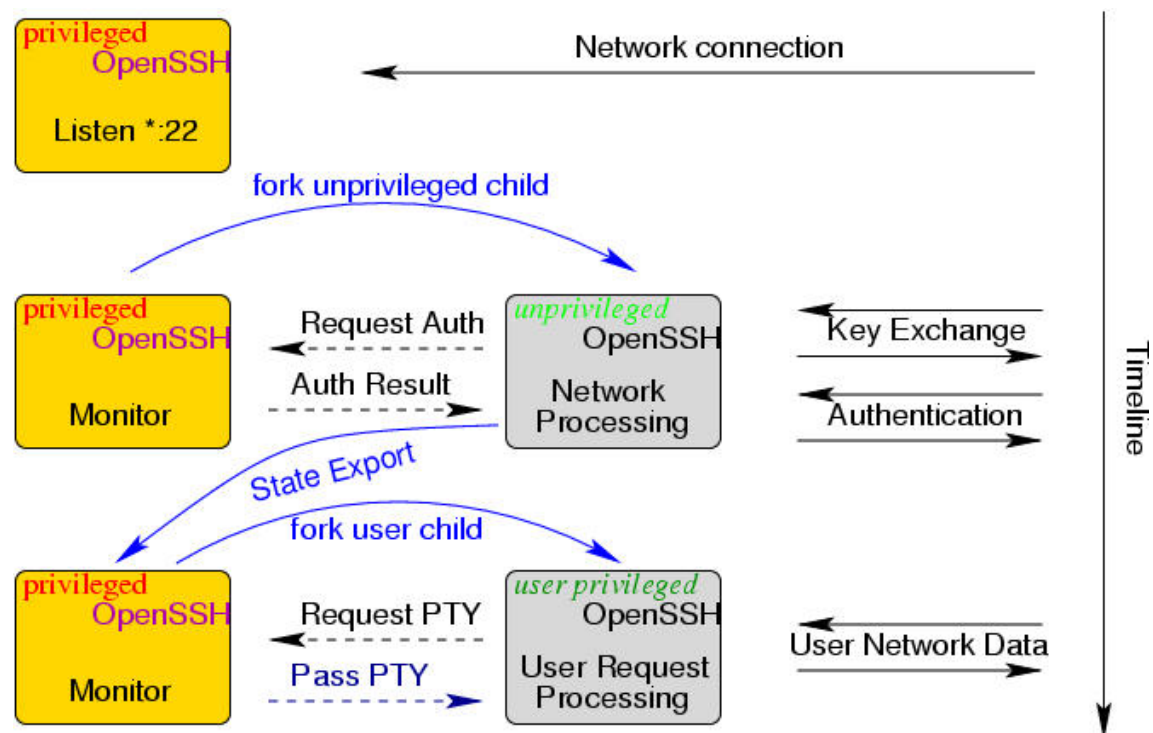


Figure 2.4.: Privilege separation in SSH (Provos 2003)

## 2.10. Flow of Action

To create a client-server protocol for remote log in and interactive sessions, a clear cut architecture is mandatory. The flow of a typical use case should look like this:

1. Server listens for incoming connection.
2. Client dials server.
3. Server spawns the users login `shell` and forwards all traffic between `shell` and Client.
4. Client uses `shell` on remote machine.
5. Client terminates session.
6. Host terminates.

---

However, there are multiple security concerns to be satiated:

1. The Client must authenticate itself for a user of the remote system with the appropriate credentials.
2. The Server has to drop privilege after a successful login to prevent privilege escalation.
3. The Server has to spawn the login `shell` of the logged in user with the appropriate rights.

Furthermore, the current design does not allow for multiple sessions to be run parallel. Therefore it was decided to spawn a new process to handle everything beginning after the connection has been established.

This lead to the following general flow of actions:

1. Server listens for incoming connection.
2. Client dials server.
3. Server spawns a Host upon established connection.
4. Host sets up connection.
5. Host asks Client to authenticate himself.
6. Client authenticates himself.
7. Host drops privilege to logged in user.
8. Host spawns the users login `shell` with the same credentials and forwards all traffic between `shell` and Client.
9. Client uses `shell` on remote machine.
10. Client terminates session.
11. Host terminates.



### 2.10.1. Old Design

An earlier draft of the flow of actions was designed as a sequence diagram and can be seen in figure 2.5.

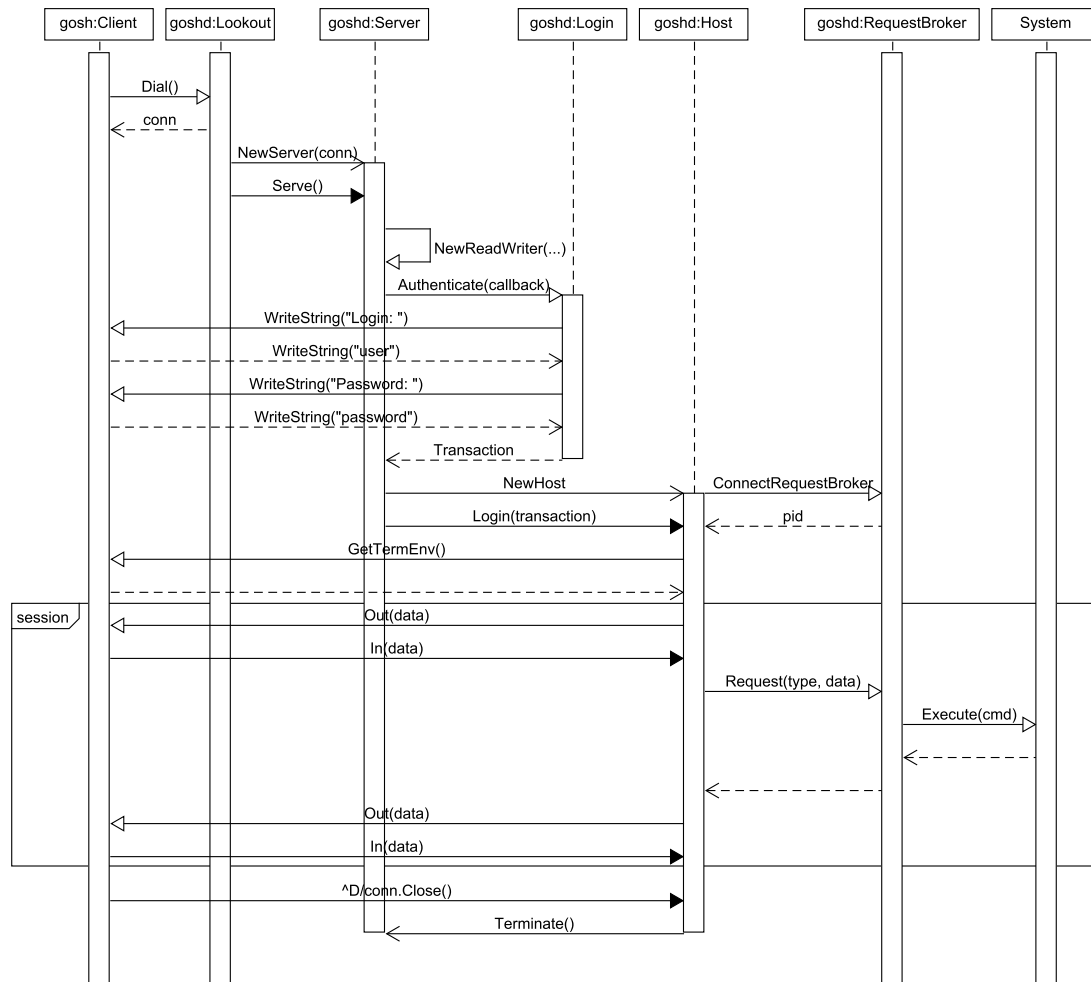


Figure 2.5.: Sequence diagram draft.

This design used a [Request Broker](#), which would put another master-slave-relationship between a [shell](#) and the [Request Broker](#). This would have been an over-complication of the use of a [shell](#), which, if set correctly, already runs only with the rights of the corresponding user and its groups.

### 2.10.2. New Design

The new and current design of the architecture can be seen in figure 2.6.

This new design of the goshd server calls the external binary goshh from the server process and lets it handle the connection itself. The server then asks for some environment variables from the client. Then the server tries to figure out whether the client can authenticate himself via keys. If authentication with keys is a viable option, it performs the key authentication according to 2.4. If it succeeds, it notifies the client of the authentication result. The host then spawns the user's [shell](#) and forwards the traffic between the two.

If key authentication does not succeed, the host performs the classical authentication with user-password-credentials which also ends in spawning a user [shell](#) if successful.

If the **shell** exits or the host process receives an **interrupt signal (SIGINT)**, it cleans up behind the exited **shell** and exits as well.

The client performs the transfer of the environment variables until it receives the termination packet. Upon arrival of said packet, it prepares for the forwarding of the traffic between the user and the server. It does so by setting the **terminal** in raw-mode and waits until the connections dies (it receives EOF) and then restores the **terminal** to the default cooked state.



## 3. Implementation

### 3.1. Secure Connection

As described in [2.2](#), [TLS](#) was used to secure the connection between the client and the server. For this, the [Go](#)-package `crypto/tls` has been used. This package requires both client and server to extend the `GODEBUG` variable with a flag to activate support for [TLS 1.3](#):

```
1 func init() {  
2     os.Setenv("GODEBUG", os.Getenv("GODEBUG")+",tls13=1")  
3 }
```

Listing 3.1: Activating [TLS 1.3](#) in [Go](#)

The server-side of the solution has to have a certificate, which has to be generated newly when actually installing the solution on a machine. For testing purposes, a self-signed certificate was created using [openssl\(1\)](#) (n.d.):

```
1 openssl req -newkey rsa:2048 -nodes -keyout key.pem -x509 -days 365 -out  
   certificate.pem
```

Listing 3.2: Generating a self-signed certificate and private key

The files `key.pem` and `certificate.pem` can be found inside the `test` folder in the project's root folder.

The current implementation is set to skip verification of insecure certificates. Handling such a case has been decided to be handled in future improvements.

### 3.2. Authentication via PAM

There are no official packages in [Go](#) that provide a wrapper to [PAM](#) (refer to [2.3](#)). In earlier stages of the project, a wrapper from [Steinert \(2015\)](#) has been used. However, it was deemed more sensible to rely on [login\(1\)](#) (2012), as this already covers login-accounting and other post-login actions (see [2.6](#) and [2.6.1](#)).

### 3.3. Authentication via Keys

The authentication via keys has been implemented with [2.4](#) in mind but with some alterations.

The first change was to store the public key in a plain text format, which was done out of convenience and can be changed in the future. Not storing the hashed public key doesn't pose any security threat, so fixing this deviation was deemed of low priority.

The second and last alteration was to have the structure of authorized keys on the server be stored exclusively in the `root` user's home directory. This is a sub-optimal approach, as this requires users to store their public keys in the superuser's directory, which can lead to mistakes. This will be fixed in the future.

To test the application, a test user was created and given a key pair which was created as follows using [openssl\(1\)](#) (n.d.):

```
1 openssl genpkey -out client.pem -algorithm rsa -pkeyopt rsa_keygen_bits:2048  
2 openssl rsa -in client.pem -out client.pub -pubout
```

Listing 3.3: Generating a key pair for the client

## 3.4. User Data Querying

Querying user data (see 2.5) has been originally been implemented by using a private package that parsed the passwd file. In later stages, this has been corrected by switching to using CGo and calling the Unix API routines.

## 3.5. Login Accounting

The current implementation either outsources the post-login actions described in 2.6 to `login(1)` (2012)(see 3.2) or omits them completely, as is the case in 3.3. The implementation of this feature is not part of the current project.

## 3.6. Terminal Mode

Setting the `terminal` mode in Go can be achieved with the functionality of the x-package `golang.org/x/crypto/ssh/terminal`:

```
1 oldState, err := terminal.MakeRaw(0)
2 if err != nil {
3     panic(err)
4 }
5 defer terminal.Restore(0, oldState)
```

Listing 3.4: Setting the `terminal` mode in Go

## 3.7. Pseudoterminal

Go does have a wrapper for `pty` in an official package, but the code is inside an internal package, called `os/signal/internal/pty`, which uses CGo to call the required API routines described in 2.8:

```
1 // Open returns a master pty and the name of the linked slave tty.
2 func Open() (master *os.File, slave string, err error) {
3     m, err := C.posix_openpt(C.O_RDWR)
4     if err != nil {
5         return nil, "", ptyError("posix_openpt", err)
6     }
7     if _, err := C.grantpt(m); err != nil {
8         C.close(m)
9         return nil, "", ptyError("grantpt", err)
10    }
11    if _, err := C.unlockpt(m); err != nil {
12        C.close(m)
13        return nil, "", ptyError("unlockpt", err)
14    }
15    slave = C.GoString(C.ptsname(m))
16    return os.NewFile(uintptr(m), "pty-master"), slave, nil
17 }
```

Listing 3.5: Go's `pty` wrapper

For the project, this code has been altered to better fit the flow of the application.

## 3.8. Service Hosting

The goshd program has to run on a server to accept incoming requests. For ease of use, the program should be able to be run as a [daemon](#). On [Linux](#), this can be achieved using the service manager [systemd\(1\)](#) (n.d.), for which a unit file has been created, which is located inside the `init` directory of the project. After deployment of the software, the service can be controlled using [systemd\(1\)](#) (n.d.) commands:

```
1 # Setup of goshd
2 sudo systemctl enable goshd.service
3 sudo systemctl start goshd.service
4 sudo systemctl info goshd.service
5
6 # Breakdown of goshd
7 sudo systemctl stop goshd.service
8 sudo systemctl disable goshd.service
```

Listing 3.6: goshd service control

## 3.9. Problems

### 3.9.1. Forking

To handle new established connections, it was deemed important to `fork` the process, as this duplicated the current process' memory and returns the [Process ID \(PID\)](#): 0 for the child process and a number greater than 0 for the parent to have the [PID](#) of the child.

In theory, this should have enabled the program to use [Go](#)'s standard library capabilities to handle connections. However, there were several problems with this approach:

#### Forking not supported

The [Go](#) standard library does not support the classical [C](#)-like forking. It only has a `syscall.ForkExec` method, which is documented as:

Combination of `fork` and `exec`, careful to be thread safe.

But since it uses `exec` as well, it is the same as calling arbitrary binaries/scripts with the `exec.Cmd` function.

However: [Go](#) has a feature called [CGo](#), which allows programs to call and interact with native [C](#)-routines. This opens up the possibility of using [fork\(2\)](#) (2017).

#### Forking breaks Go objects

Forking with the functionality of [CGo](#) does not solve the problem either. The reason is that after forking there are two programs with a `net.Conn` object. This lead to both connection objects being corrupted and turning unusable. Therefore, it was necessary to abandon the clean solution of forking and instead creating a new executable that can handle new connections by its own.

#### Sharing Data with Child

The question then was: How can a process instantiate a child process and hand over all resources to it necessary for handling the new connection?

Since they are 2 separate processes now, they don't share any memory anymore. Hence the parent has to give the child the information about the connection via arguments. The most direct way to deal with this is to use [fds](#), which can be passed as integer arguments to the child.

## Go Connection Cannot Be Transferred

Getting a `net.Conn` interface from a `fd` is supported in Go via:

```
1 fd := uintptr(0) // Dummy fd
2 conn, err := net.FileConn(os.NewFile(fd, "conn"))
3 if err != nil {
4     panic(err.String())
5 }
```

Listing 3.7: Getting a `net.Conn` interface from a `fd`

Getting the `fd` from a connection is also possible:

```
1 file, err := conn.(*net.TCPConn).File()
2 if err != nil {
3     panic(err.String())
4 }
5 fd := file.Fd()
```

Listing 3.8: Getting the `fd` from a `net.Conn` object

However: Creating a connection with the high-level API of Go and handing over the `fd` to the child to derive a `net.Conn` object from, fails.

This had some implications for the project: The listener on the server could not be created with the high-level like:

```
1 ln, err := net.Listen("tcp", ":8080")
2 if err != nil {
3     // handle error
4 }
5 for {
6     conn, err := ln.Accept()
7     if err != nil {
8         // handle error
9     }
10    go handleConnection(conn)
11 }
```

Listing 3.9: Go's high level API for listener

Instead the project had to rely on the low-level `socket`. The `x-package` Unix provides the necessary wrapper functions, which can be used instead.

The obvious drawback: Having to rely on a `x-package` which is subject to change and not being able to use the higher-level methods which **are** part of the standard library.

## 4. Results



## **5. Discussion And Prospects**

## 6. Index

### 6.1. Bibliography

Baushke, M. D. (2017), 'More Modular Exponentiation (MODP) Diffie-Hellman (DH) Key Exchange (KEX) Groups for Secure Shell (SSH)', *RFC 8268*, 1–8.

URL: <https://doi.org/10.17487/RFC8268> 3

Bider, D. (2018a), 'Extension Negotiation in the Secure Shell (SSH) Protocol', *RFC 8308*, 1–14.

URL: <https://doi.org/10.17487/RFC8308> 3

Bider, D. (2018b), 'Use of RSA Keys with SHA-256 and SHA-512 in the Secure Shell (SSH) Protocol', *RFC 8332*, 1–9.

URL: <https://doi.org/10.17487/RFC8332> 3

Bider, D. & Baushke, M. D. (2012), 'SHA-2 Data Integrity Verification for the Secure Shell (SSH) Transport Layer Protocol', *RFC 6668*, 1–5.

URL: <https://doi.org/10.17487/RFC6668> 3

C. Stephen, C. (1969), 'Network subsystem for time sharing hosts', *RFC 15*, 1–5.

URL: <https://doi.org/10.17487/RFC0015> 7

*fork(2)* (2017).

URL: <http://man7.org/linux/man-pages/man2/fork.2.html> 22

*getpwnam(3)/getpwuid(3)* (2019).

URL: <http://man7.org/linux/man-pages/man3/getpwnam.3.html> 11, 33

*grantpt(3)* (2017).

URL: <http://man7.org/linux/man-pages/man3/grantpt.3.html> 13

*isatty(3)* (2019).

URL: <http://man7.org/linux/man-pages/man3/isatty.3.html> 13

Kerrisk, M. (2010), *The Linux Programming Interface*, No Starch Press, San Francisco, CA, USA.

URL: <http://www.man7.org/tlpi/> 12, 13, 14, 31, 33

Krempeaux, C. I. (2016), 'go-telnet', Github.

URL: <https://github.com/reiver/go-telnet> 7

*login(1)* (2012).

URL: <http://man7.org/linux/man-pages/man1/login.1.html> 7, 20, 21

Moorer, J. A. (1971), 'Second Network Graphics meeting details', *RFC 253*, 1.

URL: <https://doi.org/10.17487/RFC0253> 3

Neuhaus, S. (2018), 'Bachelorarbeit 2019 - FS: BA19\_neut\_03'.

URL: [https://tat.zhaw.ch/tpada/arbeit\\_vorschau.jsp?arbeitID=16096](https://tat.zhaw.ch/tpada/arbeit_vorschau.jsp?arbeitID=16096) 3

*OpenSSH* (1999).

URL: <https://www.openssh.com/> 7

*openssl(1)* (n.d.).

URL: <https://linux.die.net/man/1/openssl> 20

- pam\_authenticate(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_authenticate.3.html](http://man7.org/linux/man-pages/man3/pam_authenticate.3.html) 10
- pam\_close\_session(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_close\\_session.3.html](http://man7.org/linux/man-pages/man3/pam_close_session.3.html) 12
- pam\_end(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_end.3.html](http://man7.org/linux/man-pages/man3/pam_end.3.html) 10
- pam\_get\_item(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_get\\_item.3.html](http://man7.org/linux/man-pages/man3/pam_get_item.3.html) 10
- pam\_open\_session(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_open\\_session.3.html](http://man7.org/linux/man-pages/man3/pam_open_session.3.html) 12
- pam\_setcred(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_setcred.3.html](http://man7.org/linux/man-pages/man3/pam_setcred.3.html) 10
- pam\_set\_item(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_set\\_item.3.html](http://man7.org/linux/man-pages/man3/pam_set_item.3.html) 10
- pam\_start(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_start.3.html](http://man7.org/linux/man-pages/man3/pam_start.3.html) 9, 10
- pam\_strerror(3)* (2016).  
URL: [http://man7.org/linux/man-pages/man3/pam\\_strerror.3.html](http://man7.org/linux/man-pages/man3/pam_strerror.3.html) 10
- posix\_openpt(3)* (2017).  
URL: [http://man7.org/linux/man-pages/man3/posix\\_openpt.3.html](http://man7.org/linux/man-pages/man3/posix_openpt.3.html) 13
- Postel, J. & Reynolds, J. K. (1983), 'Telnet protocol specification', *RFC 854*, 1–15.  
URL: <https://doi.org/10.17487/RFC0854> 7
- Provos, N. (2003), 'Privilege Separated OpenSSH'.  
URL: <http://citi.umich.edu/u/provos/ssh/privsep.html> 15, 31
- pts(4)* (2013).  
URL: <http://man7.org/linux/man-pages/man4/pts.4.html> 29
- ptsname(3)* (2017).  
URL: <http://man7.org/linux/man-pages/man3/ptsname.3.html> 13
- pty(7)* (2017).  
URL: <http://man7.org/linux/man-pages/man7/pty.7.html> 29
- pututxline(3)* (2017).  
URL: <http://man7.org/linux/man-pages/man3/pututxline.3.html> 12
- rcp(1)* (1999).  
URL: <https://linux.die.net/man/1/rcp> 8
- Rescorla, E. (2018), 'The transport layer security (TLS) protocol version 1.3', *RFC 8446*, 1–160.  
URL: <https://doi.org/10.17487/RFC8446> 9
- rexec(1)* (1996).  
URL: <https://linux.die.net/man/1/rexec> 8
- rlogin(1)* (1999).  
URL: <https://linux.die.net/man/1/rlogin> 7
- rsh(1)* (1999).  
URL: <https://linux.die.net/man/1/rsh> 7, 8

*rstat(1)* (1996).

**URL:** <https://linux.die.net/man/1/rstat> 8

*rsync(1)* (2018).

**URL:** <http://man7.org/linux/man-pages/man1/rsync.1.html> 7

*ruptime(1)* (1996).

**URL:** <https://linux.die.net/man/1/ruptime> 8

*rwho(1)* (1996).

**URL:** <https://linux.die.net/man/1/rwho> 8

*setuid(2)* (2019).

**URL:** <http://man7.org/linux/man-pages/man2/setuid.2.html> 15

Steinert, M. (2015), 'Go pam', Github.

**URL:** <https://github.com/msteinert/pam> 20

*systemd(1)* (n.d.).

**URL:** <http://man7.org/linux/man-pages/man1/systemd.1.html> 22

*telnet(1)* (1994).

**URL:** <https://linux.die.net/man/1/telnet> 7

*tty(4)* (2019).

**URL:** <http://man7.org/linux/man-pages/man4/tty.4.html> 30

*unlockpt(3)* (2017).

**URL:** <http://man7.org/linux/man-pages/man3/unlockpt.3.html> 13

---

## 6.2. Glossary

### Application Programming Interface

Accessible interface for developers to use external code. [7](#)

**CGo** [C](#) support for [Go](#). [21](#), [22](#)

### Command Line Interface

A text based interface centered around commands to perform specific tasks. [3](#)

**daemon** A (possibly latent) background process on a [Unix](#) machine that handles certain events when said events occur. [22](#)

**Diffie-Hellman key exchange** A key exchange algorithm that prevents exposure to eavesdropping third parties. [9](#)

### file descriptor

A file descriptor is an integer that represents the handle to a file. [13](#)

### Graphical User Interface

Graphical interface for the user to visually interact with a program. [7](#)

### Group ID

The unique identifier of a group represented as an integer. [11](#)

### Inter-Process-Communication

Communication between processes. [13](#)

### interrupt signal

A signal supported by [Unix](#) based [Operating Systems\(OSes\)](#) which signals to a process to interrupt it's work. [18](#)

**Linux** A [Unix](#) based [OS](#) which uses Linus Torvalds kernel and was inspired by Minix. [13](#), [15](#), [22](#), [33](#)

### Object Oriented Programming

A programming paradigm which uses objects to model real life entities. [30](#)

### Pluggable Authentication Module

Modules for user authentication. [7](#)

**port** A point for traffic to flow, represented by an unsigned integer of up to 2 bytes. The name was chosen as an analogy to ports for ships. [7](#), [30](#)

### Process ID

The unique identifier of a process represented as an integer. [22](#)

### pseudoterminal

A mechanism of [Unix](#) to allow programs to communicate as if the other was inside a [tty\(pty\(7\) 2017\)](#). [13](#)

### pseudoterminal master

The master of a [pty](#). [13](#)

### pseudoterminal slave

The slave of a [pty\(pts\(4\) 2013\)](#). [13](#)

**Request Broker** A service that oversees the action requests of a program and decides whether to permit and execute them or not, based on various factors. [17](#)

**Secure Shell**

An client-server-application that allows remote login and interaction with a [shell](#). See [1.1.1.3](#)

**Secure Sockets Layer**

Cryptographic protocol to secure the communication between two peers via symmetric cryptography. Deprecated. [9](#)

**shell** A [CLI](#) program, that reads user input line-by-line and executes those commands. [7](#), [8](#), [11–18](#), [30](#)

**socket** A network socket is an endpoint for communication over [ports](#). [23](#)

**teletype**

Originally a device that could send and receive text messages. Nowadays [tty](#) refers to [terminals](#), which emulate that behaviour([tty\(4\)](#) [2019](#)). [13](#)

**Telnet Secure**

Telnet with [SSL](#) encryption. [7](#)

**terminal** An user interface to interact with [CLI](#) programs like [shells](#). [7](#), [12](#), [13](#), [18](#), [21](#), [30](#), [33](#)

**the C programming language**

Low-level programming language originally invented by Dennis Ritchie. [9](#)

**the C++ programming language**

Descendant of [C](#) which implemented [Object Oriented Programming \(OOP\)](#). [9](#)

**the Go/Golang programming language**

Google's programming language. [3](#)

**Transport Layer Security**

Newer and recommended version of [SSL](#). [8](#)

**Unix** An originally free [OS](#) family called Unics from AT&T that re-imagined an older [OS](#) by the name of Multics. [11](#), [21](#), [29](#)

**User ID**

The unique identifier of a user represented as an integer. [11](#)

**x-package** A [Go](#) package that is not part of the standard library and that is subject to change or even entirely disappear. plural [23](#)

**X.509** An international standard for certificates in public key infrastructures. [9](#)

**Zurich University of Applied Sciences**

Name of my university of trust. [3](#)

---

## 6.3. List of Figures

2.1. How to operate a tty-oriented program over a network?(Kerrisk 2010, p.1376) . . .	13
2.2. Two programs communicating via a pty(Kerrisk 2010, p.1377) . . . . .	14
2.3. How ssh uses a pty(Kerrisk 2010, p.1378) . . . . .	14
2.4. Privilege separation in SSH (Provos 2003) . . . . .	15
2.5. Sequence diagram draft. . . . .	17
2.6. Sequence diagram of current implementation. . . . .	19

## **6.4. List of Tables**



## 6.5. List of Listings

2.1. Initializing a PAM context . . . . .	9
2.2. Terminating a PAM context . . . . .	10
2.3. PAM functions . . . . .	10
2.4. PAM authentication . . . . .	10
2.5. PAM credential setting . . . . .	10
2.6. Definition of passwd and <i>getpwnam(3)/getpwuid(3)</i> (2019) . . . . .	11
2.7. Definition of the utmpx structure (Kerrisk 2010, p.819) . . . . .	11
2.8. utmpx API functions . . . . .	12
2.9. PAM session management . . . . .	12
2.10.pty related Linux API functions . . . . .	13
3.1. Activating TLS 1.3 in Go . . . . .	20
3.2. Generating a self-signed certificate and private key . . . . .	20
3.3. Generating a key pair for the client . . . . .	20
3.4. Setting the terminal mode in Go . . . . .	21
3.5. Go's pty wrapper . . . . .	21
3.6. goshd service control . . . . .	22
3.7. Getting a net.Conn interface from a fd . . . . .	23
3.8. Getting the fd from a net.Conn object . . . . .	23
3.9. Go's high level API for listener . . . . .	23

---

## 6.6. Acronym Glossary

**API** *Application Programming Interface* 7, 11–13, 21, 23, 33, See [Application Programming Interface](#)

**C** *the C programming language* 9, 22, 29, 30, See [the C programming language](#)

**C++** *the C++ programming language* 9, See [the C++ programming language](#)

**CLI** *Command Line Interface* 3, 30, See [Command Line Interface](#)

**fd** *file descriptor* 13, 22, 23, 33, See [file descriptor](#)

**GID** *Group ID* 11, See [Group ID](#)

**Go** *the Go/Golang programming language* 3, 7, 9, 20–23, 29, 30, 33, See [the Go/Golang programming language](#)

**GUI** *Graphical User Interface* 7, See [Graphical User Interface](#)

**IPC** *Inter-Process-Communication* 13, See [Inter-Process-Communication](#)

**OOP** *Object Oriented Programming* 30, See [Object Oriented Programming](#)

**OS** *Operating System* 29, 30

**PAM** *Pluggable Authentication Module* 7, 9, 10, 12, 20, 33, See [Pluggable Authentication Module](#)

**PID** *Process ID* 22, See [Process ID](#)

**ptm** *pseudoterminal master* 13, See [pseudoterminal master](#)

**pts** *pseudoterminal slave* 13, See [pseudoterminal slave](#)

**pty** *pseudoterminal* 13, 14, 21, 29, 31, 33, See [pseudoterminal](#)

**SIGINT** *interrupt signal* 18, See [interrupt signal](#)

**SSH** *Secure Shell* 3, 7, 14, 15, See [Secure Shell](#)

**SSL** *Secure Sockets Layer* 9, 30, See [Secure Sockets Layer](#)

**TELNETS** *Telnet Secure* 7, See [Telnet Secure](#)

**TLS** *Transport Layer Security* 8, 9, 20, 33, See [Transport Layer Security](#)

**tty** *teletype* 13, 29–31, See [teletype](#)

**UID** *User ID* 11, See [User ID](#)

**ZHAW** *Zurich University of Applied Sciences* 3, See [Zurich University of Applied Sciences](#)

# A. Appendix

## A.1. Project Management

### A.1.1. Official Statement of Tasks

# Bachelor Thesis

## Preventing Supply Chain Insecurity by Authentication on Layer 2

Stephan Neuhaus

2017-06-15

### 1 Introduction

The SSH protocol [RFC253, RFC6668, RFC8268, RFC8308, RFC8332] is now over twelve years old in its current form. One of the problems with SSH is its complexity, both in the initial phase when key material is exchanged, but also later, for example because the server must always decide whether to return a character that has been sent to it or not (echo).

The goal of this work is a radically simplified protocol, which in its functions is similar to SSH. (N.B. the similarity concerns the functions, not necessarily the protocol details). You develop the protocol, as well as a client and a server. You demonstrate that your software can replace SSH. For a merely passing grade, this may be done by specifying and implementing a suitable protocol. For an improved grade, you show that your replacement can handle several common use cases, among them:

- Interactive session
- Rsync with the SSH replacement as transport protocol

### 2 Task

To this end, this thesis will

- design and implement a client-server protocol that can manage interactive sessions
- design and implement a privilege-separation architecture on the server side that allows safe dropping of privileges once a client establishes a connection

For a passing grade (4.0), the work must contain at least the following:

- in the thesis, an introduction to the problem and why the envisaged solution will solve it;
- in the thesis, a survey of related work in the area;
- in the thesis, a detailed design of the solution;

- in the thesis, an evaluation of the performance of the implemented solution; and
- in the software, a privilege-separation architecture.

These requirements do not contain anything related to security. This is not an accident.

Incorporating the following components will improve the grade. The more components are included, the better the grade will be.

- In the related work section of the thesis, a comparison of all the related work with the envisaged solution, outlining why the envisaged solution is better;
- in the thesis, a detailed analysis of the security of the solution, including possible attacks and defenses;
- use of TLS as the transport layer;
- a proof-of-concept client that can handle interactive sessions;
- a proof-of-concept client that works as a transport for rsync;

ZHAW's School of Engineering no longer provides formal language lessons for its students as part of the curriculum. I am therefore giving notice that submitting a thesis with large amounts of orthographical or grammatical errors lead to a lower grade.

The thesis can be submitted in German or English. English is preferred, but submitting in German will not lead to a lower grade.

## **A.1.2. Project Plan**

# Revised Project Plan

March 2019

## 1 Introduction

The work on the final thesis is divided into several sub tasks. The individual tasks and respective time planning was defined early.

As this is a field of work, we as a team are not familiar with, we have decided to change our original plan: "Project Plan" to a revised version.

The biggest difference is that the Prototype is developed earlier but we are removing some security measures respectively moving it to an optional goal We are subdividing the following area of development:

- Technical research: The research starts with a collection of examined current solution to a secure data transference, followed by a list of pro and cons for the approaches that includes a preferred selection. Moreover, we would survey the current state development within that field.
- Conceptualising: Look for alternative solutions and compare them. Plan the development.
- Prototype: A unsecure SSH Client
- Testing: Do generalized tests, identify possible security vulnerability
- Rework of the secure shell: Modify the secure shell based on the newly discovered needs

Furthermore there are specific milestone within the project process, which we would use to realign and discuss our time division.


## 2 Visualization

The project plan is documented in the form of a chart and is updated throughout the project. This way, deviations can be detected early and can be discussed with the supervisor and within our team.

		March				April				May				June				July
	duration	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Technical research	3 weeks																	
Conceptualising	1 week																	
Pre-work	31.03																	
Prototype without security measures	4 weeks																	
Deadline of the Prototype	30.04																	
Testing and Analysis	3 weeks																	
Rework of current protocol	3 weeks																	
Manual of Use	1 week																	
Deadline of Proof of concept	10.05																	
Writing	2 weeks																	
Hand-in Date	28.06																	

Figure 1: Project plan



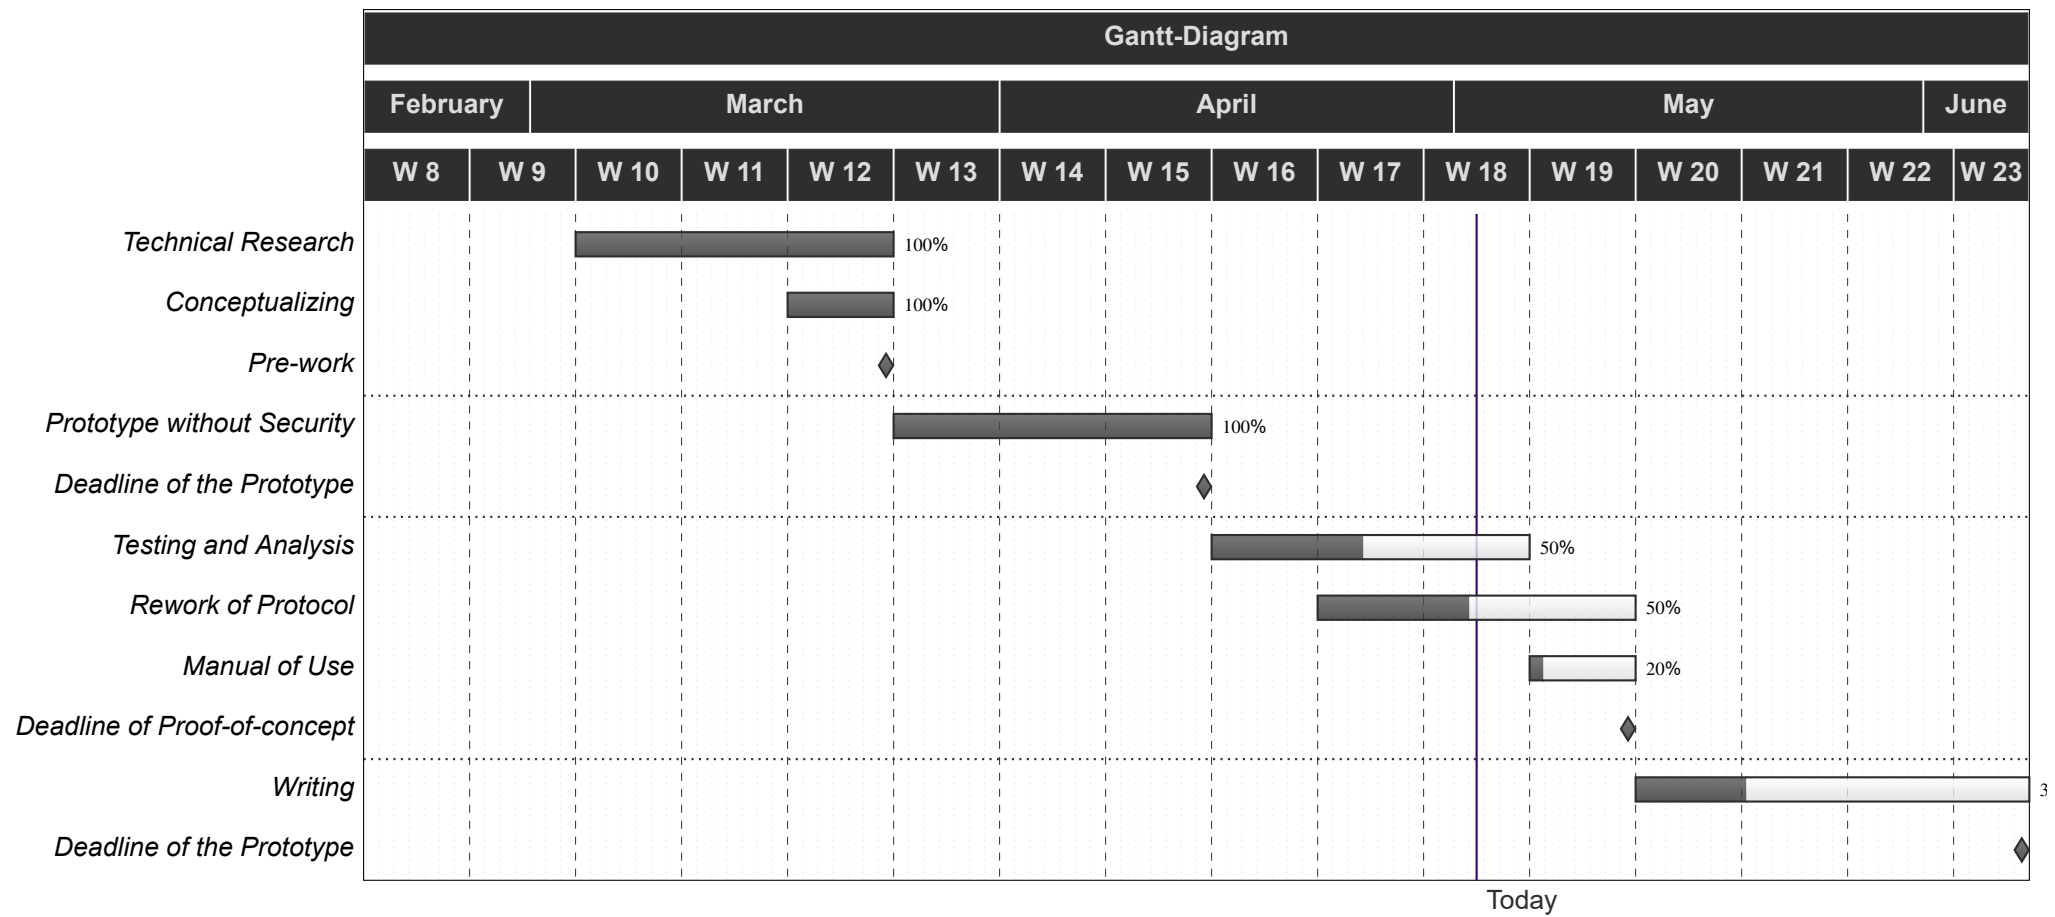

---

### A.1.3. Meeting Minutes

The meeting minutes have a disruption in style and execution beginning from the 6th meeting. Reason for this is because in the beginning of the project, Mr Schwarz was responsible for keeping the minutes, but he opted out of the project.

# Oh my Gosh - Meeting protocol

## 1 2<sup>nd</sup> Meeting

### Participant

*Bachelor thesis supervisor - Stephan Neuhausen*

*Bachelor student - Raphael Emberger*

*Bachelor student - Kevin Schwarz*

### Time duration of the meeting

*1 hour and 15 minutes*

### 1.1 Objectives

1. Keeping the bachelor thesis supervisor informed on the state of affairs
2. Getting an overview on how the progress relate to the scheduled progress

### 1.2 Summary

In this meeting the following things were achieved:

1. Decision towards ITC and UDP was achieved
2. A rough draft of a generalized process was finalized and presented to the supervisor
  - (a) Smaller misconceptions were resolved
  - (b) Fields where further research is warranted was shown
3. Reiteration of the project goal
4. Further Delimitation of the project extent.
  - (a) Smaller misconceptions were resolved

### 1.3 Tasks and resources

The following were left as tasks or as a research subject for the next meeting in descending priority:

1. Understanding shell forwarding
2. Researching the limitation of IOCTL - raw and device specific output
3. Pseudo terminals
4. Persistence in relation to Environment variables

## **1.4 Next meeting**

The next meeting plan were not changed, the formerly decided weekly scheduled date still stands.

The next meeting is dated: [14 / 03 / 19] on the first floor of the Zürich location of the ZHAW within the Room 0.03.

# Oh my Gosh - Meeting protocol

## 1 3<sup>rd</sup> Meeting

### Participant

*Bachelor thesis supervisor - Stephan Neuhausen*

*Bachelor student - Raphael Emberger*

*Bachelor student - Kevin Schwarz*

### Time duration of the meeting

*1 hour*

### 1.1 Objectives

1. Keeping the bachelor thesis supervisor informed on the state of affairs
2. Getting an overview on how the progress relate to the scheduled progress

### 1.2 Summary

In this meeting the following things were achieved:

1. General overview of a PTY
2. Certain foundation towards developing a non-secure secure shell were explained:
  - (a) Smaller misconceptions were resolved
  - (b) Fields where further research is warranted was shown
3. Reiteration of the project goal
4. Further Delimitation of the project extent.
  - (a) Smaller misconceptions were resolved

### 1.3 Tasks and resources

The following were left as tasks or as a research subject for the next meeting in descending priority:

1. Understanding shell forwarding
2. Researching the limitation of IOCTL - raw and device specific output
3. Pseudo terminals
4. Persistence in relation to Environment variables

## **1.4 Next meeting**

The next meeting plan were not changed, the formerly decided weekly scheduled date still stands.

The next meeting is dated: [14 / 03 / 19] on the first floor of the Zürich location of the ZHAW within the Room 0.03.

# Oh my Gosh - Meeting protocol

## 1 4<sup>th</sup> Meeting

### Participant

*Bachelor thesis supervisor - Stephan Neuhausen*

*Bachelor student - Raphael Emberger*

*Bachelor student - Kevin Schwarz*

### Time duration of the meeting

*25 Minutes*

### 1.1 Objectives

1. Keeping the bachelor thesis supervisor informed on the state of affairs
2. Gain an introduction to encryption

### 1.2 Summary

In this meeting the following things were achieved:

1. Introduction to Bash was given
2. Move up of the prototype deadline
3. Change of scheduled development plan:
  - (a) Decrease of the SSH scope
  - (b) Reduction of the security measures to an optional goal
  - (c)

### 1.3 Tasks and resources

The following were left as tasks or as a research subject for the next meeting in descending priority:

1. Researching the infrastructure of GO-order
2. Researching Bash and PTY on Windows environment
3. First Server - Client Demo
4. Crafting a simple process diagram for the next meeting

## **1.4 Next meeting**

The next meeting plan were not changed, the formerly decided weekly scheduled date still stands.

The next meeting is dated: [28 / 03 / 19] on the first floor of the Zürich location of the ZHAW within the Room 0.03.



# Oh my Gosh - Meeting protocol

## 1 5<sup>th</sup> Meeting

### Participant

*Bachelor thesis supervisor - Stephan Neuhausen*

*Bachelor student - Raphael Emberger*

*Bachelor student - Kevin Schwarz*

### Time duration of the meeting

*45 Minutes*

### 1.1 Objectives

1. Keeping the bachelor thesis supervisor informed on the state of affairs
2. Demonstrate Demo

### 1.2 Summary

In this meeting the following things were achieved:

1. The Prototype was tested.
2. Process Diagram was explained
3. 4 open Problems were discussed:
  - (a) PAM Struct and how they work
  - (b) Generalized Certkey location
  - (c) Use of the Prototype within Linux
  - (d) Correct pipe lining and forking

### 1.3 Tasks and resources

The following were left as tasks or as a research subject for the next meeting in descending priority:

1. Further testing of both Linux, Apple and Windows environment
2. Solving of Pam Struct problem
3. Further development

## **1.4 Next meeting**

The next meeting plan were modified, the formerly decided weekly scheduled date still stands.

The next meeting is dated: [5 / 04 / 19] on the first floor of the Zürich location of the ZHAW within the Room 0.13.

---

# Design and Implementation of an Alternative to SSH

## Meeting Minutes

### 1 Attendees

**Present:** Stephan Neuhaus, Raphael Emberger

**Absent:** Kevin Schwarz(*illness*)

### 2 Initiation

The meeting took place on the *Friday, 5th of April 2019, 13:00* in *ZL0.13, Lagerstrasse 45, Zürich*. Raphael Emberger was responsible for the minutes.

### 3 Points of discussion

#### 3.1 Process forking unsuccessful

Attempts on forking a sub-process were unsuccessful. The reason for this was that the standard library of Go doesn't allow such mechanics, as Go was designed with go-routines in mind instead.

**Solution** A quick test with `cgo` yielded a viable solution to the problem: Using the C-routine `fork()` a fork was successful.

#### 3.2 Shell instantiating and forwarding

Attempts in forwarding the client connection to a server-side shell's `stdin` and its `stdout` and `stderr` to the connection of the client were unsuccessful.

**Solution** One quick tests showed that hooking up the `std*` pipes to a local shell process with Go worked just fine. Therefore it was deemed feasible to transfer the entire interface to the client.

#### 3.3 Participation of Mr. Schwarz

Up until this date, the participation of Mr Schwarz was remarkable little in terms of writing on the code base of the project. The present parties agreed on this matter.

**Solution** It was decided to give Mr Schwarz a choice of action: Either he starts to participate heavily in the project from now on or he opts out of the project entirely.

### 4 Old Business

- **Login attempts in Linux fail:** This problem was deemed lower priority, as Login works on the WSL and can still be dealt with in later stages of the project.

### Next Meeting

*Friday, 5th of April 2019, 13:00* in *ZL0.13, Lagerstrasse 45, Zürich*

---

# Design and Implementation of an Alternative to SSH

## Meeting Minutes

### 1 Attendees

**Present:** Stephan Neuhaus, Raphael Emberger, Kevin Schwarz

### 2 Initiation

The meeting took place on the *Friday, 12th of April 2019, 13:00* in *ZL0.13, Lagerstrasse 45, Zürich*. Raphael Emberger was responsible for the minutes.

### 3 Points of discussion

#### 3.1 Participation of Mr. Schwarz

Mr Schwarz decided to opt out of the project because of time issues. Mr Neuhaus will therefore adapt the outline of the project.

#### 3.2 Reading user data works

The new module to read user data via the `getpwnam(3)` API has been implemented using `cgo`. It can read all the required data (i.e. the user shell which wasn't supported in the go standard library).

#### 3.3 Forking implemented, but causes problems

Forking has been implemented via `cgo` but after forking, the `net.Conn` object cannot be used by the child process. There is also the to further investigate, whether after forking a new process actually gets started, as a quick look at the processes didn't reveal that a fork has been processed.

**Solution** To counter this problem it is suggested to do the connection build up via `cgo` using the C-socket API. This returns an integer as a file descriptor, which shouldn't cause problems when forking.

#### 3.4 Remote start and handling of a shell has issues

After successfully hooking up the channels from the client to the shell process, almost all mechanics work as expected with exception of missing characters like the `PS{1,2,3,4}` prompts.

**Solution** It is suggested to compare the environment variables of the child shell process and the usual terminals to see if there are deal breaking differences. Adjusting the child shells environment variables might fix the problem.

### 4 Old Business

- **Login attempts in Linux fail:** This problem was deemed lower priority, as Login works on the WSL and can still be dealt with in later stages of the project.

---

## Next Meeting

*Friday, 26th of April 2019, 13:00 in ZL0.13, Lagerstrasse 45, Zürich*

---

# Design and Implementation of an Alternative to SSH

## Meeting Minutes

### 1 Attendees

**Present:** Stephan Neuhaus, Raphael Emberger

### 2 Initiation

The meeting took place on the *Friday, 26th of April 2019, 13:00* in *ZL0.13, Lagerstrasse 45, Zürich*. Raphael Emberger was responsible for the minutes.

### 3 Points of discussion

#### 3.1 Login and shell usage

The remote login, starting and usage of a user shell works now. It still does not behave like intended, as there are warnings printed on the screen and every line written gets echoed back, but overall, it works.

#### 3.2 Pty echoes stdin back to stdout on client

As described in the point above, when entering shell commands on the shell after remote login, the written lines get echoed back after hitting enter.

**Solution** The reason this was so, is because the terminal on the client was still in the *cooked* mode rather than the *raw* mode, which behaves differently from the default *cooked* mode, which reads line by line and catches and interprets signals like [Ctrl]+[C] or [Ctrl]+[D]. Setting the terminal into *raw* mode should solve the issue as explained in "The Linux Programming Interface".

#### 3.3 Transfer of SIGWINCH/ioctl

As described in the first point of discussion, when dropping into the remote shell, there are warnings displayed about a problem with `ioctl`.

**Solution** In "The Linux Programming Interface" it is also mentioned that making the child the session leader would solve this issue.

#### 3.4 Login with test user fails

Trying to login with the test user results in an error when starting the shell because of missing files.

**Solution** This issue was easily solved as the script for setting up the test user was faulty: It didn't properly create the home directory of the test user and since the process which dropped privilege after login didn't have root rights anymore, it couldn't enter the home directory. Therefore, the directory owner and permissions were amended.

---

### 3.5 Forking abandoned

3.4 of the last meeting suggested using the C-style sockets to pass the file descriptors to the child process, which should solve the issue with forking and still using the net.Conn object. This has been implemented and after some adjustment worked out well.

## 4 Old Business

- **Login attempts in Linux fail** This problem was deemed lower priority, as Login works on the WSL and can still be dealt with in later stages of the project.

## Next Meeting

*Friday, 3th of March 2019, 12:30 in ZL0.13, Lagerstrasse 45, Zürich*

---

# Design and Implementation of an Alternative to SSH

## Meeting Minutes

### 1 Attendees

**Present:** Stephan Neuhaus, Raphael Emberger

### 2 Initiation

The meeting took place on the *Friday, 3th of May 2019, 13:00* in *ZL0.13, Lagerstrasse 45, Zürich*. Raphael Emberger was responsible for the minutes.

### 3 Points of discussion

#### 3.1 Pty echoes stdin back to stdout on client

The suggested solution from last meetings 3.2 of setting the client terminal into raw mode worked out well and has since been implemented like this.

#### 3.2 SockAddr

The x-package `unix` provides wrappers for common Unix API calls. Most of the handling with sockets could be transferred to their methods, except `getpeername(3)`, which was implemented in the old way using `CGo`. The reason being that the returned `SockAddr` interface from `accept(3)` and `getpeername(3)` couldn't be casted (or rather: type-asserted) to be used as `SockAddrInet4` struct.

**Solution** After some experiments and searching the internet, it was revealed that the type assertion had to use pointers instead.

#### 3.3 Role of login in the application

Just relying on `login` to perform all the important steps to log a user in is not a viable solution, as this would make log in via keys impossible. Therefore, it was made so the server decides whether to attempt to log in via keys or just to call `login`. Key authentication has been implemented as well and doesn't rely on `login`.

#### 3.4 Documentation and bug-fixes before new features

It was deemed better to stop implementing new features as time is about to run out. Therefore, it is suggested to invest 80% of the remaining time to write on the documentation and 20% on bug-fixing. Only after everything has been finished, can new features be implemented - if at all.

#### 3.5 Documentation chapter renaming

The original template for the BSc thesis has chapters named "Theoretical Principles" and "Method" in them, which will be renamed to the more appropriate "Design" and "Implementation". The latter will not reflect the progress in a chronological order but instead order it point by point.



---

### 3.6 Login attempts in Linux fail

Relying on `login` finally solved the problem of logging in on a specific linux distribution. The log in via keys also works, as the problem was originally PEM dependent, which gets omitted when authenticating via keys.

### Next Meeting

*Friday, 10th of March 2019, 12:30 in ZL0.13, Lagerstrasse 45, Zürich*

# Design and Implementation of an Alternative to SSH

## Meeting Minutes

### 1 Attendees

**Present:** Stephan Neuhaus, Raphael Emberger

### 2 Initiation

The meeting took place on the *Friday, 10th of May 2019, 12:20* in *ZL0.13, Lagerstrasse 45, Zürich*. Raphael Emberger was responsible for the minutes.

### 3 Points of discussion

#### 3.1 File descriptors and Go

After resolving last week's issue with `SocketAddr(3.2)`, the same approach enabled us to get the `fd` of a connection: By type-asserting it as `*net.TCPConn`, which had a function that returns the underlying file, which in turn had a function for returning the underlying `fd`.

#### 3.2 Privilege dropping

After authenticating the user via keys, the host process spawns a shell with the appropriate privileges. For more secure handling, it was deemed best to drop privilege for the entire host process after authenticating via keys. Despite running with root rights (to enable a user to login as any user), the process receives an exception when calling `unix.Setuid` or `unix.Setgid`. The reason was assumed to be related to Go's infamous Go-routines.

#### 3.3 Current State of Documentation

The current state of the documentation is still insufficient. There are 4 weeks until the deadline. It is suggested to write more on the documentation.

### Next Meeting

*Friday, 17th of March 2019, 13:00* in *ZL0.13, Lagerstrasse 45, Zürich*

---

# Design and Implementation of an Alternative to SSH

## Meeting Minutes

### 1 Attendees

**Present:** Stephan Neuhaus, Raphael Emberger

### 2 Initiation

The meeting took place on the *Friday, 17th of May 2019, 12:30* in *ZL0.13, Lagerstrasse 45, Zürich*. Raphael Emberger was responsible for the minutes.

### 3 Points of discussion

#### 3.1 Referencing Linux Man Pages

As the code base heavily relies on the Linux API, it was decided to include bibtex references to the manual pages to improve readability.

#### 3.2 Clarification of Design of Public Key Cryptography

When describing public key cryptography, the current state of the documentation doesn't go into further detail other than describing the flow of actions when authenticating via public key cryptography. This part has to be improved.

#### 3.3 Login as Root possible

The current state of the implementation allows a client to authenticate itself and log in as root on the server. This is a point that should be improved, but can be postponed for now.

**Solution** When using `login(1)` to authenticate and log in a user, the `-f` flag can be used to specify a specific user. The client could already ask the user before communication with the server, which user should be used when logging in. This is partially already implemented.

#### 3.4 Keys remain in memory

The current state of the implementation of the client still retains the private key in memory when performing key authentication. This could be a possible vulnerability which could be used by a third party as an attack vector to obtain said key.

#### 3.5 Keys not stored optimally

The public key up to today stored the full public key inside a directory structure in the root user's home directory. This could cause problems when storing keys and should be changed to the way `ssh` stores authorized public keys: By storing the authorized keys for a server-side user in hashed format in its home directory.

### **3.6 RSync not implemented yet**

The layout of the tasks mentions `rsync` compatibility as both a required use-case for a passing grade and an optional extra feature. This has been amended by Mr Neuhaus by stating explicitly, that `rsync` compatibility is optional.

### **3.7 Separate bibliography for man page references**

As references to the Linux manual pages take up a considerable part of the overall references, it was considered to split it up into a manual-only bibliography and a normal bibliography. This suggestion was rejected as it was deemed tolerable to have one single bibliography.

### **3.8 Picture for the Publication Tool**

The official Publication Tool requires a picture to be attached to the abstract when handing it in to the online tool. As this thesis is centered around a CLI application, no picture has been made so far. It was suggested to simply take a screenshot of the application in operation.

## **Next Meeting**

The next meeting doesn't have a set date, time or place, as it was deemed a better option to organize a new meeting whenever the need for one arises.

## **A.2. Others**