


BECAUSE ITS A SG-CMD

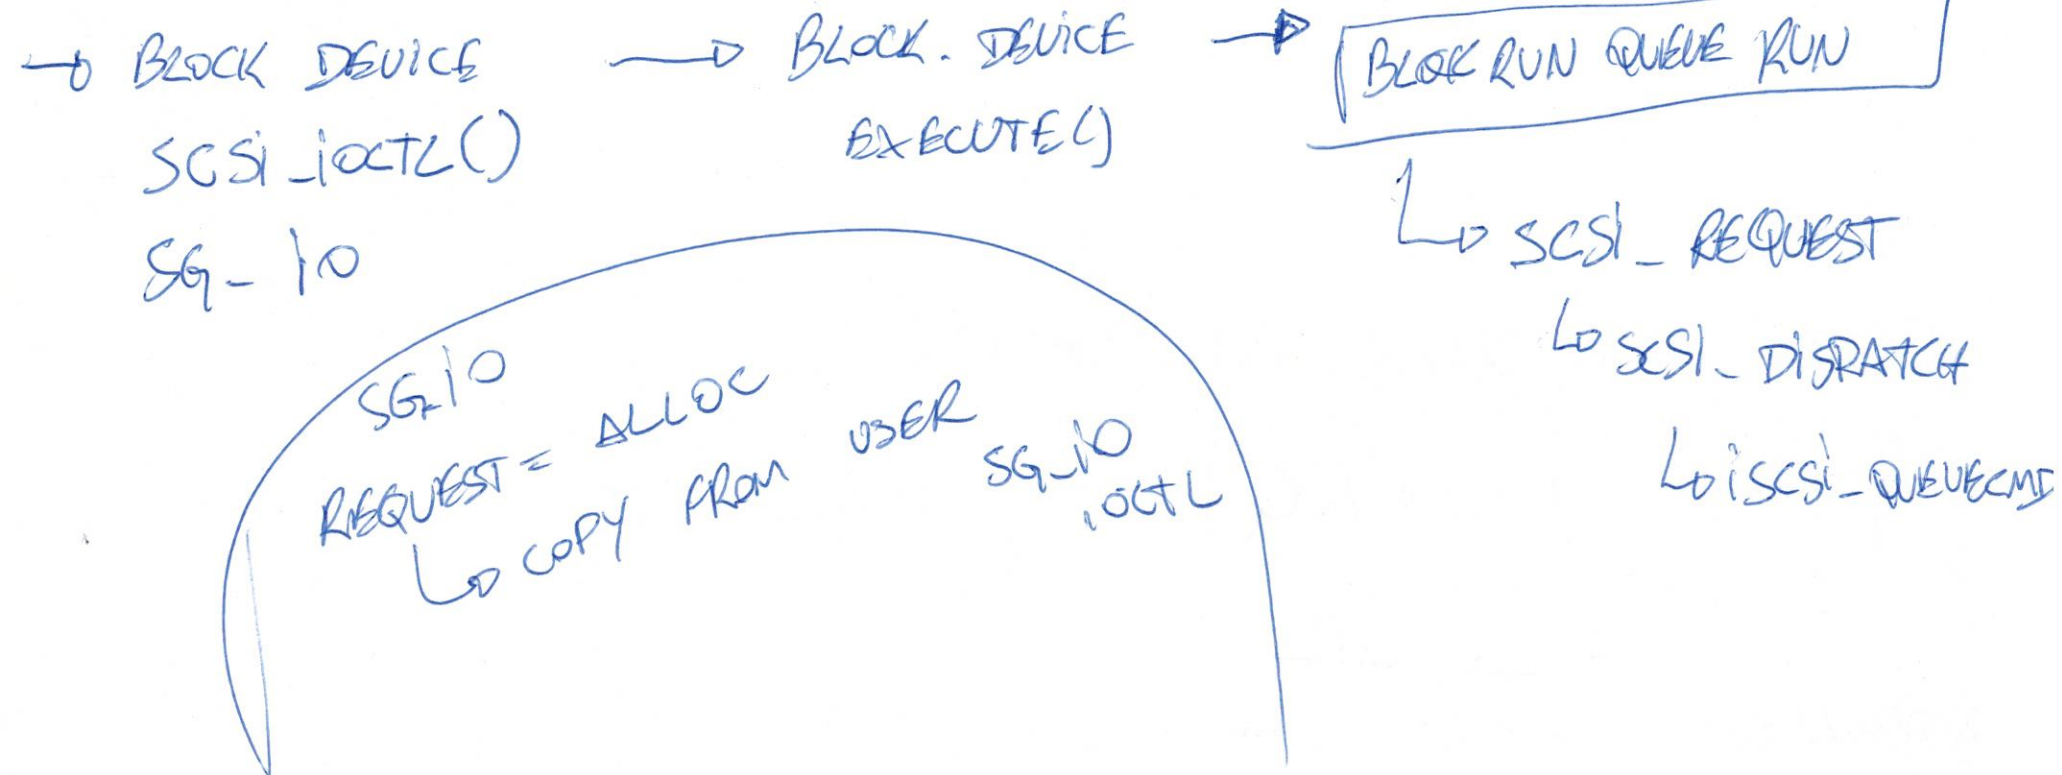

+ ~~0~~ VARS

INIT WORK (CONN \rightarrow XMIT WORK) \Rightarrow iSCSI_XMIT WORKER

LIST (CONN \rightarrow ^{MGMT QUEUE} CMD QUEUE)

\rightarrow ~~DATA~~ NA
WORK QUEUE

\otimes { TASK.RUN...
TASK.RUN...
TASK.RUN...

CREATE_SINGLETHREAD_WORK_QUEUE()

QUEUE WORK
~~DISPATCH~~ WORKER

Host \rightarrow WORK Q = "iscsi_q-x"

\otimes DATA-XMIT

XMIT WORKER \rightarrow XMIT_TASK \rightarrow TCP_TASK_XMIT
FOR EACH
TASK