

Backpropagation

Jay Urbain, PhD

Credits:

[Matt Mazur, A Step by Step Backpropagation Example](#)


[Denny Britz, wildml.com](#)

[Calculus on Computational Graphs: Backpropagation, C. Olah](#)


[CNN Class, Stanford, A. Karpathy](#)

[Machine Learning Mastery, Jason Brownlee](#)

Network Structure

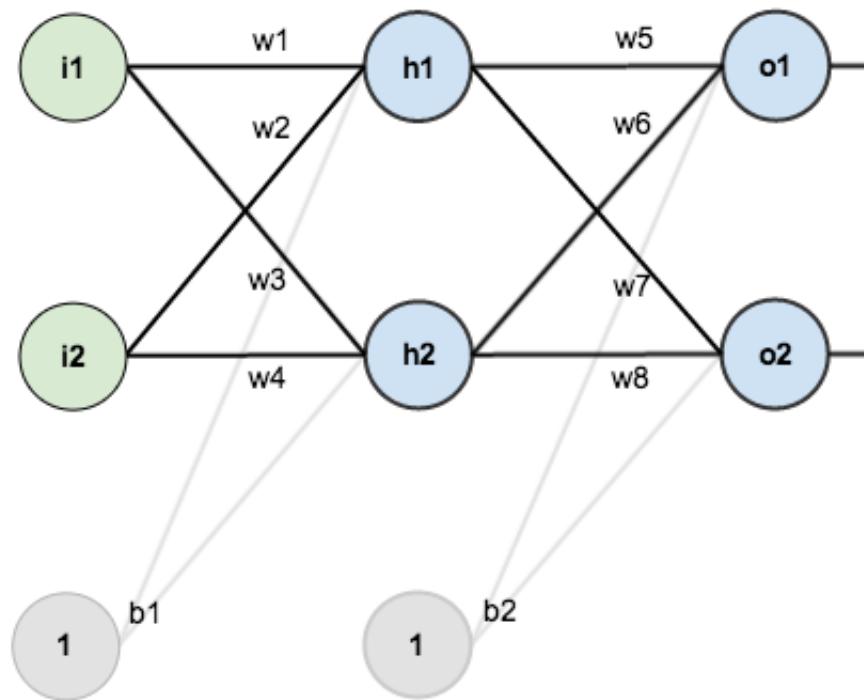

Initial weights, biases, and training inputs/outputs

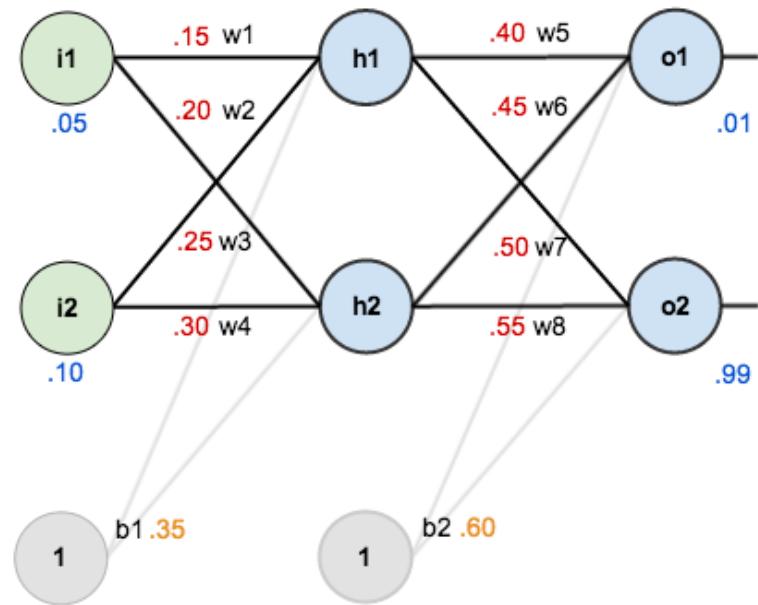

- The goal of backpropagation is to optimize the weights so that the neural network can learn how to correctly map arbitrary inputs to outputs.
- In this example we're going to work with a single training set: given inputs 0.05 and 0.10, we want the neural network to output 0.01 and 0.99.

Forward Pass

- See what the neural network currently predicts given the weights and biases and inputs of 0.05 and 0.10.
- Feed the inputs forward though the network.
- Calculate sum of products ($w * input$) as total net input to each node in the next layer.
- Apply nonlinear activation function (*logistic function*), then repeat the process with the next layer of neurons.


Forward Pass – hidden layer

$$net_{h1} = w_1 * i_1 + w_2 * i_2 + b_1 * 1$$

$$net_{h1} = 0.15 * 0.05 + 0.2 * 0.1 + 0.35 * 1 = 0.3775$$

$$out_{h1} = \frac{1}{1+e^{-net_{h1}}} = \frac{1}{1+e^{-0.3775}} = 0.593269992$$

$$out_{h2} = 0.596884378$$

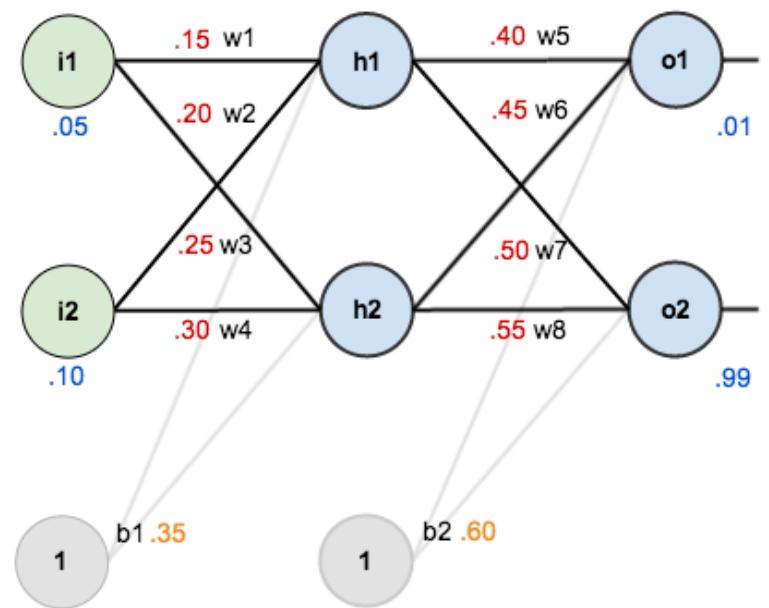


Forward Pass – output layer

$$net_{o1} = w_5 * out_{h1} + w_6 * out_{h2} + b_2 * 1$$

$$net_{o1} = 0.4 * 0.593269992 + 0.45 * 0.596884378 + 0.6 * 1 = 1.105905967$$

$$out_{o1} = \frac{1}{1+e^{-net_{o1}}} = \frac{1}{1+e^{-1.105905967}} = 0.75136507$$

$$out_{o2} = 0.772928465$$

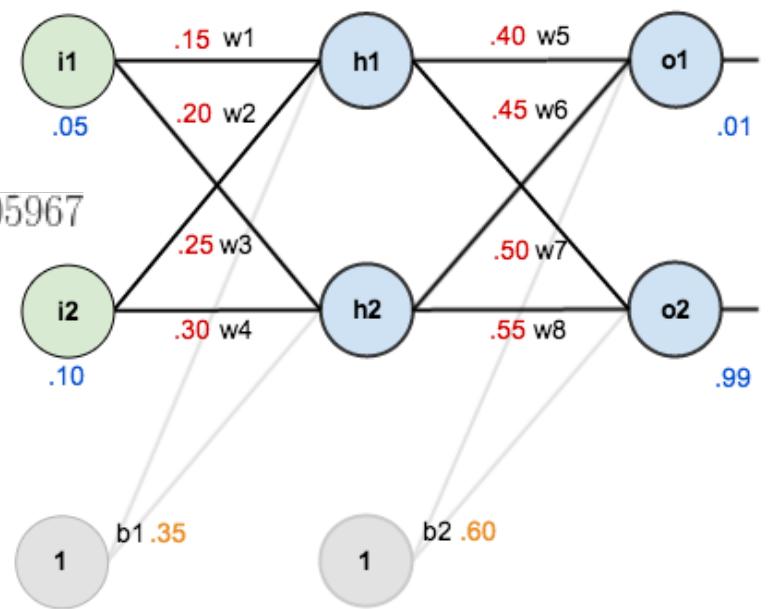

Calculating the error

- Squared error function:

$$E_{total} = \sum \frac{1}{2}(target - output)^2$$

- The target output for o_1 is 0.01 and the neural network output is 0.75136507, therefore its error is:

$$E_{o1} = \frac{1}{2}(target_{o1} - out_{o1})^2 = \frac{1}{2}(0.01 - 0.75136507)^2 = 0.274811083$$

- Repeating this process for o_2 (0.99)

$$E_{o2} = 0.023560026$$

- The total error for the neural network is the sum of these errors:


$$E_{total} = E_{o1} + E_{o2} = 0.274811083 + 0.023560026 = 0.298371109$$

Backward pass

- Goal with backpropagation is to update each of the weights in the network so that they cause the actual output to be closer to the target output.
- So we end up minimizing the error for each output neuron and the network as a whole.

Backward pass – output layer


- Consider w_5 . We want to know how much a change in w_5 affects the total error, i.e., $\frac{\partial E_{total}}{\partial w_5}$
- $\frac{\partial E_{total}}{\partial w_5}$ is read as the partial derivative of E_{total} with respect to w_5 .

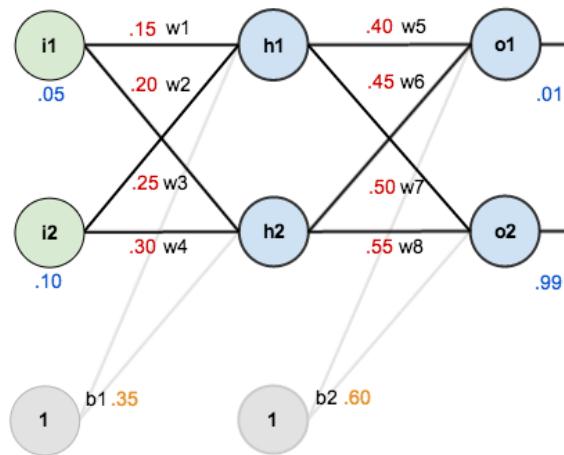

Chain rule for w_5

- Apply the chain rule:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

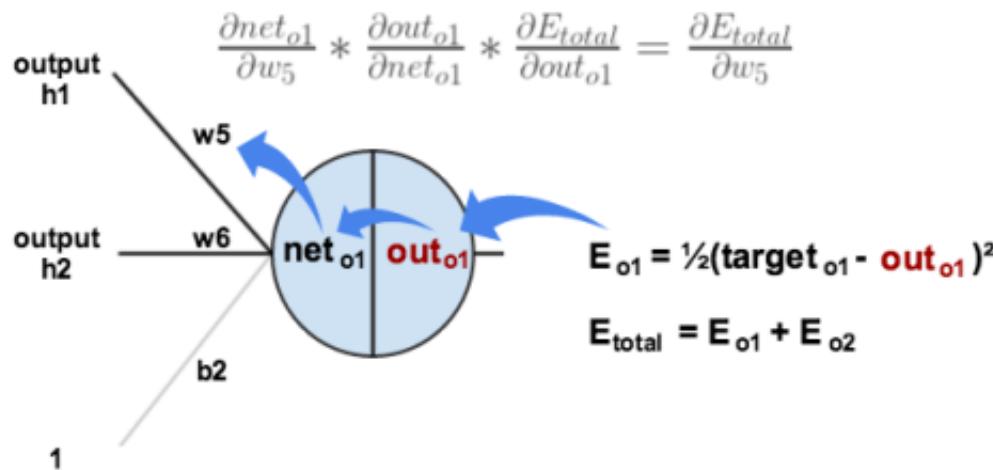

Chain rule for w_5

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

- First, how much does the total error change with respect to the output?

$$E_{total} = \frac{1}{2}(target_{o1} - out_{o1})^2 + \frac{1}{2}(target_{o2} - out_{o2})^2$$

$$\frac{\partial E_{total}}{\partial out_{o1}} = 2 * \frac{1}{2}(target_{o1} - out_{o1})^{2-1} * -1 + 0$$

$$\frac{\partial E_{total}}{\partial out_{o1}} = -(target_{o1} - out_{o1}) = -(0.01 - 0.75136507) = 0.74136507$$

Chain rule for w_5

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

- Next, how much does the output of o1 change with respect to its total input?
- The partial derivative of the logistic function is the output multiplied by 1 minus the output:

$$out_{o1} = \frac{1}{1+e^{-net_{o1}}}$$

$$\frac{\partial out_{o1}}{\partial net_{o1}} = out_{o1}(1 - out_{o1}) = 0.75136507(1 - 0.75136507) = 0.186815602$$

Chain rule for w_5

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$


- Finally, how much does the total net input of o1 change with respect to w_5 ?

$$net_{o1} = w_5 * out_{h1} + w_6 * out_{h2} + b_2 * 1$$

$$\frac{\partial net_{o1}}{\partial w_5} = 1 * out_{h1} * w_5^{(1-1)} + 0 + 0 = out_{h1} = 0.593269992$$

- Putting it all together:

$$\frac{\partial E_{total}}{\partial w_5} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial w_5}$$

$$\frac{\partial E_{total}}{\partial w_5} = 0.74136507 * 0.186815602 * 0.593269992 = 0.082167041$$

Updating the weights to decrease the error

- To decrease the error, we subtract this value from the current weight (multiplied by some learning rate, eta, which we'll set to 0.5):

$$w_5^+ = w_5 - \eta * \frac{\partial E_{total}}{\partial w_5} = 0.4 - 0.5 * 0.082167041 = 0.35891648$$

- We can repeat this process to get the new weights w_6 , w_7 , and w_8 :

$$w_6^+ = 0.408666186$$

$$w_7^+ = 0.511301270$$

$$w_8^+ = 0.561370121$$

Note: Perform the actual updates in the neural network after we have the new weights leading into the hidden layer neurons

Reformatted as the delta rule

$$\frac{\partial E_{total}}{\partial w_5} = -(target_{o1} - out_{o1}) * out_{o1}(1 - out_{o1}) * out_{h1}$$

Alternatively, we have $\frac{\partial E_{total}}{\partial out_{o1}}$ and $\frac{\partial out_{o1}}{\partial net_{o1}}$ which can be written as $\frac{\partial E_{total}}{\partial net_{o1}}$, aka δ_{o1} (the Greek letter delta) aka the *node delta*. We can use this to rewrite the calculation above:

$$\delta_{o1} = \frac{\partial E_{total}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} = \frac{\partial E_{total}}{\partial net_{o1}}$$

$$\delta_{o1} = -(target_{o1} - out_{o1}) * out_{o1}(1 - out_{o1})$$

Therefore:

$$\frac{\partial E_{total}}{\partial w_5} = \delta_{o1} out_{h1}$$

Some sources extract the negative sign from δ so it would be written as:

$$\frac{\partial E_{total}}{\partial w_5} = -\delta_{o1} out_{h1}$$


Hidden Layer

$$\frac{\partial E_{total}}{\partial w_1} = \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$

- Next, continue the backwards pass by calculating new values for w_1 , w_2 , w_3 , and w_4 .

$$\frac{\partial E_{total}}{\partial w_1} = \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$

$$\downarrow$$
$$\frac{\partial E_{total}}{\partial out_{h1}} = \frac{\partial E_{o1}}{\partial out_{h1}} + \frac{\partial E_{o2}}{\partial out_{h1}}$$

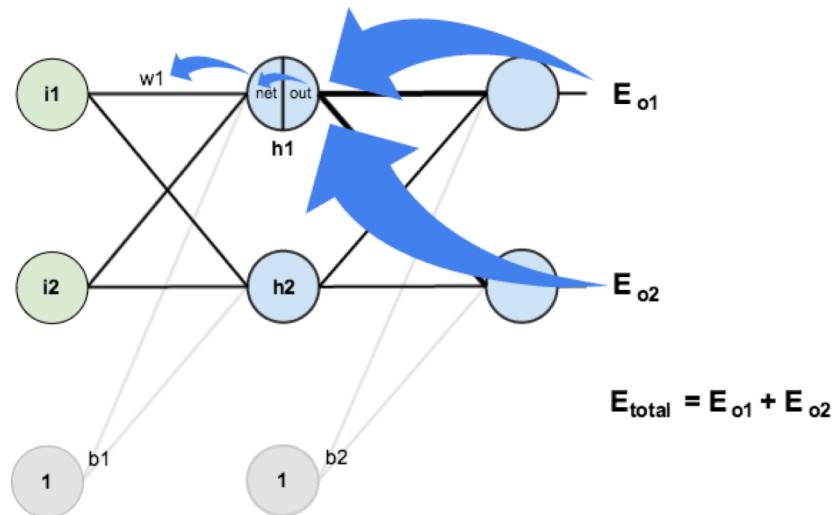

Hidden layer

$$\frac{\partial E_{total}}{\partial w_1} = \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$


- Need to account for the fact that the output of each hidden layer neuron contributes to the output (and therefore error) of multiple output neurons.
- I.e., out_{h1} affects both out_{o1} and out_{o2}

$$\frac{\partial E_{total}}{\partial out_{h1}} = \frac{\partial E_{o1}}{\partial out_{h1}} + \frac{\partial E_{o2}}{\partial out_{h1}}$$

$$\frac{\partial E_{o1}}{\partial out_{h1}} = \frac{\partial E_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial out_{h1}}$$

- Using values we calculated earlier:

$$\frac{\partial E_{o1}}{\partial net_{o1}} = \frac{\partial E_{o1}}{\partial out_{o1}} * \frac{\partial out_{o1}}{\partial net_{o1}} = 0.74136507 * 0.186815602 = 0.138498562$$

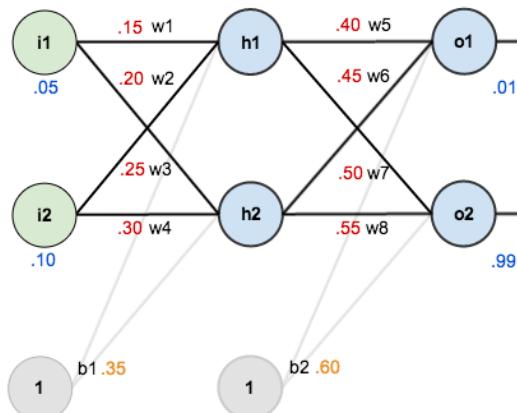

Hidden layer

$$\frac{\partial E_{total}}{\partial w_1} = \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$

- $\frac{\partial net_{o1}}{\partial out_{h1}}$ is equal to w_5 :

$$net_{o1} = w_5 * out_{h1} + w_6 * out_{h2} + b_2 * 1$$

$$\frac{\partial net_{o1}}{\partial out_{h1}} = w_5 = 0.40$$


- Plugging them in:

$$\frac{\partial E_{o1}}{\partial out_{h1}} = \frac{\partial E_{o1}}{\partial net_{o1}} * \frac{\partial net_{o1}}{\partial out_{h1}} = 0.138498562 * 0.40 = 0.055399425$$

For $\frac{\partial E_{o2}}{\partial out_{h1}}$

$$\frac{\partial E_{o2}}{\partial out_{h1}} = -0.019049119$$

$$\frac{\partial E_{total}}{\partial out_{h1}} = \frac{\partial E_{o1}}{\partial out_{h1}} + \frac{\partial E_{o2}}{\partial out_{h1}} = 0.055399425 + -0.019049119 = 0.036350306$$

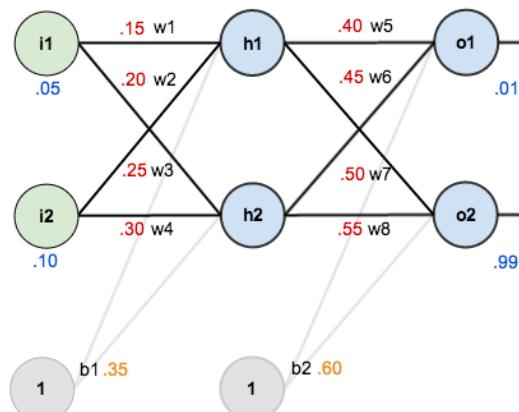

Hidden layer

$$\frac{\partial E_{total}}{\partial w_1} = \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$

- Calculate the partial derivative of the total net input to h_1 with respect to w_1 is the same as we did for the output neuron:

$$net_{h1} = w_1 * i_1 + w_3 * i_2 + b_1 * 1$$

$$\frac{\partial net_{h1}}{\partial w_1} = i_1 = 0.05$$

- Putting it all together:

$$\frac{\partial E_{total}}{\partial w_1} = \frac{\partial E_{total}}{\partial out_{h1}} * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$

$$\frac{\partial E_{total}}{\partial w_1} = 0.036350306 * 0.241300709 * 0.05 = 0.000438568$$

With respect to delta rule:

You might also see this written as:

$$\frac{\partial E_{total}}{\partial w_1} = \left(\sum_o \frac{\partial E_{total}}{\partial out_o} * \frac{\partial out_o}{\partial net_o} * \frac{\partial net_o}{\partial out_{h1}} \right) * \frac{\partial out_{h1}}{\partial net_{h1}} * \frac{\partial net_{h1}}{\partial w_1}$$

$$\frac{\partial E_{total}}{\partial w_1} = \left(\sum_o \delta_o * w_{ho} \right) * out_{h1}(1 - out_{h1}) * i_1$$

$$\frac{\partial E_{total}}{\partial w_1} = \delta_{h1} i_1$$

Updating weights

$$w_1^+ = w_1 - \eta * \frac{\partial E_{total}}{\partial w_1} = 0.15 - 0.5 * 0.000438568 = 0.149780716$$

$$w_2^+ = 0.19956143$$

$$w_3^+ = 0.24975114$$

$$w_4^+ = 0.29950229$$

Continue feedforward, backpropagation

- Updated all of our weights
- When we fed forward the 0.05 and 0.1 inputs originally, the error on the network was 0.298371109.
- After this first round of backpropagation, the total error is now down to 0.291027924.
- Repeating this process 10,000 times, the error plummets to 0.0000351085.
- At this point, when we feed forward 0.05 and 0.1, the two outputs neurons generate 0.015912196 (vs 0.01 target) and 0.984065734 (vs 0.99 target).