

Universidade de São Paulo
Instituto de Matemática e Estatística
Bachalerado em Ciência da Computação

Rafael Mota Gregorut

Título da monografia
se for longo ocupa esta linha também

São Paulo
Dezembro de 2015

**Título da monografia
se for longo ocupa esta linha também**

Monografia final da disciplina
MAC0499 – Trabalho de Formatura Supervisionado.

Orientadora: Prof. Dr. Ana Cristina Vieira de Melo

São Paulo
Dezembro de 2015

Resumo

Elemento obrigatório, constituído de uma sequência de frases concisas e objetivas, em forma de texto. Deve apresentar os objetivos, métodos empregados, resultados e conclusões. O resumo deve ser redigido em parágrafo único, conter no máximo 500 palavras e ser seguido dos termos representativos do conteúdo do trabalho (palavras-chave).

Palavras-chave: palavra-chave1, palavra-chave2, palavra-chave3.

Abstract

Elemento obrigatório, elaborado com as mesmas características do resumo em língua portuguesa.

Keywords: keyword1, keyword2, keyword3.

Contents

1	Concepts	1
1.1	Statecharts and Automata	1
1.1.1	Nondeterministic finite automata	1
1.1.2	Statechart models	2
1.2	Tests	3
1.2.1	Testing goals	3
1.2.2	The processes of testing	4
1.2.3	Functional and Structural tests	4
A	Título do apêndice	7
	Bibliography	9

Chapter 1

Concepts

1.1 Statecharts and Automata

A software specification is a reference document which contains the requisites the program should satisfy. It can also be understood as a model of how the system should behave. A specification may be developed with natural language, with user cases for example, or using formal software engineering techniques.

Statecharts are a type of formal software specification based on finite states machines (FSM) specially used in complex systems modeling, such as reactive systems and were defined in [3]. Similar to an automaton, a statechart has sets of states, transitions and input events that cause change of state. However, a statechart has additional features: orthogonality, hierarchy, broadcasting and history.

1.1.1 Nondeterministic finite automata

Definition: A nondeterministic finite automaton is a quintuple $M = (K, \Sigma, \Delta, s, F)$, where:

- K is the set of states
- Σ is the input alphabet
- Δ is the transition relation, a subset of $K \times (\Sigma \cup e) \times K$, where e is the empty string
- $s \in K$ is the initial state
- $F \subseteq K$ is the set of final states

Each tripe $(q, a, p) \in \Delta$ is a transition of M . If M is currently in state q and the next input is a , then M may follow any transition of the form (q, a, p) or (q, e, p) . In the later case, no input is read. A configuration of M is an element of K^* and the relation \vdash (yields one step) between two configurations is defined as: $(q, w) \vdash (q', w') \Leftrightarrow$ there is a $u \in \Sigma \cup e$ such that $w = uw'$ and $(q, u, q') \in \Delta$.

Further information and formalism regarding finite automata can be obtained in [4].

A nondeterministic finite automaton example

1.1.2 Statechart models

A statechart model can be considered a extended finite state machine. The syntax of statechart is defined over the set of states, transitions, events, actions, conditions, expressions and labels [3]. In short terms:

- Transitions are the relations between states
- Events are the input that might cause a transition to happen
- Actions are generally triggered when a transition occurs
- Conditions are boolean verifications added to a transition in order to restrict the occurrence of that transitions
- Expressions are composed of variables and algebraic operations over them
- A label is a pair made of an event and an action that is used to label a transition

Furthermore, it is worth to notice that a statechart model possess other features, described over the next sections of this chapter, that do not appear in a common finite state machine. These extra resources are useful, for instance, to model concurrency and different abstraction levels in a more practical way.

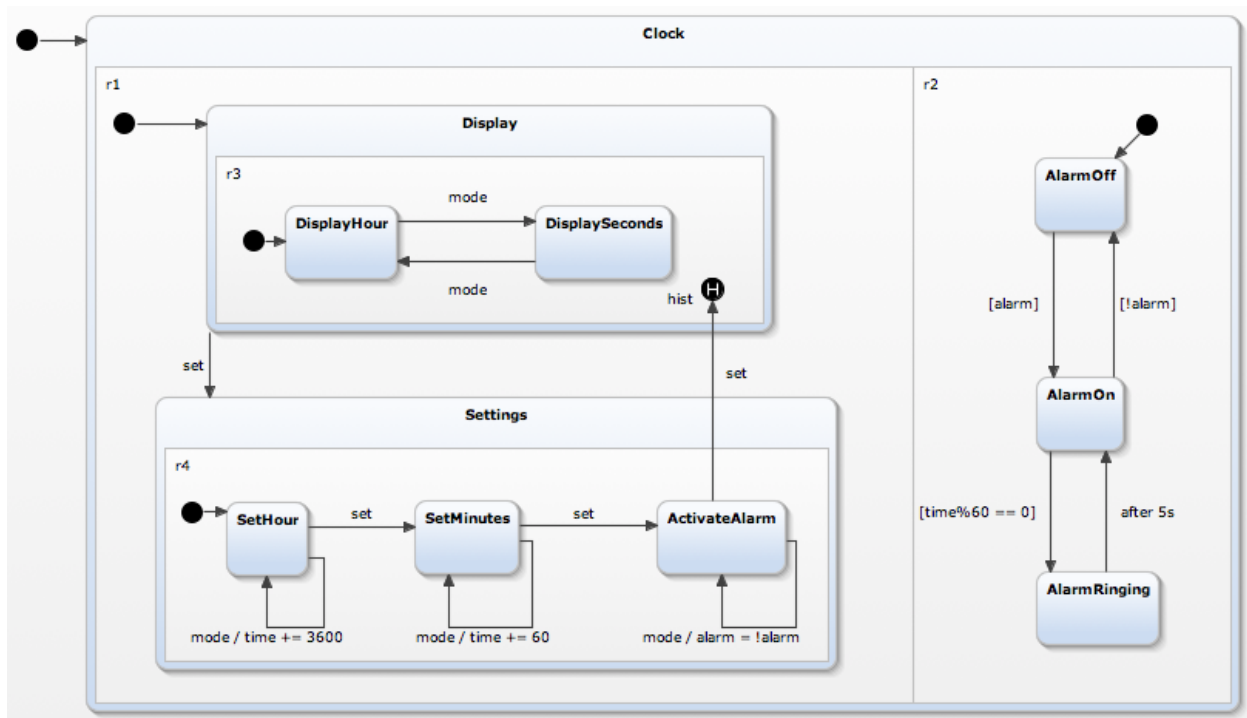


Figure 1.1: Statechart example. A clock model.

Orthogonality

More than one state may be active at the same time in a statechart, which is called orthogonality. It can be used to model concurrent and parallel situations. The set of active states in a certain moment is called configuration.

Hierarchy

It is possible that a state contains other states, called substates, and internal transitions, increasing the abstraction and encapsulation level of the model.

Guard conditions

In a transition, a guard condition is always verified before the change of states take place. If the condition is satisfied, in other words, the expression returns true, the transition will happen. Otherwise, that transition is not allowed to happen. An expression in a guard condition involve variables and operations. It is possible to check whether a state was entered for example.

Broadcasting

Besides an input event, a transition might have an action that is triggered when the transition is done. An action may cause another transition to happen, that is called broadcasting. This feature makes it possible that chain reactions occur in a statechart model.

History

A statechart is capable of remembering previously visited states by accessing the history state.

A statechart example

Find below an example of a statechart model. When compared to the nondeterministic finite automaton displayed previously, we can notice that the number of states is reduced due to the increase in the abstraction level using hierarchy and orthogonality. Besides, in the statechart we can make usage of guard transitions and broadcasting, enriching the model with more information.

1.2 Tests

Since code has been written, programs have been tested. Testing is one of the most important means of assessing the software quality and it typically consumes from 40% up to 50% of the software development effort [5]. Therefore, it constitutes an important area in software engineering.

Testing evolved from an activity related to debugging code to a way of checking specification, design as well as implementation [5]. It can be considered a process not only to detect bugs, but to also prevent them [2].

1.2.1 Testing goals

In an organization, the goals of testing vary depending on the level of maturity of the team [1]: At a more inexperienced approach, testing could be viewed as the same as debugging the code. A further step would be to consider testing as the process to make sure that a software does what it is supposed to do. But, in this case, if a team runs a test suite and every test case passed, should the team consider that the software is correct or could it be that the test cases were not enough? How does the team decide when to stop?

A different perspective, then, would be to understand testing as the process of finding errors. Therefore a successful test case would be the one that indicated an error in the system [7]. Although discovering unexpected results and behaviour is a valid goal, it might put tester and developers in an adversarial relationship, which certainly damages the team interaction.

Testing shows the presence, but not the absence of errors. Hence, realizing that when executing a software we are under some risk that may have unimportant or great consequences leads to another way to see the intention of the test process: to reduce the risk of using the program, an effort that should be performed by both testers and developers.

Thus, testing can be seen as a mental discipline that helps all professionals in the software industry to increase quality. [1]. The whole software development process could benefit from that thinking: Design and specification would be more clear and precise and the implementation would have fewer errors and would be more easily validated, for example.

1.2.2 The processes of testing

Since testing is a time consuming activity, the creation of test cases can be done during each stage of the development process, even though their execution will only be possible after some part of the code is implemented.

V-Model

The V-model in figure (COLOCAR FIGURA) associates each level of testing to a different phase in the development process. This model is typically viewed as an extension of the waterfall methodology, but it does not mandatorily implies the waterfall approach since the synthesis and analysis activities generically apply to any development process [1].

- Requirement analysis phase: Customer's needs are registered. **User acceptance tests (UAT)** are constructed to validate that the delivered system meets the customer's requirements.
- System design phase: Technical team analyzed the captured requirements and study the possibilities to implement them and document a technical specification. **System tests** are designed at this stage assuming that all pieces work individually and checks if the system works as a whole.
- Architectural design phase: Specify interface relationships, dependencies, structure and behaviour of subsystems. **Integration tests** are developed, with the assumption that each module works correctly, in order to verify all interfaces and communication among subsystems.
- Detailed design phase: A low-level design is done to divide the system in smaller pieces, each one of them with the corresponding behaviour specified so that the programmer can code. **Module testing** is designed to check each module individually.
- Implementation phase: Code is actually produced. **Unit tests** are designed to test every smallest unit of code, such a method, can work correctly when isolated.

1.2.3 Functional and Structural tests

Testing techniques can be divided in functional and structural categories.

Functional technique (black box)

Functionalities described in the specification are considered to create the test cases. It is necessary to study the behaviour and functionalities presented, develop the corresponding test cases, submit the system to the test cases and analyze the results observed comparing them to what was expected according to the description in the specification. Examples of criteria in this technique[6]:

- **Equivalence classes partitioning**

Input data are partitioned into valid and invalid classes according to the conditions specified. The test cases are created based on each class by selecting a element in each class are a representative of the whole class. Using this criterion, the test cases can be executed systematically according to the requisites.

- **Analysis of the limit value**

Similar to the previous criterion, but the selection of the representative is done based on the classes' boundary. For that reason, the conditions associated with the limit values are exercised more strictly.

Since many specifications are written in descriptive way, the test cases developed using the functional technique can be informal and not specific enough, which makes it difficult to automate their execution and human intervention becomes necessary. However, this technique only requires that requisites, input and corresponding output are identified. Thus, it can be applied during several testing phases, such as integration and system.

Structural technique (white box)

The structure of the code implementation is considered to create the test cases. In this technique, the program is represented by an oriented graph of flow control, in which each vertex corresponds to a block of code, a statement in the code for instance, and each edge corresponds to a transition between the blocks. The criteria related to this technique are generally concerned with the coverage of the program graph, such as [1]:

- **Node coverage**

Every reachable node in the graph must be exercised by the test set. Node coverage is implemented by many testing tools, most often in the form of statement coverage

- **Edge coverage**

Every edge in the graph must be tested in the test set.

- **Complete path coverage**

All paths in the graph must be tested by the test set. This criterion is infeasible if there are cycles in the graph due to the infinity number of paths.

- **Prime path coverage**

A path is a prime path if it is a simple path and it does not appear as a proper subpath of any other simple path. In this criterion, all prime paths should be tested.

- **Specified Path Coverage**

A specific set S of paths is given and the test set must exercise all paths in S . In situation might occur if the use scenarios provided by the customer are converted to paths in the graph and the team wishes to test them.

Tests obtained via structural technique contribute specially to code maintenance and increase the reliability of the implementation. But, they do not represent a way to validate the system against customer's requirements, since the specified requisites are not considered in their design.

Appendix A

Título do apêndice

[illegible]

Bibliography

- [1] Paul Ammann and Jeff Offutt. *Introduction to Software Testing*. Cambridge University Press, 2008. [3](#), [4](#), [5](#)
- [2] Boris Beizer. *Software Testing Techniques*. 2 edition, 1990. [3](#)
- [3] David Harel, Amir Pnueli, Jeanette Schmidt, and Rivi Sherman. On the formal semantics of statecharts. In *Proceedings of Symposium on Logic in Computer Science*, pages 55–64, 1987. [1](#), [2](#)
- [4] Harry R. Lewis and Christos H. Papadimitriou. *Elements of the Theory of Computation*. Prentice Hall, Inc, 2 edition, 1998. [1](#)
- [5] Lu Luo. Software testing techniques - technology maturation and research strategy. Technical report, Institute for Software Research International, Carnegie Mellon University, Pittsburgh,USA. [3](#)
- [6] José Carlos Maldonado, Ellen Franciane Barbosa, Auri M. R. Vincenzi, Márcio Eduardo Delamaro, Simone do Roccio Senger de Souza, and Mario Jino. *Introdução ao teste de software*, 2004. [5](#)
- [7] Glenford J. Myers, Tom Badgett, and Corey Sandler. *The art of software testing*. John Wiley & Sons, Inc, 3rd edition, 2012. [4](#)