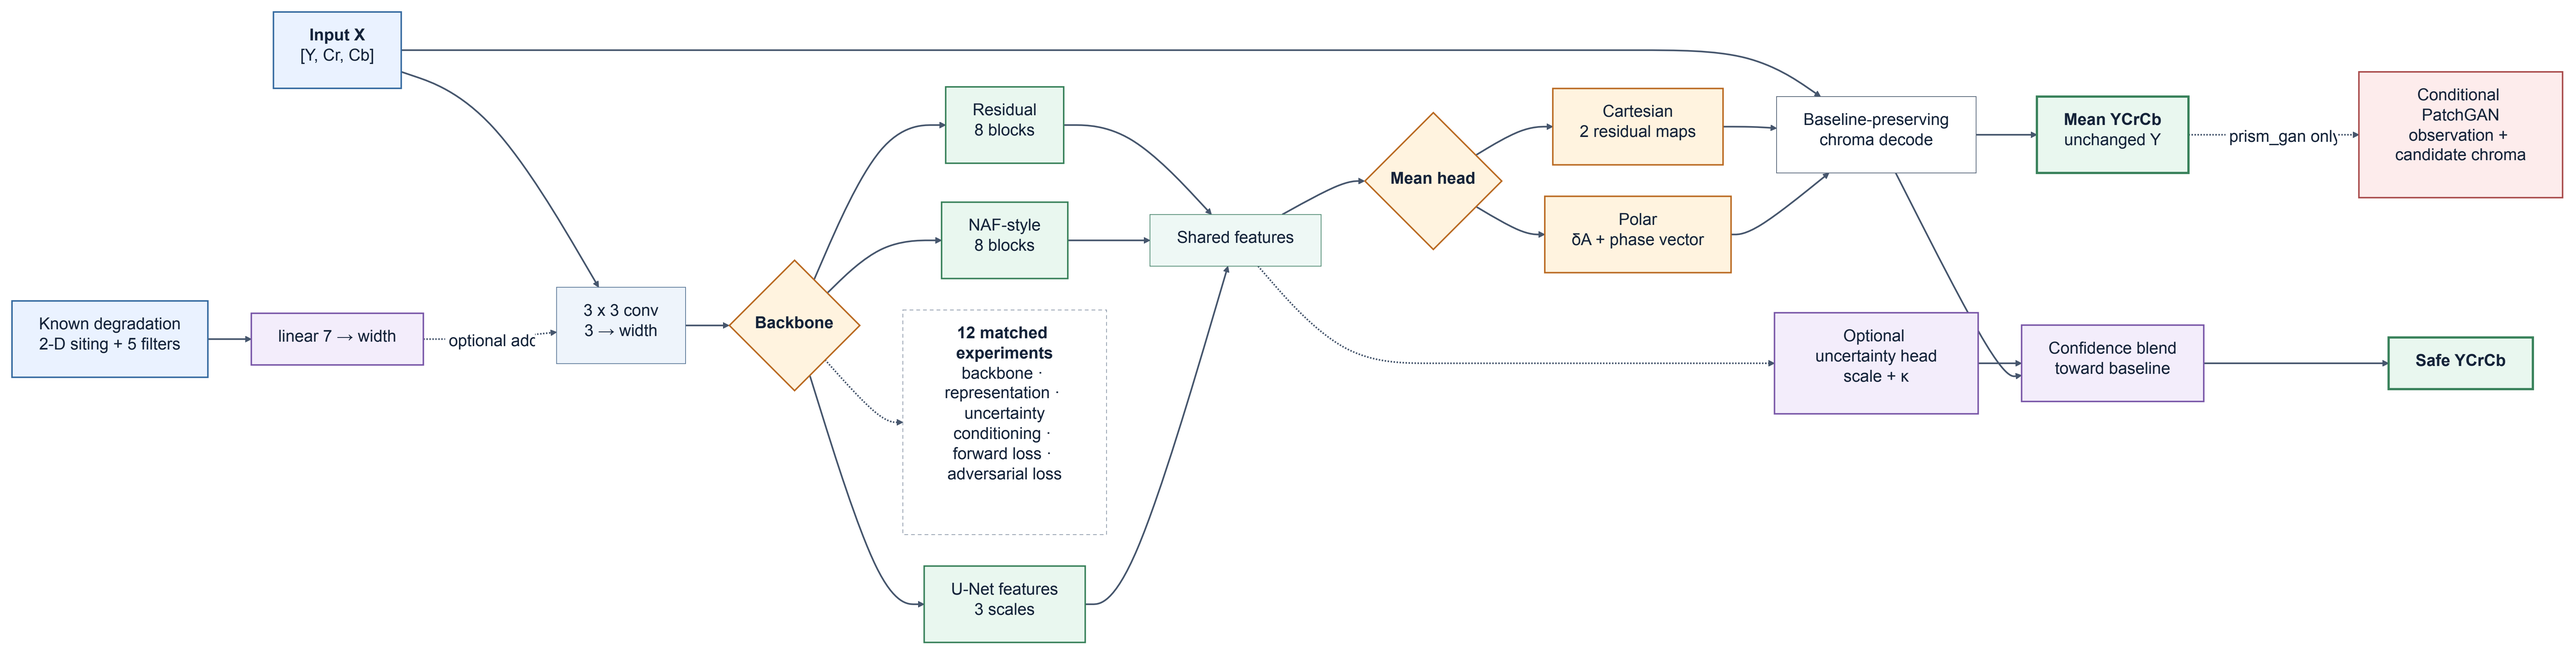

Input X
[Y, Cr, Cb]
Known degradation
2-D siting + 5 filters
linear 7 → width
optional adc
3 x 3 conv
3 → width
Backbone
Residual
8 blocks
NAF-style
8 blocks
12 matched
experiments
backbone ·
representation ·
uncertainty
conditioning ·
forward loss ·
adversarial loss
U-Net features
3 scales
Shared features
Mean head
Cartesian
2 residual maps
Polar
δA + phase vector
Baseline-preserving
chroma decode
Mean YCrCb
unchanged Y
prism_gan only
Conditional
PatchGAN
observation +
candidate chroma
Optional
uncertainty head
scale + κ
Confidence blend
toward baseline
Safe YCrCb