

From time series to complex networks: The visibility graph

Lucas Lacasa^{*†}, Bartolo Luque^{*}, Fernando Ballesteros[‡], Jordi Luque[§], and Juan Carlos Nuño[¶]

^{*}Departamento Matemática Aplicada y Estadística, ETSI Aeronáuticos, Universidad Politécnica de Madrid, 28040 Madrid, Spain; [†]Observatorio Astronómico, Universidad de Valencia, 46010 Valencia, Spain; [‡]Departamento de Teoría del Senyal i Comunicacions, Universitat Politècnica de Catalunya, 08034 Barcelona, Spain; and [¶]Departamento Matemática Aplicada a los Recursos Naturales, ETSI Montes, Universidad Politécnica de Madrid, 28040 Madrid, Spain

Edited by Albert-László Barabási, Northeastern University, Boston, MA, and accepted by the Editorial Board January 15, 2008 (received for review September 29, 2007)

In this work we present a simple and fast computational method, the *visibility algorithm*, that converts a time series into a graph. The constructed graph inherits several properties of the series in its structure. Thereby, periodic series convert into regular graphs, and random series do so into random graphs. Moreover, fractal series convert into scale-free networks, enhancing the fact that power law degree distributions are related to fractality, something highly discussed recently. Some remarkable examples and analytical tools are outlined to test the method's reliability. Many different measures, recently developed in the complex network theory, could by means of this new approach characterize time series from a new point of view.

Brownian motion | complex systems | fractals

In this article we present a tool in time series analysis: the *visibility graph*. This algorithm maps a time series into a network. The main idea is to study to which extent the techniques and focus of graph theory are useful as a way to characterize time series. As will be shown below, this network inherits several properties of the time series, and its study reveals nontrivial information about the series itself.

For illustrative purposes, in Fig. 1 we present a scheme of the visibility algorithm. In the upper zone we plot the first 20 values of a periodic series by using vertical bars (the data values are displayed above the plot). Considering this as a landscape, we link every bar (every point of the time series) with all those that can be seen from the top of the considered one (gray lines), obtaining the associated graph (shown in the lower part of the figure). In this graph, every node corresponds, in the same order, to series data, and two nodes are connected if visibility exists between the corresponding data, that is to say, if there is a straight line that connects the series data, provided that this “visibility line” does not intersect any intermediate data height.

More formally, we can establish the following visibility criteria: two arbitrary data values (t_a, y_a) and (t_b, y_b) will have visibility, and consequently will become two connected nodes of the associated graph, if any other data (t_c, y_c) placed between them fulfills:

$$y_c < y_b + (y_a - y_b) \frac{t_b - t_c}{t_b - t_a} \quad [1]$$

We can easily check that by means of the present algorithm, the associated graph extracted from a time series is always:

1. Connected: each node sees at least its nearest neighbors (left and right).
2. Undirected: the way the algorithm is built up, there is no direction defined in the links.
3. Invariant under affine transformations of the series data: the visibility criterion is invariant under rescaling of both horizontal and vertical axes, and under horizontal and vertical translations (see Fig. 2).

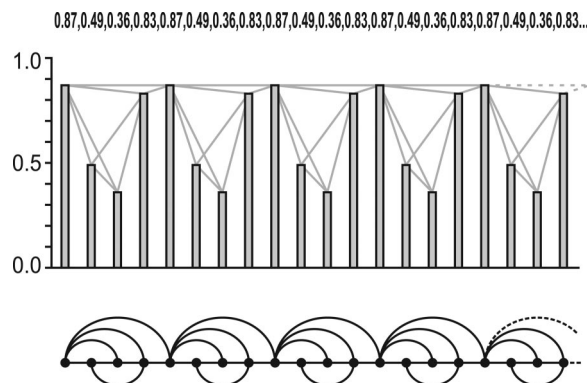


Fig. 1. Example of a time series (20 data values) and the associated graph derived from the visibility algorithm. In the graph, every node corresponds, in the same order, to series data. The visibility rays between the data define the links connecting nodes in the graph.

In a recent work (1), Zhang and Small (ZS) introduced another mapping between time series and complex networks. Although the philosophy is similar to this work (to encode the time series in a graph to characterize the series by using graph theory), fundamental differences exist between both methods, mainly in what refers to the range of applicability (ZS only focus on pseudoperiodic time series, associating each series cycle to a node and defining links between nodes by temporal correlation measures, whereas the visibility graph can be applied to every kind of time series) and the graph connectedness (in ZS the giant component is assured only ad hoc; meanwhile, the visibility graph is always connected by definition).

The key question is to know whether the associated graph inherits some structure of the time series, and consequently whether the process that generated the time series may be characterized by using graph theory. In a first step we will consider periodic series. As a matter of fact, the example plotted in Fig. 1 is nothing but a periodic series with period 4. The associated visibility graph is regular, as long as it is constructed by periodic repetition of a pattern. The degree distribution of this graph is formed by a finite number of peaks related to the series period, much in the vein of the Fourier power spectrum of a time series. Generically speaking, all periodic time series are mapped into regular graphs, the discrete degree distribution being the fingerprint of the time series periods. In the case of

Author contributions: B.L., F.B., and J.C.N. designed research; L.L. and B.L. performed research; L.L. and B.L. contributed new reagents/analytic tools; L.L., B.L., F.B., and J.L. analyzed data; and L.L. wrote the paper.

The authors declare no conflict of interest.

This article is a PNAS Direct Submission. A.-L.B. is a guest editor invited by the Editorial Board.

[†]To whom correspondence should be addressed. E-mail: lucas@dmae.upm.es.

© 2008 by The National Academy of Sciences of the USA

that the network structure is completely determined in the (binary) adjacency matrix. For instance, two periodic series with the same period as $T_1 = \{\dots, 3, 1, 3, 1, \dots\}$ and $T_2 = \{\dots, 3, 2, 3, 2, \dots\}$ would have the same visibility graph, albeit being quantitatively different. Although the spirit of the visibility graph is to focus on time series structural properties (periodicity, fractality, etc.), the method can be trivially generalized by using weighted networks (where the adjacency matrix is not binary and the weights determine the slope of the visibility line between two data values), if we eventually need to quantitatively distinguish time series like T_1 and T_2 , for instance.

Although in this article we have only tackled undirected graphs, note that one could also extract a directed graph (related to the temporal axis direction) in such a way that for a given node one should distinguish two different connectivities: an incoming degree k_{in} , related to how many nodes see a given node i , and an outgoing degree k_{out} , that is the number nodes that node i sees. In that situation, if the direct visibility graph extracted from a given time series is not invariant under time reversion [that is, if $P(k_{in}) \neq P(k_{out})$], one could assert that the process that generated the series is not conservative. In a first approximation we have studied the undirected version and the directed one will be eventually addressed in further work.

There are some direct applications of the method that can be put forward. The relation between the exponent of the degree distributions and the Hurst exponent of the series will be addressed in further work. In particular, it turns out that the method presented here constitutes a reliable tool to estimate Hurst exponents, as far as a functional relation between the Hurst exponent of a fractal series and the degree distribution of

its visibility graph holds (J.C.N., B.L., L.L., and F.B., unpublished work). Note that the estimation of Hurst exponents is an issue of major importance in data analysis that is yet to be completely solved (see, for instance, ref. 20). Fractional Brownian motions, a concept of great interest in a large variety of fields ranging from electronic devices to biology, will also be considered in relation with the preceding point.

Moreover, the ability of the algorithm to detect not only the difference between random and chaotic series but also the spatial location of inverse bifurcations in chaotic dynamical systems is another fundamental issue that will also be at the core of further investigations (unpublished work). Finally, the visibility graph characterizes nontrivial time series and, in that sense, the method may be relevant in specific problems of different garments, such as human behavior time series recently put forward (21).

In summary, a algorithm that converts time series into graphs is presented. The structure of the time series is conserved in the graph topology: periodic series convert into regular graphs, random series into random graphs, and fractal series into scale-free graphs. Such characterization goes beyond the preceding points, since different graph topologies arise from apparently similar fractal series. In fact, the method captures the hub repulsion phenomenon associated with fractal networks (11) and thus distinguishes scale-free visibility graphs evidencing the small-world effect from those showing scale invariance. With the visibility algorithm, a natural bridge between complex networks theory and time series analysis has now been built.

ACKNOWLEDGMENTS. We thank the editor and two anonymous referees for their comments. This work was supported by Spanish Ministry of Science Grant FIS2006-08607.

1. Zhang J, Small M (2006) *Phys Rev Lett* 96:238701.
2. Bollobás B (1998) *Modern Graph Theory* (Springer, New York).
3. Feller W (1971) *An Introduction to Probability Theory and Its Applications* (Wiley, New York).
4. Barabási AL, Albert R (1999) *Science* 286:509.
5. Albert R, Barabási AL (2002) *Rev Mod Phys* 74:47–92.
6. Newman MEJ (2003) *SIAM Rev* 45:167–256.
7. Dorogovtsev S, Mendes JFF (2002) *Adv Phys* 51:4.
8. Boccaletti S, Latora V, Moreno Y, Chávez M, Hwang DU (2006) *Phys Rep* 424:175–308.
9. Song C, Havlin S, Makse HA (2005) *Nature* 433:392.
10. Goh KI, Salvi G, Kahng B, Kim D (2006) *Phys Rev Lett* 96:018701.
11. Song C, Havlin S, Makse HA (2006) *Nat Phys* 2:275.
12. Kim JS, Goh KI, Salvi G, Oh E, Kahng B, Kim D (2007) *Phys Rev E* 75:016110.
13. Watts DJ, Strogatz SH (1998) *Nature* 393:440–442.
14. Conway J (1988) *Some Crazy Sequences*, Lecture presented at AT&T Bell Labs, Murray Hill, NJ, 15 July.
15. Hofstadter D (1980) *Gödel, Escher, Bach* (Vintage Books, New York), pp 137–138.
16. Stern MA (1858) *J Reine Angew Math* 55:193–220.
17. Schroeder MR (1991) *Fractals, Chaos, and Power Laws* (Freeman, New York).
18. Barabási A-L, Ravasz E, Vicsek T (2001) *Physica A* 299:559564.
19. Hicks KH, Mullen GL, Sato I (2002) Distribution of irreducible polynomials over F_2 . *Finite Fields with Applications to Coding Theory, Cryptography and Related Areas* (Oaxaca, 2001) (Springer, Berlin), pp 177–186.
20. Karagiannis T, Molle M, Faloutsos M (2004) *IEEE Internet Comput* 8:5.
21. Vázquez A, Gama Oliveira J, Deszö Z, Goh K, Kondor I, Barabási AL (2006) *Phys Rev E* 73:036127.