
ETABS®

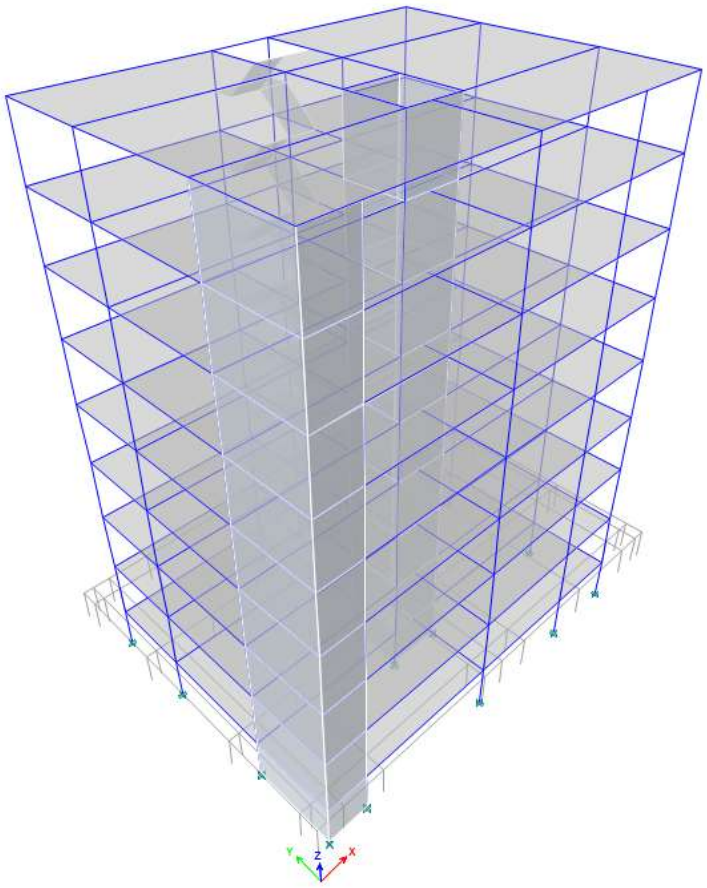

Project Report

Model File: 210051162, Revision 0
3/17/2026

Table of Contents

1. Structure Data 6
   - 1.1 Story Data 6
   - 1.2 Grid Data 6
   - 1.3 Point Coordinates 6
   - 1.4 Line Connectivity 18
   - 1.5 Area Connectivity 19
   - 1.6 Mass 21
   - 1.7 Groups 22
2. Properties 24
   - 2.1 Materials 24
   - 2.2 Frame Sections 24
   - 2.3 Shell Sections 25
   - 2.4 Reinforcement Sizes 25
   - 2.5 Links 26
   - 2.6 Tendon Sections 26
3. Assignments 27
   - 3.1 Joint Assignments 27
   - 3.2 Frame Assignments 35
   - 3.3 Shell Assignments 52
4. Loads 60
   - 4.1 Load Patterns 60
   - 4.2 Auto Wind Loading 60
   - 4.3 Auto Seismic Loading 70
   - 4.4 Applied Loads 74
     - 4.4.1 Point Loads 74
     - 4.4.2 Line Loads 76
     - 4.4.3 Area Loads 86
   - 4.5 Functions 92
     - 4.5.1 Response Spectrum Functions 92
     - 4.5.2 Time History Functions 92
   - 4.6 Load Cases 92
   - 4.7 Load Combinations 92
5. Analysis Results 97

Table of Contents

5.1 Structure Results 97

5.2 Story Results 130

5.3 Point Results 307

5.4 Modal Results 370

List of Tables

Table 1.1 Story Definitions 6
Table 1.2 Grid Definitions - General 6
Table 1.3 Grid Definitions - Grid Lines 6
Table 1.4 Point Bays 7
Table 1.5 Point Object Connectivity 10
Table 1.6 Column Bays 18
Table 1.7 Beam Bays 19
Table 1.8 Floor Bays 19
Table 1.9 Wall Bays 20
Table 1.10 Mass Source Definition 21
Table 1.11 Centers Of Mass And Rigidity 21
Table 1.12 Mass Summary by Diaphragm 22
Table 1.13 Mass Summary by Story 22
Table 1.14 Mass Summary by Group 22
Table 1.15 Group Definitions 23
Table 2.1 Material Properties - General 24
Table 2.2 Frame Section Property Definitions - Summary 24
Table 2.3 Area Section Property Definitions - Summary 25
Table 2.4 Reinforcing Bar Sizes 25
Table 2.5 Link Property Definitions - Summary 26
Table 2.6 Tendon Section Properties 26
Table 3.1 Joint Assignments - Summary 27
Table 3.2 Frame Assignments - Summary 35
Table 3.3 Area Assignments - Summary 52
Table 4.1 Load Pattern Definitions 60
Table 4.4 Joint Loads Assignments - Force 74
Table 4.5 Frame Loads Assignments - Distributed 76
Table 4.6 Area Load Assignments - Uniform 86
Table 4.7 Functions - Response Spectrum - User Defined 92
Table 4.8 Functions - Time History - User Defined 92
Table 4.9 Load Case Definitions - Summary 92
Table 4.10 Load Combination Definitions 92
Table 5.1 Base Reactions 97
Table 5.2 Centers Of Mass And Rigidity 100

List of Tables

Table 5.3 Diaphragm Center Of Mass Displacements 100
Table 5.4 Story Max Over Avg Displacements 130
Table 5.5 Story Drifts 159
Table 5.6 Story Max Over Avg Drifts 218
Table 5.7 Story Forces 247
Table 5.8 Joint Reactions 308
Table 5.9 Modal Periods And Frequencies 370
Table 5.10 Modal Participating Mass Ratios 370
Table 5.11 Modal Load Participation Ratios 371
Table 5.12 Modal Direction Factors 371

1 Structure Data

This chapter provides model geometry information, including items such as story levels, point coordinates, and element connectivity.

1.1 Story Data

Table 1.1 - Story Definitions

Tower	Name	Height ft	Master Story	Similar To	Splice Story	Splice Height ft	Color
T1	ROOF	10	No	1ST	No		Green
T1	7TH	10	No	1ST	No		Red
T1	6TH	10	No	1ST	No		Yellow
T1	5TH	10	No	1ST	No		Blue
T1	4TH	10	No	1ST	No		Cyan
T1	3RD	10	No	1ST	No		Magenta
T1	2ND	10	No	1ST	No		Gray8Dark
T1	1ST	10	Yes	None	No		Green
T1	GF	7	No	None	No		Red

1.2 Grid Data

Table 1.2 - Grid Definitions - General

Tower	Name	Type	Ux ft	Uy ft	Rz deg	Story Range	User Top Story	User Bottom Story	Bubble Size in	Color
T1	G1	Cartesian	0	0	0	Default			30	Gray6

Table 1.3 - Grid Definitions - Grid Lines

Name	Grid Line Type	ID	Ordinate ft	Angle deg	X1 ft	Y1 ft	X2 ft	Y2 ft	Bubble Location	Visible
G1	X (Cartesian)	A	0						End	Yes
G1	X (Cartesian)	B	1.667						End	Yes
G1	X (Cartesian)	C	4.334						End	Yes
G1	X (Cartesian)	D	11.334						End	Yes
G1	X (Cartesian)	E	31.334						End	Yes
G1	X (Cartesian)	F	35.334						End	Yes
G1	X (Cartesian)	G	40.334						End	Yes
G1	X (Cartesian)	H	54.334						End	Yes
G1	X (Cartesian)	I	66.334						End	Yes
G1	X (Cartesian)	J	70.2507						End	Yes
G1	X (Cartesian)	K	72.2507						End	Yes
G1	Y (Cartesian)	1	0						Start	Yes
G1	Y (Cartesian)	2	3.0833						Start	Yes
G1	Y (Cartesian)	3	17.0833						Start	Yes
G1	Y (Cartesian)	4	36.0833						Start	Yes
G1	Y (Cartesian)	5	50.0833						Start	Yes
G1	Y (Cartesian)	6	53.1666						Start	Yes

1.3 Point Coordinates

Table 1.4 - Point Bays

Label	Is Auto Point	X ft	Y ft	DZBelow ft
1	No	35.834	41.5833	0
2	No	35.834	46.9166	5
3	Yes	34.7102	26.0181	0
4	No	66.334	3.0833	0
5	No	31.334	50.0833	0
6	No	40.334	50.0833	0
7	No	4.334	36.0833	0
8	No	66.334	36.0833	0
9	No	35.334	3.0833	0
10	No	54.334	3.0833	0
11	No	4.334	50.0833	0
12	No	66.334	50.0833	0
13	No	4.334	17.0833	0
14	No	11.334	3.0833	0
15	No	66.334	17.0833	0
16	No	31.334	36.0833	0
17	No	40.334	36.0833	0
18	No	31.334	17.0833	0
19	No	40.334	17.0833	0
20	Yes	34.4005	25.891	0
21	Yes	34.4005	25.891	0
22	Yes	34.4005	25.891	0
23	Yes	34.4005	25.891	0
24	Yes	34.4005	25.891	0
25	Yes	34.4005	25.891	0
26	Yes	34.4005	25.891	0
27	No	35.334	17.0833	0
28	Yes	34.6407	26.0082	0
29	No	4.334	3.0833	0
30	Yes	35.334	26.5833	0
31	Yes	35.334	26.5833	0
32	Yes	35.334	26.5833	0
33	Yes	35.334	26.5833	0
34	No	31.334	41.5833	0
35	No	40.334	41.5833	0
36	No	40.334	46.9166	5
37	No	31.334	46.9166	5
38	Yes	35.334	26.5833	0
39	Yes	35.334	26.5833	0
40	No	40.334	50.0833	5
41	No	31.334	50.0833	5
42	Yes	35.334	26.5833	0
43	Yes	35.334	26.5833	0
44	Yes	35.334	26.5833	0

Table 1.4 - Point Bays (continued)

Label	Is Auto Point	X ft	Y ft	DZBelow ft
45	No	31.334	26.5833	0
46	No	40.334	26.5833	0
153	Yes	35.334	26.5833	0
154	Yes	35.334	26.5833	0
155	Yes	35.334	26.5833	0
156	Yes	35.334	26.5833	0
157	Yes	35.334	26.5833	0
158	Yes	35.334	26.5833	0
159	Yes	35.334	26.5833	0
160	Yes	35.334	26.5833	0
161	Yes	35.334	26.5833	0
162	Yes	35.334	26.5833	0
163	Yes	35.334	26.5833	0
164	Yes	35.334	26.5833	0
165	Yes	35.334	26.5833	0
166	Yes	35.334	26.5833	0
167	Yes	35.334	26.5833	0
168	Yes	35.334	26.5833	0
169	Yes	35.334	26.5833	0
170	Yes	35.334	26.5833	0
171	Yes	35.334	26.5833	0
172	Yes	35.334	26.5833	0
173	Yes	35.334	26.5833	0
174	Yes	35.334	26.5833	0
175	Yes	35.334	26.5833	0
176	Yes	35.334	26.5833	0
177	Yes	35.334	26.5833	0
178	Yes	35.334	26.5833	0
179	Yes	35.334	26.5833	0
180	Yes	35.334	26.5833	0
181	Yes	35.334	26.5833	0
182	Yes	35.334	26.5833	0
183	Yes	35.334	26.5833	0
184	Yes	35.334	26.5833	0
185	Yes	35.334	26.5833	0
186	Yes	35.334	26.5833	0
187	Yes	35.334	26.5833	0
188	Yes	35.334	26.5833	0
189	Yes	35.334	26.5833	0
190	Yes	35.334	26.5833	0
191	Yes	35.334	26.5833	0
192	Yes	35.334	26.5833	0
193	Yes	35.334	26.5833	0
194	Yes	35.334	26.5833	0
195	Yes	35.334	26.5833	0

Table 1.4 - Point Bays (continued)

Label	Is Auto Point	X ft	Y ft	DZBelow ft
196	Yes	35.334	26.5833	0
197	Yes	35.334	26.5833	0
198	Yes	35.334	26.5833	0
199	Yes	35.334	26.5833	0
200	Yes	35.334	26.5833	0
201	Yes	35.334	26.5833	0
202	Yes	35.334	26.5833	0
203	Yes	35.334	26.5833	0
204	Yes	35.334	26.5833	0
205	Yes	35.334	26.5833	0
206	Yes	35.334	26.5833	0
207	Yes	35.334	26.5833	0
208	Yes	35.334	26.5833	0
209	Yes	35.334	26.5833	0
210	Yes	35.334	26.5833	0
211	Yes	35.334	26.5833	0
212	Yes	35.334	26.5833	0
213	Yes	35.334	26.5833	0
214	Yes	35.334	26.5833	0
215	Yes	35.334	26.5833	0
216	Yes	35.334	26.5833	0
217	Yes	35.334	26.5833	0
218	Yes	35.334	26.5833	0
219	Yes	35.334	26.5833	0
220	Yes	35.334	26.5833	0
221	Yes	35.334	26.5833	0
222	Yes	35.334	26.5833	0
223	Yes	35.334	26.5833	0
224	Yes	35.334	26.5833	0
225	Yes	35.334	26.5833	0
226	Yes	35.334	26.5833	0
227	Yes	35.334	26.5833	0
228	Yes	35.334	26.5833	0
229	Yes	35.334	26.5833	0
230	Yes	35.334	26.5833	0
231	Yes	35.334	26.5833	0
232	Yes	35.334	26.5833	0
233	Yes	35.334	26.5833	0
234	Yes	35.334	26.5833	0
235	Yes	35.334	26.5833	0
236	Yes	35.334	26.5833	0
237	Yes	35.334	26.5833	0
238	Yes	35.334	26.5833	0
239	Yes	35.334	26.5833	0
240	Yes	35.334	26.5833	0

Table 1.4 - Point Bays (continued)

Label	Is Auto Point	X ft	Y ft	DZBelow ft
241	Yes	35.334	26.5833	0
242	Yes	35.334	26.5833	0
243	Yes	35.334	26.5833	0
244	Yes	35.334	26.5833	0
245	Yes	35.334	26.5833	0
246	Yes	35.334	26.5833	0
247	Yes	35.334	26.5833	0
248	Yes	35.334	26.5833	0
249	Yes	35.334	26.5833	0
250	Yes	35.334	26.5833	0
251	Yes	35.334	26.5833	0

Table 1.5 - Point Object Connectivity

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
53	No	ROOF	4	No	66.334	3.0833	87
85	No	ROOF	5	No	31.334	50.0833	87
93	No	ROOF	6	No	40.334	50.0833	87
141	No	ROOF	7	No	4.334	36.0833	87
149	No	ROOF	8	No	66.334	36.0833	87
133	No	ROOF	9	No	35.334	3.0833	87
173	No	ROOF	10	No	54.334	3.0833	87
37	No	ROOF	11	No	4.334	50.0833	87
45	No	ROOF	12	No	66.334	50.0833	87
69	No	ROOF	13	No	4.334	17.0833	87
77	No	ROOF	14	No	11.334	3.0833	87
61	No	ROOF	15	No	66.334	17.0833	87
101	No	ROOF	16	No	31.334	36.0833	87
109	No	ROOF	17	No	40.334	36.0833	87
117	No	ROOF	18	No	31.334	17.0833	87
125	No	ROOF	19	No	40.334	17.0833	87
164	No	ROOF	27	No	35.334	17.0833	87
156	No	ROOF	29	No	4.334	3.0833	87
182	No	ROOF	34	No	31.334	41.5833	87
181	No	ROOF	35	No	40.334	41.5833	87
200	No	ROOF	36	No	40.334	46.9166	82
199	No	ROOF	37	No	31.334	46.9166	82
201	No	ROOF	40	No	40.334	50.0833	82
202	No	ROOF	41	No	31.334	50.0833	82
233	No	ROOF	1	No	35.834	41.5833	87
232	No	ROOF	2	No	35.834	46.9166	82
367	No	ROOF	45	No	31.334	26.5833	87
376	No	ROOF	46	No	40.334	26.5833	87
354	Yes	ROOF	3	Yes	34.7102	26.0181	87
246	Yes	ROOF	30	Yes	35.334	26.5833	87

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
255	Yes	ROOF	153	Yes	35.334	26.5833	87
264	Yes	ROOF	162	Yes	35.334	26.5833	87
273	Yes	ROOF	171	Yes	35.334	26.5833	87
282	Yes	ROOF	180	Yes	35.334	26.5833	87
291	Yes	ROOF	189	Yes	35.334	26.5833	87
300	Yes	ROOF	198	Yes	35.334	26.5833	87
309	Yes	ROOF	207	Yes	35.334	26.5833	87
318	Yes	ROOF	216	Yes	35.334	26.5833	87
327	Yes	ROOF	225	Yes	35.334	26.5833	87
336	Yes	ROOF	234	Yes	35.334	26.5833	87
345	Yes	ROOF	243	Yes	35.334	26.5833	87
52	No	7TH	4	No	66.334	3.0833	77
84	No	7TH	5	No	31.334	50.0833	77
92	No	7TH	6	No	40.334	50.0833	77
140	No	7TH	7	No	4.334	36.0833	77
148	No	7TH	8	No	66.334	36.0833	77
132	No	7TH	9	No	35.334	3.0833	77
172	No	7TH	10	No	54.334	3.0833	77
36	No	7TH	11	No	4.334	50.0833	77
44	No	7TH	12	No	66.334	50.0833	77
68	No	7TH	13	No	4.334	17.0833	77
76	No	7TH	14	No	11.334	3.0833	77
60	No	7TH	15	No	66.334	17.0833	77
100	No	7TH	16	No	31.334	36.0833	77
108	No	7TH	17	No	40.334	36.0833	77
116	No	7TH	18	No	31.334	17.0833	77
124	No	7TH	19	No	40.334	17.0833	77
165	No	7TH	27	No	35.334	17.0833	77
157	No	7TH	29	No	4.334	3.0833	77
184	No	7TH	34	No	31.334	41.5833	77
183	No	7TH	35	No	40.334	41.5833	77
204	No	7TH	36	No	40.334	46.9166	72
203	No	7TH	37	No	31.334	46.9166	72
205	No	7TH	40	No	40.334	50.0833	72
206	No	7TH	41	No	31.334	50.0833	72
235	No	7TH	1	No	35.834	41.5833	77
234	No	7TH	2	No	35.834	46.9166	72
366	No	7TH	45	No	31.334	26.5833	77
375	No	7TH	46	No	40.334	26.5833	77
355	Yes	7TH	20	Yes	34.4005	25.891	77
247	Yes	7TH	31	Yes	35.334	26.5833	77
256	Yes	7TH	154	Yes	35.334	26.5833	77
265	Yes	7TH	163	Yes	35.334	26.5833	77
274	Yes	7TH	172	Yes	35.334	26.5833	77
283	Yes	7TH	181	Yes	35.334	26.5833	77

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
292	Yes	7TH	190	Yes	35.334	26.5833	77
301	Yes	7TH	199	Yes	35.334	26.5833	77
310	Yes	7TH	208	Yes	35.334	26.5833	77
319	Yes	7TH	217	Yes	35.334	26.5833	77
328	Yes	7TH	226	Yes	35.334	26.5833	77
337	Yes	7TH	235	Yes	35.334	26.5833	77
346	Yes	7TH	244	Yes	35.334	26.5833	77
54	No	6TH	4	No	66.334	3.0833	67
86	No	6TH	5	No	31.334	50.0833	67
94	No	6TH	6	No	40.334	50.0833	67
142	No	6TH	7	No	4.334	36.0833	67
150	No	6TH	8	No	66.334	36.0833	67
134	No	6TH	9	No	35.334	3.0833	67
174	No	6TH	10	No	54.334	3.0833	67
38	No	6TH	11	No	4.334	50.0833	67
46	No	6TH	12	No	66.334	50.0833	67
70	No	6TH	13	No	4.334	17.0833	67
78	No	6TH	14	No	11.334	3.0833	67
62	No	6TH	15	No	66.334	17.0833	67
102	No	6TH	16	No	31.334	36.0833	67
110	No	6TH	17	No	40.334	36.0833	67
118	No	6TH	18	No	31.334	17.0833	67
126	No	6TH	19	No	40.334	17.0833	67
166	No	6TH	27	No	35.334	17.0833	67
158	No	6TH	29	No	4.334	3.0833	67
186	No	6TH	34	No	31.334	41.5833	67
185	No	6TH	35	No	40.334	41.5833	67
208	No	6TH	36	No	40.334	46.9166	62
207	No	6TH	37	No	31.334	46.9166	62
209	No	6TH	40	No	40.334	50.0833	62
210	No	6TH	41	No	31.334	50.0833	62
237	No	6TH	1	No	35.834	41.5833	67
236	No	6TH	2	No	35.834	46.9166	62
368	No	6TH	45	No	31.334	26.5833	67
377	No	6TH	46	No	40.334	26.5833	67
356	Yes	6TH	21	Yes	34.4005	25.891	67
248	Yes	6TH	32	Yes	35.334	26.5833	67
257	Yes	6TH	155	Yes	35.334	26.5833	67
266	Yes	6TH	164	Yes	35.334	26.5833	67
275	Yes	6TH	173	Yes	35.334	26.5833	67
284	Yes	6TH	182	Yes	35.334	26.5833	67
293	Yes	6TH	191	Yes	35.334	26.5833	67
302	Yes	6TH	200	Yes	35.334	26.5833	67
311	Yes	6TH	209	Yes	35.334	26.5833	67
320	Yes	6TH	218	Yes	35.334	26.5833	67

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
329	Yes	6TH	227	Yes	35.334	26.5833	67
338	Yes	6TH	236	Yes	35.334	26.5833	67
347	Yes	6TH	245	Yes	35.334	26.5833	67
55	No	5TH	4	No	66.334	3.0833	57
87	No	5TH	5	No	31.334	50.0833	57
95	No	5TH	6	No	40.334	50.0833	57
143	No	5TH	7	No	4.334	36.0833	57
151	No	5TH	8	No	66.334	36.0833	57
135	No	5TH	9	No	35.334	3.0833	57
175	No	5TH	10	No	54.334	3.0833	57
39	No	5TH	11	No	4.334	50.0833	57
47	No	5TH	12	No	66.334	50.0833	57
71	No	5TH	13	No	4.334	17.0833	57
79	No	5TH	14	No	11.334	3.0833	57
63	No	5TH	15	No	66.334	17.0833	57
103	No	5TH	16	No	31.334	36.0833	57
111	No	5TH	17	No	40.334	36.0833	57
119	No	5TH	18	No	31.334	17.0833	57
127	No	5TH	19	No	40.334	17.0833	57
167	No	5TH	27	No	35.334	17.0833	57
159	No	5TH	29	No	4.334	3.0833	57
188	No	5TH	34	No	31.334	41.5833	57
187	No	5TH	35	No	40.334	41.5833	57
212	No	5TH	36	No	40.334	46.9166	52
211	No	5TH	37	No	31.334	46.9166	52
213	No	5TH	40	No	40.334	50.0833	52
214	No	5TH	41	No	31.334	50.0833	52
239	No	5TH	1	No	35.834	41.5833	57
238	No	5TH	2	No	35.834	46.9166	52
369	No	5TH	45	No	31.334	26.5833	57
378	No	5TH	46	No	40.334	26.5833	57
357	Yes	5TH	22	Yes	34.4005	25.891	57
249	Yes	5TH	33	Yes	35.334	26.5833	57
258	Yes	5TH	156	Yes	35.334	26.5833	57
267	Yes	5TH	165	Yes	35.334	26.5833	57
276	Yes	5TH	174	Yes	35.334	26.5833	57
285	Yes	5TH	183	Yes	35.334	26.5833	57
294	Yes	5TH	192	Yes	35.334	26.5833	57
303	Yes	5TH	201	Yes	35.334	26.5833	57
312	Yes	5TH	210	Yes	35.334	26.5833	57
321	Yes	5TH	219	Yes	35.334	26.5833	57
330	Yes	5TH	228	Yes	35.334	26.5833	57
339	Yes	5TH	237	Yes	35.334	26.5833	57
348	Yes	5TH	246	Yes	35.334	26.5833	57
56	No	4TH	4	No	66.334	3.0833	47

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
88	No	4TH	5	No	31.334	50.0833	47
96	No	4TH	6	No	40.334	50.0833	47
144	No	4TH	7	No	4.334	36.0833	47
152	No	4TH	8	No	66.334	36.0833	47
136	No	4TH	9	No	35.334	3.0833	47
176	No	4TH	10	No	54.334	3.0833	47
40	No	4TH	11	No	4.334	50.0833	47
48	No	4TH	12	No	66.334	50.0833	47
72	No	4TH	13	No	4.334	17.0833	47
80	No	4TH	14	No	11.334	3.0833	47
64	No	4TH	15	No	66.334	17.0833	47
104	No	4TH	16	No	31.334	36.0833	47
112	No	4TH	17	No	40.334	36.0833	47
120	No	4TH	18	No	31.334	17.0833	47
128	No	4TH	19	No	40.334	17.0833	47
168	No	4TH	27	No	35.334	17.0833	47
160	No	4TH	29	No	4.334	3.0833	47
190	No	4TH	34	No	31.334	41.5833	47
189	No	4TH	35	No	40.334	41.5833	47
216	No	4TH	36	No	40.334	46.9166	42
215	No	4TH	37	No	31.334	46.9166	42
217	No	4TH	40	No	40.334	50.0833	42
218	No	4TH	41	No	31.334	50.0833	42
241	No	4TH	1	No	35.834	41.5833	47
240	No	4TH	2	No	35.834	46.9166	42
370	No	4TH	45	No	31.334	26.5833	47
379	No	4TH	46	No	40.334	26.5833	47
358	Yes	4TH	23	Yes	34.4005	25.891	47
250	Yes	4TH	38	Yes	35.334	26.5833	47
259	Yes	4TH	157	Yes	35.334	26.5833	47
268	Yes	4TH	166	Yes	35.334	26.5833	47
277	Yes	4TH	175	Yes	35.334	26.5833	47
286	Yes	4TH	184	Yes	35.334	26.5833	47
295	Yes	4TH	193	Yes	35.334	26.5833	47
304	Yes	4TH	202	Yes	35.334	26.5833	47
313	Yes	4TH	211	Yes	35.334	26.5833	47
322	Yes	4TH	220	Yes	35.334	26.5833	47
331	Yes	4TH	229	Yes	35.334	26.5833	47
340	Yes	4TH	238	Yes	35.334	26.5833	47
349	Yes	4TH	247	Yes	35.334	26.5833	47
57	No	3RD	4	No	66.334	3.0833	37
89	No	3RD	5	No	31.334	50.0833	37
97	No	3RD	6	No	40.334	50.0833	37
145	No	3RD	7	No	4.334	36.0833	37
153	No	3RD	8	No	66.334	36.0833	37

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
137	No	3RD	9	No	35.334	3.0833	37
177	No	3RD	10	No	54.334	3.0833	37
41	No	3RD	11	No	4.334	50.0833	37
49	No	3RD	12	No	66.334	50.0833	37
73	No	3RD	13	No	4.334	17.0833	37
81	No	3RD	14	No	11.334	3.0833	37
65	No	3RD	15	No	66.334	17.0833	37
105	No	3RD	16	No	31.334	36.0833	37
113	No	3RD	17	No	40.334	36.0833	37
121	No	3RD	18	No	31.334	17.0833	37
129	No	3RD	19	No	40.334	17.0833	37
169	No	3RD	27	No	35.334	17.0833	37
161	No	3RD	29	No	4.334	3.0833	37
192	No	3RD	34	No	31.334	41.5833	37
191	No	3RD	35	No	40.334	41.5833	37
220	No	3RD	36	No	40.334	46.9166	32
219	No	3RD	37	No	31.334	46.9166	32
221	No	3RD	40	No	40.334	50.0833	32
222	No	3RD	41	No	31.334	50.0833	32
243	No	3RD	1	No	35.834	41.5833	37
242	No	3RD	2	No	35.834	46.9166	32
371	No	3RD	45	No	31.334	26.5833	37
380	No	3RD	46	No	40.334	26.5833	37
359	Yes	3RD	24	Yes	34.4005	25.891	37
251	Yes	3RD	39	Yes	35.334	26.5833	37
260	Yes	3RD	158	Yes	35.334	26.5833	37
269	Yes	3RD	167	Yes	35.334	26.5833	37
278	Yes	3RD	176	Yes	35.334	26.5833	37
287	Yes	3RD	185	Yes	35.334	26.5833	37
296	Yes	3RD	194	Yes	35.334	26.5833	37
305	Yes	3RD	203	Yes	35.334	26.5833	37
314	Yes	3RD	212	Yes	35.334	26.5833	37
323	Yes	3RD	221	Yes	35.334	26.5833	37
332	Yes	3RD	230	Yes	35.334	26.5833	37
341	Yes	3RD	239	Yes	35.334	26.5833	37
350	Yes	3RD	248	Yes	35.334	26.5833	37
58	No	2ND	4	No	66.334	3.0833	27
90	No	2ND	5	No	31.334	50.0833	27
98	No	2ND	6	No	40.334	50.0833	27
146	No	2ND	7	No	4.334	36.0833	27
154	No	2ND	8	No	66.334	36.0833	27
138	No	2ND	9	No	35.334	3.0833	27
178	No	2ND	10	No	54.334	3.0833	27
42	No	2ND	11	No	4.334	50.0833	27
50	No	2ND	12	No	66.334	50.0833	27

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
74	No	2ND	13	No	4.334	17.0833	27
82	No	2ND	14	No	11.334	3.0833	27
66	No	2ND	15	No	66.334	17.0833	27
106	No	2ND	16	No	31.334	36.0833	27
114	No	2ND	17	No	40.334	36.0833	27
122	No	2ND	18	No	31.334	17.0833	27
130	No	2ND	19	No	40.334	17.0833	27
170	No	2ND	27	No	35.334	17.0833	27
162	No	2ND	29	No	4.334	3.0833	27
194	No	2ND	34	No	31.334	41.5833	27
193	No	2ND	35	No	40.334	41.5833	27
224	No	2ND	36	No	40.334	46.9166	22
223	No	2ND	37	No	31.334	46.9166	22
225	No	2ND	40	No	40.334	50.0833	22
226	No	2ND	41	No	31.334	50.0833	22
245	No	2ND	1	No	35.834	41.5833	27
244	No	2ND	2	No	35.834	46.9166	22
372	No	2ND	45	No	31.334	26.5833	27
381	No	2ND	46	No	40.334	26.5833	27
360	Yes	2ND	25	Yes	34.4005	25.891	27
252	Yes	2ND	42	Yes	35.334	26.5833	27
261	Yes	2ND	159	Yes	35.334	26.5833	27
270	Yes	2ND	168	Yes	35.334	26.5833	27
279	Yes	2ND	177	Yes	35.334	26.5833	27
288	Yes	2ND	186	Yes	35.334	26.5833	27
297	Yes	2ND	195	Yes	35.334	26.5833	27
306	Yes	2ND	204	Yes	35.334	26.5833	27
315	Yes	2ND	213	Yes	35.334	26.5833	27
324	Yes	2ND	222	Yes	35.334	26.5833	27
333	Yes	2ND	231	Yes	35.334	26.5833	27
342	Yes	2ND	240	Yes	35.334	26.5833	27
351	Yes	2ND	249	Yes	35.334	26.5833	27
51	No	1ST	4	No	66.334	3.0833	17
83	No	1ST	5	No	31.334	50.0833	17
91	No	1ST	6	No	40.334	50.0833	17
139	No	1ST	7	No	4.334	36.0833	17
147	No	1ST	8	No	66.334	36.0833	17
131	No	1ST	9	No	35.334	3.0833	17
171	No	1ST	10	No	54.334	3.0833	17
35	No	1ST	11	No	4.334	50.0833	17
43	No	1ST	12	No	66.334	50.0833	17
67	No	1ST	13	No	4.334	17.0833	17
75	No	1ST	14	No	11.334	3.0833	17
59	No	1ST	15	No	66.334	17.0833	17
99	No	1ST	16	No	31.334	36.0833	17

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
107	No	1ST	17	No	40.334	36.0833	17
115	No	1ST	18	No	31.334	17.0833	17
123	No	1ST	19	No	40.334	17.0833	17
163	No	1ST	27	No	35.334	17.0833	17
155	No	1ST	29	No	4.334	3.0833	17
180	No	1ST	34	No	31.334	41.5833	17
179	No	1ST	35	No	40.334	41.5833	17
196	No	1ST	36	No	40.334	46.9166	12
195	No	1ST	37	No	31.334	46.9166	12
197	No	1ST	40	No	40.334	50.0833	12
198	No	1ST	41	No	31.334	50.0833	12
231	No	1ST	1	No	35.834	41.5833	17
230	No	1ST	2	No	35.834	46.9166	12
373	No	1ST	45	No	31.334	26.5833	17
382	No	1ST	46	No	40.334	26.5833	17
361	Yes	1ST	26	Yes	34.4005	25.891	17
253	Yes	1ST	43	Yes	35.334	26.5833	17
262	Yes	1ST	160	Yes	35.334	26.5833	17
271	Yes	1ST	169	Yes	35.334	26.5833	17
280	Yes	1ST	178	Yes	35.334	26.5833	17
289	Yes	1ST	187	Yes	35.334	26.5833	17
298	Yes	1ST	196	Yes	35.334	26.5833	17
307	Yes	1ST	205	Yes	35.334	26.5833	17
316	Yes	1ST	214	Yes	35.334	26.5833	17
325	Yes	1ST	223	Yes	35.334	26.5833	17
334	Yes	1ST	232	Yes	35.334	26.5833	17
343	Yes	1ST	241	Yes	35.334	26.5833	17
352	Yes	1ST	250	Yes	35.334	26.5833	17
17	No	GF	4	No	66.334	3.0833	7
18	No	GF	5	No	31.334	50.0833	7
19	No	GF	6	No	40.334	50.0833	7
20	No	GF	7	No	4.334	36.0833	7
21	No	GF	8	No	66.334	36.0833	7
22	No	GF	9	No	35.334	3.0833	7
23	No	GF	10	No	54.334	3.0833	7
24	No	GF	11	No	4.334	50.0833	7
25	No	GF	12	No	66.334	50.0833	7
26	No	GF	13	No	4.334	17.0833	7
27	No	GF	14	No	11.334	3.0833	7
28	No	GF	15	No	66.334	17.0833	7
29	No	GF	16	No	31.334	36.0833	7
30	No	GF	17	No	40.334	36.0833	7
31	No	GF	18	No	31.334	17.0833	7
32	No	GF	19	No	40.334	17.0833	7
34	No	GF	27	No	35.334	17.0833	7

Table 1.5 - Point Object Connectivity (continued)

UniqueName	Is Auto Point	Story	PointBay	IsSpecial	X ft	Y ft	Z ft
33	No	GF	29	No	4.334	3.0833	7
228	No	GF	34	No	31.334	41.5833	7
227	No	GF	35	No	40.334	41.5833	7
229	No	GF	1	No	35.834	41.5833	7
363	No	GF	45	No	31.334	26.5833	7
364	No	GF	46	No	40.334	26.5833	7
362	Yes	GF	28	Yes	34.6407	26.0082	7
254	Yes	GF	44	Yes	35.334	26.5833	7
263	Yes	GF	161	Yes	35.334	26.5833	7
272	Yes	GF	170	Yes	35.334	26.5833	7
281	Yes	GF	179	Yes	35.334	26.5833	7
290	Yes	GF	188	Yes	35.334	26.5833	7
299	Yes	GF	197	Yes	35.334	26.5833	7
308	Yes	GF	206	Yes	35.334	26.5833	7
317	Yes	GF	215	Yes	35.334	26.5833	7
326	Yes	GF	224	Yes	35.334	26.5833	7
335	Yes	GF	233	Yes	35.334	26.5833	7
344	Yes	GF	242	Yes	35.334	26.5833	7
353	Yes	GF	251	Yes	35.334	26.5833	7
1	No	Base	4	No	66.334	3.0833	0
2	No	Base	5	No	31.334	50.0833	0
3	No	Base	6	No	40.334	50.0833	0
4	No	Base	7	No	4.334	36.0833	0
5	No	Base	8	No	66.334	36.0833	0
6	No	Base	9	No	35.334	3.0833	0
7	No	Base	10	No	54.334	3.0833	0
8	No	Base	11	No	4.334	50.0833	0
9	No	Base	12	No	66.334	50.0833	0
10	No	Base	13	No	4.334	17.0833	0
11	No	Base	14	No	11.334	3.0833	0
12	No	Base	15	No	66.334	17.0833	0
13	No	Base	16	No	31.334	36.0833	0
14	No	Base	17	No	40.334	36.0833	0
15	No	Base	18	No	31.334	17.0833	0
16	No	Base	19	No	40.334	17.0833	0
383	No	Base	29	No	4.334	3.0833	0
365	No	Base	45	No	31.334	26.5833	0
374	No	Base	46	No	40.334	26.5833	0

1.4 Line Connectivity

Table 1.6 - Column Bays

Label	PointBayI	PointBayJ	IEndStory
C4	4	4	Below
C5	5	5	Below
C6	6	6	Below

Table 1.6 - Column Bays (continued)

Label	PointBayI	PointBayJ	IEndStory
C7	7	7	Below
C8	8	8	Below
C9	9	9	Below
C10	10	10	Below
C11	11	11	Below
C12	12	12	Below
C13	13	13	Below
C14	14	14	Below
C15	15	15	Below
C16	16	16	Below
C17	17	17	Below
C18	18	18	Below
C19	19	19	Below

Table 1.7 - Beam Bays

Label	PointBayI	PointBayJ
B1	45	46
B19	29	14
B24	10	4
B25	7	11
B26	13	7
B27	29	13
B28	8	12
B29	15	8
B30	4	15
B31	16	5
B32	17	6
B33	18	16
B34	19	17
B37	9	27
B38	5	6
B39	11	5
B40	7	16
B41	13	18
B42	6	12
B43	17	8
B44	19	15
B45	14	9
B46	9	10
B47	18	19
B48	16	17

1.5 Area Connectivity

Table 1.8 - Floor Bays

Label	NumPoints	PointNumber	PointBay
F1	4	1	16
F1		2	17
F1		3	35
F1		4	34
F3	4	1	37
F3		2	36
F3		3	40
F3		4	41
F4	4	1	7
F4		2	16
F4		3	5
F4		4	11
F5	4	1	17
F5		2	8
F5		3	12
F5		4	6
F6	4	1	13
F6		2	18
F6		3	16
F6		4	7
F7	4	1	19
F7		2	15
F7		3	8
F7		4	17
F8	4	1	29
F8		2	9
F8		3	27
F8		4	13
F9	4	1	9
F9		2	4
F9		3	15
F9		4	27
F10	4	1	45
F10		2	46
F10		3	17
F10		4	16

Table 1.9 - Wall Bays

Label	NumPoints	PointNumber	PointBay	PointStory
W1	4	1	1	Below
W1		2	35	Below
W1		3	36	Same
W1		4	2	Same
W2	4	1	2	Same
W2		2	37	Same
W2		3	34	Same

Table 1.9 - Wall Bays (continued)

Label	NumPoints	PointNumber	PointBay	PointStory
W2		4	1	Same
W3	4	1	18	Below
W3		2	45	Below
W3		3	45	Same
W3		4	18	Same
W4	4	1	45	Below
W4		2	46	Below
W4		3	46	Same
W4		4	45	Same
W5	4	1	46	Below
W5		2	19	Below
W5		3	19	Same
W5		4	46	Same
W6	4	1	19	Below
W6		2	18	Below
W6		3	18	Same
W6		4	19	Same
W7	4	1	13	Below
W7		2	29	Below
W7		3	29	Same
W7		4	13	Same
W8	4	1	29	Below
W8		2	14	Below
W8		3	14	Same
W8		4	29	Same

1.6 Mass

Table 1.10 - Mass Source Definition

Name	Is Default	Include Lateral Mass?	Include Vertical Mass?	Lump Mass?	Source Self Mass?	Source Added Mass?	Source Load Patterns?	Move Mass Centroid?	Move Ratio X	Move Ratio Y	Load Pattern	Multiplier
MsSrc1	Yes	Yes	Yes	Yes	No	No	Yes	No			Dead	1
MsSrc1											Live	0.25
MsSrc1											PW	1
MsSrc1											FF	1

Table 1.11 - Centers Of Mass And Rigidity

Story	Diaphragm	Mass X lb-s2/ft	Mass Y lb-s2/ft	XCM ft	YCM ft	Cum Mass X lb-s2/ft	Cum Mass Y lb-s2/ft	XCCM ft	YCCM ft	XCR ft	YCR ft
ROOF	D1	17943.07	17943.07	34.7102	26.0181	17943.07	17943.07	34.7102	26.0181		
7TH	D1	22780.4	22780.4	34.4005	25.891	40723.47	40723.47	34.537	25.947		
6TH	D1	22780.4	22780.4	34.4005	25.891	63503.86	63503.86	34.488	25.9269		
5TH	D1	22780.4	22780.4	34.4005	25.891	86284.26	86284.26	34.4649	25.9174		
4TH	D1	22780.4	22780.4	34.4005	25.891	109064.66	109064.66	34.4515	25.9119		

Table 1.11 - Centers Of Mass And Rigidity (continued)

Story	Diaphragm	Mass X lb-s2/ft	Mass Y lb-s2/ft	XCM ft	YCM ft	Cum Mass X lb-s2/ft	Cum Mass Y lb-s2/ft	XCCM ft	YCCM ft	XCR ft	YCR ft
3RD	D1	22780.4	22780.4	34.4005	25.891	131845.06	131845.06	34.4427	25.9083		
2ND	D1	22780.4	22780.4	34.4005	25.891	154625.45	154625.45	34.4365	25.9058		
1ST	D1	22780.4	22780.4	34.4005	25.891	177405.85	177405.85	34.4319	25.9039		
GF	D1	22581.56	22581.56	34.6407	26.0082	199987.41	199987.41	34.4554	25.9157		

Table 1.12 - Mass Summary by Diaphragm

Story	Diaphragm	Mass X lb-s2/ft	Mass Y lb-s2/ft	Mass Moment of Inertia kip-ft-s2	X Mass Center ft	Y Mass Center ft
ROOF	D1	17943.07	17943.07	10660.9685	34.7102	26.0181
7TH	D1	22780.4	22780.4	14134.3684	34.4005	25.891
6TH	D1	22780.4	22780.4	14134.3684	34.4005	25.891
5TH	D1	22780.4	22780.4	14134.3684	34.4005	25.891
4TH	D1	22780.4	22780.4	14134.3684	34.4005	25.891
3RD	D1	22780.4	22780.4	14134.3684	34.4005	25.891
2ND	D1	22780.4	22780.4	14134.3684	34.4005	25.891
1ST	D1	22780.4	22780.4	14134.3684	34.4005	25.891
GF	D1	22581.56	22581.56	14129.0749	34.6407	26.0082

Table 1.13 - Mass Summary by Story

Story	UX lb-s2/ft	UY lb-s2/ft	UZ lb-s2/ft
ROOF	18143.03	18143.03	18305.38
7TH	22980.36	22980.36	22980.36
6TH	22980.36	22980.36	22980.36
5TH	22980.36	22980.36	22980.36
4TH	22980.36	22980.36	22980.36
3RD	22980.36	22980.36	22980.36
2ND	22980.36	22980.36	22980.36
1ST	22980.36	22980.36	22980.36
GF	22781.52	22781.52	22619.17
Base	1668.92	1668.92	1668.92

Table 1.14 - Mass Summary by Group

Group	Self Mass lb-s2/ft	Self Weight kip	Mass X lb-s2/ft	Mass Y lb-s2/ft	Mass Z lb-s2/ft
All	0	4374.0619	203455.97	203455.97	203455.97

1.7 Groups

Table 1.15 - Group Definitions

Name	Color	Steel Design?	Concrete Design?	Composite Design?
All	Yellow	No	No	No

2 Properties

This chapter provides property information for materials, frame sections, shell sections, and links.

2.1 Materials

Table 2.1 - Material Properties - General

Material	Type	SymType	Grade	Color	Notes
4000Psi	Concrete	Isotropic	f'c 4000 psi	Red	
A416Gr270	Tendon	Uniaxial	Grade 270	Blue	
A992Fy50	Steel	Isotropic	Grade 50	Green	
FY=60000 PSI	Rebar	Uniaxial	Grade 60	Yellow	

2.2 Frame Sections

Table 2.2 - Frame Section Property Definitions - Summary (Part 1 of 4)

Name	Material	Shape	Color	Area in2	J in4	I33 in4	I22 in4	I23 in4	IMajor in4	IMinor in4
C1 20*20	4000Psi	Concrete Rectangular	Green	400	22533.33	13333.33	13333.33			
C2 22*22	4000Psi	Concrete Rectangular	Cyan	484	32991.05	19521.33	19521.33			
C3 24*24	4000Psi	Concrete Rectangular	Red	576	46725.12	27648	27648			
FB 24*12	4000Psi	Concrete Rectangular	Blue	288	9492.12	13824	3456			
GB 26*14	4000Psi	Concrete Rectangular	Cyan	364	15770.49	20505.33	5945.33			
GC1 22*22	4000Psi	Concrete Rectangular	Magenta	484	32991.05	19521.33	19521.33			
GC2 24*24	4000Psi	Concrete Rectangular	Yellow	576	46725.12	27648	27648			
GC3 26*26	4000Psi	Concrete Rectangular	Gray8Dark	676	64357.45	38081.33	38081.33			
SB 20*12	4000Psi	Concrete Rectangular	Green	240	7212.47	8000	2880			

Table 2.2 - Frame Section Property Definitions - Summary (Part 2 of 4)

Name	MajorAngle deg	As2 in2	As3 in2	S33Pos in3	S33Neg in3	S22Pos in3	S22Neg in3	Z33 in3	Z22 in3	R33 in	R22 in
C1 20*20		333.33	333.33	1333.33	1333.33	1333.33	1333.33	2000	2000	5.7735	5.7735
C2 22*22		403.33	403.33	1774.67	1774.67	1774.67	1774.67	2662	2662	6.3509	6.3509
C3 24*24		480	480	2304	2304	2304	2304	3456	3456	6.9282	6.9282
FB 24*12		240	240	1152	1152	576	576	1728	864	6.9282	3.4641
GB 26*14		303.33	303.33	1577.33	1577.33	849.33	849.33	2366	1274	7.5056	4.0415
GC1 22*22		403.33	403.33	1774.67	1774.67	1774.67	1774.67	2662	2662	6.3509	6.3509
GC2 24*24		480	480	2304	2304	2304	2304	3456	3456	6.9282	6.9282
GC3 26*26		563.33	563.33	2929.33	2929.33	2929.33	2929.33	4394	4394	7.5056	7.5056
SB 20*12		200	200	800	800	480	480	1200	720	5.7735	3.4641

Table 2.2 - Frame Section Property Definitions - Summary (Part 3 of 4)

Name	Fillet Radius in	CG Offset 3 in	CG Offset 2 in	PNA Offset 3 in	PNA Offset 2 in	SC Offset 3 in	SC Offset 2 in	Area Modifier	As2 Modifier	As3 Modifier	J Modifier
C1 20*20		0	0	0	0			1	1	1	0.001
C2 22*22		0	0	0	0			1	1	1	0.001
C3 24*24		0	0	0	0			1	1	1	0.001

Table 2.2 - Frame Section Property Definitions - Summary (Part 3 of 4, continued)

Name	Fillet Radius in	CG Offset 3 in	CG Offset 2 in	PNA Offset 3 in	PNA Offset 2 in	SC Offset 3 in	SC Offset 2 in	Area Modifier	As2 Modifier	As3 Modifier	J Modifier
FB 24*12		0	0	0	0			1	1	1	0.001
GB 26*14		0	0	0	0			1	1	1	0.001
GC1 22*22		0	0	0	0			1	1	1	0.001
GC2 24*24		0	0	0	0			1	1	1	0.001
GC3 26*26		0	0	0	0			1	1	1	0.001
SB 20*12		0	0	0	0			1	1	1	0.001

Table 2.2 - Frame Section Property Definitions - Summary (Part 4 of 4)

Name	I22 Modifier	Mass Modifier	Weight Modifier
C1 20*20	0.98	1	1
C2 22*22	0.98	1	1
C3 24*24	0.98	1	1
FB 24*12	0.49	1	1
GB 26*14	0.49	1	1
GC1 22*22	0.98	1	1
GC2 24*24	0.98	1	1
GC3 26*26	0.98	1	1
SB 20*12	0.49	1	1

2.3 Shell Sections

Table 2.3 - Area Section Property Definitions - Summary

Name	Type	Element Type	Material	Total Thickness in	Deck Material	Deck Depth in
Deck1	Deck	Membrane	4000Psi	6.5	A992Fy50	3
LANDING SLAB	Slab	Shell-Thin	4000Psi	8		
SHEAR 10	Wall	Shell-Thin	4000Psi	10		
SHEAR WALL	Wall	Shell-Thin	4000Psi	6		
Slab 6IN	Slab	Shell-Thin	4000Psi	6		
STAIR	Slab	Shell-Thin	4000Psi	10		
SW 12	Wall	Shell-Thin	4000Psi	12		

2.4 Reinforcement Sizes

Table 2.4 - Reinforcing Bar Sizes

Name	Diameter in	Area in2
#2	0.25	0.05
#3	0.375	0.11
#4	0.5	0.2
#5	0.625	0.31
#6	0.75	0.44
#7	0.875	0.6

Table 2.4 - Reinforcing Bar Sizes (continued)

Name	Diameter in	Area in2
#8	1	0.79
#9	1.128	1
#10	1.27	1.27
#11	1.41	1.56
#14	1.693	2.25
#18	2.257	4

2.5 Links

Table 2.5 - Link Property Definitions - Summary

Name	Type	Degrees of Freedom	Mass lb-s2/ft	Weight kip	Defined Length ft	Defined Area ft2
Link1	Linear	U1	0	0	1	1

2.6 Tendon Sections

Table 2.6 - Tendon Section Properties

Name	Material	StrandArea in2	Color	Notes
Tendon1	A416Gr270	0.15	Magenta	

3 Assignments

This chapter provides a listing of the assignments applied to the model.

3.1 Joint Assignments

Table 3.1 - Joint Assignments - Summary

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
ROOF	4	53	From Area					
ROOF	5	85	From Area					
ROOF	6	93	From Area					
ROOF	7	141	From Area					
ROOF	8	149	From Area					
ROOF	9	133	From Area					
ROOF	10	173	From Area					
ROOF	11	37	From Area					
ROOF	12	45	From Area					
ROOF	13	69	From Area					
ROOF	14	77	From Area					
ROOF	15	61	From Area					
ROOF	16	101	From Area					
ROOF	17	109	From Area					
ROOF	18	117	From Area					
ROOF	19	125	From Area					
ROOF	27	164	From Area					
ROOF	29	156	From Area					
ROOF	34	182	From Area					
ROOF	35	181	From Area					
ROOF	36	200	From Area					
ROOF	37	199	From Area					
ROOF	40	201	From Area					
ROOF	41	202	From Area					
ROOF	1	233	From Area					
ROOF	2	232	From Area					
ROOF	45	367	From Area					
ROOF	46	376	From Area					
ROOF	3	354	D1					
ROOF	30	246	D1					
ROOF	153	255	D1					
ROOF	162	264	D1					
ROOF	171	273	D1					
ROOF	180	282	D1					
ROOF	189	291	D1					
ROOF	198	300	D1					
ROOF	207	309	D1					
ROOF	216	318	D1					
ROOF	225	327	D1					
ROOF	234	336	D1					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
ROOF	243	345	D1					
7TH	4	52	From Area					
7TH	5	84	From Area					
7TH	6	92	From Area					
7TH	7	140	From Area					
7TH	8	148	From Area					
7TH	9	132	From Area					
7TH	10	172	From Area					
7TH	11	36	From Area					
7TH	12	44	From Area					
7TH	13	68	From Area					
7TH	14	76	From Area					
7TH	15	60	From Area					
7TH	16	100	From Area					
7TH	17	108	From Area					
7TH	18	116	From Area					
7TH	19	124	From Area					
7TH	27	165	From Area					
7TH	29	157	From Area					
7TH	34	184	From Area					
7TH	35	183	From Area					
7TH	36	204	From Area					
7TH	37	203	From Area					
7TH	40	205	From Area					
7TH	41	206	From Area					
7TH	1	235	From Area					
7TH	2	234	From Area					
7TH	45	366	From Area					
7TH	46	375	From Area					
7TH	20	355	D1					
7TH	31	247	D1					
7TH	154	256	D1					
7TH	163	265	D1					
7TH	172	274	D1					
7TH	181	283	D1					
7TH	190	292	D1					
7TH	199	301	D1					
7TH	208	310	D1					
7TH	217	319	D1					
7TH	226	328	D1					
7TH	235	337	D1					
7TH	244	346	D1					
6TH	4	54	From Area					
6TH	5	86	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
6TH	6	94	From Area					
6TH	7	142	From Area					
6TH	8	150	From Area					
6TH	9	134	From Area					
6TH	10	174	From Area					
6TH	11	38	From Area					
6TH	12	46	From Area					
6TH	13	70	From Area					
6TH	14	78	From Area					
6TH	15	62	From Area					
6TH	16	102	From Area					
6TH	17	110	From Area					
6TH	18	118	From Area					
6TH	19	126	From Area					
6TH	27	166	From Area					
6TH	29	158	From Area					
6TH	34	186	From Area					
6TH	35	185	From Area					
6TH	36	208	From Area					
6TH	37	207	From Area					
6TH	40	209	From Area					
6TH	41	210	From Area					
6TH	1	237	From Area					
6TH	2	236	From Area					
6TH	45	368	From Area					
6TH	46	377	From Area					
6TH	21	356	D1					
6TH	32	248	D1					
6TH	155	257	D1					
6TH	164	266	D1					
6TH	173	275	D1					
6TH	182	284	D1					
6TH	191	293	D1					
6TH	200	302	D1					
6TH	209	311	D1					
6TH	218	320	D1					
6TH	227	329	D1					
6TH	236	338	D1					
6TH	245	347	D1					
5TH	4	55	From Area					
5TH	5	87	From Area					
5TH	6	95	From Area					
5TH	7	143	From Area					
5TH	8	151	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
5TH	9	135	From Area					
5TH	10	175	From Area					
5TH	11	39	From Area					
5TH	12	47	From Area					
5TH	13	71	From Area					
5TH	14	79	From Area					
5TH	15	63	From Area					
5TH	16	103	From Area					
5TH	17	111	From Area					
5TH	18	119	From Area					
5TH	19	127	From Area					
5TH	27	167	From Area					
5TH	29	159	From Area					
5TH	34	188	From Area					
5TH	35	187	From Area					
5TH	36	212	From Area					
5TH	37	211	From Area					
5TH	40	213	From Area					
5TH	41	214	From Area					
5TH	1	239	From Area					
5TH	2	238	From Area					
5TH	45	369	From Area					
5TH	46	378	From Area					
5TH	22	357	D1					
5TH	33	249	D1					
5TH	156	258	D1					
5TH	165	267	D1					
5TH	174	276	D1					
5TH	183	285	D1					
5TH	192	294	D1					
5TH	201	303	D1					
5TH	210	312	D1					
5TH	219	321	D1					
5TH	228	330	D1					
5TH	237	339	D1					
5TH	246	348	D1					
4TH	4	56	From Area					
4TH	5	88	From Area					
4TH	6	96	From Area					
4TH	7	144	From Area					
4TH	8	152	From Area					
4TH	9	136	From Area					
4TH	10	176	From Area					
4TH	11	40	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
4TH	12	48	From Area					
4TH	13	72	From Area					
4TH	14	80	From Area					
4TH	15	64	From Area					
4TH	16	104	From Area					
4TH	17	112	From Area					
4TH	18	120	From Area					
4TH	19	128	From Area					
4TH	27	168	From Area					
4TH	29	160	From Area					
4TH	34	190	From Area					
4TH	35	189	From Area					
4TH	36	216	From Area					
4TH	37	215	From Area					
4TH	40	217	From Area					
4TH	41	218	From Area					
4TH	1	241	From Area					
4TH	2	240	From Area					
4TH	45	370	From Area					
4TH	46	379	From Area					
4TH	23	358	D1					
4TH	38	250	D1					
4TH	157	259	D1					
4TH	166	268	D1					
4TH	175	277	D1					
4TH	184	286	D1					
4TH	193	295	D1					
4TH	202	304	D1					
4TH	211	313	D1					
4TH	220	322	D1					
4TH	229	331	D1					
4TH	238	340	D1					
4TH	247	349	D1					
3RD	4	57	From Area					
3RD	5	89	From Area					
3RD	6	97	From Area					
3RD	7	145	From Area					
3RD	8	153	From Area					
3RD	9	137	From Area					
3RD	10	177	From Area					
3RD	11	41	From Area					
3RD	12	49	From Area					
3RD	13	73	From Area					
3RD	14	81	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
3RD	15	65	From Area					
3RD	16	105	From Area					
3RD	17	113	From Area					
3RD	18	121	From Area					
3RD	19	129	From Area					
3RD	27	169	From Area					
3RD	29	161	From Area					
3RD	34	192	From Area					
3RD	35	191	From Area					
3RD	36	220	From Area					
3RD	37	219	From Area					
3RD	40	221	From Area					
3RD	41	222	From Area					
3RD	1	243	From Area					
3RD	2	242	From Area					
3RD	45	371	From Area					
3RD	46	380	From Area					
3RD	24	359	D1					
3RD	39	251	D1					
3RD	158	260	D1					
3RD	167	269	D1					
3RD	176	278	D1					
3RD	185	287	D1					
3RD	194	296	D1					
3RD	203	305	D1					
3RD	212	314	D1					
3RD	221	323	D1					
3RD	230	332	D1					
3RD	239	341	D1					
3RD	248	350	D1					
2ND	4	58	From Area					
2ND	5	90	From Area					
2ND	6	98	From Area					
2ND	7	146	From Area					
2ND	8	154	From Area					
2ND	9	138	From Area					
2ND	10	178	From Area					
2ND	11	42	From Area					
2ND	12	50	From Area					
2ND	13	74	From Area					
2ND	14	82	From Area					
2ND	15	66	From Area					
2ND	16	106	From Area					
2ND	17	114	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
2ND	18	122	From Area					
2ND	19	130	From Area					
2ND	27	170	From Area					
2ND	29	162	From Area					
2ND	34	194	From Area					
2ND	35	193	From Area					
2ND	36	224	From Area					
2ND	37	223	From Area					
2ND	40	225	From Area					
2ND	41	226	From Area					
2ND	1	245	From Area					
2ND	2	244	From Area					
2ND	45	372	From Area					
2ND	46	381	From Area					
2ND	25	360	D1					
2ND	42	252	D1					
2ND	159	261	D1					
2ND	168	270	D1					
2ND	177	279	D1					
2ND	186	288	D1					
2ND	195	297	D1					
2ND	204	306	D1					
2ND	213	315	D1					
2ND	222	324	D1					
2ND	231	333	D1					
2ND	240	342	D1					
2ND	249	351	D1					
1ST	4	51	From Area					
1ST	5	83	From Area					
1ST	6	91	From Area					
1ST	7	139	From Area					
1ST	8	147	From Area					
1ST	9	131	From Area					
1ST	10	171	From Area					
1ST	11	35	From Area					
1ST	12	43	From Area					
1ST	13	67	From Area					
1ST	14	75	From Area					
1ST	15	59	From Area					
1ST	16	99	From Area					
1ST	17	107	From Area					
1ST	18	115	From Area					
1ST	19	123	From Area					
1ST	27	163	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
1ST	29	155	From Area					
1ST	34	180	From Area					
1ST	35	179	From Area					
1ST	36	196	From Area					
1ST	37	195	From Area					
1ST	40	197	From Area					
1ST	41	198	From Area					
1ST	1	231	From Area					
1ST	2	230	From Area					
1ST	45	373	From Area					
1ST	46	382	From Area					
1ST	26	361	D1					
1ST	43	253	D1					
1ST	160	262	D1					
1ST	169	271	D1					
1ST	178	280	D1					
1ST	187	289	D1					
1ST	196	298	D1					
1ST	205	307	D1					
1ST	214	316	D1					
1ST	223	325	D1					
1ST	232	334	D1					
1ST	241	343	D1					
1ST	250	352	D1					
GF	4	17	From Area					
GF	5	18	From Area					
GF	6	19	From Area					
GF	7	20	From Area					
GF	8	21	From Area					
GF	9	22	From Area					
GF	10	23	From Area					
GF	11	24	From Area					
GF	12	25	From Area					
GF	13	26	From Area					
GF	14	27	From Area					
GF	15	28	From Area					
GF	16	29	From Area					
GF	17	30	From Area					
GF	18	31	From Area					
GF	19	32	From Area					
GF	27	34	From Area					
GF	29	33	From Area					
GF	34	228	From Area					
GF	35	227	From Area					

Table 3.1 - Joint Assignments - Summary (continued)

Story	Label	UniqueName	Diaphragm	Restraints	Spring	Added Mass	Panel Zone	Include in Mesh
GF	1	229	From Area					
GF	45	363	From Area					
GF	46	364	From Area					
GF	28	362	D1					
GF	44	254	D1					
GF	161	263	D1					
GF	170	272	D1					
GF	179	281	D1					
GF	188	290	D1					
GF	197	299	D1					
GF	206	308	D1					
GF	215	317	D1					
GF	224	326	D1					
GF	233	335	D1					
GF	242	344	D1					
GF	251	353	D1					
Base	4	1	From Area	UX; UY; UZ; RX; RY; RZ				
Base	5	2	From Area	UX; UY; UZ; RX; RY; RZ				
Base	6	3	From Area	UX; UY; UZ; RX; RY; RZ				
Base	7	4	From Area	UX; UY; UZ; RX; RY; RZ				
Base	8	5	From Area	UX; UY; UZ; RX; RY; RZ				
Base	9	6	From Area	UX; UY; UZ; RX; RY; RZ				
Base	10	7	From Area	UX; UY; UZ; RX; RY; RZ				
Base	11	8	From Area	UX; UY; UZ; RX; RY; RZ				
Base	12	9	From Area	UX; UY; UZ; RX; RY; RZ				
Base	13	10	From Area	UX; UY; UZ; RX; RY; RZ				
Base	14	11	From Area	UX; UY; UZ; RX; RY; RZ				
Base	15	12	From Area	UX; UY; UZ; RX; RY; RZ				
Base	16	13	From Area	UX; UY; UZ; RX; RY; RZ				
Base	17	14	From Area	UX; UY; UZ; RX; RY; RZ				
Base	18	15	From Area	UX; UY; UZ; RX; RY; RZ				
Base	19	16	From Area	UX; UY; UZ; RX; RY; RZ				
Base	29	383	From Area	UX; UY; UZ				
Base	45	365	From Area	UX; UY; UZ				
Base	46	374	From Area	UX; UY; UZ				

3.2 Frame Assignments

Table 3.2 - Frame Assignments - Summary (Part 1 of 2)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
210	ROOF	B19	Beam	7		FB 24*12	FB 24*12		2	
348	ROOF	B24	Beam	12		FB 24*12	FB 24*12		2	
202	ROOF	B25	Beam	14		FB 24*12	FB 24*12		2	
194	ROOF	B26	Beam	19		FB 24*12	FB 24*12		2	
186	ROOF	B27	Beam	14		FB 24*12	FB 24*12		2	
242	ROOF	B28	Beam	14		FB 24*12	FB 24*12		2	
234	ROOF	B29	Beam	19		FB 24*12	FB 24*12		2	
226	ROOF	B30	Beam	14		FB 24*12	FB 24*12		2	
250	ROOF	B31	Beam	14		FB 24*12	FB 24*12		2	
258	ROOF	B32	Beam	14		FB 24*12	FB 24*12		2	
266	ROOF	B33	Beam	19		FB 24*12	FB 24*12		2	
274	ROOF	B34	Beam	19		FB 24*12	FB 24*12		2	
282	ROOF	B37	Beam	14		FB 24*12	FB 24*12		2	
170	ROOF	B38	Beam	9		FB 24*12	FB 24*12		2	
162	ROOF	B39	Beam	27		FB 24*12	FB 24*12		2	
314	ROOF	B40	Beam	27		FB 24*12	FB 24*12		2	
290	ROOF	B41	Beam	27		FB 24*12	FB 24*12		2	
178	ROOF	B42	Beam	26		FB 24*12	FB 24*12		2	
330	ROOF	B43	Beam	26		FB 24*12	FB 24*12		2	
306	ROOF	B44	Beam	26		FB 24*12	FB 24*12		2	
218	ROOF	B45	Beam	24		FB 24*12	FB 24*12		2	
347	ROOF	B46	Beam	19		FB 24*12	FB 24*12		2	
298	ROOF	B47	Beam	9		FB 24*12	FB 24*12		2	
322	ROOF	B48	Beam	9		FB 24*12	FB 24*12		2	
364	ROOF	B1	Beam	9		FB 24*12	FB 24*12		2	
58	ROOF	C4	Column	10		C1 20*20	C1 20*20			3
90	ROOF	C5	Column	10		C2 22*22	C2 22*22			3
98	ROOF	C6	Column	10		C2 22*22	C2 22*22			3
146	ROOF	C7	Column	10		C2 22*22	C2 22*22			3
154	ROOF	C8	Column	10		C2 22*22	C2 22*22			3
138	ROOF	C9	Column	10		C2 22*22	C2 22*22			3
338	ROOF	C10	Column	10		C2 22*22	C2 22*22			3
42	ROOF	C11	Column	10		C1 20*20	C1 20*20			3
50	ROOF	C12	Column	10		C1 20*20	C1 20*20			3
74	ROOF	C13	Column	10		C3 24*24	C3 24*24			3
82	ROOF	C14	Column	10		C3 24*24	C3 24*24			3
66	ROOF	C15	Column	10		C3 24*24	C3 24*24			3
106	ROOF	C16	Column	10		C2 22*22	C2 22*22			3
114	ROOF	C17	Column	10		C2 22*22	C2 22*22			3
122	ROOF	C18	Column	10		C2 22*22	C2 22*22			3
130	ROOF	C19	Column	10		C2 22*22	C2 22*22			3
211	7TH	B19	Beam	7		FB 24*12	FB 24*12		2	
350	7TH	B24	Beam	12		FB 24*12	FB 24*12		2	
203	7TH	B25	Beam	14		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
195	7TH	B26	Beam	19		FB 24*12	FB 24*12		2	
187	7TH	B27	Beam	14		FB 24*12	FB 24*12		2	
243	7TH	B28	Beam	14		FB 24*12	FB 24*12		2	
235	7TH	B29	Beam	19		FB 24*12	FB 24*12		2	
227	7TH	B30	Beam	14		FB 24*12	FB 24*12		2	
251	7TH	B31	Beam	14		FB 24*12	FB 24*12		2	
259	7TH	B32	Beam	14		FB 24*12	FB 24*12		2	
267	7TH	B33	Beam	19		FB 24*12	FB 24*12		2	
275	7TH	B34	Beam	19		FB 24*12	FB 24*12		2	
283	7TH	B37	Beam	14		FB 24*12	FB 24*12		2	
171	7TH	B38	Beam	9		FB 24*12	FB 24*12		2	
163	7TH	B39	Beam	27		FB 24*12	FB 24*12		2	
315	7TH	B40	Beam	27		FB 24*12	FB 24*12		2	
291	7TH	B41	Beam	27		FB 24*12	FB 24*12		2	
179	7TH	B42	Beam	26		FB 24*12	FB 24*12		2	
331	7TH	B43	Beam	26		FB 24*12	FB 24*12		2	
307	7TH	B44	Beam	26		FB 24*12	FB 24*12		2	
219	7TH	B45	Beam	24		FB 24*12	FB 24*12		2	
349	7TH	B46	Beam	19		FB 24*12	FB 24*12		2	
299	7TH	B47	Beam	9		FB 24*12	FB 24*12		2	
323	7TH	B48	Beam	9		FB 24*12	FB 24*12		2	
365	7TH	B1	Beam	9		FB 24*12	FB 24*12		2	
59	7TH	C4	Column	10		C1 20*20	C1 20*20			3
91	7TH	C5	Column	10		C2 22*22	C2 22*22			3
99	7TH	C6	Column	10		C2 22*22	C2 22*22			3
147	7TH	C7	Column	10		C2 22*22	C2 22*22			3
155	7TH	C8	Column	10		C2 22*22	C2 22*22			3
139	7TH	C9	Column	10		C2 22*22	C2 22*22			3
339	7TH	C10	Column	10		C2 22*22	C2 22*22			3
43	7TH	C11	Column	10		C1 20*20	C1 20*20			3
51	7TH	C12	Column	10		C1 20*20	C1 20*20			3
75	7TH	C13	Column	10		C3 24*24	C3 24*24			3
83	7TH	C14	Column	10		C3 24*24	C3 24*24			3
67	7TH	C15	Column	10		C3 24*24	C3 24*24			3
107	7TH	C16	Column	10		C2 22*22	C2 22*22			3
115	7TH	C17	Column	10		C2 22*22	C2 22*22			3
123	7TH	C18	Column	10		C2 22*22	C2 22*22			3
131	7TH	C19	Column	10		C2 22*22	C2 22*22			3
212	6TH	B19	Beam	7		FB 24*12	FB 24*12		2	
352	6TH	B24	Beam	12		FB 24*12	FB 24*12		2	
204	6TH	B25	Beam	14		FB 24*12	FB 24*12		2	
196	6TH	B26	Beam	19		FB 24*12	FB 24*12		2	
188	6TH	B27	Beam	14		FB 24*12	FB 24*12		2	
244	6TH	B28	Beam	14		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
236	6TH	B29	Beam	19		FB 24*12	FB 24*12		2	
228	6TH	B30	Beam	14		FB 24*12	FB 24*12		2	
252	6TH	B31	Beam	14		FB 24*12	FB 24*12		2	
260	6TH	B32	Beam	14		FB 24*12	FB 24*12		2	
268	6TH	B33	Beam	19		FB 24*12	FB 24*12		2	
276	6TH	B34	Beam	19		FB 24*12	FB 24*12		2	
284	6TH	B37	Beam	14		FB 24*12	FB 24*12		2	
172	6TH	B38	Beam	9		FB 24*12	FB 24*12		2	
164	6TH	B39	Beam	27		FB 24*12	FB 24*12		2	
316	6TH	B40	Beam	27		FB 24*12	FB 24*12		2	
292	6TH	B41	Beam	27		FB 24*12	FB 24*12		2	
180	6TH	B42	Beam	26		FB 24*12	FB 24*12		2	
332	6TH	B43	Beam	26		FB 24*12	FB 24*12		2	
308	6TH	B44	Beam	26		FB 24*12	FB 24*12		2	
220	6TH	B45	Beam	24		FB 24*12	FB 24*12		2	
351	6TH	B46	Beam	19		FB 24*12	FB 24*12		2	
300	6TH	B47	Beam	9		FB 24*12	FB 24*12		2	
324	6TH	B48	Beam	9		FB 24*12	FB 24*12		2	
366	6TH	B1	Beam	9		FB 24*12	FB 24*12		2	
60	6TH	C4	Column	10		C1 20*20	C1 20*20			3
92	6TH	C5	Column	10		C2 22*22	C2 22*22			3
100	6TH	C6	Column	10		C2 22*22	C2 22*22			3
148	6TH	C7	Column	10		C2 22*22	C2 22*22			3
156	6TH	C8	Column	10		C2 22*22	C2 22*22			3
140	6TH	C9	Column	10		C2 22*22	C2 22*22			3
340	6TH	C10	Column	10		C2 22*22	C2 22*22			3
44	6TH	C11	Column	10		C1 20*20	C1 20*20			3
52	6TH	C12	Column	10		C1 20*20	C1 20*20			3
76	6TH	C13	Column	10		C3 24*24	C3 24*24			3
84	6TH	C14	Column	10		C3 24*24	C3 24*24			3
68	6TH	C15	Column	10		C3 24*24	C3 24*24			3
108	6TH	C16	Column	10		C2 22*22	C2 22*22			3
116	6TH	C17	Column	10		C2 22*22	C2 22*22			3
124	6TH	C18	Column	10		C2 22*22	C2 22*22			3
132	6TH	C19	Column	10		C2 22*22	C2 22*22			3
213	5TH	B19	Beam	7		FB 24*12	FB 24*12		2	
354	5TH	B24	Beam	12		FB 24*12	FB 24*12		2	
205	5TH	B25	Beam	14		FB 24*12	FB 24*12		2	
197	5TH	B26	Beam	19		FB 24*12	FB 24*12		2	
189	5TH	B27	Beam	14		FB 24*12	FB 24*12		2	
245	5TH	B28	Beam	14		FB 24*12	FB 24*12		2	
237	5TH	B29	Beam	19		FB 24*12	FB 24*12		2	
229	5TH	B30	Beam	14		FB 24*12	FB 24*12		2	
253	5TH	B31	Beam	14		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
261	5TH	B32	Beam	14		FB 24*12	FB 24*12		2	
269	5TH	B33	Beam	19		FB 24*12	FB 24*12		2	
277	5TH	B34	Beam	19		FB 24*12	FB 24*12		2	
285	5TH	B37	Beam	14		FB 24*12	FB 24*12		2	
173	5TH	B38	Beam	9		FB 24*12	FB 24*12		2	
165	5TH	B39	Beam	27		FB 24*12	FB 24*12		2	
317	5TH	B40	Beam	27		FB 24*12	FB 24*12		2	
293	5TH	B41	Beam	27		FB 24*12	FB 24*12		2	
181	5TH	B42	Beam	26		FB 24*12	FB 24*12		2	
333	5TH	B43	Beam	26		FB 24*12	FB 24*12		2	
309	5TH	B44	Beam	26		FB 24*12	FB 24*12		2	
221	5TH	B45	Beam	24		FB 24*12	FB 24*12		2	
353	5TH	B46	Beam	19		FB 24*12	FB 24*12		2	
301	5TH	B47	Beam	9		FB 24*12	FB 24*12		2	
325	5TH	B48	Beam	9		FB 24*12	FB 24*12		2	
367	5TH	B1	Beam	9		FB 24*12	FB 24*12		2	
61	5TH	C4	Column	10		C1 20*20	C1 20*20			3
93	5TH	C5	Column	10		C2 22*22	C2 22*22			3
101	5TH	C6	Column	10		C2 22*22	C2 22*22			3
149	5TH	C7	Column	10		C2 22*22	C2 22*22			3
157	5TH	C8	Column	10		C2 22*22	C2 22*22			3
141	5TH	C9	Column	10		C2 22*22	C2 22*22			3
341	5TH	C10	Column	10		C2 22*22	C2 22*22			3
45	5TH	C11	Column	10		C1 20*20	C1 20*20			3
53	5TH	C12	Column	10		C1 20*20	C1 20*20			3
77	5TH	C13	Column	10		C3 24*24	C3 24*24			3
85	5TH	C14	Column	10		C3 24*24	C3 24*24			3
69	5TH	C15	Column	10		C3 24*24	C3 24*24			3
109	5TH	C16	Column	10		C2 22*22	C2 22*22			3
117	5TH	C17	Column	10		C2 22*22	C2 22*22			3
125	5TH	C18	Column	10		C2 22*22	C2 22*22			3
133	5TH	C19	Column	10		C2 22*22	C2 22*22			3
214	4TH	B19	Beam	7		FB 24*12	FB 24*12		2	
356	4TH	B24	Beam	12		FB 24*12	FB 24*12		2	
206	4TH	B25	Beam	14		FB 24*12	FB 24*12		2	
198	4TH	B26	Beam	19		FB 24*12	FB 24*12		2	
190	4TH	B27	Beam	14		FB 24*12	FB 24*12		2	
246	4TH	B28	Beam	14		FB 24*12	FB 24*12		2	
238	4TH	B29	Beam	19		FB 24*12	FB 24*12		2	
230	4TH	B30	Beam	14		FB 24*12	FB 24*12		2	
254	4TH	B31	Beam	14		FB 24*12	FB 24*12		2	
262	4TH	B32	Beam	14		FB 24*12	FB 24*12		2	
270	4TH	B33	Beam	19		FB 24*12	FB 24*12		2	
278	4TH	B34	Beam	19		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
286	4TH	B37	Beam	14		FB 24*12	FB 24*12		2	
174	4TH	B38	Beam	9		FB 24*12	FB 24*12		2	
166	4TH	B39	Beam	27		FB 24*12	FB 24*12		2	
318	4TH	B40	Beam	27		FB 24*12	FB 24*12		2	
294	4TH	B41	Beam	27		FB 24*12	FB 24*12		2	
182	4TH	B42	Beam	26		FB 24*12	FB 24*12		2	
334	4TH	B43	Beam	26		FB 24*12	FB 24*12		2	
310	4TH	B44	Beam	26		FB 24*12	FB 24*12		2	
222	4TH	B45	Beam	24		FB 24*12	FB 24*12		2	
355	4TH	B46	Beam	19		FB 24*12	FB 24*12		2	
302	4TH	B47	Beam	9		FB 24*12	FB 24*12		2	
326	4TH	B48	Beam	9		FB 24*12	FB 24*12		2	
368	4TH	B1	Beam	9		FB 24*12	FB 24*12		2	
62	4TH	C4	Column	10		C1 20*20	C1 20*20			3
94	4TH	C5	Column	10		C2 22*22	C2 22*22			3
102	4TH	C6	Column	10		C2 22*22	C2 22*22			3
150	4TH	C7	Column	10		C2 22*22	C2 22*22			3
158	4TH	C8	Column	10		C2 22*22	C2 22*22			3
142	4TH	C9	Column	10		C2 22*22	C2 22*22			3
342	4TH	C10	Column	10		C2 22*22	C2 22*22			3
46	4TH	C11	Column	10		C1 20*20	C1 20*20			3
54	4TH	C12	Column	10		C1 20*20	C1 20*20			3
78	4TH	C13	Column	10		C3 24*24	C3 24*24			3
86	4TH	C14	Column	10		C3 24*24	C3 24*24			3
70	4TH	C15	Column	10		C3 24*24	C3 24*24			3
110	4TH	C16	Column	10		C2 22*22	C2 22*22			3
118	4TH	C17	Column	10		C2 22*22	C2 22*22			3
126	4TH	C18	Column	10		C2 22*22	C2 22*22			3
134	4TH	C19	Column	10		C2 22*22	C2 22*22			3
215	3RD	B19	Beam	7		FB 24*12	FB 24*12		2	
358	3RD	B24	Beam	12		FB 24*12	FB 24*12		2	
207	3RD	B25	Beam	14		FB 24*12	FB 24*12		2	
199	3RD	B26	Beam	19		FB 24*12	FB 24*12		2	
191	3RD	B27	Beam	14		FB 24*12	FB 24*12		2	
247	3RD	B28	Beam	14		FB 24*12	FB 24*12		2	
239	3RD	B29	Beam	19		FB 24*12	FB 24*12		2	
231	3RD	B30	Beam	14		FB 24*12	FB 24*12		2	
255	3RD	B31	Beam	14		FB 24*12	FB 24*12		2	
263	3RD	B32	Beam	14		FB 24*12	FB 24*12		2	
271	3RD	B33	Beam	19		FB 24*12	FB 24*12		2	
279	3RD	B34	Beam	19		FB 24*12	FB 24*12		2	
287	3RD	B37	Beam	14		FB 24*12	FB 24*12		2	
175	3RD	B38	Beam	9		FB 24*12	FB 24*12		2	
167	3RD	B39	Beam	27		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
319	3RD	B40	Beam	27		FB 24*12	FB 24*12		2	
295	3RD	B41	Beam	27		FB 24*12	FB 24*12		2	
183	3RD	B42	Beam	26		FB 24*12	FB 24*12		2	
335	3RD	B43	Beam	26		FB 24*12	FB 24*12		2	
311	3RD	B44	Beam	26		FB 24*12	FB 24*12		2	
223	3RD	B45	Beam	24		FB 24*12	FB 24*12		2	
357	3RD	B46	Beam	19		FB 24*12	FB 24*12		2	
303	3RD	B47	Beam	9		FB 24*12	FB 24*12		2	
327	3RD	B48	Beam	9		FB 24*12	FB 24*12		2	
369	3RD	B1	Beam	9		FB 24*12	FB 24*12		2	
63	3RD	C4	Column	10		C1 20*20	C1 20*20			3
95	3RD	C5	Column	10		C2 22*22	C2 22*22			3
103	3RD	C6	Column	10		C2 22*22	C2 22*22			3
151	3RD	C7	Column	10		C2 22*22	C2 22*22			3
159	3RD	C8	Column	10		C2 22*22	C2 22*22			3
143	3RD	C9	Column	10		C2 22*22	C2 22*22			3
343	3RD	C10	Column	10		C2 22*22	C2 22*22			3
47	3RD	C11	Column	10		C1 20*20	C1 20*20			3
55	3RD	C12	Column	10		C1 20*20	C1 20*20			3
79	3RD	C13	Column	10		C3 24*24	C3 24*24			3
87	3RD	C14	Column	10		C3 24*24	C3 24*24			3
71	3RD	C15	Column	10		C3 24*24	C3 24*24			3
111	3RD	C16	Column	10		C2 22*22	C2 22*22			3
119	3RD	C17	Column	10		C2 22*22	C2 22*22			3
127	3RD	C18	Column	10		C2 22*22	C2 22*22			3
135	3RD	C19	Column	10		C2 22*22	C2 22*22			3
216	2ND	B19	Beam	7		FB 24*12	FB 24*12		2	
360	2ND	B24	Beam	12		FB 24*12	FB 24*12		2	
208	2ND	B25	Beam	14		FB 24*12	FB 24*12		2	
200	2ND	B26	Beam	19		FB 24*12	FB 24*12		2	
192	2ND	B27	Beam	14		FB 24*12	FB 24*12		2	
248	2ND	B28	Beam	14		FB 24*12	FB 24*12		2	
240	2ND	B29	Beam	19		FB 24*12	FB 24*12		2	
232	2ND	B30	Beam	14		FB 24*12	FB 24*12		2	
256	2ND	B31	Beam	14		FB 24*12	FB 24*12		2	
264	2ND	B32	Beam	14		FB 24*12	FB 24*12		2	
272	2ND	B33	Beam	19		FB 24*12	FB 24*12		2	
280	2ND	B34	Beam	19		FB 24*12	FB 24*12		2	
288	2ND	B37	Beam	14		FB 24*12	FB 24*12		2	
176	2ND	B38	Beam	9		FB 24*12	FB 24*12		2	
168	2ND	B39	Beam	27		FB 24*12	FB 24*12		2	
320	2ND	B40	Beam	27		FB 24*12	FB 24*12		2	
296	2ND	B41	Beam	27		FB 24*12	FB 24*12		2	
184	2ND	B42	Beam	26		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
336	2ND	B43	Beam	26		FB 24*12	FB 24*12		2	
312	2ND	B44	Beam	26		FB 24*12	FB 24*12		2	
224	2ND	B45	Beam	24		FB 24*12	FB 24*12		2	
359	2ND	B46	Beam	19		FB 24*12	FB 24*12		2	
304	2ND	B47	Beam	9		FB 24*12	FB 24*12		2	
328	2ND	B48	Beam	9		FB 24*12	FB 24*12		2	
370	2ND	B1	Beam	9		FB 24*12	FB 24*12		2	
64	2ND	C4	Column	10		C1 20*20	C1 20*20			3
96	2ND	C5	Column	10		C2 22*22	C2 22*22			3
104	2ND	C6	Column	10		C2 22*22	C2 22*22			3
152	2ND	C7	Column	10		C2 22*22	C2 22*22			3
160	2ND	C8	Column	10		C2 22*22	C2 22*22			3
144	2ND	C9	Column	10		C2 22*22	C2 22*22			3
344	2ND	C10	Column	10		C2 22*22	C2 22*22			3
48	2ND	C11	Column	10		C1 20*20	C1 20*20			3
56	2ND	C12	Column	10		C1 20*20	C1 20*20			3
80	2ND	C13	Column	10		C3 24*24	C3 24*24			3
88	2ND	C14	Column	10		C3 24*24	C3 24*24			3
72	2ND	C15	Column	10		C3 24*24	C3 24*24			3
112	2ND	C16	Column	10		C2 22*22	C2 22*22			3
120	2ND	C17	Column	10		C2 22*22	C2 22*22			3
128	2ND	C18	Column	10		C2 22*22	C2 22*22			3
136	2ND	C19	Column	10		C2 22*22	C2 22*22			3
209	1ST	B19	Beam	7		FB 24*12	FB 24*12		2	
346	1ST	B24	Beam	12		FB 24*12	FB 24*12		2	
201	1ST	B25	Beam	14		FB 24*12	FB 24*12		2	
193	1ST	B26	Beam	19		FB 24*12	FB 24*12		2	
185	1ST	B27	Beam	14		FB 24*12	FB 24*12		2	
241	1ST	B28	Beam	14		FB 24*12	FB 24*12		2	
233	1ST	B29	Beam	19		FB 24*12	FB 24*12		2	
225	1ST	B30	Beam	14		FB 24*12	FB 24*12		2	
249	1ST	B31	Beam	14		FB 24*12	FB 24*12		2	
257	1ST	B32	Beam	14		FB 24*12	FB 24*12		2	
265	1ST	B33	Beam	19		FB 24*12	FB 24*12		2	
273	1ST	B34	Beam	19		FB 24*12	FB 24*12		2	
281	1ST	B37	Beam	14		FB 24*12	FB 24*12		2	
169	1ST	B38	Beam	9		FB 24*12	FB 24*12		2	
161	1ST	B39	Beam	27		FB 24*12	FB 24*12		2	
313	1ST	B40	Beam	27		FB 24*12	FB 24*12		2	
289	1ST	B41	Beam	27		FB 24*12	FB 24*12		2	
177	1ST	B42	Beam	26		FB 24*12	FB 24*12		2	
329	1ST	B43	Beam	26		FB 24*12	FB 24*12		2	
305	1ST	B44	Beam	26		FB 24*12	FB 24*12		2	
217	1ST	B45	Beam	24		FB 24*12	FB 24*12		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
345	1ST	B46	Beam	19		FB 24*12	FB 24*12		2	
297	1ST	B47	Beam	9		FB 24*12	FB 24*12		2	
321	1ST	B48	Beam	9		FB 24*12	FB 24*12		2	
363	1ST	B1	Beam	9		FB 24*12	FB 24*12		2	
57	1ST	C4	Column	10		C1 20*20	C1 20*20			3
89	1ST	C5	Column	10		C2 22*22	C2 22*22			3
97	1ST	C6	Column	10		C2 22*22	C2 22*22			3
145	1ST	C7	Column	10		C2 22*22	C2 22*22			3
153	1ST	C8	Column	10		C2 22*22	C2 22*22			3
137	1ST	C9	Column	10		C2 22*22	C2 22*22			3
337	1ST	C10	Column	10		C2 22*22	C2 22*22			3
41	1ST	C11	Column	10		C1 20*20	C1 20*20			3
49	1ST	C12	Column	10		C1 20*20	C1 20*20			3
73	1ST	C13	Column	10		C3 24*24	C3 24*24			3
81	1ST	C14	Column	10		C3 24*24	C3 24*24			3
65	1ST	C15	Column	10		C3 24*24	C3 24*24			3
105	1ST	C16	Column	10		C2 22*22	C2 22*22			3
113	1ST	C17	Column	10		C2 22*22	C2 22*22			3
121	1ST	C18	Column	10		C2 22*22	C2 22*22			3
129	1ST	C19	Column	10		C2 22*22	C2 22*22			3
26	GF	B19	Beam	7		GB 26*14	GB 26*14		2	
29	GF	B24	Beam	12		GB 26*14	GB 26*14		2	
30	GF	B25	Beam	14		GB 26*14	GB 26*14		2	
31	GF	B26	Beam	19		GB 26*14	GB 26*14		2	
32	GF	B27	Beam	14		GB 26*14	GB 26*14		2	
33	GF	B28	Beam	14		GB 26*14	GB 26*14		2	
34	GF	B29	Beam	19		GB 26*14	GB 26*14		2	
35	GF	B30	Beam	14		GB 26*14	GB 26*14		2	
36	GF	B31	Beam	14		GB 26*14	GB 26*14		2	
37	GF	B32	Beam	14		GB 26*14	GB 26*14		2	
38	GF	B33	Beam	19		GB 26*14	GB 26*14		2	
39	GF	B34	Beam	19		GB 26*14	GB 26*14		2	
40	GF	B37	Beam	14		GB 26*14	GB 26*14		2	
18	GF	B38	Beam	9		GB 26*14	GB 26*14		2	
17	GF	B39	Beam	27		GB 26*14	GB 26*14		2	
20	GF	B40	Beam	27		GB 26*14	GB 26*14		2	
23	GF	B41	Beam	27		GB 26*14	GB 26*14		2	
19	GF	B42	Beam	26		GB 26*14	GB 26*14		2	
22	GF	B43	Beam	26		GB 26*14	GB 26*14		2	
25	GF	B44	Beam	26		GB 26*14	GB 26*14		2	
27	GF	B45	Beam	24		GB 26*14	GB 26*14		2	
28	GF	B46	Beam	19		GB 26*14	GB 26*14		2	
24	GF	B47	Beam	9		GB 26*14	GB 26*14		2	
21	GF	B48	Beam	9		GB 26*14	GB 26*14		2	

Table 3.2 - Frame Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Design Type	Length ft	Auto Select	Analysis Section	Design Section	Axis Angle deg	Max Station Spacing ft	Min Number Stations
361	GF	B1	Beam	9		FB 24*12	FB 24*12		2	
1	GF	C4	Column	7		C1 20*20	C1 20*20			3
2	GF	C5	Column	7		C2 22*22	C2 22*22			3
3	GF	C6	Column	7		C2 22*22	C2 22*22			3
4	GF	C7	Column	7		C2 22*22	C2 22*22			3
5	GF	C8	Column	7		C2 22*22	C2 22*22			3
6	GF	C9	Column	7		C2 22*22	C2 22*22			3
7	GF	C10	Column	7		C2 22*22	C2 22*22			3
8	GF	C11	Column	7		C1 20*20	C1 20*20			3
9	GF	C12	Column	7		C1 20*20	C1 20*20			3
10	GF	C13	Column	7		C3 24*24	C3 24*24			3
11	GF	C14	Column	7		C3 24*24	C3 24*24			3
12	GF	C15	Column	7		C3 24*24	C3 24*24			3
13	GF	C16	Column	7		C2 22*22	C2 22*22			3
14	GF	C17	Column	7		C2 22*22	C2 22*22			3
15	GF	C18	Column	7		C2 22*22	C2 22*22			3
16	GF	C19	Column	7		C2 22*22	C2 22*22			3

Table 3.2 - Frame Assignments - Summary (Part 2 of 2)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
210									
348									
202									
194									
186									
242									
234									
226									
250									
258									
266									
274									
282									
170									
162									
314									
290									
178									
330									
306									
218									
347									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
298									
322									
364									
58									
90									
98									
146									
154									
138									
338									
42									
50									
74									
82									
66									
106									
114									
122									
130									
211									
350									
203									
195									
187									
243									
235									
227									
251									
259									
267									
275									
283									
171									
163									
315									
291									
179									
331									
307									
219									
349									
299									
323									
365									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
59									
91									
99									
147									
155									
139									
339									
43									
51									
75									
83									
67									
107									
115									
123									
131									
212									
352									
204									
196									
188									
244									
236									
228									
252									
260									
268									
276									
284									
172									
164									
316									
292									
180									
332									
308									
220									
351									
300									
324									
366									
60									
92									
100									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
148									
156									
140									
340									
44									
52									
76									
84									
68									
108									
116									
124									
132									
213									
354									
205									
197									
189									
245									
237									
229									
253									
261									
269									
277									
285									
173									
165									
317									
293									
181									
333									
309									
221									
353									
301									
325									
367									
61									
93									
101									
149									
157									
141									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
341									
45									
53									
77									
85									
69									
109									
117									
125									
133									
214									
356									
206									
198									
190									
246									
238									
230									
254									
262									
270									
278									
286									
174									
166									
318									
294									
182									
334									
310									
222									
355									
302									
326									
368									
62									
94									
102									
150									
158									
142									
342									
46									
54									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
78									
86									
70									
110									
118									
126									
134									
215									
358									
207									
199									
191									
247									
239									
231									
255									
263									
271									
279									
287									
175									
167									
319									
295									
183									
335									
311									
223									
357									
303									
327									
369									
63									
95									
103									
151									
159									
143									
343									
47									
55									
79									
87									
71									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
111									
119									
127									
135									
216									
360									
208									
200									
192									
248									
240									
232									
256									
264									
272									
280									
288									
176									
168									
320									
296									
184									
336									
312									
224									
359									
304									
328									
370									
64									
96									
104									
152									
160									
144									
344									
48									
56									
80									
88									
72									
112									
120									
128									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
136									
209									
346									
201									
193									
185									
241									
233									
225									
249									
257									
265									
273									
281									
169									
161									
313									
289									
177									
329									
305									
217									
345									
297									
321									
363									
57									
89									
97									
145									
153									
137									
337									
41									
49									
73									
81									
65									
105									
113									
121									
129									
26									
29									

Table 3.2 - Frame Assignments - Summary (Part 2 of 2, continued)

UniqueName	Releases	User Offsets	Added Mass lb-s2/ft2	Pier	Spandrel	Spring	Modifiers	T/C Limits	Moment Beam Type
30									
31									
32									
33									
34									
35									
36									
37									
38									
39									
40									
18									
17									
20									
23									
19									
22									
25									
27									
28									
24									
21									
361									
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									
11									
12									
13									
14									
15									
16									

3.3 Shell Assignments

Table 3.3 - Area Assignments - Summary (Part 1 of 2)

UniqueName	Story	Label	Section Property	Property Type	Diaphragm	Axis Angle deg	Added Mass lb-s2/ft3	Pier	Spandrel
2	ROOF	F1	LANDING SLAB	Slab	D1				
10	ROOF	F3	LANDING SLAB	Slab					
25	ROOF	F4	Slab 6IN	Slab	D1				
33	ROOF	F5	Slab 6IN	Slab	D1				
41	ROOF	F6	Slab 6IN	Slab	D1				
49	ROOF	F7	Slab 6IN	Slab	D1				
57	ROOF	F8	Slab 6IN	Slab	D1				
65	ROOF	F9	Slab 6IN	Slab	D1				
145	ROOF	F10	Slab 6IN	Slab					
82	ROOF	W1	STAIR	Slab					
74	ROOF	W2	STAIR	Slab					
90	ROOF	W3	SHEAR 10	Wall					
99	ROOF	W4	SHEAR 10	Wall					
108	ROOF	W5	SHEAR 10	Wall					
117	ROOF	W6	SHEAR 10	Wall					
126	ROOF	W7	SHEAR 10	Wall					
135	ROOF	W8	SHEAR 10	Wall					
3	7TH	F1	LANDING SLAB	Slab	D1				
11	7TH	F3	LANDING SLAB	Slab					
26	7TH	F4	Slab 6IN	Slab	D1				
34	7TH	F5	Slab 6IN	Slab	D1				
42	7TH	F6	Slab 6IN	Slab	D1				
50	7TH	F7	Slab 6IN	Slab	D1				
58	7TH	F8	Slab 6IN	Slab	D1				
66	7TH	F9	Slab 6IN	Slab	D1				
146	7TH	F10	Slab 6IN	Slab					
83	7TH	W1	STAIR	Slab					
75	7TH	W2	STAIR	Slab					
91	7TH	W3	SHEAR 10	Wall					
100	7TH	W4	SHEAR 10	Wall					
109	7TH	W5	SHEAR 10	Wall					
118	7TH	W6	SHEAR 10	Wall					
127	7TH	W7	SHEAR 10	Wall					
136	7TH	W8	SHEAR 10	Wall					
4	6TH	F1	LANDING SLAB	Slab	D1				
12	6TH	F3	LANDING SLAB	Slab					
27	6TH	F4	Slab 6IN	Slab	D1				
35	6TH	F5	Slab 6IN	Slab	D1				
43	6TH	F6	Slab 6IN	Slab	D1				
51	6TH	F7	Slab 6IN	Slab	D1				
59	6TH	F8	Slab 6IN	Slab	D1				
67	6TH	F9	Slab 6IN	Slab	D1				
147	6TH	F10	Slab 6IN	Slab					
84	6TH	W1	STAIR	Slab					

Table 3.3 - Area Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Section Property	Property Type	Diaphragm	Axis Angle deg	Added Mass lb-s2/ft3	Pier	Spandrel
76	6TH	W2	STAIR	Slab					
92	6TH	W3	SHEAR 10	Wall					
101	6TH	W4	SHEAR 10	Wall					
110	6TH	W5	SHEAR 10	Wall					
119	6TH	W6	SHEAR 10	Wall					
128	6TH	W7	SHEAR 10	Wall					
137	6TH	W8	SHEAR 10	Wall					
5	5TH	F1	LANDING SLAB	Slab	D1				
13	5TH	F3	LANDING SLAB	Slab					
28	5TH	F4	Slab 6IN	Slab	D1				
36	5TH	F5	Slab 6IN	Slab	D1				
44	5TH	F6	Slab 6IN	Slab	D1				
52	5TH	F7	Slab 6IN	Slab	D1				
60	5TH	F8	Slab 6IN	Slab	D1				
68	5TH	F9	Slab 6IN	Slab	D1				
148	5TH	F10	Slab 6IN	Slab					
85	5TH	W1	STAIR	Slab					
77	5TH	W2	STAIR	Slab					
93	5TH	W3	SHEAR 10	Wall					
102	5TH	W4	SHEAR 10	Wall					
111	5TH	W5	SHEAR 10	Wall					
120	5TH	W6	SHEAR 10	Wall					
129	5TH	W7	SHEAR 10	Wall					
138	5TH	W8	SHEAR 10	Wall					
6	4TH	F1	LANDING SLAB	Slab	D1				
14	4TH	F3	LANDING SLAB	Slab					
29	4TH	F4	Slab 6IN	Slab	D1				
37	4TH	F5	Slab 6IN	Slab	D1				
45	4TH	F6	Slab 6IN	Slab	D1				
53	4TH	F7	Slab 6IN	Slab	D1				
61	4TH	F8	Slab 6IN	Slab	D1				
69	4TH	F9	Slab 6IN	Slab	D1				
149	4TH	F10	Slab 6IN	Slab					
86	4TH	W1	STAIR	Slab					
78	4TH	W2	STAIR	Slab					
94	4TH	W3	SHEAR 10	Wall					
103	4TH	W4	SHEAR 10	Wall					
112	4TH	W5	SHEAR 10	Wall					
121	4TH	W6	SHEAR 10	Wall					
130	4TH	W7	SHEAR 10	Wall					
139	4TH	W8	SHEAR 10	Wall					
7	3RD	F1	LANDING SLAB	Slab	D1				
15	3RD	F3	LANDING SLAB	Slab					

Table 3.3 - Area Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Section Property	Property Type	Diaphragm	Axis Angle deg	Added Mass lb-s2/ft3	Pier	Spandrel
30	3RD	F4	Slab 6IN	Slab	D1				
38	3RD	F5	Slab 6IN	Slab	D1				
46	3RD	F6	Slab 6IN	Slab	D1				
54	3RD	F7	Slab 6IN	Slab	D1				
62	3RD	F8	Slab 6IN	Slab	D1				
70	3RD	F9	Slab 6IN	Slab	D1				
150	3RD	F10	Slab 6IN	Slab					
87	3RD	W1	STAIR	Slab					
79	3RD	W2	STAIR	Slab					
95	3RD	W3	SHEAR 10	Wall					
104	3RD	W4	SHEAR 10	Wall					
113	3RD	W5	SHEAR 10	Wall					
122	3RD	W6	SHEAR 10	Wall					
131	3RD	W7	SHEAR 10	Wall					
140	3RD	W8	SHEAR 10	Wall					
8	2ND	F1	LANDING SLAB	Slab	D1				
16	2ND	F3	LANDING SLAB	Slab					
31	2ND	F4	Slab 6IN	Slab	D1				
39	2ND	F5	Slab 6IN	Slab	D1				
47	2ND	F6	Slab 6IN	Slab	D1				
55	2ND	F7	Slab 6IN	Slab	D1				
63	2ND	F8	Slab 6IN	Slab	D1				
71	2ND	F9	Slab 6IN	Slab	D1				
151	2ND	F10	Slab 6IN	Slab					
81	2ND	W1	STAIR	Slab					
80	2ND	W2	STAIR	Slab					
96	2ND	W3	SHEAR 10	Wall					
105	2ND	W4	SHEAR 10	Wall					
114	2ND	W5	SHEAR 10	Wall					
123	2ND	W6	SHEAR 10	Wall					
132	2ND	W7	SHEAR 10	Wall					
141	2ND	W8	SHEAR 10	Wall					
1	1ST	F1	LANDING SLAB	Slab	D1				
9	1ST	F3	LANDING SLAB	Slab					
24	1ST	F4	Slab 6IN	Slab	D1				
32	1ST	F5	Slab 6IN	Slab	D1				
40	1ST	F6	Slab 6IN	Slab	D1				
48	1ST	F7	Slab 6IN	Slab	D1				
56	1ST	F8	Slab 6IN	Slab	D1				
64	1ST	F9	Slab 6IN	Slab	D1				
144	1ST	F10	Slab 6IN	Slab					
72	1ST	W1	STAIR	Slab					
73	1ST	W2	STAIR	Slab					

Table 3.3 - Area Assignments - Summary (Part 1 of 2, continued)

UniqueName	Story	Label	Section Property	Property Type	Diaphragm	Axis Angle deg	Added Mass lb-s2/ft3	Pier	Spandrel
97	1ST	W3	SHEAR 10	Wall					
106	1ST	W4	SHEAR 10	Wall					
115	1ST	W5	SHEAR 10	Wall					
124	1ST	W6	SHEAR 10	Wall					
133	1ST	W7	SHEAR 10	Wall					
142	1ST	W8	SHEAR 10	Wall					
17	GF	F1	LANDING SLAB	Slab	D1				
18	GF	F4	Slab 6IN	Slab	D1				
19	GF	F5	Slab 6IN	Slab	D1				
20	GF	F6	Slab 6IN	Slab	D1				
21	GF	F7	Slab 6IN	Slab	D1				
22	GF	F8	Slab 6IN	Slab	D1				
23	GF	F9	Slab 6IN	Slab	D1				
89	GF	F10	Slab 6IN	Slab					
88	GF	W3	SHEAR 10	Wall					
98	GF	W4	SHEAR 10	Wall					
107	GF	W5	SHEAR 10	Wall					
116	GF	W6	SHEAR 10	Wall					
125	GF	W7	SHEAR 10	Wall					
134	GF	W8	SHEAR 10	Wall					

Table 3.3 - Area Assignments - Summary (Part 2 of 2)

UniqueName	Spandrel Story	Spring	Modifiers
2			
10			
25			
33			
41			
49			
57			
65			
145			
82			
74			
90			
99			
108			
117			
126			
135			
3			
11			
26			

Table 3.3 - Area Assignments - Summary (Part 2 of 2, continued)

UniqueName	Spandrel Story	Spring	Modifiers
34			
42			
50			
58			
66			
146			
83			
75			
91			
100			
109			
118			
127			
136			
4			
12			
27			
35			
43			
51			
59			
67			
147			
84			
76			
92			
101			
110			
119			
128			
137			
5			
13			
28			
36			
44			
52			
60			
68			
148			
85			
77			
93			
102			
111			

Table 3.3 - Area Assignments - Summary (Part 2 of 2, continued)

UniqueName	Spandrel Story	Spring	Modifiers
120			
129			
138			
6			
14			
29			
37			
45			
53			
61			
69			
149			
86			
78			
94			
103			
112			
121			
130			
139			
7			
15			
30			
38			
46			
54			
62			
70			
150			
87			
79			
95			
104			
113			
122			
131			
140			
8			
16			
31			
39			
47			
55			
63			
71			

Table 3.3 - Area Assignments - Summary (Part 2 of 2, continued)

UniqueName	Spandrel Story	Spring	Modifiers
151			
81			
80			
96			
105			
114			
123			
132			
141			
1			
9			
24			
32			
40			
48			
56			
64			
144			
72			
73			
97			
106			
115			
124			
133			
142			
17			
18			
19			
20			
21			
22			
23			
89			
88			
98			
107			
116			
125			
134			

4 Loads

This chapter provides loading information as applied to the model.

4.1 Load Patterns

Table 4.1 - Load Pattern Definitions

Name	Is Auto Load	Type	Self Weight Multiplier	Auto Load
~LLRF	Yes	Other	0	
Dead	No	Dead	1	
EQ	No	Seismic	0	ASCE 7-05
EQ(1/6)	Yes	Seismic	0	ASCE 7-05
EQ(2/6)	Yes	Seismic	0	ASCE 7-05
EQ(3/6)	Yes	Seismic	0	ASCE 7-05
EQ(4/6)	Yes	Seismic	0	ASCE 7-05
EQ(5/6)	Yes	Seismic	0	ASCE 7-05
EQ(6/6)	Yes	Seismic	0	ASCE 7-05
FF	No	Super Dead	0	
Live	No	Live	0	
PW	No	Super Dead	0	
ROOF LIVE	No	Roof Live	0	
wind	No	Wind	0	ASCE 7-05
wind(1/12)	Yes	Wind	0	ASCE 7-05
wind(10/12)	Yes	Wind	0	ASCE 7-05
wind(11/12)	Yes	Wind	0	ASCE 7-05
wind(12/12)	Yes	Wind	0	ASCE 7-05
wind(2/12)	Yes	Wind	0	ASCE 7-05
wind(3/12)	Yes	Wind	0	ASCE 7-05
wind(4/12)	Yes	Wind	0	ASCE 7-05
wind(5/12)	Yes	Wind	0	ASCE 7-05
wind(6/12)	Yes	Wind	0	ASCE 7-05
wind(7/12)	Yes	Wind	0	ASCE 7-05
wind(8/12)	Yes	Wind	0	ASCE 7-05
wind(9/12)	Yes	Wind	0	ASCE 7-05

4.2 Auto Wind Loading

ASCE 7-05 Auto Wind Load Calculation

This calculation presents the automatically generated lateral wind loads for load pattern wind according to ASCE 7-05, as calculated by ETABS.

Exposure Parameters

Exposure From = Diaphragms

Exposure Category = C

Wind Direction = 0 degrees

Basic Wind Speed, V [ASCE 6.5.4]		$V = 147.17\ mph$
Windward Coefficient, $C_{p,wind}$ [ASCE 6.5.11.2.1]		$C_{p,wind}$ =Varies
Leeward Coefficient, $C_{p,lee}$ [ASCE 6.5.11.2.1]		$C_{p,lee}$ =Varies

Wind Case = All Cases

Top Story = ROOF

Bottom Story = 1ST

Include Parapet = Yes, Parapet Height = 2.4606

Factors and Coefficients


Gradient Height, z_g [ASCE Table 6-2]		$z_g = 900$
Emperical Exponent, α [ASCE Table 6-2]		$\alpha = 9.5$
Velocity Pressure Exposure Coefficient, $K_{z;}$ [ASCE Table 6-3]	$K_z = 2.01 \left(\frac{z}{z_g}\right)^{\frac{2}{\alpha}}$	for $15ft \le z \le z_g$
	$K_z = 2.01 \left(\frac{15}{z_g}\right)^{\frac{2}{\alpha}}$	for $z \le 15ft$
Topographical Factor, K_{zt} [ASCE 6.5.7.2]		$K_{zt} = 1$
Directionality Factor, K_d [ASCE 6.5.4.4]		$K_d = 0.85$
Importance Factor, I [ASCE 6.5.5]		$I = 1$
Gust Effect Factor, G [ASCE 6.5.8]		$G = 0.85$

Lateral Loading


Velocity Pressure, q_z [ASCE 6.5.10 Eq. 6-15]	$q_z = 0.00256\ K_z K_{zt} K_d V^2 I$
Design Wind Pressure, p [ASCE 6.5.12.2.1 Eq. 6-17]	$p = qG\ C_{p,wind} + q_h\ (G\ C_{p,lee})$

Applied Story Forces

Lateral Load to Stories - 0°

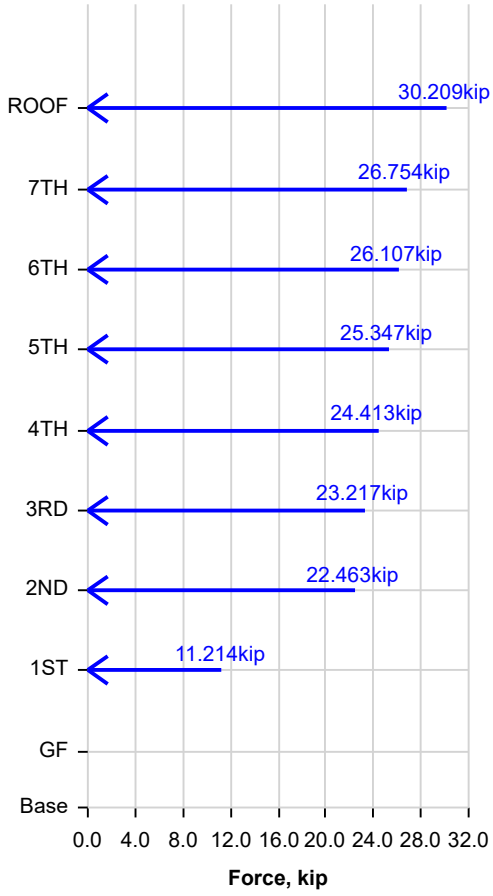


Lateral Load to Stories - 90°

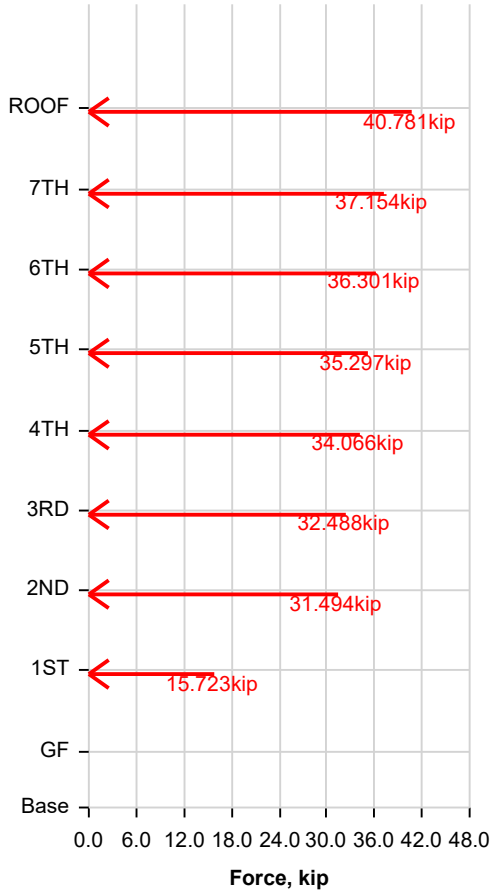


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	30.209	0
7TH	77	26.754	0
6TH	67	26.107	0
5TH	57	25.347	0
4TH	47	24.413	0
3RD	37	23.217	0
2ND	27	22.463	0
1ST	17	11.214	0
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 0°

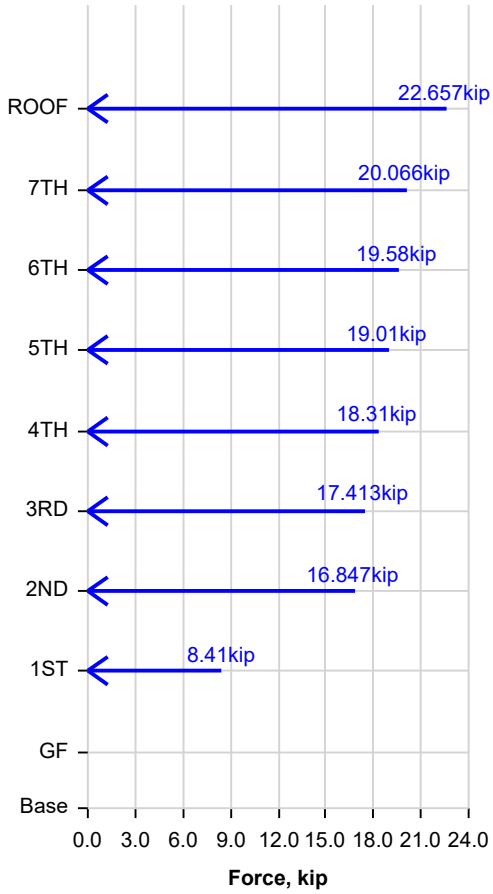


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	0	40.781
7TH	77	0	37.154
6TH	67	0	36.301
5TH	57	0	35.297
4TH	47	0	34.066
3RD	37	0	32.488
2ND	27	0	31.494
1ST	17	0	15.723
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 0°

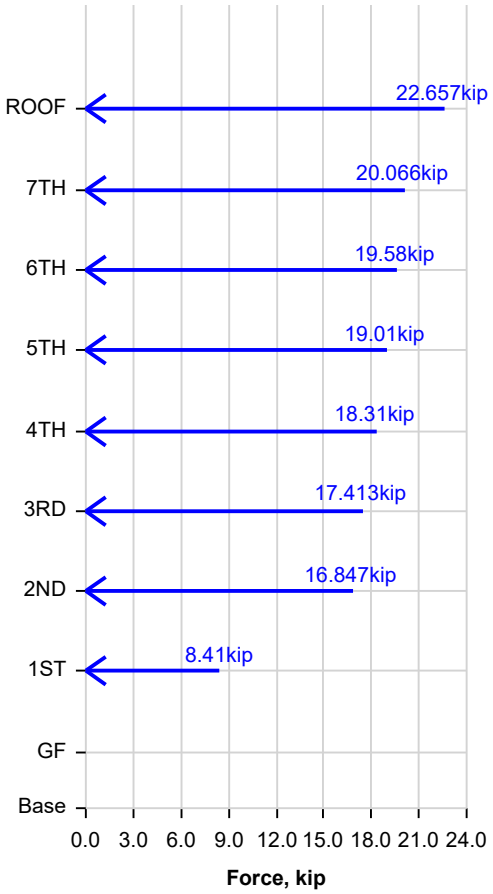


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	22.657	0
7TH	77	20.066	0
6TH	67	19.58	0
5TH	57	19.01	0
4TH	47	18.31	0
3RD	37	17.413	0
2ND	27	16.847	0
1ST	17	8.41	0
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 90°

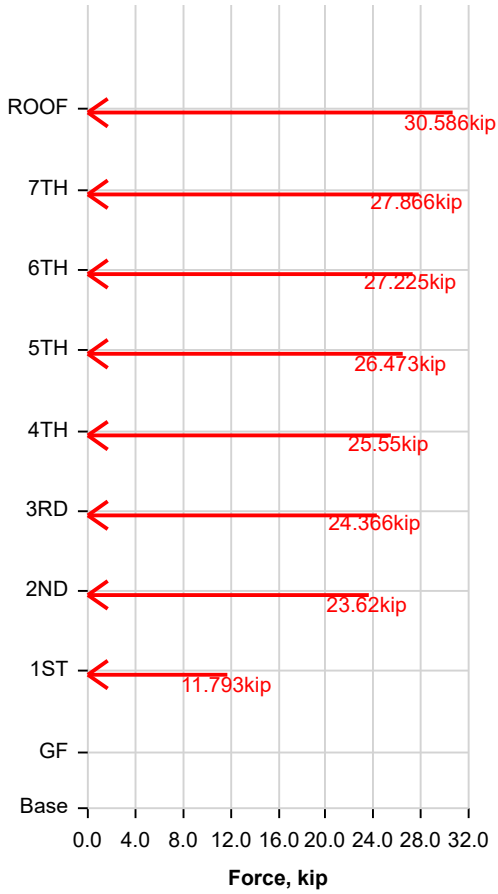


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	22.657	0
7TH	77	20.066	0
6TH	67	19.58	0
5TH	57	19.01	0
4TH	47	18.31	0
3RD	37	17.413	0
2ND	27	16.847	0
1ST	17	8.41	0
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 90°

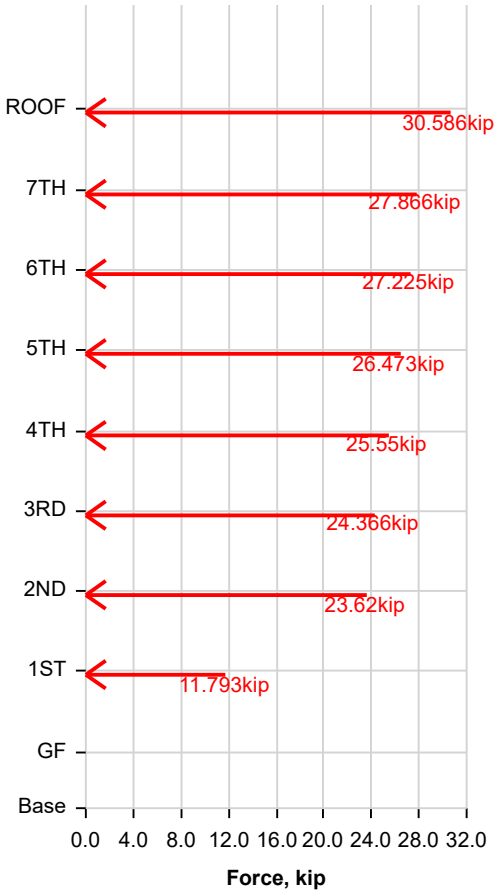


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	0	30.586
7TH	77	0	27.866
6TH	67	0	27.225
5TH	57	0	26.473
4TH	47	0	25.55
3RD	37	0	24.366
2ND	27	0	23.62
1ST	17	0	11.793
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 0°

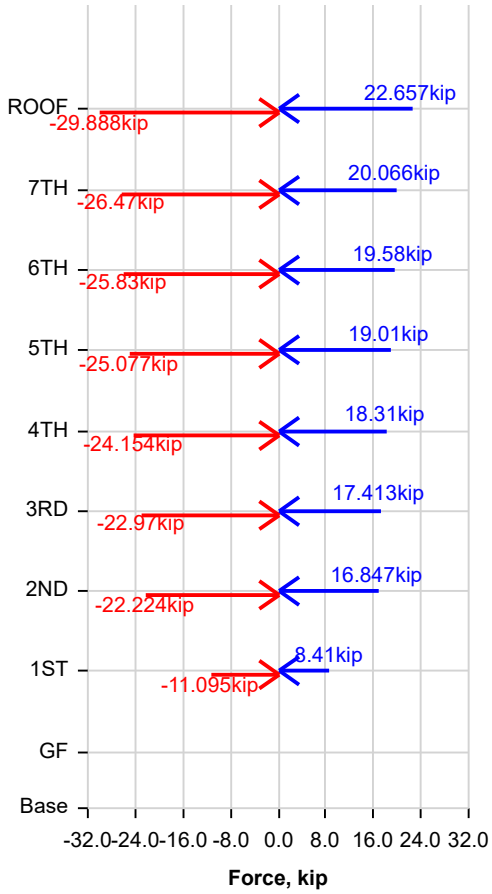


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	0	30.586
7TH	77	0	27.866
6TH	67	0	27.225
5TH	57	0	26.473
4TH	47	0	25.55
3RD	37	0	24.366
2ND	27	0	23.62
1ST	17	0	11.793
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 90°

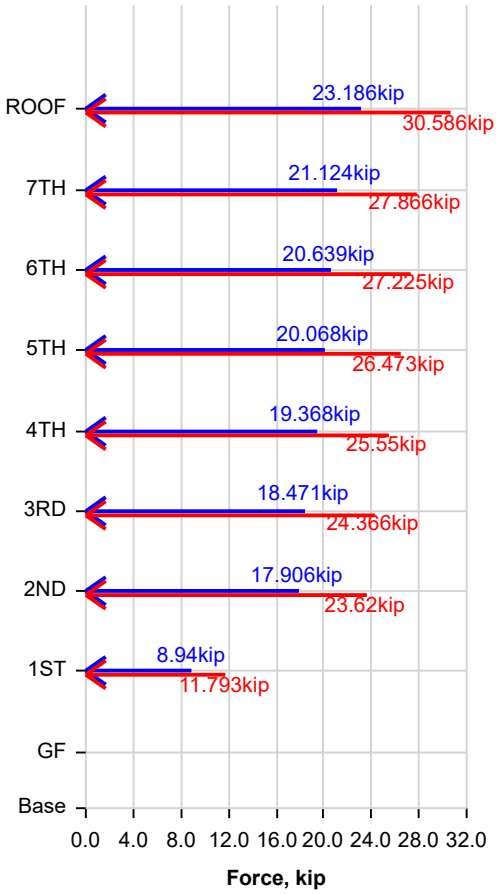


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	22.657	-29.888
7TH	77	20.066	-26.47
6TH	67	19.58	-25.83
5TH	57	19.01	-25.077
4TH	47	18.31	-24.154
3RD	37	17.413	-22.97
2ND	27	16.847	-22.224
1ST	17	8.41	-11.095
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 0°

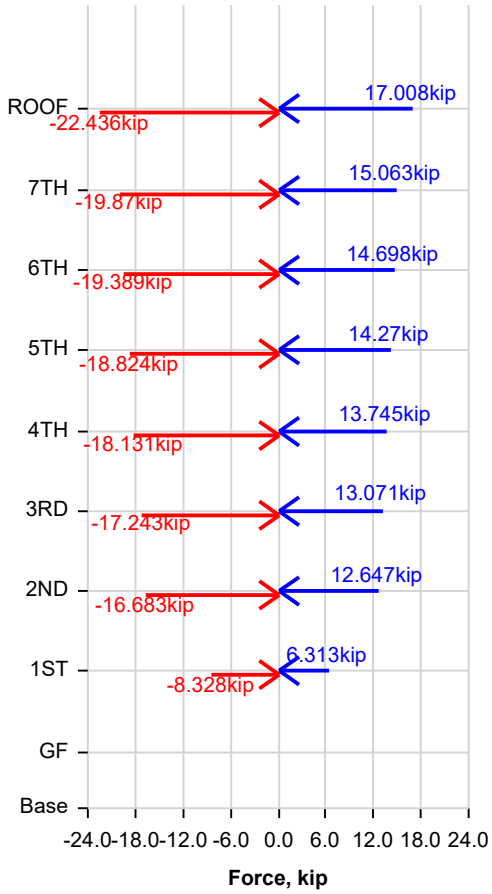


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	23.186	30.586
7TH	77	21.124	27.866
6TH	67	20.639	27.225
5TH	57	20.068	26.473
4TH	47	19.368	25.55
3RD	37	18.471	24.366
2ND	27	17.906	23.62
1ST	17	8.94	11.793
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 0°

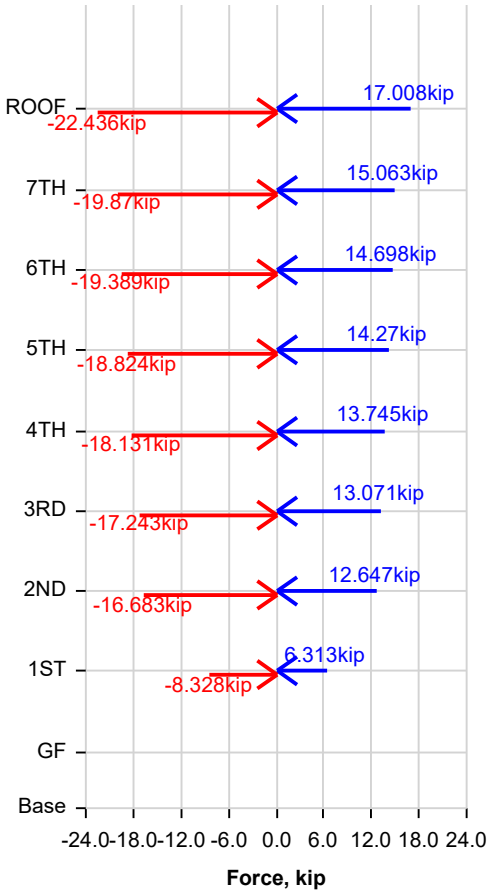


Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	17.008	-22.436
7TH	77	15.063	-19.87
6TH	67	14.698	-19.389
5TH	57	14.27	-18.824
4TH	47	13.745	-18.131
3RD	37	13.071	-17.243
2ND	27	12.647	-16.683
1ST	17	6.313	-8.328
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 90°

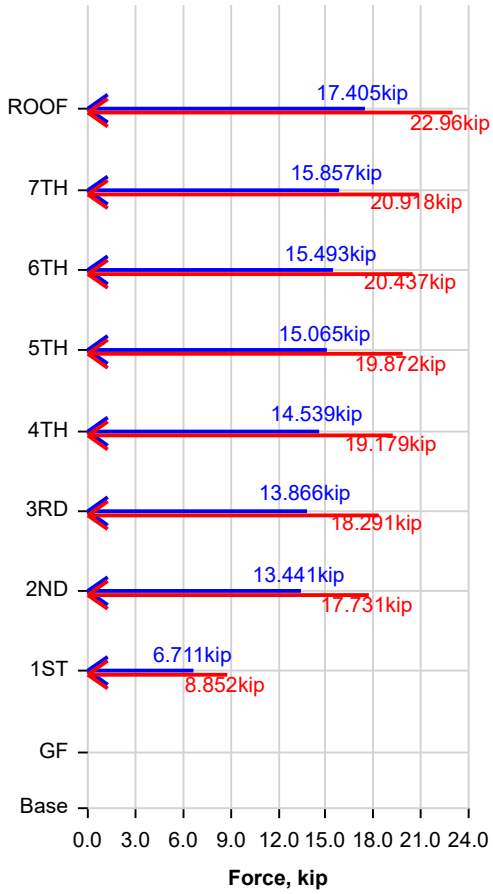

Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	17.008	-22.436
7TH	77	15.063	-19.87
6TH	67	14.698	-19.389
5TH	57	14.27	-18.824
4TH	47	13.745	-18.131
3RD	37	13.071	-17.243
2ND	27	12.647	-16.683
1ST	17	6.313	-8.328
GF	7	0	0
Base	0	0	0

Lateral Load to Stories - 90°

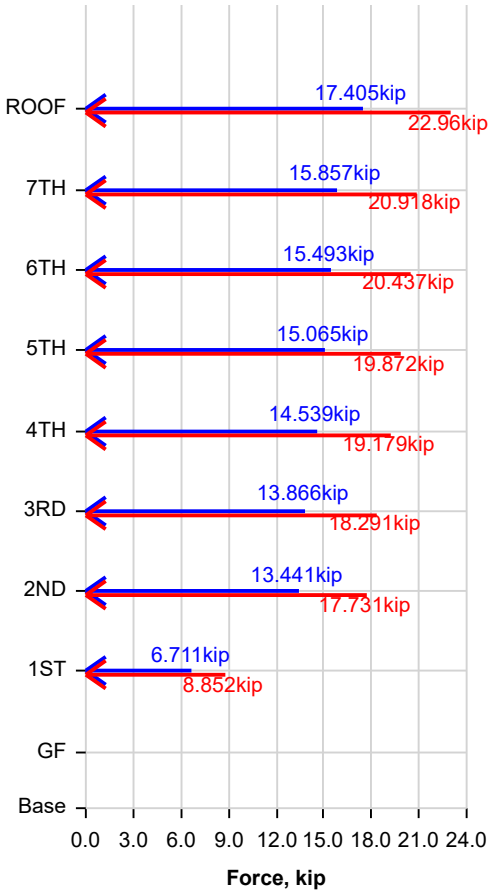

Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	17.405	22.96
7TH	77	15.857	20.918
6TH	67	15.493	20.437
5TH	57	15.065	19.872
4TH	47	14.539	19.179
3RD	37	13.866	18.291
2ND	27	13.441	17.731
1ST	17	6.711	8.852
GF	7	0	0
Base	0	0	0

Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	17.405	22.96
7TH	77	15.857	20.918
6TH	67	15.493	20.437
5TH	57	15.065	19.872
4TH	47	14.539	19.179
3RD	37	13.866	18.291
2ND	27	13.441	17.731
1ST	17	6.711	8.852
GF	7	0	0
Base	0	0	0

4.3 Auto Seismic Loading

ASCE 7-05 Auto Seismic Load Calculation

This calculation presents the automatically generated lateral seismic loads for load pattern EQ according to ASCE 7-05, as calculated by ETABS.

Direction and Eccentricity

Direction = Multiple

Eccentricity Ratio = 5% for all diaphragms

Structural Period

Period Calculation Method = User Specified

User Period		$T = 0.89\ sec$
Long-Period Transition Period, T_L [ASCE 11.4.5]		$T_L = 2\ sec$

Factors and Coefficients

Response Modification Factor, R [ASCE Table 12.2-1]		$R = 8$
System Overstrength Factor, Ω_0 [ASCE Table 12.2-1]		$\Omega_0 = 3$
Deflection Amplification Factor, C_d [ASCE Table 12.2-1]		$C_d = 5.5$
Importance Factor, I [ASCE Table 11.5-1]		$I = 1$
Ss and S1 Source = User Specified		
Mapped MCE Spectral Response Acceleration, S_s [ASCE 11.4.1]		$S_s = 0.5g$
Mapped MCE Spectral Response Acceleration, S_1 [ASCE 11.4.1]		$S_1 = 0.2g$
Site Class [ASCE Table 20.3-1] = F - Requires Site Response Analysis		
Site Coefficient, F_a [ASCE Table 11.4-1]		$F_a = 1.4$
Site Coefficient, F_v [ASCE Table 11.4-2]		$F_v = 1.75$

Seismic Response

MCE Spectral Response Acceleration, S_{MS} [ASCE 11.4.3, Eq. 11.4-1]	$S_{MS} = F_a S_S$	$S_{MS} = 0.7g$
MCE Spectral Response Acceleration, S_{M1} [ASCE 11.4.3, Eq. 11.4-2]	$S_{M1} = F_v S_1$	$S_{M1} = 0.35g$
Design Spectral Response Acceleration, S_{DS} [ASCE 11.4.4, Eq. 11.4-3]	$S_{DS} = \frac{2}{3} S_{MS}$	$S_{DS} = 0.466667g$
Design Spectral Response Acceleration, S_{D1} [ASCE 11.4.4, Eq. 11.4-4]	$S_{D1} = \frac{2}{3} S_{M1}$	$S_{D1} = 0.233333g$

Equivalent Lateral Forces

Seismic Response Coefficient, C_S [ASCE 12.8.1.1, Eq. 12.8-2]

$$C_S = \frac{S_{DS}}{(\frac{R}{I})}$$

[ASCE 12.8.1.1, Eq. 12.8-3]

$$C_{S,max} = \frac{S_{D1}}{T(\frac{R}{I})}$$

[ASCE 12.8.1.1, Eq. 12.8-5]

$$C_{S,min} = 0.01$$

[ASCE 12.8.1.1, Eq. 12.8-6]

$$C_{S,min} = 0.5\frac{S_1}{(\frac{R}{I})} \text{ for } S_1 = 0.6g$$


$$C_{S,min} \le C_s \le C_{S,max}$$

Calculated Base Shear

Direction	Period Used (sec)	C_s	W (kip)	V (kip)
X	0.89	0.032772	6492.3065	212.7629
Y	0.89	0.032772	6492.3065	212.7629
X + Ecc. Y	0.89	0.032772	6492.3065	212.7629
Y + Ecc. X	0.89	0.032772	6492.3065	212.7629
X - Ecc. Y	0.89	0.032772	6492.3065	212.7629
Y - Ecc. X	0.89	0.032772	6492.3065	212.7629


Applied Story Forces

Lateral Load to Stories - X

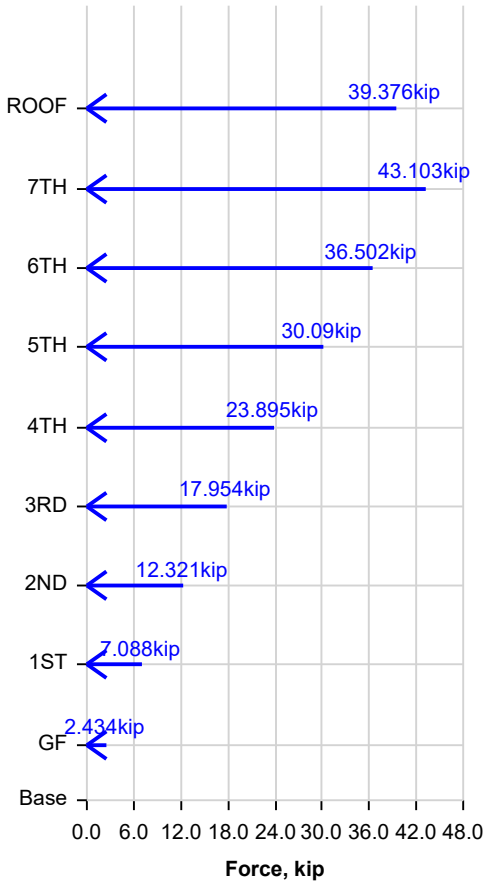

Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	39.376	0
7TH	77	43.103	0
6TH	67	36.502	0
5TH	57	30.09	0
4TH	47	23.895	0
3RD	37	17.954	0
2ND	27	12.321	0
1ST	17	7.088	0
GF	7	2.434	0
Base	0	0	0

Lateral Load to Stories - Y

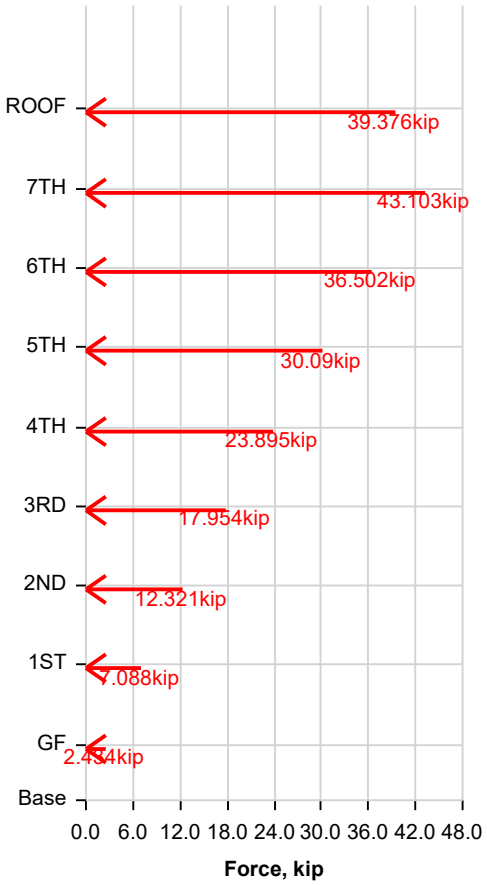

Story	Elevation	X-Dir	Y-Dir
	ft	kip	kip
ROOF	87	0	39.376
7TH	77	0	43.103
6TH	67	0	36.502
5TH	57	0	30.09
4TH	47	0	23.895
3RD	37	0	17.954
2ND	27	0	12.321
1ST	17	0	7.088
GF	7	0	2.434
Base	0	0	0

4.4 Applied Loads

4.4.1 Point Loads

Table 4.4 - Joint Loads Assignments - Force

Story	Label	UniqueName	Load Pattern	FX kip	FY kip	FZ kip	MX kip-ft	MY kip-ft	MZ kip-ft	X Dimension in	Y Dimension in
ROOF	30	246	wind(1/12)	30.209	0	0	0	0	0	0	0
7TH	31	247	wind(1/12)	26.754	0	0	0	0	0	0	0
6TH	32	248	wind(1/12)	26.107	0	0	0	0	0	0	0
5TH	33	249	wind(1/12)	25.347	0	0	0	0	0	0	0
4TH	38	250	wind(1/12)	24.413	0	0	0	0	0	0	0
3RD	39	251	wind(1/12)	23.217	0	0	0	0	0	0	0
2ND	42	252	wind(1/12)	22.463	0	0	0	0	0	0	0
1ST	43	253	wind(1/12)	11.214	0	0	0	0	0	0	0
GF	44	254	wind(1/12)	0	0	0	0	0	0	0	0
ROOF	153	255	wind(2/12)	0	40.781	0	0	0	0	0	0
7TH	154	256	wind(2/12)	0	37.154	0	0	0	0	0	0
6TH	155	257	wind(2/12)	0	36.301	0	0	0	0	0	0
5TH	156	258	wind(2/12)	0	35.297	0	0	0	0	0	0
4TH	157	259	wind(2/12)	0	34.066	0	0	0	0	0	0
3RD	158	260	wind(2/12)	0	32.488	0	0	0	0	0	0
2ND	159	261	wind(2/12)	0	31.494	0	0	0	0	0	0
1ST	160	262	wind(2/12)	0	15.723	0	0	0	0	0	0
GF	161	263	wind(2/12)	0	0	0	0	0	0	0	0
ROOF	162	264	wind(3/12)	22.657	0	0	0	0	159.7315	0	0
7TH	163	265	wind(3/12)	20.066	0	0	0	0	141.4643	0	0
6TH	164	266	wind(3/12)	19.58	0	0	0	0	138.0421	0	0
5TH	165	267	wind(3/12)	19.01	0	0	0	0	134.0203	0	0
4TH	166	268	wind(3/12)	18.31	0	0	0	0	129.0859	0	0
3RD	167	269	wind(3/12)	17.413	0	0	0	0	122.7614	0	0
2ND	168	270	wind(3/12)	16.847	0	0	0	0	118.774	0	0
1ST	169	271	wind(3/12)	8.41	0	0	0	0	59.2935	0	0
GF	170	272	wind(3/12)	0	0	0	0	0	0	0	0
ROOF	171	273	wind(4/12)	22.657	0	0	0	0	-159.7315	0	0
7TH	172	274	wind(4/12)	20.066	0	0	0	0	-141.4643	0	0
6TH	173	275	wind(4/12)	19.58	0	0	0	0	-138.0421	0	0
5TH	174	276	wind(4/12)	19.01	0	0	0	0	-134.0203	0	0
4TH	175	277	wind(4/12)	18.31	0	0	0	0	-129.0859	0	0
3RD	176	278	wind(4/12)	17.413	0	0	0	0	-122.7614	0	0
2ND	177	279	wind(4/12)	16.847	0	0	0	0	-118.774	0	0
1ST	178	280	wind(4/12)	8.41	0	0	0	0	-59.2935	0	0
GF	179	281	wind(4/12)	0	0	0	0	0	0	0	0
ROOF	180	282	wind(5/12)	0	30.586	0	0	0	284.4487	0	0
7TH	181	283	wind(5/12)	0	27.866	0	0	0	259.1521	0	0
6TH	182	284	wind(5/12)	0	27.225	0	0	0	253.1969	0	0
5TH	183	285	wind(5/12)	0	26.473	0	0	0	246.1984	0	0
4TH	184	286	wind(5/12)	0	25.55	0	0	0	237.6118	0	0
3RD	185	287	wind(5/12)	0	24.366	0	0	0	226.6062	0	0

Table 4.4 - Joint Loads Assignments - Force (continued)

Story	Label	UniqueName	Load Pattern	FX kip	FY kip	FZ kip	MX kip-ft	MY kip-ft	MZ kip-ft	X Dimension in	Y Dimension in
2ND	186	288	wind(5/12)	0	23.62	0	0	0	219.6675	0	0
1ST	187	289	wind(5/12)	0	11.793	0	0	0	109.6711	0	0
GF	188	290	wind(5/12)	0	0	0	0	0	0	0	0
ROOF	189	291	wind(6/12)	0	30.586	0	0	0	-284.4487	0	0
7TH	190	292	wind(6/12)	0	27.866	0	0	0	-259.1521	0	0
6TH	191	293	wind(6/12)	0	27.225	0	0	0	-253.1969	0	0
5TH	192	294	wind(6/12)	0	26.473	0	0	0	-246.1984	0	0
4TH	193	295	wind(6/12)	0	25.55	0	0	0	-237.6118	0	0
3RD	194	296	wind(6/12)	0	24.366	0	0	0	-226.6062	0	0
2ND	195	297	wind(6/12)	0	23.62	0	0	0	-219.6675	0	0
1ST	196	298	wind(6/12)	0	11.793	0	0	0	-109.6711	0	0
GF	197	299	wind(6/12)	0	0	0	0	0	0	0	0
ROOF	198	300	wind(7/12)	22.657	-29.888	0	0	0	0	0	0
7TH	199	301	wind(7/12)	20.066	-26.47	0	0	0	0	0	0
6TH	200	302	wind(7/12)	19.58	-25.83	0	0	0	0	0	0
5TH	201	303	wind(7/12)	19.01	-25.077	0	0	0	0	0	0
4TH	202	304	wind(7/12)	18.31	-24.154	0	0	0	0	0	0
3RD	203	305	wind(7/12)	17.413	-22.97	0	0	0	0	0	0
2ND	204	306	wind(7/12)	16.847	-22.224	0	0	0	0	0	0
1ST	205	307	wind(7/12)	8.41	-11.095	0	0	0	0	0	0
GF	206	308	wind(7/12)	0	0	0	0	0	0	0	0
ROOF	207	309	wind(8/12)	23.186	30.586	0	0	0	0	0	0
7TH	208	310	wind(8/12)	21.124	27.866	0	0	0	0	0	0
6TH	209	311	wind(8/12)	20.639	27.225	0	0	0	0	0	0
5TH	210	312	wind(8/12)	20.068	26.473	0	0	0	0	0	0
4TH	211	313	wind(8/12)	19.368	25.55	0	0	0	0	0	0
3RD	212	314	wind(8/12)	18.471	24.366	0	0	0	0	0	0
2ND	213	315	wind(8/12)	17.906	23.62	0	0	0	0	0	0
1ST	214	316	wind(8/12)	8.94	11.793	0	0	0	0	0	0
GF	215	317	wind(8/12)	0	0	0	0	0	0	0	0
ROOF	216	318	wind(9/12)	17.008	-22.436	0	0	0	328.5585	0	0
7TH	217	319	wind(9/12)	15.063	-19.87	0	0	0	290.9839	0	0
6TH	218	320	wind(9/12)	14.698	-19.389	0	0	0	283.9445	0	0
5TH	219	321	wind(9/12)	14.27	-18.824	0	0	0	275.672	0	0
4TH	220	322	wind(9/12)	13.745	-18.131	0	0	0	265.5223	0	0
3RD	221	323	wind(9/12)	13.071	-17.243	0	0	0	252.5132	0	0
2ND	222	324	wind(9/12)	12.647	-16.683	0	0	0	244.3113	0	0
1ST	223	325	wind(9/12)	6.313	-8.328	0	0	0	121.9634	0	0
GF	224	326	wind(9/12)	0	0	0	0	0	0	0	0
ROOF	225	327	wind(10/12)	17.008	-22.436	0	0	0	-328.5585	0	0
7TH	226	328	wind(10/12)	15.063	-19.87	0	0	0	-290.9839	0	0
6TH	227	329	wind(10/12)	14.698	-19.389	0	0	0	-283.9445	0	0
5TH	228	330	wind(10/12)	14.27	-18.824	0	0	0	-275.672	0	0
4TH	229	331	wind(10/12)	13.745	-18.131	0	0	0	-265.5223	0	0

Table 4.4 - Joint Loads Assignments - Force (continued)

Story	Label	UniqueName	Load Pattern	FX kip	FY kip	FZ kip	MX kip-ft	MY kip-ft	MZ kip-ft	X Dimension in	Y Dimension in
3RD	230	332	wind(10/12)	13.071	-17.243	0	0	0	-252.5132	0	0
2ND	231	333	wind(10/12)	12.647	-16.683	0	0	0	-244.3113	0	0
1ST	232	334	wind(10/12)	6.313	-8.328	0	0	0	-121.9634	0	0
GF	233	335	wind(10/12)	0	0	0	0	0	0	0	0
ROOF	234	336	wind(11/12)	17.405	22.96	0	0	0	336.2314	0	0
7TH	235	337	wind(11/12)	15.857	20.918	0	0	0	306.3297	0	0
6TH	236	338	wind(11/12)	15.493	20.437	0	0	0	299.2904	0	0
5TH	237	339	wind(11/12)	15.065	19.872	0	0	0	291.0178	0	0
4TH	238	340	wind(11/12)	14.539	19.179	0	0	0	280.8681	0	0
3RD	239	341	wind(11/12)	13.866	18.291	0	0	0	267.859	0	0
2ND	240	342	wind(11/12)	13.441	17.731	0	0	0	259.6571	0	0
1ST	241	343	wind(11/12)	6.711	8.852	0	0	0	129.6363	0	0
GF	242	344	wind(11/12)	0	0	0	0	0	0	0	0
ROOF	243	345	wind(12/12)	17.405	22.96	0	0	0	-336.2314	0	0
7TH	244	346	wind(12/12)	15.857	20.918	0	0	0	-306.3297	0	0
6TH	245	347	wind(12/12)	15.493	20.437	0	0	0	-299.2904	0	0
5TH	246	348	wind(12/12)	15.065	19.872	0	0	0	-291.0178	0	0
4TH	247	349	wind(12/12)	14.539	19.179	0	0	0	-280.8681	0	0
3RD	248	350	wind(12/12)	13.866	18.291	0	0	0	-267.859	0	0
2ND	249	351	wind(12/12)	13.441	17.731	0	0	0	-259.6571	0	0
1ST	250	352	wind(12/12)	6.711	8.852	0	0	0	-129.6363	0	0
GF	251	353	wind(12/12)	0	0	0	0	0	0	0	0

4.4.2 Line Loads

Table 4.5 - Frame Loads Assignments - Distributed (Part 1 of 2)

UniqueName	Load Pattern	Story	Label	Load Type	Direction	Distance Type	Relative Distance A	Relative Distance B	Absolute Distance A ft	Absolute Distance B ft
210	Live	ROOF	B19	Force	Gravity	Relative	0	1	0	7
348	Live	ROOF	B24	Force	Gravity	Relative	0	1	0	12
202	Live	ROOF	B25	Force	Gravity	Relative	0	1	0	14
194	Live	ROOF	B26	Force	Gravity	Relative	0	1	0	19
186	Live	ROOF	B27	Force	Gravity	Relative	0	1	0	14
242	Live	ROOF	B28	Force	Gravity	Relative	0	1	0	14
234	Live	ROOF	B29	Force	Gravity	Relative	0	1	0	19
226	Live	ROOF	B30	Force	Gravity	Relative	0	1	0	14
170	Live	ROOF	B38	Force	Gravity	Relative	0	1	0	9
162	Live	ROOF	B39	Force	Gravity	Relative	0	1	0	27
178	Live	ROOF	B42	Force	Gravity	Relative	0	1	0	26
218	Live	ROOF	B45	Force	Gravity	Relative	0	1	0	24
347	Live	ROOF	B46	Force	Gravity	Relative	0	1	0	19
211	Live	7TH	B19	Force	Gravity	Relative	0	1	0	7
350	Live	7TH	B24	Force	Gravity	Relative	0	1	0	12

Table 4.5 - Frame Loads Assignments - Distributed (Part 1 of 2, continued)

UniqueName	Load Pattern	Story	Label	Load Type	Direction	Distance Type	Relative Distance A	Relative Distance B	Absolute Distance A ft	Absolute Distance B ft
203	Live	7TH	B25	Force	Gravity	Relative	0	1	0	14
195	Live	7TH	B26	Force	Gravity	Relative	0	1	0	19
187	Live	7TH	B27	Force	Gravity	Relative	0	1	0	14
243	Live	7TH	B28	Force	Gravity	Relative	0	1	0	14
235	Live	7TH	B29	Force	Gravity	Relative	0	1	0	19
227	Live	7TH	B30	Force	Gravity	Relative	0	1	0	14
251	Live	7TH	B31	Force	Gravity	Relative	0	1	0	14
259	Live	7TH	B32	Force	Gravity	Relative	0	1	0	14
267	Live	7TH	B33	Force	Gravity	Relative	0	1	0	19
275	Live	7TH	B34	Force	Gravity	Relative	0	1	0	19
283	Live	7TH	B37	Force	Gravity	Relative	0	1	0	14
171	Live	7TH	B38	Force	Gravity	Relative	0	1	0	9
163	Live	7TH	B39	Force	Gravity	Relative	0	1	0	27
315	Live	7TH	B40	Force	Gravity	Relative	0	1	0	27
291	Live	7TH	B41	Force	Gravity	Relative	0	1	0	27
179	Live	7TH	B42	Force	Gravity	Relative	0	1	0	26
331	Live	7TH	B43	Force	Gravity	Relative	0	1	0	26
307	Live	7TH	B44	Force	Gravity	Relative	0	1	0	26
219	Live	7TH	B45	Force	Gravity	Relative	0	0.8333	0	20
349	Live	7TH	B46	Force	Gravity	Relative	0	1	0	19
299	Live	7TH	B47	Force	Gravity	Relative	0	1	0	9
323	Live	7TH	B48	Force	Gravity	Relative	0	1	0	9
212	Live	6TH	B19	Force	Gravity	Relative	0	1	0	7
352	Live	6TH	B24	Force	Gravity	Relative	0	1	0	12
204	Live	6TH	B25	Force	Gravity	Relative	0	1	0	14
196	Live	6TH	B26	Force	Gravity	Relative	0	1	0	19
188	Live	6TH	B27	Force	Gravity	Relative	0	1	0	14
244	Live	6TH	B28	Force	Gravity	Relative	0	1	0	14
236	Live	6TH	B29	Force	Gravity	Relative	0	1	0	19
228	Live	6TH	B30	Force	Gravity	Relative	0	1	0	14
252	Live	6TH	B31	Force	Gravity	Relative	0	1	0	14
260	Live	6TH	B32	Force	Gravity	Relative	0	1	0	14
268	Live	6TH	B33	Force	Gravity	Relative	0	1	0	19
276	Live	6TH	B34	Force	Gravity	Relative	0	1	0	19
284	Live	6TH	B37	Force	Gravity	Relative	0	1	0	14
172	Live	6TH	B38	Force	Gravity	Relative	0	1	0	9
164	Live	6TH	B39	Force	Gravity	Relative	0	1	0	27
316	Live	6TH	B40	Force	Gravity	Relative	0	1	0	27
292	Live	6TH	B41	Force	Gravity	Relative	0	1	0	27
180	Live	6TH	B42	Force	Gravity	Relative	0	1	0	26
332	Live	6TH	B43	Force	Gravity	Relative	0	1	0	26
308	Live	6TH	B44	Force	Gravity	Relative	0	1	0	26
220	Live	6TH	B45	Force	Gravity	Relative	0	0.8333	0	20
351	Live	6TH	B46	Force	Gravity	Relative	0	1	0	19

Table 4.5 - Frame Loads Assignments - Distributed (Part 1 of 2, continued)

UniqueName	Load Pattern	Story	Label	Load Type	Direction	Distance Type	Relative Distance A	Relative Distance B	Absolute Distance A ft	Absolute Distance B ft
300	Live	6TH	B47	Force	Gravity	Relative	0	1	0	9
324	Live	6TH	B48	Force	Gravity	Relative	0	1	0	9
213	Live	5TH	B19	Force	Gravity	Relative	0	1	0	7
354	Live	5TH	B24	Force	Gravity	Relative	0	1	0	12
205	Live	5TH	B25	Force	Gravity	Relative	0	1	0	14
197	Live	5TH	B26	Force	Gravity	Relative	0	1	0	19
189	Live	5TH	B27	Force	Gravity	Relative	0	1	0	14
245	Live	5TH	B28	Force	Gravity	Relative	0	1	0	14
237	Live	5TH	B29	Force	Gravity	Relative	0	1	0	19
229	Live	5TH	B30	Force	Gravity	Relative	0	1	0	14
253	Live	5TH	B31	Force	Gravity	Relative	0	1	0	14
261	Live	5TH	B32	Force	Gravity	Relative	0	1	0	14
269	Live	5TH	B33	Force	Gravity	Relative	0	1	0	19
277	Live	5TH	B34	Force	Gravity	Relative	0	1	0	19
285	Live	5TH	B37	Force	Gravity	Relative	0	1	0	14
173	Live	5TH	B38	Force	Gravity	Relative	0	1	0	9
165	Live	5TH	B39	Force	Gravity	Relative	0	1	0	27
317	Live	5TH	B40	Force	Gravity	Relative	0	1	0	27
293	Live	5TH	B41	Force	Gravity	Relative	0	1	0	27
181	Live	5TH	B42	Force	Gravity	Relative	0	1	0	26
333	Live	5TH	B43	Force	Gravity	Relative	0	1	0	26
309	Live	5TH	B44	Force	Gravity	Relative	0	1	0	26
221	Live	5TH	B45	Force	Gravity	Relative	0	0.8333	0	20
353	Live	5TH	B46	Force	Gravity	Relative	0	1	0	19
301	Live	5TH	B47	Force	Gravity	Relative	0	1	0	9
325	Live	5TH	B48	Force	Gravity	Relative	0	1	0	9
214	Live	4TH	B19	Force	Gravity	Relative	0	1	0	7
356	Live	4TH	B24	Force	Gravity	Relative	0	1	0	12
206	Live	4TH	B25	Force	Gravity	Relative	0	1	0	14
198	Live	4TH	B26	Force	Gravity	Relative	0	1	0	19
190	Live	4TH	B27	Force	Gravity	Relative	0	1	0	14
246	Live	4TH	B28	Force	Gravity	Relative	0	1	0	14
238	Live	4TH	B29	Force	Gravity	Relative	0	1	0	19
230	Live	4TH	B30	Force	Gravity	Relative	0	1	0	14
254	Live	4TH	B31	Force	Gravity	Relative	0	1	0	14
262	Live	4TH	B32	Force	Gravity	Relative	0	1	0	14
270	Live	4TH	B33	Force	Gravity	Relative	0	1	0	19
278	Live	4TH	B34	Force	Gravity	Relative	0	1	0	19
286	Live	4TH	B37	Force	Gravity	Relative	0	1	0	14
174	Live	4TH	B38	Force	Gravity	Relative	0	1	0	9
166	Live	4TH	B39	Force	Gravity	Relative	0	1	0	27
318	Live	4TH	B40	Force	Gravity	Relative	0	1	0	27
294	Live	4TH	B41	Force	Gravity	Relative	0	1	0	27
182	Live	4TH	B42	Force	Gravity	Relative	0	1	0	26

Table 4.5 - Frame Loads Assignments - Distributed (Part 1 of 2, continued)

UniqueName	Load Pattern	Story	Label	Load Type	Direction	Distance Type	Relative Distance A	Relative Distance B	Absolute Distance A ft	Absolute Distance B ft
334	Live	4TH	B43	Force	Gravity	Relative	0	1	0	26
310	Live	4TH	B44	Force	Gravity	Relative	0	1	0	26
222	Live	4TH	B45	Force	Gravity	Relative	0	0.8333	0	20
355	Live	4TH	B46	Force	Gravity	Relative	0	1	0	19
302	Live	4TH	B47	Force	Gravity	Relative	0	1	0	9
326	Live	4TH	B48	Force	Gravity	Relative	0	1	0	9
215	Live	3RD	B19	Force	Gravity	Relative	0	1	0	7
358	Live	3RD	B24	Force	Gravity	Relative	0	1	0	12
207	Live	3RD	B25	Force	Gravity	Relative	0	1	0	14
199	Live	3RD	B26	Force	Gravity	Relative	0	1	0	19
191	Live	3RD	B27	Force	Gravity	Relative	0	1	0	14
247	Live	3RD	B28	Force	Gravity	Relative	0	1	0	14
239	Live	3RD	B29	Force	Gravity	Relative	0	1	0	19
231	Live	3RD	B30	Force	Gravity	Relative	0	1	0	14
255	Live	3RD	B31	Force	Gravity	Relative	0	1	0	14
263	Live	3RD	B32	Force	Gravity	Relative	0	1	0	14
271	Live	3RD	B33	Force	Gravity	Relative	0	1	0	19
279	Live	3RD	B34	Force	Gravity	Relative	0	1	0	19
287	Live	3RD	B37	Force	Gravity	Relative	0	1	0	14
175	Live	3RD	B38	Force	Gravity	Relative	0	1	0	9
167	Live	3RD	B39	Force	Gravity	Relative	0	1	0	27
319	Live	3RD	B40	Force	Gravity	Relative	0	1	0	27
295	Live	3RD	B41	Force	Gravity	Relative	0	1	0	27
183	Live	3RD	B42	Force	Gravity	Relative	0	1	0	26
335	Live	3RD	B43	Force	Gravity	Relative	0	1	0	26
311	Live	3RD	B44	Force	Gravity	Relative	0	1	0	26
223	Live	3RD	B45	Force	Gravity	Relative	0	0.8333	0	20
357	Live	3RD	B46	Force	Gravity	Relative	0	1	0	19
303	Live	3RD	B47	Force	Gravity	Relative	0	1	0	9
327	Live	3RD	B48	Force	Gravity	Relative	0	1	0	9
216	Live	2ND	B19	Force	Gravity	Relative	0	1	0	7
360	Live	2ND	B24	Force	Gravity	Relative	0	1	0	12
208	Live	2ND	B25	Force	Gravity	Relative	0	1	0	14
200	Live	2ND	B26	Force	Gravity	Relative	0	1	0	19
192	Live	2ND	B27	Force	Gravity	Relative	0	1	0	14
248	Live	2ND	B28	Force	Gravity	Relative	0	1	0	14
240	Live	2ND	B29	Force	Gravity	Relative	0	1	0	19
232	Live	2ND	B30	Force	Gravity	Relative	0	1	0	14
256	Live	2ND	B31	Force	Gravity	Relative	0	1	0	14
264	Live	2ND	B32	Force	Gravity	Relative	0	1	0	14
272	Live	2ND	B33	Force	Gravity	Relative	0	1	0	19
280	Live	2ND	B34	Force	Gravity	Relative	0	1	0	19
288	Live	2ND	B37	Force	Gravity	Relative	0	1	0	14
176	Live	2ND	B38	Force	Gravity	Relative	0	1	0	9

Table 4.5 - Frame Loads Assignments - Distributed (Part 1 of 2, continued)

UniqueName	Load Pattern	Story	Label	Load Type	Direction	Distance Type	Relative Distance A	Relative Distance B	Absolute Distance A ft	Absolute Distance B ft
168	Live	2ND	B39	Force	Gravity	Relative	0	1	0	27
320	Live	2ND	B40	Force	Gravity	Relative	0	1	0	27
296	Live	2ND	B41	Force	Gravity	Relative	0	1	0	27
184	Live	2ND	B42	Force	Gravity	Relative	0	1	0	26
336	Live	2ND	B43	Force	Gravity	Relative	0	1	0	26
312	Live	2ND	B44	Force	Gravity	Relative	0	1	0	26
224	Live	2ND	B45	Force	Gravity	Relative	0	0.8333	0	20
359	Live	2ND	B46	Force	Gravity	Relative	0	1	0	19
304	Live	2ND	B47	Force	Gravity	Relative	0	1	0	9
328	Live	2ND	B48	Force	Gravity	Relative	0	1	0	9
209	Live	1ST	B19	Force	Gravity	Relative	0	1	0	7
346	Live	1ST	B24	Force	Gravity	Relative	0	1	0	12
201	Live	1ST	B25	Force	Gravity	Relative	0	1	0	14
193	Live	1ST	B26	Force	Gravity	Relative	0	1	0	19
185	Live	1ST	B27	Force	Gravity	Relative	0	1	0	14
241	Live	1ST	B28	Force	Gravity	Relative	0	1	0	14
233	Live	1ST	B29	Force	Gravity	Relative	0	1	0	19
225	Live	1ST	B30	Force	Gravity	Relative	0	1	0	14
249	Live	1ST	B31	Force	Gravity	Relative	0	1	0	14
257	Live	1ST	B32	Force	Gravity	Relative	0	1	0	14
265	Live	1ST	B33	Force	Gravity	Relative	0	1	0	19
273	Live	1ST	B34	Force	Gravity	Relative	0	1	0	19
281	Live	1ST	B37	Force	Gravity	Relative	0	1	0	14
169	Live	1ST	B38	Force	Gravity	Relative	0	1	0	9
161	Live	1ST	B39	Force	Gravity	Relative	0	1	0	27
313	Live	1ST	B40	Force	Gravity	Relative	0	1	0	27
289	Live	1ST	B41	Force	Gravity	Relative	0	1	0	27
177	Live	1ST	B42	Force	Gravity	Relative	0	1	0	26
329	Live	1ST	B43	Force	Gravity	Relative	0	1	0	26
305	Live	1ST	B44	Force	Gravity	Relative	0	1	0	26
217	Live	1ST	B45	Force	Gravity	Relative	0	0.8333	0	20
345	Live	1ST	B46	Force	Gravity	Relative	0	1	0	19
297	Live	1ST	B47	Force	Gravity	Relative	0	1	0	9
321	Live	1ST	B48	Force	Gravity	Relative	0	1	0	9
26	Live	GF	B19	Force	Gravity	Relative	0	1	0	7
29	Live	GF	B24	Force	Gravity	Relative	0	1	0	12
30	Live	GF	B25	Force	Gravity	Relative	0	1	0	14
31	Live	GF	B26	Force	Gravity	Relative	0	1	0	19
32	Live	GF	B27	Force	Gravity	Relative	0	1	0	14
33	Live	GF	B28	Force	Gravity	Relative	0	1	0	14
34	Live	GF	B29	Force	Gravity	Relative	0	1	0	19
35	Live	GF	B30	Force	Gravity	Relative	0	1	0	14
36	Live	GF	B31	Force	Gravity	Relative	0	1	0	14
37	Live	GF	B32	Force	Gravity	Relative	0	1	0	14

Table 4.5 - Frame Loads Assignments - Distributed (Part 1 of 2, continued)

UniqueName	Load Pattern	Story	Label	Load Type	Direction	Distance Type	Relative Distance A	Relative Distance B	Absolute Distance A ft	Absolute Distance B ft
38	Live	GF	B33	Force	Gravity	Relative	0	1	0	19
39	Live	GF	B34	Force	Gravity	Relative	0	1	0	19
40	Live	GF	B37	Force	Gravity	Relative	0	1	0	14
18	Live	GF	B38	Force	Gravity	Relative	0	1	0	9
17	Live	GF	B39	Force	Gravity	Relative	0	1	0	27
20	Live	GF	B40	Force	Gravity	Relative	0	1	0	27
23	Live	GF	B41	Force	Gravity	Relative	0	1	0	27
19	Live	GF	B42	Force	Gravity	Relative	0	1	0	26
22	Live	GF	B43	Force	Gravity	Relative	0	1	0	26
25	Live	GF	B44	Force	Gravity	Relative	0	1	0	26
28	Live	GF	B46	Force	Gravity	Relative	0	1	0	19
24	Live	GF	B47	Force	Gravity	Relative	0	1	0	9
21	Live	GF	B48	Force	Gravity	Relative	0	1	0	9

Table 4.5 - Frame Loads Assignments - Distributed (Part 2 of 2)

UniqueName	Load Pattern	Force A kip/ft	Force B kip/ft	Moment A kip-ft/ft	Moment B kip-ft/ft
210	Live	0.15	0.15		
348	Live	0.15	0.15		
202	Live	0.15	0.15		
194	Live	0.15	0.15		
186	Live	0.15	0.15		
242	Live	0.15	0.15		
234	Live	0.15	0.15		
226	Live	0.15	0.15		
170	Live	0.15	0.15		
162	Live	0.15	0.15		
178	Live	0.15	0.15		
218	Live	0.15	0.15		
347	Live	0.15	0.15		
211	Live	1	1		
350	Live	1	1		
203	Live	1	1		
195	Live	1	1		
187	Live	1	1		
243	Live	1	1		
235	Live	1	1		
227	Live	1	1		
251	Live	0.5	0.5		
259	Live	0.5	0.5		
267	Live	0.5	0.5		
275	Live	0.5	0.5		
283	Live	0.5	0.5		

Table 4.5 - Frame Loads Assignments - Distributed (Part 2 of 2, continued)

UniqueName	Load Pattern	Force A kip/ft	Force B kip/ft	Moment A kip-ft/ft	Moment B kip-ft/ft
171	Live	1	1		
163	Live	1	1		
315	Live	0.5	0.5		
291	Live	0.5	0.5		
179	Live	1	1		
331	Live	0.5	0.5		
307	Live	0.5	0.5		
219	Live	1	1		
349	Live	1	1		
299	Live	0.5	0.5		
323	Live	0.5	0.5		
212	Live	1	1		
352	Live	1	1		
204	Live	1	1		
196	Live	1	1		
188	Live	1	1		
244	Live	1	1		
236	Live	1	1		
228	Live	1	1		
252	Live	0.5	0.5		
260	Live	0.5	0.5		
268	Live	0.5	0.5		
276	Live	0.5	0.5		
284	Live	0.5	0.5		
172	Live	1	1		
164	Live	1	1		
316	Live	0.5	0.5		
292	Live	0.5	0.5		
180	Live	1	1		
332	Live	0.5	0.5		
308	Live	0.5	0.5		
220	Live	1	1		
351	Live	1	1		
300	Live	0.5	0.5		
324	Live	0.5	0.5		
213	Live	1	1		
354	Live	1	1		
205	Live	1	1		
197	Live	1	1		
189	Live	1	1		
245	Live	1	1		
237	Live	1	1		
229	Live	1	1		
253	Live	0.5	0.5		

Table 4.5 - Frame Loads Assignments - Distributed (Part 2 of 2, continued)

UniqueName	Load Pattern	Force A kip/ft	Force B kip/ft	Moment A kip-ft/ft	Moment B kip-ft/ft
261	Live	0.5	0.5		
269	Live	0.5	0.5		
277	Live	0.5	0.5		
285	Live	0.5	0.5		
173	Live	1	1		
165	Live	1	1		
317	Live	0.5	0.5		
293	Live	0.5	0.5		
181	Live	1	1		
333	Live	0.5	0.5		
309	Live	0.5	0.5		
221	Live	1	1		
353	Live	1	1		
301	Live	0.5	0.5		
325	Live	0.5	0.5		
214	Live	1	1		
356	Live	1	1		
206	Live	1	1		
198	Live	1	1		
190	Live	1	1		
246	Live	1	1		
238	Live	1	1		
230	Live	1	1		
254	Live	0.5	0.5		
262	Live	0.5	0.5		
270	Live	0.5	0.5		
278	Live	0.5	0.5		
286	Live	0.5	0.5		
174	Live	1	1		
166	Live	1	1		
318	Live	0.5	0.5		
294	Live	0.5	0.5		
182	Live	1	1		
334	Live	0.5	0.5		
310	Live	0.5	0.5		
222	Live	1	1		
355	Live	1	1		
302	Live	0.5	0.5		
326	Live	0.5	0.5		
215	Live	1	1		
358	Live	1	1		
207	Live	1	1		
199	Live	1	1		
191	Live	1	1		

Table 4.5 - Frame Loads Assignments - Distributed (Part 2 of 2, continued)

UniqueName	Load Pattern	Force A kip/ft	Force B kip/ft	Moment A kip-ft/ft	Moment B kip-ft/ft
247	Live	1	1		
239	Live	1	1		
231	Live	1	1		
255	Live	0.5	0.5		
263	Live	0.5	0.5		
271	Live	0.5	0.5		
279	Live	0.5	0.5		
287	Live	0.5	0.5		
175	Live	1	1		
167	Live	1	1		
319	Live	0.5	0.5		
295	Live	0.5	0.5		
183	Live	1	1		
335	Live	0.5	0.5		
311	Live	0.5	0.5		
223	Live	1	1		
357	Live	1	1		
303	Live	0.5	0.5		
327	Live	0.5	0.5		
216	Live	1	1		
360	Live	1	1		
208	Live	1	1		
200	Live	1	1		
192	Live	1	1		
248	Live	1	1		
240	Live	1	1		
232	Live	1	1		
256	Live	0.5	0.5		
264	Live	0.5	0.5		
272	Live	0.5	0.5		
280	Live	0.5	0.5		
288	Live	0.5	0.5		
176	Live	1	1		
168	Live	1	1		
320	Live	0.5	0.5		
296	Live	0.5	0.5		
184	Live	1	1		
336	Live	0.5	0.5		
312	Live	0.5	0.5		
224	Live	1	1		
359	Live	1	1		
304	Live	0.5	0.5		
328	Live	0.5	0.5		
209	Live	1	1		

Table 4.5 - Frame Loads Assignments - Distributed (Part 2 of 2, continued)

UniqueName	Load Pattern	Force A kip/ft	Force B kip/ft	Moment A kip-ft/ft	Moment B kip-ft/ft
346	Live	1	1		
201	Live	1	1		
193	Live	1	1		
185	Live	1	1		
241	Live	1	1		
233	Live	1	1		
225	Live	1	1		
249	Live	0.5	0.5		
257	Live	0.5	0.5		
265	Live	0.5	0.5		
273	Live	0.5	0.5		
281	Live	0.5	0.5		
169	Live	1	1		
161	Live	1	1		
313	Live	0.5	0.5		
289	Live	0.5	0.5		
177	Live	1	1		
329	Live	0.5	0.5		
305	Live	0.5	0.5		
217	Live	1	1		
345	Live	1	1		
297	Live	0.5	0.5		
321	Live	0.5	0.5		
26	Live	1	1		
29	Live	1	1		
30	Live	1	1		
31	Live	1	1		
32	Live	1	1		
33	Live	1	1		
34	Live	1	1		
35	Live	1	1		
36	Live	0.5	0.5		
37	Live	0.5	0.5		
38	Live	0.5	0.5		
39	Live	0.5	0.5		
40	Live	0.5	0.5		
18	Live	1	1		
17	Live	1	1		
20	Live	0.5	0.5		
23	Live	0.5	0.5		
19	Live	1	1		
22	Live	0.5	0.5		
25	Live	0.5	0.5		
28	Live	1	1		

Table 4.5 - Frame Loads Assignments - Distributed (Part 2 of 2, continued)

UniqueName	Load Pattern	Force A kip/ft	Force B kip/ft	Moment A kip-ft/ft	Moment B kip-ft/ft
24	Live	0.5	0.5		
21	Live	0.5	0.5		

4.4.3 Area Loads

Table 4.6 - Area Load Assignments - Uniform

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
ROOF	F1	2	Live	Gravity	100.25
ROOF	F3	10	Live	Gravity	100.25
ROOF	F4	25	Live	Gravity	41.77
ROOF	F5	33	Live	Gravity	41.77
ROOF	F6	41	Live	Gravity	41.77
ROOF	F7	49	Live	Gravity	41.77
ROOF	F8	57	Live	Gravity	41.77
ROOF	F9	65	Live	Gravity	41.77
ROOF	F10	145	Live	Gravity	41.77
ROOF	W1	82	Live	Gravity	100.25
ROOF	W2	74	Live	Gravity	100.25
7TH	F1	3	Live	Gravity	100.25
7TH	F3	11	Live	Gravity	100.25
7TH	F4	26	Live	Gravity	41.77
7TH	F5	34	Live	Gravity	41.77
7TH	F6	42	Live	Gravity	41.77
7TH	F7	50	Live	Gravity	41.77
7TH	F8	58	Live	Gravity	41.77
7TH	F9	66	Live	Gravity	41.77
7TH	F10	146	Live	Gravity	41.77
7TH	W1	83	Live	Gravity	100.25
7TH	W2	75	Live	Gravity	100.25
6TH	F1	4	Live	Gravity	100.25
6TH	F3	12	Live	Gravity	100.25
6TH	F4	27	Live	Gravity	41.77
6TH	F5	35	Live	Gravity	41.77
6TH	F6	43	Live	Gravity	41.77
6TH	F7	51	Live	Gravity	41.77
6TH	F8	59	Live	Gravity	41.77
6TH	F9	67	Live	Gravity	41.77
6TH	F10	147	Live	Gravity	41.77
6TH	W1	84	Live	Gravity	100.25
6TH	W2	76	Live	Gravity	100.25
5TH	F1	5	Live	Gravity	100.25
5TH	F3	13	Live	Gravity	100.25
5TH	F4	28	Live	Gravity	41.77
5TH	F5	36	Live	Gravity	41.77

Table 4.6 - Area Load Assignments - Uniform (continued)

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
5TH	F6	44	Live	Gravity	41.77
5TH	F7	52	Live	Gravity	41.77
5TH	F8	60	Live	Gravity	41.77
5TH	F9	68	Live	Gravity	41.77
5TH	F10	148	Live	Gravity	41.77
5TH	W1	85	Live	Gravity	100.25
5TH	W2	77	Live	Gravity	100.25
4TH	F1	6	Live	Gravity	100.25
4TH	F3	14	Live	Gravity	100.25
4TH	F4	29	Live	Gravity	41.77
4TH	F5	37	Live	Gravity	41.77
4TH	F6	45	Live	Gravity	41.77
4TH	F7	53	Live	Gravity	41.77
4TH	F8	61	Live	Gravity	41.77
4TH	F9	69	Live	Gravity	41.77
4TH	F10	149	Live	Gravity	41.77
4TH	W1	86	Live	Gravity	100.25
4TH	W2	78	Live	Gravity	100.25
3RD	F1	7	Live	Gravity	100.25
3RD	F3	15	Live	Gravity	100.25
3RD	F4	30	Live	Gravity	41.77
3RD	F5	38	Live	Gravity	41.77
3RD	F6	46	Live	Gravity	41.77
3RD	F7	54	Live	Gravity	41.77
3RD	F8	62	Live	Gravity	41.77
3RD	F9	70	Live	Gravity	41.77
3RD	F10	150	Live	Gravity	41.77
3RD	W1	87	Live	Gravity	100.25
3RD	W2	79	Live	Gravity	100.25
2ND	F1	8	Live	Gravity	100.25
2ND	F3	16	Live	Gravity	100.25
2ND	F4	31	Live	Gravity	41.77
2ND	F5	39	Live	Gravity	41.77
2ND	F6	47	Live	Gravity	41.77
2ND	F7	55	Live	Gravity	41.77
2ND	F8	63	Live	Gravity	41.77
2ND	F9	71	Live	Gravity	41.77
2ND	F10	151	Live	Gravity	41.77
2ND	W1	81	Live	Gravity	100.25
2ND	W2	80	Live	Gravity	100.25
1ST	F1	1	Live	Gravity	100.25
1ST	F3	9	Live	Gravity	100.25
1ST	F4	24	Live	Gravity	41.77
1ST	F5	32	Live	Gravity	41.77
1ST	F6	40	Live	Gravity	41.77

Table 4.6 - Area Load Assignments - Uniform (continued)

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
1ST	F7	48	Live	Gravity	41.77
1ST	F8	56	Live	Gravity	41.77
1ST	F9	64	Live	Gravity	41.77
1ST	F10	144	Live	Gravity	41.77
1ST	W1	72	Live	Gravity	100.25
1ST	W2	73	Live	Gravity	100.25
GF	F1	17	Live	Gravity	100.25
GF	F4	18	Live	Gravity	41.77
GF	F5	19	Live	Gravity	41.77
GF	F6	20	Live	Gravity	41.77
GF	F7	21	Live	Gravity	41.77
GF	F8	22	Live	Gravity	41.77
GF	F9	23	Live	Gravity	41.77
GF	F10	89	Live	Gravity	41.77
ROOF	F4	25	PW	Gravity	25
ROOF	F5	33	PW	Gravity	25
ROOF	F6	41	PW	Gravity	25
ROOF	F7	49	PW	Gravity	25
ROOF	F8	57	PW	Gravity	25
ROOF	F9	65	PW	Gravity	25
ROOF	F10	145	PW	Gravity	25
ROOF	W2	74	PW	Gravity	25
7TH	F4	26	PW	Gravity	25
7TH	F5	34	PW	Gravity	25
7TH	F6	42	PW	Gravity	25
7TH	F7	50	PW	Gravity	25
7TH	F8	58	PW	Gravity	25
7TH	F9	66	PW	Gravity	25
7TH	F10	146	PW	Gravity	25
7TH	W2	75	PW	Gravity	25
6TH	F4	27	PW	Gravity	25
6TH	F5	35	PW	Gravity	25
6TH	F6	43	PW	Gravity	25
6TH	F7	51	PW	Gravity	25
6TH	F8	59	PW	Gravity	25
6TH	F9	67	PW	Gravity	25
6TH	F10	147	PW	Gravity	25
6TH	W2	76	PW	Gravity	25
5TH	F4	28	PW	Gravity	25
5TH	F5	36	PW	Gravity	25
5TH	F6	44	PW	Gravity	25
5TH	F7	52	PW	Gravity	25
5TH	F8	60	PW	Gravity	25
5TH	F9	68	PW	Gravity	25
5TH	F10	148	PW	Gravity	25

Table 4.6 - Area Load Assignments - Uniform (continued)

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
5TH	W2	77	PW	Gravity	25
4TH	F4	29	PW	Gravity	25
4TH	F5	37	PW	Gravity	25
4TH	F6	45	PW	Gravity	25
4TH	F7	53	PW	Gravity	25
4TH	F8	61	PW	Gravity	25
4TH	F9	69	PW	Gravity	25
4TH	F10	149	PW	Gravity	25
4TH	W2	78	PW	Gravity	25
3RD	F4	30	PW	Gravity	25
3RD	F5	38	PW	Gravity	25
3RD	F6	46	PW	Gravity	25
3RD	F7	54	PW	Gravity	25
3RD	F8	62	PW	Gravity	25
3RD	F9	70	PW	Gravity	25
3RD	F10	150	PW	Gravity	25
3RD	W2	79	PW	Gravity	25
2ND	F4	31	PW	Gravity	25
2ND	F5	39	PW	Gravity	25
2ND	F6	47	PW	Gravity	25
2ND	F7	55	PW	Gravity	25
2ND	F8	63	PW	Gravity	25
2ND	F9	71	PW	Gravity	25
2ND	F10	151	PW	Gravity	25
2ND	W2	80	PW	Gravity	25
1ST	F4	24	PW	Gravity	25
1ST	F5	32	PW	Gravity	25
1ST	F6	40	PW	Gravity	25
1ST	F7	48	PW	Gravity	25
1ST	F8	56	PW	Gravity	25
1ST	F9	64	PW	Gravity	25
1ST	F10	144	PW	Gravity	25
1ST	W2	73	PW	Gravity	25
GF	F4	18	PW	Gravity	25
GF	F5	19	PW	Gravity	25
GF	F6	20	PW	Gravity	25
GF	F7	21	PW	Gravity	25
GF	F8	22	PW	Gravity	25
GF	F9	23	PW	Gravity	25
GF	F10	89	PW	Gravity	25
ROOF	F1	2	FF	Gravity	25
ROOF	F3	10	FF	Gravity	25
ROOF	F4	25	FF	Gravity	25
ROOF	F5	33	FF	Gravity	25
ROOF	F6	41	FF	Gravity	25

Table 4.6 - Area Load Assignments - Uniform (continued)

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
ROOF	F7	49	FF	Gravity	25
ROOF	F8	57	FF	Gravity	25
ROOF	F9	65	FF	Gravity	25
ROOF	F10	145	FF	Gravity	25
ROOF	W1	82	FF	Gravity	25
ROOF	W2	74	FF	Gravity	25
7TH	F1	3	FF	Gravity	25
7TH	F3	11	FF	Gravity	25
7TH	F4	26	FF	Gravity	25
7TH	F5	34	FF	Gravity	25
7TH	F6	42	FF	Gravity	25
7TH	F7	50	FF	Gravity	25
7TH	F8	58	FF	Gravity	25
7TH	F9	66	FF	Gravity	25
7TH	F10	146	FF	Gravity	25
7TH	W1	83	FF	Gravity	25
7TH	W2	75	FF	Gravity	25
6TH	F1	4	FF	Gravity	25
6TH	F3	12	FF	Gravity	25
6TH	F4	27	FF	Gravity	25
6TH	F5	35	FF	Gravity	25
6TH	F6	43	FF	Gravity	25
6TH	F7	51	FF	Gravity	25
6TH	F8	59	FF	Gravity	25
6TH	F9	67	FF	Gravity	25
6TH	F10	147	FF	Gravity	25
6TH	W1	84	FF	Gravity	25
6TH	W2	76	FF	Gravity	25
5TH	F1	5	FF	Gravity	25
5TH	F3	13	FF	Gravity	25
5TH	F4	28	FF	Gravity	25
5TH	F5	36	FF	Gravity	25
5TH	F6	44	FF	Gravity	25
5TH	F7	52	FF	Gravity	25
5TH	F8	60	FF	Gravity	25
5TH	F9	68	FF	Gravity	25
5TH	F10	148	FF	Gravity	25
5TH	W1	85	FF	Gravity	25
5TH	W2	77	FF	Gravity	25
4TH	F1	6	FF	Gravity	25
4TH	F3	14	FF	Gravity	25
4TH	F4	29	FF	Gravity	25
4TH	F5	37	FF	Gravity	25
4TH	F6	45	FF	Gravity	25
4TH	F7	53	FF	Gravity	25

Table 4.6 - Area Load Assignments - Uniform (continued)

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
4TH	F8	61	FF	Gravity	25
4TH	F9	69	FF	Gravity	25
4TH	F10	149	FF	Gravity	25
4TH	W1	86	FF	Gravity	25
4TH	W2	78	FF	Gravity	25
3RD	F1	7	FF	Gravity	25
3RD	F3	15	FF	Gravity	25
3RD	F4	30	FF	Gravity	25
3RD	F5	38	FF	Gravity	25
3RD	F6	46	FF	Gravity	25
3RD	F7	54	FF	Gravity	25
3RD	F8	62	FF	Gravity	25
3RD	F9	70	FF	Gravity	25
3RD	F10	150	FF	Gravity	25
3RD	W1	87	FF	Gravity	25
3RD	W2	79	FF	Gravity	25
2ND	F1	8	FF	Gravity	25
2ND	F3	16	FF	Gravity	25
2ND	F4	31	FF	Gravity	25
2ND	F5	39	FF	Gravity	25
2ND	F6	47	FF	Gravity	25
2ND	F7	55	FF	Gravity	25
2ND	F8	63	FF	Gravity	25
2ND	F9	71	FF	Gravity	25
2ND	F10	151	FF	Gravity	25
2ND	W1	81	FF	Gravity	25
2ND	W2	80	FF	Gravity	25
1ST	F1	1	FF	Gravity	25
1ST	F3	9	FF	Gravity	25
1ST	F4	24	FF	Gravity	25
1ST	F5	32	FF	Gravity	25
1ST	F6	40	FF	Gravity	25
1ST	F7	48	FF	Gravity	25
1ST	F8	56	FF	Gravity	25
1ST	F9	64	FF	Gravity	25
1ST	F10	144	FF	Gravity	25
1ST	W1	72	FF	Gravity	25
1ST	W2	73	FF	Gravity	25
GF	F1	17	FF	Gravity	25
GF	F4	18	FF	Gravity	25
GF	F5	19	FF	Gravity	25
GF	F6	20	FF	Gravity	25
GF	F7	21	FF	Gravity	25
GF	F8	22	FF	Gravity	25
GF	F9	23	FF	Gravity	25

Table 4.6 - Area Load Assignments - Uniform (continued)

Story	Label	UniqueName	Load Pattern	Direction	Load lb/ft2
GF	F10	89	FF	Gravity	25
ROOF	F4	25	ROOF LIVE	Gravity	100.25
ROOF	F5	33	ROOF LIVE	Gravity	100.25
ROOF	F6	41	ROOF LIVE	Gravity	100.25
ROOF	F7	49	ROOF LIVE	Gravity	100.25
ROOF	F8	57	ROOF LIVE	Gravity	100.25
ROOF	F9	65	ROOF LIVE	Gravity	100.25

4.5 Functions

4.5.1 Response Spectrum Functions

Table 4.7 - Functions - Response Spectrum - User Defined

Name	Period sec	Value	Damping Ratio
UnifRS	0	1	0.05
UnifRS	1	1	

4.5.2 Time History Functions

Table 4.8 - Functions - Time History - User Defined

Name	Time sec	Value
RampTH	0	0
RampTH	1	1
RampTH	4	1
UnifTH	0	1
UnifTH	1	1

4.6 Load Cases

Table 4.9 - Load Case Definitions - Summary

Name	Type	Notes
Modal	Modal - Eigen	
Dead	Linear Static	
Live	Linear Static	
PW	Linear Static	
FF	Linear Static	
ROOF LIVE	Linear Static	
EQ	Linear Static	
wind	Linear Static	

4.7 Load Combinations

Table 4.10 - Load Combination Definitions

Name	Type	Is Auto	Load Name	Mode	SF	Notes
0.9D-1.6W	Linear Add	No	Dead		0.9	
0.9D-1.6W			wind		-1.6	
0.9D+1.6W	Linear Add	No	Dead		0.9	
0.9D+1.6W			wind		1.6	
1.2D-1.6W+L+.5Lr	Linear Add	No	Dead		1.2	
1.2D-1.6W+L+.5Lr			Live		1	
1.2D-1.6W+L+.5Lr			ROOF LIVE		0.5	
1.2D-1.6W+L+.5Lr			wind		-1.6	
1.2D+1.6L+.5Lr	Linear Add	No	Dead		1.2	
1.2D+1.6L+.5Lr			Live		1.6	
1.2D+1.6L+.5Lr			ROOF LIVE		0.5	
1.2D+1.6Lr-.8W	Linear Add	No	Dead		1.2	
1.2D+1.6Lr-.8W			wind		-0.8	
1.2D+1.6Lr-.8W			ROOF LIVE		1.6	
1.2D+1.6Lr+.8W	Linear Add	No	Dead		1.2	
1.2D+1.6Lr+.8W			wind		0.8	
1.2D+1.6Lr+.8W			ROOF LIVE		1.6	
1.2D+1.6Lr+L	Linear Add	No	Dead		1.2	
1.2D+1.6Lr+L			Live		1	
1.2D+1.6Lr+L			ROOF LIVE		1.6	
1.2D+1.6W+L+.5Lr	Linear Add	No	Dead		1.2	
1.2D+1.6W+L+.5Lr			Live		1	
1.2D+1.6W+L+.5Lr			ROOF LIVE		0.5	
1.2D+1.6W+L+.5Lr			wind		1.6	
1.4D	Linear Add	No	Dead		1.4	
1.246D-1E+1L	Linear Add	No	Dead		1.246	
1.246D-1E+1L			EQ		-1	
1.246D-1E+1L			Live		1	
1.246D+1E+1L	Linear Add	No	Dead		1.246	
1.246D+1E+1L			EQ		1	
1.246D+1E+1L			Live		1	
.854D+E	Linear Add	No	Dead		0.854	
.854D+E			EQ		1	
.854D-E	Linear Add	No	Dead		0.854	
.854D-E			EQ		-1	
D+.5L	Linear Add	No	Dead		1	
D+.5L			Live		0.5	
D+.5L-.7W	Linear Add	No	Dead		1	
D+.5L-.7W			Live		0.5	
D+.5L-.7W			wind		-0.7	
D+.5L+.7W	Linear Add	No	Dead		1	
D+.5L+.7W			Live		0.5	
D+.5L+.7W			wind		0.7	
D+L	Linear Add	No	Dead		1	
D+L			Live		1	

Table 4.10 - Load Combination Definitions (continued)

Name	Type	Is Auto	Load Name	Mode	SF	Notes
DConS1	Linear Add	Yes	Dead		1.4	Dead [Strength]
DConS1			PW		1.4	
DConS1			FF		1.4	
DConS2	Linear Add	Yes	Dead		1.2	Dead + Live [Strength]
DConS2			Live		1.6	
DConS2			PW		1.2	
DConS2			FF		1.2	
DConS3	Linear Add	Yes	Dead		1.2	Dead + Live + Roof Live [Strength]
DConS3			Live		1.6	
DConS3			PW		1.2	
DConS3			FF		1.2	
DConS3			ROOF LIVE		0.5	
DConS4	Linear Add	Yes	Dead		1.2	Dead + Live + Roof Live [Strength]
DConS4			Live		1	
DConS4			PW		1.2	
DConS4			FF		1.2	
DConS4			ROOF LIVE		1.6	
DConS5	Linear Add	Yes	Dead		1.2	Dead + Live + Wind + Snow [Strength]
DConS5			Live		1	
DConS5			PW		1.2	
DConS5			FF		1.2	
DConS5			wind		1.6	
DConS6	Linear Add	Yes	Dead		1.2	Dead + Live - Wind + Snow [Strength]
DConS6			Live		1	
DConS6			PW		1.2	
DConS6			FF		1.2	
DConS6			wind		-1.6	
DConS7	Linear Add	Yes	Dead		1.2	Dead + Live + Roof Live + Wind [Strength]
DConS7			Live		1	
DConS7			PW		1.2	
DConS7			FF		1.2	
DConS7			ROOF LIVE		0.5	
DConS7			wind		1.6	
DConS8	Linear Add	Yes	Dead		1.2	Dead + Live + Roof Live - Wind [Strength]
DConS8			Live		1	
DConS8			PW		1.2	
DConS8			FF		1.2	
DConS8			ROOF LIVE		0.5	
DConS8			wind		-1.6	
DConS9	Linear Add	Yes	Dead		1.2	Dead + Roof Live + Wind [Strength]
DConS9			PW		1.2	
DConS9			FF		1.2	
DConS9			ROOF LIVE		1.6	
DConS9			wind		0.8	

Table 4.10 - Load Combination Definitions (continued)

Name	Type	Is Auto	Load Name	Mode	SF	Notes
DConS10	Linear Add	Yes	Dead		1.2	Dead + Roof Live - Wind [Strength]
DConS10			PW		1.2	
DConS10			FF		1.2	
DConS10			ROOF LIVE		1.6	
DConS10			wind		-0.8	
DConS11	Linear Add	Yes	Dead		1.2	Dead + Wind [Strength]
DConS11			PW		1.2	
DConS11			FF		1.2	
DConS11			wind		0.8	
DConS12	Linear Add	Yes	Dead		1.2	Dead - Wind [Strength]
DConS12			PW		1.2	
DConS12			FF		1.2	
DConS12			wind		-0.8	
DConS13	Linear Add	Yes	Dead		0.9	Dead (min) + Wind [Strength]
DConS13			PW		0.9	
DConS13			FF		0.9	
DConS13			wind		1.6	
DConS14	Linear Add	Yes	Dead		0.9	Dead (min) - Wind [Strength]
DConS14			PW		0.9	
DConS14			FF		0.9	
DConS14			wind		-1.6	
DConS15	Linear Add	Yes	Dead		1.3	Dead + Live + Static Earthquake [Strength]
DConS15			Live		1	
DConS15			PW		1.3	
DConS15			FF		1.3	
DConS15			EQ		1	
DConS16	Linear Add	Yes	Dead		1.3	Dead + Live - Static Earthquake [Strength]
DConS16			Live		1	
DConS16			PW		1.3	
DConS16			FF		1.3	
DConS16			EQ		-1	
DConS17	Linear Add	Yes	Dead		1.3	Dead + Static Earthquake [Strength]
DConS17			PW		1.3	
DConS17			FF		1.3	
DConS17			EQ		1	
DConS18	Linear Add	Yes	Dead		1.3	Dead - Static Earthquake [Strength]
DConS18			PW		1.3	
DConS18			FF		1.3	
DConS18			EQ		-1	
DConS19	Linear Add	Yes	Dead		0.8	Dead (min) + Static Earthquake [Strength]
DConS19			PW		0.8	
DConS19			FF		0.8	
DConS19			EQ		1	
DConS20	Linear Add	Yes	Dead		0.8	Dead (min) - Static Earthquake [Strength]

Table 4.10 - Load Combination Definitions (continued)

Name	Type	Is Auto	Load Name	Mode	SF	Notes
DConS20			PW		0.8	
DConS20			FF		0.8	
DConS20			EQ		-1	

5 Analysis Results

This chapter provides analysis results.

5.1 Structure Results

Table 5.1 - Base Reactions (Part 1 of 2)

Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip	MX kip-ft	MY kip-ft
Dead	LinStatic				0	0	4374.062	111178.53	-148744.5727
Live	LinStatic				0	0	3676.958	101243.0524	-130418.0117
PW	LinStatic				0	0	614.642	16079.0542	-21682.453
FF	LinStatic				0	0	638.059	17079.153	-22536.382
ROOF LIVE	LinStatic				0	0	262.354	6765.8273	-9255.1452
EQ	LinStatic	Max			0	0	0	13162.9841	0
EQ	LinStatic	Min			-212.763	-212.763	0	0	-13162.9841
wind	LinStatic	Max			0	187.707	0	14773.7422	0
wind	LinStatic	Min			-189.725	-263.305	0	-10572.1773	-10685.8566
1.4D	Combination				0	0	6123.687	155649.9419	-208242.4018
1.2D+1.6L+.5Lr	Combination				0	0	11263.184	298786.0335	-391789.8786
1.2D+1.6Lr+L	Combination				0	0	9345.599	245482.612	-323719.7312
1.2D+1.6Lr+.8W	Combination	Max			0	150.166	5668.641	156058.5533	-193301.7195
1.2D+1.6Lr+.8W	Combination	Min			-151.78	-210.644	5668.641	135781.8178	-201850.4048
1.2D+1.6Lr-.8W	Combination	Max			151.78	210.644	5668.641	152697.3014	-184753.0343
1.2D+1.6Lr-.8W	Combination	Min			0	-150.166	5668.641	132420.5659	-193301.7195
1.2D+1.6W+L+.5Lr	Combination	Max			0	300.331	9057.009	261678.1895	-313539.0715
1.2D+1.6W+L+.5Lr	Combination	Min			-303.561	-421.288	9057.009	221124.7184	-330636.4421
1.2D-1.6W+L+.5Lr	Combination	Max			303.561	421.288	9057.009	254955.6856	-296441.701
1.2D-1.6W+L+.5Lr	Combination	Min			0	-300.331	9057.009	214402.2146	-313539.0715
1.246D+1E+1L	Combination	Max			0	0	9127.039	252934.4849	-315753.7493
1.246D+1E+1L	Combination	Min			-212.763	-212.763	9127.039	239771.5008	-328916.7334
1.246D-1E+1L	Combination	Max			212.763	212.763	9127.039	239771.5008	-302590.7652
1.246D-1E+1L	Combination	Min			0	0	9127.039	226608.5166	-315753.7493
0.9D+1.6W	Combination	Max			0	300.331	3936.656	123698.6644	-133870.1154
0.9D+1.6W	Combination	Min			-303.561	-421.288	3936.656	83145.1933	-150967.486
0.9D-1.6W	Combination	Max			303.561	421.288	3936.656	116976.1606	-116772.7449
0.9D-1.6W	Combination	Min			0	-300.331	3936.656	76422.6895	-133870.1154
.854D+E	Combination	Max			0	0	3735.449	108109.4487	-127027.8651
.854D+E	Combination	Min			-212.763	-212.763	3735.449	94946.4646	-140190.8492
.854D-E	Combination	Max			212.763	212.763	3735.449	94946.4646	-113864.881
.854D-E	Combination	Min			0	0	3735.449	81783.4805	-127027.8651
D+L	Combination				0	0	8051.02	212421.5824	-279162.5844
D+.5L	Combination				0	0	6212.541	161800.0562	-213953.5786
D+.5L+.7W	Combination	Max			0	131.395	6212.541	172141.6757	-213953.5786
D+.5L+.7W	Combination	Min			-132.808	-184.314	6212.541	154399.5321	-221433.6782
D+.5L-.7W	Combination	Max			132.808	184.314	6212.541	169200.5803	-206473.4789
D+.5L-.7W	Combination	Min			0	-131.395	6212.541	151458.4367	-213953.5786
DConS1	Combination				0	0	7877.468	202071.432	-270148.7707
DConS2	Combination				0	0	12635.248	335192.9685	-440224.9079
DConS3	Combination				0	0	12766.425	338575.8821	-444852.4805

Table 5.1 - Base Reactions (Part 1 of 2, continued)

Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip	MX kip-ft	MY kip-ft
DConS4	Combination				0	0	10848.84	285272.4607	-376782.3332
DConS5	Combination	Max			0	300.331	10429.073	298085.1245	-361974.1009
DConS5	Combination	Min			-303.561	-421.288	10429.073	257531.6534	-379071.4714
DConS6	Combination	Max			303.561	421.288	10429.073	291362.6207	-344876.7304
DConS6	Combination	Min			0	-300.331	10429.073	250809.1496	-361974.1009
DConS7	Combination	Max			0	300.331	10560.25	301468.0381	-366601.6735
DConS7	Combination	Min			-303.561	-421.288	10560.25	260914.5671	-383699.044
DConS8	Combination	Max			303.561	421.288	10560.25	294745.5343	-349504.303
DConS8	Combination	Min			0	-300.331	10560.25	254192.0632	-366601.6735
DConS9	Combination	Max			0	150.166	7171.883	195848.402	-246364.3215
DConS9	Combination	Min			-151.78	-210.644	7171.883	175571.6664	-254913.0068
DConS10	Combination	Max			151.78	210.644	7171.883	192487.1501	-237815.6362
DConS10	Combination	Min			0	-150.166	7171.883	172210.4145	-246364.3215
DConS11	Combination	Max			0	150.166	6752.115	185023.0783	-231556.0892
DConS11	Combination	Min			-151.78	-210.644	6752.115	164746.3428	-240104.7745
DConS12	Combination	Max			151.78	210.644	6752.115	181661.8264	-223007.4039
DConS12	Combination	Min			0	-150.166	6752.115	161385.0909	-231556.0892
DConS13	Combination	Max			0	300.331	5064.087	153541.0509	-173667.0669
DConS13	Combination	Min			-303.561	-421.288	5064.087	112987.5798	-190764.4374
DConS14	Combination	Max			303.561	421.288	5064.087	146818.5471	-156569.6964
DConS14	Combination	Min			0	-300.331	5064.087	106265.076	-173667.0669
DConS15	Combination	Max			0	0	10991.75	302043.7949	-381270.4417
DConS15	Combination	Min			-212.763	-212.763	10991.75	288880.8108	-394433.4258
DConS16	Combination	Max			212.763	212.763	10991.75	288880.8108	-368107.4575
DConS16	Combination	Min			0	0	10991.75	275717.8266	-381270.4417
DConS17	Combination	Max			0	0	7314.792	200800.7425	-250852.43
DConS17	Combination	Min			-212.763	-212.763	7314.792	187637.7583	-264015.4141
DConS18	Combination	Max			212.763	212.763	7314.792	187637.7583	-237689.4458
DConS18	Combination	Min			0	0	7314.792	174474.7742	-250852.43
DConS19	Combination	Max			0	0	4501.41	128632.3739	-154370.7261
DConS19	Combination	Min			-212.763	-212.763	4501.41	115469.3897	-167533.7103
DConS20	Combination	Max			212.763	212.763	4501.41	115469.3897	-141207.742
DConS20	Combination	Min			0	0	4501.41	102306.4056	-154370.7261

Table 5.1 - Base Reactions (Part 2 of 2)

MZ kip-ft	X ft	Y ft	Z ft
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
6018.0336	0	0	0
-7988.1228	0	0	0
10415.0861	0	0	0

Table 5.1 - Base Reactions (Part 2 of 2, continued)

MZ kip-ft	X ft	Y ft	Z ft
-9303.6194	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
8332.0689	0	0	0
-7442.8955	0	0	0
7442.8955	0	0	0
-8332.0689	0	0	0
16664.1377	0	0	0
-14885.7911	0	0	0
14885.7911	0	0	0
-16664.1377	0	0	0
6018.0336	0	0	0
-7988.1228	0	0	0
7988.1228	0	0	0
-6018.0336	0	0	0
16664.1377	0	0	0
-14885.7911	0	0	0
14885.7911	0	0	0
-16664.1377	0	0	0
6018.0336	0	0	0
-7988.1228	0	0	0
7988.1228	0	0	0
-6018.0336	0	0	0
0	0	0	0
0	0	0	0
7290.5602	0	0	0
-6512.5336	0	0	0
6512.5336	0	0	0
-7290.5602	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
0	0	0	0
16664.1377	0	0	0
-14885.7911	0	0	0
14885.7911	0	0	0
-16664.1377	0	0	0
16664.1377	0	0	0
-14885.7911	0	0	0
14885.7911	0	0	0
-16664.1377	0	0	0
8332.0689	0	0	0
-7442.8955	0	0	0
7442.8955	0	0	0

Table 5.1 - Base Reactions (Part 2 of 2, continued)

MZ kip-ft	X ft	Y ft	Z ft
-8332.0689	0	0	0
8332.0689	0	0	0
-7442.8955	0	0	0
7442.8955	0	0	0
-8332.0689	0	0	0
16664.1377	0	0	0
-14885.7911	0	0	0
14885.7911	0	0	0
-16664.1377	0	0	0
6018.0336	0	0	0
-7988.1228	0	0	0
7988.1228	0	0	0
-6018.0336	0	0	0
6018.0336	0	0	0
-7988.1228	0	0	0
7988.1228	0	0	0
-6018.0336	0	0	0
6018.0336	0	0	0
-7988.1228	0	0	0
7988.1228	0	0	0
-6018.0336	0	0	0

Table 5.2 - Centers Of Mass And Rigidity

Story	Diaphragm	Mass X lb-s2/ft	Mass Y lb-s2/ft	XCM ft	YCM ft	Cum Mass X lb-s2/ft	Cum Mass Y lb-s2/ft	XCCM ft	YCCM ft	XCR ft	YCR ft
ROOF	D1	17943.07	17943.07	34.7102	26.0181	17943.07	17943.07	34.7102	26.0181		
7TH	D1	22780.4	22780.4	34.4005	25.891	40723.47	40723.47	34.537	25.947		
6TH	D1	22780.4	22780.4	34.4005	25.891	63503.86	63503.86	34.488	25.9269		
5TH	D1	22780.4	22780.4	34.4005	25.891	86284.26	86284.26	34.4649	25.9174		
4TH	D1	22780.4	22780.4	34.4005	25.891	109064.66	109064.66	34.4515	25.9119		
3RD	D1	22780.4	22780.4	34.4005	25.891	131845.06	131845.06	34.4427	25.9083		
2ND	D1	22780.4	22780.4	34.4005	25.891	154625.45	154625.45	34.4365	25.9058		
1ST	D1	22780.4	22780.4	34.4005	25.891	177405.85	177405.85	34.4319	25.9039		
GF	D1	22581.56	22581.56	34.6407	26.0082	199987.41	199987.41	34.4554	25.9157		

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
ROOF	D1	Dead	LinStatic				0.007724	0.037031	-2.7E-05
ROOF	D1	Live	LinStatic				0.018041	0.049225	-8E-06
ROOF	D1	PW	LinStatic				0.00198	0.005526	-1E-05
ROOF	D1	FF	LinStatic				0.002669	0.007128	-1E-05
ROOF	D1	ROOF LIVE	LinStatic				0.00069	0.002394	-6E-06
ROOF	D1	EQ	LinStatic	Max			0.506132	0.307424	0.000346

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
ROOF	D1	EQ	LinStatic	Min			0.011063	0.01022	-0.000269
ROOF	D1	wind	LinStatic	Max			0.392601	0.325794	0.000453
ROOF	D1	wind	LinStatic	Min			-0.005608	-0.224645	-0.000513
ROOF	D1	1.4D	Combination				0.010813	0.051843	-3.7E-05
ROOF	D1	1.2D+1.6L+.5Lr	Combination				0.03848	0.124394	-4.7E-05
ROOF	D1	1.2D+1.6Lr+L	Combination				0.028414	0.097493	-4.9E-05
ROOF	D1	1.2D+1.6Lr+.8W	Combination	Max			0.324453	0.308904	0.000321
ROOF	D1	1.2D+1.6Lr+.8W	Combination	Min			0.005886	-0.131447	-0.000452
ROOF	D1	1.2D+1.6Lr-.8W	Combination	Max			0.014859	0.227984	0.000369
ROOF	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.303708	-0.212367	-0.000404
ROOF	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.655816	0.61613	0.000682
ROOF	D1	1.2D+1.6W+L+.5Lr	Combination	Min			0.018681	-0.264572	-0.000864
ROOF	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.036628	0.45429	0.000779
ROOF	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.600507	-0.426412	-0.000767
ROOF	D1	1.246D+1E+1L	Combination	Max			0.533798	0.402789	0.000305
ROOF	D1	1.246D+1E+1L	Combination	Min			0.038728	0.105585	-0.000309
ROOF	D1	1.246D-1E+1L	Combination	Max			0.016602	0.085146	0.000228
ROOF	D1	1.246D-1E+1L	Combination	Min			-0.478467	-0.212058	-0.000387
ROOF	D1	0.9D+1.6W	Combination	Max			0.635113	0.554599	0.0007
ROOF	D1	0.9D+1.6W	Combination	Min			-0.002022	-0.326104	-0.000845
ROOF	D1	0.9D-1.6W	Combination	Max			0.015925	0.392759	0.000797
ROOF	D1	0.9D-1.6W	Combination	Min			-0.62121	-0.487943	-0.000748
ROOF	D1	.854D+E	Combination	Max			0.512729	0.339048	0.000323
ROOF	D1	.854D+E	Combination	Min			0.017659	0.041844	-0.000291
ROOF	D1	.854D-E	Combination	Max			-0.004467	0.021405	0.000246
ROOF	D1	.854D-E	Combination	Min			-0.499536	-0.275799	-0.000369
ROOF	D1	D+L	Combination				0.025765	0.086256	-3.4E-05
ROOF	D1	D+.5L	Combination				0.016745	0.061643	-3E-05
ROOF	D1	D+.5L+.7W	Combination	Max			0.291565	0.289699	0.000286
ROOF	D1	D+.5L+.7W	Combination	Min			0.012819	-0.095608	-0.00039
ROOF	D1	D+.5L-.7W	Combination	Max			0.02067	0.218895	0.000329
ROOF	D1	D+.5L-.7W	Combination	Min			-0.258076	-0.166413	-0.000347
ROOF	D1	DConS1	Combination				0.017322	0.069559	-6.5E-05
ROOF	D1	DConS2	Combination				0.043713	0.138381	-6.8E-05
ROOF	D1	DConS3	Combination				0.044058	0.139579	-7.1E-05
ROOF	D1	DConS4	Combination				0.033992	0.112678	-7.3E-05
ROOF	D1	DConS5	Combination	Max			0.66105	0.630118	0.000661
ROOF	D1	DConS5	Combination	Min			0.023915	-0.250585	-0.000885
ROOF	D1	DConS6	Combination	Max			0.041862	0.468278	0.000758
ROOF	D1	DConS6	Combination	Min			-0.595273	-0.412424	-0.000788
ROOF	D1	DConS7	Combination	Max			0.661395	0.631315	0.000658
ROOF	D1	DConS7	Combination	Min			0.02426	-0.249387	-0.000888
ROOF	D1	DConS8	Combination	Max			0.042207	0.469475	0.000755
ROOF	D1	DConS8	Combination	Min			-0.594928	-0.411227	-0.000791
ROOF	D1	DConS9	Combination	Max			0.330032	0.324089	0.000297

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
ROOF	D1	DConS9	Combination	Min			0.011464	-0.116262	-0.000476
ROOF	D1	DConS10	Combination	Max			0.020438	0.243169	0.000345
ROOF	D1	DConS10	Combination	Min			-0.29813	-0.197182	-0.000428
ROOF	D1	DConS11	Combination	Max			0.328928	0.320258	0.000306
ROOF	D1	DConS11	Combination	Min			0.010361	-0.120094	-0.000466
ROOF	D1	DConS12	Combination	Max			0.019334	0.239338	0.000355
ROOF	D1	DConS12	Combination	Min			-0.299233	-0.201013	-0.000418
ROOF	D1	DConS13	Combination	Max			0.639297	0.565987	0.000683
ROOF	D1	DConS13	Combination	Min			0.002162	-0.314715	-0.000863
ROOF	D1	DConS14	Combination	Max			0.020109	0.404148	0.00078
ROOF	D1	DConS14	Combination	Min			-0.617026	-0.476554	-0.000766
ROOF	D1	DConS15	Combination	Max			0.540258	0.421239	0.000278
ROOF	D1	DConS15	Combination	Min			0.045189	0.124035	-0.000337
ROOF	D1	DConS16	Combination	Max			0.023063	0.103596	0.000201
ROOF	D1	DConS16	Combination	Min			-0.472007	-0.193608	-0.000414
ROOF	D1	DConS17	Combination	Max			0.522217	0.372014	0.000286
ROOF	D1	DConS17	Combination	Min			0.027147	0.07481	-0.000329
ROOF	D1	DConS18	Combination	Max			0.005022	0.054371	0.000208
ROOF	D1	DConS18	Combination	Min			-0.490048	-0.242833	-0.000407
ROOF	D1	DConS19	Combination	Max			0.516031	0.347172	0.000309
ROOF	D1	DConS19	Combination	Min			0.020961	0.049968	-0.000306
ROOF	D1	DConS20	Combination	Max			-0.001165	0.029528	0.000231
ROOF	D1	DConS20	Combination	Min			-0.496234	-0.267675	-0.000383
7TH	D1	Dead	LinStatic				0.006311	0.030539	-2.2E-05
7TH	D1	Live	LinStatic				0.014887	0.040556	-7E-06
7TH	D1	PW	LinStatic				0.001646	0.004554	-9E-06
7TH	D1	FF	LinStatic				0.002214	0.005871	-8E-06
7TH	D1	ROOF LIVE	LinStatic				0.000539	0.001816	-5E-06
7TH	D1	EQ	LinStatic	Max			0.442521	0.273301	0.000324
7TH	D1	EQ	LinStatic	Min			0.00815	0.007993	-0.000247
7TH	D1	wind	LinStatic	Max			0.344553	0.290943	0.000421
7TH	D1	wind	LinStatic	Min			-0.006749	-0.2011	-0.000475
7TH	D1	1.4D	Combination				0.008835	0.042754	-3.1E-05
7TH	D1	1.2D+1.6L+.5Lr	Combination				0.031662	0.102444	-4E-05
7TH	D1	1.2D+1.6Lr+L	Combination				0.023322	0.080108	-4.1E-05
7TH	D1	1.2D+1.6Lr+.8W	Combination	Max			0.284078	0.272307	0.000302
7TH	D1	1.2D+1.6Lr+.8W	Combination	Min			0.003036	-0.121327	-0.000414
7TH	D1	1.2D+1.6Lr-.8W	Combination	Max			0.013835	0.200432	0.000345
7TH	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.267207	-0.193202	-0.000371
7TH	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.574014	0.543619	0.000637
7TH	D1	1.2D+1.6W+L+.5Lr	Combination	Min			0.011931	-0.243649	-0.000795
7TH	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.033528	0.39987	0.000724
7TH	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.528555	-0.387398	-0.000709
7TH	D1	1.246D+1E+1L	Combination	Max			0.465271	0.351908	0.00029
7TH	D1	1.246D+1E+1L	Combination	Min			0.0309	0.0866	-0.000282

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
7TH	D1	1.246D-1E+1L	Combination	Max			0.0146	0.070614	0.000213
7TH	D1	1.246D-1E+1L	Combination	Min			-0.419771	-0.194694	-0.000359
7TH	D1	0.9D+1.6W	Combination	Max			0.556964	0.492993	0.000653
7TH	D1	0.9D+1.6W	Combination	Min			-0.005118	-0.294275	-0.00078
7TH	D1	0.9D-1.6W	Combination	Max			0.016478	0.349245	0.00074
7TH	D1	0.9D-1.6W	Combination	Min			-0.545605	-0.438023	-0.000693
7TH	D1	.854D+E	Combination	Max			0.447911	0.299381	0.000305
7TH	D1	.854D+E	Combination	Min			0.01354	0.034073	-0.000266
7TH	D1	.854D-E	Combination	Max			-0.002761	0.018087	0.000228
7TH	D1	.854D-E	Combination	Min			-0.437132	-0.247221	-0.000343
7TH	D1	D+L	Combination				0.021198	0.071095	-2.9E-05
7TH	D1	D+.5L	Combination				0.013754	0.050817	-2.6E-05
7TH	D1	D+.5L+.7W	Combination	Max			0.254941	0.254477	0.000269
7TH	D1	D+.5L+.7W	Combination	Min			0.00903	-0.089953	-0.000358
7TH	D1	D+.5L-.7W	Combination	Max			0.018479	0.191587	0.000307
7TH	D1	D+.5L-.7W	Combination	Min			-0.227433	-0.152843	-0.00032
7TH	D1	DConS1	Combination				0.01424	0.057348	-5.4E-05
7TH	D1	DConS2	Combination				0.036024	0.114045	-5.7E-05
7TH	D1	DConS3	Combination				0.036294	0.114953	-6E-05
7TH	D1	DConS4	Combination				0.027955	0.092618	-6.1E-05
7TH	D1	DConS5	Combination	Max			0.578377	0.55522	0.00062
7TH	D1	DConS5	Combination	Min			0.016294	-0.232048	-0.000813
7TH	D1	DConS6	Combination	Max			0.03789	0.411471	0.000706
7TH	D1	DConS6	Combination	Min			-0.524192	-0.375797	-0.000726
7TH	D1	DConS7	Combination	Max			0.578646	0.556128	0.000617
7TH	D1	DConS7	Combination	Min			0.016563	-0.23114	-0.000816
7TH	D1	DConS8	Combination	Max			0.03816	0.41238	0.000704
7TH	D1	DConS8	Combination	Min			-0.523923	-0.374889	-0.000729
7TH	D1	DConS9	Combination	Max			0.28871	0.284816	0.000282
7TH	D1	DConS9	Combination	Min			0.007669	-0.108818	-0.000434
7TH	D1	DConS10	Combination	Max			0.018467	0.212942	0.000325
7TH	D1	DConS10	Combination	Min			-0.262574	-0.180692	-0.000391
7TH	D1	DConS11	Combination	Max			0.287848	0.28191	0.00029
7TH	D1	DConS11	Combination	Min			0.006806	-0.111724	-0.000427
7TH	D1	DConS12	Combination	Max			0.017604	0.210036	0.000333
7TH	D1	DConS12	Combination	Min			-0.263437	-0.183598	-0.000383
7TH	D1	DConS13	Combination	Max			0.560438	0.502375	0.000638
7TH	D1	DConS13	Combination	Min			-0.001644	-0.284893	-0.000795
7TH	D1	DConS14	Combination	Max			0.019952	0.358627	0.000725
7TH	D1	DConS14	Combination	Min			-0.54213	-0.428641	-0.000708
7TH	D1	DConS15	Combination	Max			0.47063	0.367109	0.000267
7TH	D1	DConS15	Combination	Min			0.036259	0.101801	-0.000305
7TH	D1	DConS16	Combination	Max			0.019959	0.085815	0.00019
7TH	D1	DConS16	Combination	Min			-0.414412	-0.179493	-0.000382
7TH	D1	DConS17	Combination	Max			0.455744	0.326553	0.000274

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
7TH	D1	DConS17	Combination	Min			0.021373	0.061245	-0.000298
7TH	D1	DConS18	Combination	Max			0.005072	0.045259	0.000197
7TH	D1	DConS18	Combination	Min			-0.429299	-0.220049	-0.000375
7TH	D1	DConS19	Combination	Max			0.450658	0.306071	0.000293
7TH	D1	DConS19	Combination	Min			0.016287	0.040764	-0.000279
7TH	D1	DConS20	Combination	Max			-1.3E-05	0.024777	0.000216
7TH	D1	DConS20	Combination	Min			-0.434384	-0.24053	-0.000356
6TH	D1	Dead	LinStatic				0.004974	0.024298	-1.8E-05
6TH	D1	Live	LinStatic				0.011851	0.032181	-6E-06
6TH	D1	PW	LinStatic				0.001327	0.003618	-7E-06
6TH	D1	FF	LinStatic				0.001778	0.004662	-6E-06
6TH	D1	ROOF LIVE	LinStatic				0.000364	0.001441	-3E-06
6TH	D1	EQ	LinStatic	Max			0.37539	0.236721	0.000294
6TH	D1	EQ	LinStatic	Min			0.005166	0.005154	-0.000221
6TH	D1	wind	LinStatic	Max			0.294035	0.253737	0.00038
6TH	D1	wind	LinStatic	Min			-0.008019	-0.176253	-0.000427
6TH	D1	1.4D	Combination				0.006964	0.034018	-2.5E-05
6TH	D1	1.2D+1.6L+.5Lr	Combination				0.025111	0.081368	-3.2E-05
6TH	D1	1.2D+1.6Lr+L	Combination				0.018401	0.063645	-3.2E-05
6TH	D1	1.2D+1.6Lr+.8W	Combination	Max			0.241779	0.234454	0.000278
6TH	D1	1.2D+1.6Lr+.8W	Combination	Min			0.000135	-0.109538	-0.000368
6TH	D1	1.2D+1.6Lr-.8W	Combination	Max			0.012966	0.172467	0.000315
6TH	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.228678	-0.171525	-0.000331
6TH	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.488458	0.468038	0.00058
6TH	D1	1.2D+1.6W+L+.5Lr	Combination	Min			0.00517	-0.219946	-0.000712
6TH	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.030832	0.344065	0.000655
6TH	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.452455	-0.343919	-0.000637
6TH	D1	1.246D+1E+1L	Combination	Max			0.393438	0.299177	0.000267
6TH	D1	1.246D+1E+1L	Combination	Min			0.023214	0.06761	-0.000248
6TH	D1	1.246D-1E+1L	Combination	Max			0.012882	0.057303	0.000193
6TH	D1	1.246D-1E+1L	Combination	Min			-0.357342	-0.174264	-0.000322
6TH	D1	0.9D+1.6W	Combination	Max			0.474933	0.427847	0.000593
6TH	D1	0.9D+1.6W	Combination	Min			-0.008354	-0.260137	-0.0007
6TH	D1	0.9D-1.6W	Combination	Max			0.017307	0.303874	0.000668
6TH	D1	0.9D-1.6W	Combination	Min			-0.46598	-0.38411	-0.000624
6TH	D1	.854D+E	Combination	Max			0.379638	0.257472	0.000279
6TH	D1	.854D+E	Combination	Min			0.009414	0.025905	-0.000236
6TH	D1	.854D-E	Combination	Max			-0.000918	0.015597	0.000206
6TH	D1	.854D-E	Combination	Min			-0.371142	-0.21597	-0.000309
6TH	D1	D+L	Combination				0.016825	0.056479	-2.3E-05
6TH	D1	D+.5L	Combination				0.010899	0.040389	-2E-05
6TH	D1	D+.5L+.7W	Combination	Max			0.216724	0.218004	0.000246
6TH	D1	D+.5L+.7W	Combination	Min			0.005286	-0.082989	-0.00032
6TH	D1	D+.5L-.7W	Combination	Max			0.016513	0.163766	0.000279
6TH	D1	D+.5L-.7W	Combination	Min			-0.194925	-0.137227	-0.000287

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
6TH	D1	DConS1	Combination				0.011311	0.045611	-4.3E-05
6TH	D1	DConS2	Combination				0.028656	0.090584	-4.6E-05
6TH	D1	DConS3	Combination				0.028838	0.091305	-4.8E-05
6TH	D1	DConS4	Combination				0.022127	0.073582	-4.8E-05
6TH	D1	DConS5	Combination	Max			0.492002	0.477254	0.000566
6TH	D1	DConS5	Combination	Min			0.008715	-0.21073	-0.000726
6TH	D1	DConS6	Combination	Max			0.034376	0.353281	0.000641
6TH	D1	DConS6	Combination	Min			-0.448911	-0.334703	-0.000651
6TH	D1	DConS7	Combination	Max			0.492184	0.477975	0.000564
6TH	D1	DConS7	Combination	Min			0.008896	-0.210009	-0.000728
6TH	D1	DConS8	Combination	Max			0.034558	0.354002	0.000639
6TH	D1	DConS8	Combination	Min			-0.448729	-0.333982	-0.000653
6TH	D1	DConS9	Combination	Max			0.245505	0.24439	0.000262
6TH	D1	DConS9	Combination	Min			0.003861	-0.099602	-0.000385
6TH	D1	DConS10	Combination	Max			0.016692	0.182404	0.000299
6TH	D1	DConS10	Combination	Min			-0.224952	-0.161588	-0.000347
6TH	D1	DConS11	Combination	Max			0.244923	0.242084	0.000267
6TH	D1	DConS11	Combination	Min			0.00328	-0.101908	-0.000379
6TH	D1	DConS12	Combination	Max			0.01611	0.180098	0.000305
6TH	D1	DConS12	Combination	Min			-0.225533	-0.163894	-0.000341
6TH	D1	DConS13	Combination	Max			0.477728	0.4353	0.000581
6TH	D1	DConS13	Combination	Min			-0.00556	-0.252684	-0.000712
6TH	D1	DConS14	Combination	Max			0.020102	0.311327	0.000656
6TH	D1	DConS14	Combination	Min			-0.463185	-0.376657	-0.000636
6TH	D1	DConS15	Combination	Max			0.397743	0.311254	0.000248
6TH	D1	DConS15	Combination	Min			0.027519	0.079687	-0.000267
6TH	D1	DConS16	Combination	Max			0.017188	0.06938	0.000175
6TH	D1	DConS16	Combination	Min			-0.353037	-0.162187	-0.00034
6TH	D1	DConS17	Combination	Max			0.385893	0.279073	0.000254
6TH	D1	DConS17	Combination	Min			0.015669	0.047506	-0.000261
6TH	D1	DConS18	Combination	Max			0.005337	0.037199	0.000181
6TH	D1	DConS18	Combination	Min			-0.364887	-0.194368	-0.000334
6TH	D1	DConS19	Combination	Max			0.381853	0.262784	0.000269
6TH	D1	DConS19	Combination	Min			0.011629	0.031217	-0.000246
6TH	D1	DConS20	Combination	Max			0.001298	0.02091	0.000196
6TH	D1	DConS20	Combination	Min			-0.368927	-0.210658	-0.000319
5TH	D1	Dead	LinStatic				0.003746	0.018472	-1.3E-05
5TH	D1	Live	LinStatic				0.008982	0.024333	-4E-06
5TH	D1	PW	LinStatic				0.001028	0.002748	-5E-06
5TH	D1	FF	LinStatic				0.001369	0.003538	-5E-06
5TH	D1	ROOF LIVE	LinStatic				0.00024	0.001075	-2E-06
5TH	D1	EQ	LinStatic	Max			0.305381	0.196736	0.000255
5TH	D1	EQ	LinStatic	Min			0.002638	0.00273	-0.000189
5TH	D1	wind	LinStatic	Max			0.241265	0.213007	0.000331
5TH	D1	wind	LinStatic	Min			-0.008673	-0.148771	-0.000371

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
5TH	D1	1.4D	Combination				0.005244	0.025861	-1.9E-05
5TH	D1	1.2D+1.6L+.5Lr	Combination				0.018987	0.061637	-2.4E-05
5TH	D1	1.2D+1.6Lr+L	Combination				0.013862	0.048219	-2.4E-05
5TH	D1	1.2D+1.6Lr+.8W	Combination	Max			0.197891	0.194292	0.000245
5TH	D1	1.2D+1.6Lr+.8W	Combination	Min			-0.002059	-0.095131	-0.000316
5TH	D1	1.2D+1.6Lr-.8W	Combination	Max			0.011818	0.142903	0.000277
5TH	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.188133	-0.14652	-0.000284
5TH	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.399622	0.387848	0.000508
5TH	D1	1.2D+1.6W+L+.5Lr	Combination	Min			-0.00028	-0.190998	-0.000614
5TH	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.027475	0.285071	0.000571
5TH	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.372427	-0.293775	-0.000551
5TH	D1	1.246D+1E+1L	Combination	Max			0.31903	0.244085	0.000235
5TH	D1	1.246D+1E+1L	Combination	Min			0.016288	0.050079	-0.00021
5TH	D1	1.246D-1E+1L	Combination	Max			0.011011	0.044619	0.000168
5TH	D1	1.246D-1E+1L	Combination	Min			-0.291731	-0.149387	-0.000276
5TH	D1	0.9D+1.6W	Combination	Max			0.389395	0.357436	0.000518
5TH	D1	0.9D+1.6W	Combination	Min			-0.010506	-0.22141	-0.000605
5TH	D1	0.9D-1.6W	Combination	Max			0.017248	0.254659	0.000581
5TH	D1	0.9D-1.6W	Combination	Min			-0.382653	-0.324187	-0.000542
5TH	D1	.854D+E	Combination	Max			0.30858	0.212511	0.000244
5TH	D1	.854D+E	Combination	Min			0.005837	0.018505	-0.000201
5TH	D1	.854D-E	Combination	Max			0.00056	0.013045	0.000178
5TH	D1	.854D-E	Combination	Min			-0.302182	-0.180961	-0.000267
5TH	D1	D+L	Combination				0.012728	0.042805	-1.8E-05
5TH	D1	D+.5L	Combination				0.008237	0.030638	-1.5E-05
5TH	D1	D+.5L+.7W	Combination	Max			0.177123	0.179744	0.000216
5TH	D1	D+.5L+.7W	Combination	Min			0.002166	-0.073502	-0.000275
5TH	D1	D+.5L-.7W	Combination	Max			0.014308	0.134778	0.000244
5TH	D1	D+.5L-.7W	Combination	Min			-0.160649	-0.118467	-0.000247
5TH	D1	DConS1	Combination				0.0086	0.034661	-3.3E-05
5TH	D1	DConS2	Combination				0.021743	0.068643	-3.5E-05
5TH	D1	DConS3	Combination				0.021864	0.06918	-3.6E-05
5TH	D1	DConS4	Combination				0.016739	0.055762	-3.6E-05
5TH	D1	DConS5	Combination	Max			0.402378	0.394854	0.000497
5TH	D1	DConS5	Combination	Min			0.002477	-0.183992	-0.000626
5TH	D1	DConS6	Combination	Max			0.030231	0.292077	0.00056
5TH	D1	DConS6	Combination	Min			-0.36967	-0.286769	-0.000562
5TH	D1	DConS7	Combination	Max			0.402499	0.395392	0.000496
5TH	D1	DConS7	Combination	Min			0.002597	-0.183454	-0.000627
5TH	D1	DConS8	Combination	Max			0.030351	0.292614	0.000559
5TH	D1	DConS8	Combination	Min			-0.36955	-0.286232	-0.000563
5TH	D1	DConS9	Combination	Max			0.200768	0.201835	0.000233
5TH	D1	DConS9	Combination	Min			0.000817	-0.087588	-0.000328
5TH	D1	DConS10	Combination	Max			0.014695	0.150446	0.000265
5TH	D1	DConS10	Combination	Min			-0.185256	-0.138977	-0.000297

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
5TH	D1	DConS11	Combination	Max			0.200384	0.200115	0.000237
5TH	D1	DConS11	Combination	Min			0.000433	-0.089308	-0.000325
5TH	D1	DConS12	Combination	Max			0.01431	0.148727	0.000268
5TH	D1	DConS12	Combination	Min			-0.185641	-0.140696	-0.000293
5TH	D1	DConS13	Combination	Max			0.391553	0.363094	0.000508
5TH	D1	DConS13	Combination	Min			-0.008349	-0.215752	-0.000614
5TH	D1	DConS14	Combination	Max			0.019406	0.260316	0.000572
5TH	D1	DConS14	Combination	Min			-0.380496	-0.318529	-0.000551
5TH	D1	DConS15	Combination	Max			0.322349	0.253255	0.000221
5TH	D1	DConS15	Combination	Min			0.019607	0.059248	-0.000224
5TH	D1	DConS16	Combination	Max			0.01433	0.053789	0.000154
5TH	D1	DConS16	Combination	Min			-0.288413	-0.140218	-0.00029
5TH	D1	DConS17	Combination	Max			0.313367	0.228922	0.000225
5TH	D1	DConS17	Combination	Min			0.010624	0.034915	-0.00022
5TH	D1	DConS18	Combination	Max			0.005348	0.029456	0.000159
5TH	D1	DConS18	Combination	Min			-0.297395	-0.164551	-0.000286
5TH	D1	DConS19	Combination	Max			0.310295	0.216543	0.000237
5TH	D1	DConS19	Combination	Min			0.007553	0.022536	-0.000208
5TH	D1	DConS20	Combination	Max			0.002276	0.017077	0.000171
5TH	D1	DConS20	Combination	Min			-0.300466	-0.17693	-0.000274
4TH	D1	Dead	LinStatic				0.00264	0.013202	-9E-06
4TH	D1	Live	LinStatic				0.006362	0.017239	-3E-06
4TH	D1	PW	LinStatic				0.000753	0.001965	-4E-06
4TH	D1	FF	LinStatic				0.000993	0.002525	-4E-06
4TH	D1	ROOF LIVE	LinStatic				0.000148	0.000753	-1E-06
4TH	D1	EQ	LinStatic	Max			0.234238	0.154313	0.000209
4TH	D1	EQ	LinStatic	Min			0.000618	0.000781	-0.000153
4TH	D1	wind	LinStatic	Max			0.18714	0.16926	0.000273
4TH	D1	wind	LinStatic	Min			-0.008629	-0.118963	-0.000305
4TH	D1	1.4D	Combination				0.003696	0.018482	-1.3E-05
4TH	D1	1.2D+1.6L+.5Lr	Combination				0.01342	0.043801	-1.7E-05
4TH	D1	1.2D+1.6Lr+L	Combination				0.009766	0.034286	-1.7E-05
4TH	D1	1.2D+1.6Lr+.8W	Combination	Max			0.153116	0.152455	0.000205
4TH	D1	1.2D+1.6Lr+.8W	Combination	Min			-0.0035	-0.078124	-0.000257
4TH	D1	1.2D+1.6Lr-.8W	Combination	Max			0.010307	0.112217	0.00023
4TH	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.146308	-0.118361	-0.000232
4TH	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.309027	0.304274	0.000422
4TH	D1	1.2D+1.6W+L+.5Lr	Combination	Min			-0.004204	-0.156884	-0.000503
4TH	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.02341	0.223799	0.000472
4TH	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.28982	-0.237358	-0.000452
4TH	D1	1.246D+1E+1L	Combination	Max			0.243889	0.188002	0.000194
4TH	D1	1.246D+1E+1L	Combination	Min			0.010269	0.03447	-0.000168
4TH	D1	1.246D-1E+1L	Combination	Max			0.009033	0.032908	0.000139
4TH	D1	1.246D-1E+1L	Combination	Min			-0.224587	-0.120625	-0.000224
4TH	D1	0.9D+1.6W	Combination	Max			0.301799	0.282698	0.000429

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
4TH	D1	0.9D+1.6W	Combination	Min			-0.011431	-0.17846	-0.000496
4TH	D1	0.9D-1.6W	Combination	Max			0.016183	0.202223	0.000479
4TH	D1	0.9D-1.6W	Combination	Min			-0.297048	-0.258934	-0.000445
4TH	D1	.854D+E	Combination	Max			0.236492	0.165588	0.000201
4TH	D1	.854D+E	Combination	Min			0.002872	0.012055	-0.000161
4TH	D1	.854D-E	Combination	Max			0.001637	0.010493	0.000146
4TH	D1	.854D-E	Combination	Min			-0.231984	-0.143039	-0.000217
4TH	D1	D+L	Combination				0.009002	0.030441	-1.3E-05
4TH	D1	D+.5L	Combination				0.005821	0.021821	-1.1E-05
4TH	D1	D+.5L+.7W	Combination	Max			0.136818	0.140303	0.00018
4TH	D1	D+.5L+.7W	Combination	Min			-0.00022	-0.061453	-0.000224
4TH	D1	D+.5L-.7W	Combination	Max			0.011861	0.105096	0.000202
4TH	D1	D+.5L-.7W	Combination	Min			-0.125177	-0.096661	-0.000202
4TH	D1	DConS1	Combination				0.00614	0.024768	-2.3E-05
4TH	D1	DConS2	Combination				0.015442	0.048812	-2.5E-05
4TH	D1	DConS3	Combination				0.015515	0.049188	-2.6E-05
4TH	D1	DConS4	Combination				0.011861	0.039673	-2.6E-05
4TH	D1	DConS5	Combination	Max			0.311048	0.309285	0.000414
4TH	D1	DConS5	Combination	Min			-0.002182	-0.151873	-0.000511
4TH	D1	DConS6	Combination	Max			0.025431	0.22881	0.000464
4TH	D1	DConS6	Combination	Min			-0.287799	-0.232347	-0.00046
4TH	D1	DConS7	Combination	Max			0.311122	0.309661	0.000413
4TH	D1	DConS7	Combination	Min			-0.002108	-0.151496	-0.000512
4TH	D1	DConS8	Combination	Max			0.025505	0.229186	0.000464
4TH	D1	DConS8	Combination	Min			-0.287725	-0.231971	-0.000461
4TH	D1	DConS9	Combination	Max			0.155211	0.157842	0.000196
4TH	D1	DConS9	Combination	Min			-0.001404	-0.072737	-0.000266
4TH	D1	DConS10	Combination	Max			0.012402	0.117605	0.000222
4TH	D1	DConS10	Combination	Min			-0.144213	-0.112974	-0.000241
4TH	D1	DConS11	Combination	Max			0.154975	0.156637	0.000199
4TH	D1	DConS11	Combination	Min			-0.001641	-0.073941	-0.000264
4TH	D1	DConS12	Combination	Max			0.012166	0.1164	0.000224
4TH	D1	DConS12	Combination	Min			-0.144449	-0.114179	-0.000238
4TH	D1	DConS13	Combination	Max			0.303371	0.286738	0.000422
4TH	D1	DConS13	Combination	Min			-0.00986	-0.174419	-0.000502
4TH	D1	DConS14	Combination	Max			0.017754	0.206263	0.000473
4TH	D1	DConS14	Combination	Min			-0.295476	-0.254894	-0.000452
4TH	D1	DConS15	Combination	Max			0.246301	0.194551	0.000184
4TH	D1	DConS15	Combination	Min			0.012681	0.041019	-0.000178
4TH	D1	DConS16	Combination	Max			0.011445	0.039457	0.000129
4TH	D1	DConS16	Combination	Min			-0.222175	-0.114076	-0.000234
4TH	D1	DConS17	Combination	Max			0.239939	0.177312	0.000188
4TH	D1	DConS17	Combination	Min			0.006319	0.02378	-0.000175
4TH	D1	DConS18	Combination	Max			0.005084	0.022218	0.000132
4TH	D1	DConS18	Combination	Min			-0.228537	-0.131315	-0.000231

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
4TH	D1	DConS19	Combination	Max			0.237746	0.168466	0.000196
4TH	D1	DConS19	Combination	Min			0.004126	0.014934	-0.000167
4TH	D1	DConS20	Combination	Max			0.002891	0.013372	0.00014
4TH	D1	DConS20	Combination	Min			-0.230729	-0.14016	-0.000223
3RD	D1	Dead	LinStatic				0.001681	0.00863	-6E-06
3RD	D1	Live	LinStatic				0.004068	0.011118	-2E-06
3RD	D1	PW	LinStatic				0.000507	0.001287	-2E-06
3RD	D1	FF	LinStatic				0.000657	0.001649	-2E-06
3RD	D1	ROOF LIVE	LinStatic				7.9E-05	0.00048	-1E-06
3RD	D1	EQ	LinStatic	Max			0.164875	0.111268	0.000158
3RD	D1	EQ	LinStatic	Min			-0.000807	-0.000609	-0.000115
3RD	D1	wind	LinStatic	Max			0.133511	0.123938	0.000208
3RD	D1	wind	LinStatic	Min			-0.007819	-0.087779	-0.000232
3RD	D1	1.4D	Combination				0.002353	0.012082	-8E-06
3RD	D1	1.2D+1.6L+.5Lr	Combination				0.008565	0.028385	-1.1E-05
3RD	D1	1.2D+1.6Lr+L	Combination				0.006211	0.022241	-1.1E-05
3RD	D1	1.2D+1.6Lr+.8W	Combination	Max			0.108952	0.110273	0.000158
3RD	D1	1.2D+1.6Lr+.8W	Combination	Min			-0.004112	-0.0591	-0.000194
3RD	D1	1.2D+1.6Lr-.8W	Combination	Max			0.008399	0.081346	0.000177
3RD	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.104666	-0.088027	-0.000175
3RD	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.219742	0.220014	0.000323
3RD	D1	1.2D+1.6W+L+.5Lr	Combination	Min			-0.006387	-0.118732	-0.00038
3RD	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.018635	0.16216	0.000361
3RD	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.207493	-0.176587	-0.000342
3RD	D1	1.246D+1E+1L	Combination	Max			0.171037	0.133139	0.000148
3RD	D1	1.246D+1E+1L	Combination	Min			0.005355	0.021261	-0.000124
3RD	D1	1.246D-1E+1L	Combination	Max			0.006969	0.02248	0.000105
3RD	D1	1.246D-1E+1L	Combination	Min			-0.158713	-0.089398	-0.000167
3RD	D1	0.9D+1.6W	Combination	Max			0.21513	0.206067	0.000328
3RD	D1	0.9D+1.6W	Combination	Min			-0.010998	-0.132679	-0.000376
3RD	D1	0.9D-1.6W	Combination	Max			0.014023	0.148213	0.000365
3RD	D1	0.9D-1.6W	Combination	Min			-0.212105	-0.190534	-0.000338
3RD	D1	.854D+E	Combination	Max			0.166311	0.118638	0.000153
3RD	D1	.854D+E	Combination	Min			0.000628	0.00676	-0.00012
3RD	D1	.854D-E	Combination	Max			0.002242	0.007979	0.00011
3RD	D1	.854D-E	Combination	Min			-0.16344	-0.103899	-0.000163
3RD	D1	D+L	Combination				0.005749	0.019748	-8E-06
3RD	D1	D+.5L	Combination				0.003715	0.014189	-7E-06
3RD	D1	D+.5L+.7W	Combination	Max			0.097172	0.100945	0.000139
3RD	D1	D+.5L+.7W	Combination	Min			-0.001759	-0.047256	-0.000169
3RD	D1	D+.5L-.7W	Combination	Max			0.009188	0.075634	0.000155
3RD	D1	D+.5L-.7W	Combination	Min			-0.089743	-0.072568	-0.000153
3RD	D1	DConS1	Combination				0.003983	0.016192	-1.5E-05
3RD	D1	DConS2	Combination				0.009922	0.031667	-1.6E-05
3RD	D1	DConS3	Combination				0.009962	0.031907	-1.7E-05

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
3RD	D1	DConS4	Combination				0.007608	0.025764	-1.6E-05
3RD	D1	DConS5	Combination	Max			0.221099	0.223297	0.000318
3RD	D1	DConS5	Combination	Min			-0.005029	-0.115449	-0.000386
3RD	D1	DConS6	Combination	Max			0.019992	0.165443	0.000356
3RD	D1	DConS6	Combination	Min			-0.206136	-0.173304	-0.000348
3RD	D1	DConS7	Combination	Max			0.221139	0.223537	0.000318
3RD	D1	DConS7	Combination	Min			-0.004989	-0.11521	-0.000386
3RD	D1	DConS8	Combination	Max			0.020032	0.165682	0.000355
3RD	D1	DConS8	Combination	Min			-0.206096	-0.173064	-0.000348
3RD	D1	DConS9	Combination	Max			0.110349	0.113796	0.000152
3RD	D1	DConS9	Combination	Min			-0.002715	-0.055577	-0.000199
3RD	D1	DConS10	Combination	Max			0.009796	0.084869	0.000171
3RD	D1	DConS10	Combination	Min			-0.103268	-0.084504	-0.00018
3RD	D1	DConS11	Combination	Max			0.110223	0.113029	0.000154
3RD	D1	DConS11	Combination	Min			-0.002842	-0.056345	-0.000198
3RD	D1	DConS12	Combination	Max			0.009669	0.084101	0.000173
3RD	D1	DConS12	Combination	Min			-0.103395	-0.085272	-0.000179
3RD	D1	DConS13	Combination	Max			0.216178	0.208709	0.000323
3RD	D1	DConS13	Combination	Min			-0.00995	-0.130037	-0.00038
3RD	D1	DConS14	Combination	Max			0.015071	0.150855	0.000361
3RD	D1	DConS14	Combination	Min			-0.211057	-0.187892	-0.000342
3RD	D1	DConS15	Combination	Max			0.172642	0.137422	0.000142
3RD	D1	DConS15	Combination	Min			0.006959	0.025544	-0.000131
3RD	D1	DConS16	Combination	Max			0.008573	0.026762	9.9E-05
3RD	D1	DConS16	Combination	Min			-0.157109	-0.085115	-0.000174
3RD	D1	DConS17	Combination	Max			0.168574	0.126303	0.000144
3RD	D1	DConS17	Combination	Min			0.002891	0.014426	-0.000129
3RD	D1	DConS18	Combination	Max			0.004505	0.015644	0.000101
3RD	D1	DConS18	Combination	Min			-0.161177	-0.096234	-0.000171
3RD	D1	DConS19	Combination	Max			0.167151	0.120521	0.000149
3RD	D1	DConS19	Combination	Min			0.001469	0.008643	-0.000123
3RD	D1	DConS20	Combination	Max			0.003083	0.009862	0.000106
3RD	D1	DConS20	Combination	Min			-0.1626	-0.102016	-0.000166
2ND	D1	Dead	LinStatic				0.000896	0.004897	-3E-06
2ND	D1	Live	LinStatic				0.002184	0.006177	-1E-06
2ND	D1	PW	LinStatic				0.000297	0.000734	-1E-06
2ND	D1	FF	LinStatic				0.000373	0.000937	-1E-06
2ND	D1	ROOF LIVE	LinStatic				3.2E-05	0.000264	-4.083E-07
2ND	D1	EQ	LinStatic	Max			0.101167	0.070175	0.000104
2ND	D1	EQ	LinStatic	Min			-0.001529	-0.00134	-7.6E-05
2ND	D1	wind	LinStatic	Max			0.083167	0.079482	0.000139
2ND	D1	wind	LinStatic	Min			-0.006213	-0.056853	-0.000155
2ND	D1	1.4D	Combination				0.001254	0.006856	-4E-06
2ND	D1	1.2D+1.6L+.5Lr	Combination				0.004585	0.015891	-6E-06
2ND	D1	1.2D+1.6Lr+L	Combination				0.003311	0.012476	-5E-06

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
2ND	D1	1.2D+1.6Lr+.8W	Combination	Max			0.067661	0.069885	0.000107
2ND	D1	1.2D+1.6Lr+.8W	Combination	Min			-0.003843	-0.039183	-0.000128
2ND	D1	1.2D+1.6Lr-.8W	Combination	Max			0.006097	0.051782	0.00012
2ND	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.065407	-0.057286	-0.000116
2ND	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.136343	0.139357	0.000218
2ND	D1	1.2D+1.6W+L+.5Lr	Combination	Min			-0.006665	-0.078779	-0.000253
2ND	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.013215	0.103149	0.000243
2ND	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.129793	-0.114986	-0.000228
2ND	D1	1.246D+1E+1L	Combination	Max			0.104467	0.082454	9.9E-05
2ND	D1	1.246D+1E+1L	Combination	Min			0.001771	0.010938	-8.1E-05
2ND	D1	1.246D-1E+1L	Combination	Max			0.004829	0.013618	7.1E-05
2ND	D1	1.246D-1E+1L	Combination	Min			-0.097867	-0.057897	-0.000109
2ND	D1	0.9D+1.6W	Combination	Max			0.133874	0.131578	0.00022
2ND	D1	0.9D+1.6W	Combination	Min			-0.009134	-0.086557	-0.000251
2ND	D1	0.9D-1.6W	Combination	Max			0.010746	0.095371	0.000246
2ND	D1	0.9D-1.6W	Combination	Min			-0.132262	-0.122764	-0.000226
2ND	D1	.854D+E	Combination	Max			0.101932	0.074357	0.000102
2ND	D1	.854D+E	Combination	Min			-0.000764	0.002842	-7.8E-05
2ND	D1	.854D-E	Combination	Max			0.002294	0.005522	7.3E-05
2ND	D1	.854D-E	Combination	Min			-0.100402	-0.065993	-0.000107
2ND	D1	D+L	Combination				0.00308	0.011074	-4E-06
2ND	D1	D+.5L	Combination				0.001988	0.007985	-4E-06
2ND	D1	D+.5L+.7W	Combination	Max			0.060205	0.063623	9.4E-05
2ND	D1	D+.5L+.7W	Combination	Min			-0.002361	-0.031811	-0.000112
2ND	D1	D+.5L-.7W	Combination	Max			0.006337	0.047782	0.000105
2ND	D1	D+.5L-.7W	Combination	Min			-0.056229	-0.047652	-0.000101
2ND	D1	DConS1	Combination				0.002192	0.009194	-8E-06
2ND	D1	DConS2	Combination				0.005373	0.017763	-9E-06
2ND	D1	DConS3	Combination				0.005389	0.017896	-9E-06
2ND	D1	DConS4	Combination				0.004114	0.014481	-8E-06
2ND	D1	DConS5	Combination	Max			0.13713	0.141229	0.000215
2ND	D1	DConS5	Combination	Min			-0.005878	-0.076907	-0.000256
2ND	D1	DConS6	Combination	Max			0.014003	0.105021	0.00024
2ND	D1	DConS6	Combination	Min			-0.129005	-0.113114	-0.000231
2ND	D1	DConS7	Combination	Max			0.137147	0.141361	0.000215
2ND	D1	DConS7	Combination	Min			-0.005861	-0.076774	-0.000256
2ND	D1	DConS8	Combination	Max			0.014019	0.105154	0.00024
2ND	D1	DConS8	Combination	Min			-0.128989	-0.112982	-0.000231
2ND	D1	DConS9	Combination	Max			0.068464	0.071889	0.000104
2ND	D1	DConS9	Combination	Min			-0.00304	-0.037178	-0.000131
2ND	D1	DConS10	Combination	Max			0.006901	0.053786	0.000117
2ND	D1	DConS10	Combination	Min			-0.064603	-0.055282	-0.000119
2ND	D1	DConS11	Combination	Max			0.068412	0.071466	0.000105
2ND	D1	DConS11	Combination	Min			-0.003092	-0.037601	-0.000131
2ND	D1	DConS12	Combination	Max			0.006849	0.053363	0.000117

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
2ND	D1	DConS12	Combination	Min			-0.064655	-0.055705	-0.000118
2ND	D1	DConS13	Combination	Max			0.134477	0.133082	0.000218
2ND	D1	DConS13	Combination	Min			-0.008531	-0.085054	-0.000253
2ND	D1	DConS14	Combination	Max			0.011349	0.096875	0.000243
2ND	D1	DConS14	Combination	Min			-0.131659	-0.121261	-0.000228
2ND	D1	DConS15	Combination	Max			0.105386	0.084889	9.6E-05
2ND	D1	DConS15	Combination	Min			0.00269	0.013374	-8.4E-05
2ND	D1	DConS16	Combination	Max			0.005748	0.016054	6.8E-05
2ND	D1	DConS16	Combination	Min			-0.096948	-0.055461	-0.000113
2ND	D1	DConS17	Combination	Max			0.103202	0.078713	9.7E-05
2ND	D1	DConS17	Combination	Min			0.000506	0.007197	-8.3E-05
2ND	D1	DConS18	Combination	Max			0.003564	0.009877	6.9E-05
2ND	D1	DConS18	Combination	Min			-0.099132	-0.061638	-0.000111
2ND	D1	DConS19	Combination	Max			0.10242	0.075429	0.0001
2ND	D1	DConS19	Combination	Min			-0.000276	0.003914	-8E-05
2ND	D1	DConS20	Combination	Max			0.002781	0.006594	7.1E-05
2ND	D1	DConS20	Combination	Min			-0.099915	-0.064921	-0.000109
1ST	D1	Dead	LinStatic				0.00032	0.002141	-1E-06
1ST	D1	Live	LinStatic				0.000815	0.002604	-2.121E-07
1ST	D1	PW	LinStatic				0.000132	0.000324	-1E-06
1ST	D1	FF	LinStatic				0.000154	0.000412	-4.564E-07
1ST	D1	ROOF LIVE	LinStatic				6E-06	0.000111	-1.332E-07
1ST	D1	EQ	LinStatic	Max			0.047969	0.034439	5.4E-05
1ST	D1	EQ	LinStatic	Min			-0.001454	-0.001318	-4E-05
1ST	D1	wind	LinStatic	Max			0.04	0.039583	7.3E-05
1ST	D1	wind	LinStatic	Min			-0.003879	-0.028699	-8.1E-05
1ST	D1	1.4D	Combination				0.000449	0.002998	-1E-06
1ST	D1	1.2D+1.6L+.5Lr	Combination				0.001691	0.006791	-1E-06
1ST	D1	1.2D+1.6Lr+L	Combination				0.001208	0.005351	-1E-06
1ST	D1	1.2D+1.6Lr+.8W	Combination	Max			0.032393	0.034414	5.7E-05
1ST	D1	1.2D+1.6Lr+.8W	Combination	Min			-0.002709	-0.020212	-6.6E-05
1ST	D1	1.2D+1.6Lr-.8W	Combination	Max			0.003496	0.025707	6.4E-05
1ST	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.031606	-0.028919	-6E-05
1ST	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.065202	0.068561	0.000115
1ST	D1	1.2D+1.6W+L+.5Lr	Combination	Min			-0.005004	-0.04069	-0.000132
1ST	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.007408	0.051148	0.000129
1ST	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.062798	-0.058104	-0.000118
1ST	D1	1.246D+1E+1L	Combination	Max			0.049182	0.039711	5.2E-05
1ST	D1	1.246D+1E+1L	Combination	Min			-0.00024	0.003954	-4.1E-05
1ST	D1	1.246D-1E+1L	Combination	Max			0.002667	0.006589	3.8E-05
1ST	D1	1.246D-1E+1L	Combination	Min			-0.046755	-0.029168	-5.5E-05
1ST	D1	0.9D+1.6W	Combination	Max			0.064288	0.065259	0.000116
1ST	D1	0.9D+1.6W	Combination	Min			-0.005917	-0.043992	-0.000131
1ST	D1	0.9D-1.6W	Combination	Max			0.006494	0.047846	0.000129
1ST	D1	0.9D-1.6W	Combination	Min			-0.063711	-0.061405	-0.000118

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
1ST	D1	.854D+E	Combination	Max			0.048242	0.036268	5.3E-05
1ST	D1	.854D+E	Combination	Min			-0.00118	0.000511	-4E-05
1ST	D1	.854D-E	Combination	Max			0.001727	0.003146	3.9E-05
1ST	D1	.854D-E	Combination	Min			-0.047695	-0.032611	-5.5E-05
1ST	D1	D+L	Combination				0.001135	0.004745	-1E-06
1ST	D1	D+.5L	Combination				0.000728	0.003443	-1E-06
1ST	D1	D+.5L+.7W	Combination	Max			0.028728	0.031151	5E-05
1ST	D1	D+.5L+.7W	Combination	Min			-0.001987	-0.016647	-5.8E-05
1ST	D1	D+.5L-.7W	Combination	Max			0.003443	0.023533	5.6E-05
1ST	D1	D+.5L-.7W	Combination	Min			-0.027272	-0.024265	-5.2E-05
1ST	D1	DConS1	Combination				0.000849	0.004028	-3E-06
1ST	D1	DConS2	Combination				0.002031	0.007619	-3E-06
1ST	D1	DConS3	Combination				0.002034	0.007674	-3E-06
1ST	D1	DConS4	Combination				0.001551	0.006235	-3E-06
1ST	D1	DConS5	Combination	Max			0.065542	0.069389	0.000114
1ST	D1	DConS5	Combination	Min			-0.004663	-0.039863	-0.000133
1ST	D1	DConS6	Combination	Max			0.007748	0.051976	0.000128
1ST	D1	DConS6	Combination	Min			-0.062457	-0.057276	-0.000119
1ST	D1	DConS7	Combination	Max			0.065545	0.069445	0.000114
1ST	D1	DConS7	Combination	Min			-0.004661	-0.039807	-0.000133
1ST	D1	DConS8	Combination	Max			0.007751	0.052031	0.000128
1ST	D1	DConS8	Combination	Min			-0.062455	-0.05722	-0.000119
1ST	D1	DConS9	Combination	Max			0.032737	0.035297	5.6E-05
1ST	D1	DConS9	Combination	Min			-0.002366	-0.019328	-6.8E-05
1ST	D1	DConS10	Combination	Max			0.00384	0.026591	6.3E-05
1ST	D1	DConS10	Combination	Min			-0.031263	-0.028035	-6.1E-05
1ST	D1	DConS11	Combination	Max			0.032728	0.035119	5.6E-05
1ST	D1	DConS11	Combination	Min			-0.002375	-0.019507	-6.7E-05
1ST	D1	DConS12	Combination	Max			0.003831	0.026412	6.3E-05
1ST	D1	DConS12	Combination	Min			-0.031272	-0.028213	-6.1E-05
1ST	D1	DConS13	Combination	Max			0.064546	0.065922	0.000115
1ST	D1	DConS13	Combination	Min			-0.00566	-0.043329	-0.000132
1ST	D1	DConS14	Combination	Max			0.006752	0.048509	0.000129
1ST	D1	DConS14	Combination	Min			-0.063454	-0.060743	-0.000118
1ST	D1	DConS15	Combination	Max			0.049572	0.040784	5.1E-05
1ST	D1	DConS15	Combination	Min			0.00015	0.005027	-4.2E-05
1ST	D1	DConS16	Combination	Max			0.003057	0.007662	3.7E-05
1ST	D1	DConS16	Combination	Min			-0.046366	-0.028095	-5.6E-05
1ST	D1	DConS17	Combination	Max			0.048757	0.03818	5.1E-05
1ST	D1	DConS17	Combination	Min			-0.000665	0.002423	-4.2E-05
1ST	D1	DConS18	Combination	Max			0.002242	0.005058	3.7E-05
1ST	D1	DConS18	Combination	Min			-0.04718	-0.030699	-5.6E-05
1ST	D1	DConS19	Combination	Max			0.048454	0.036741	5.2E-05
1ST	D1	DConS19	Combination	Min			-0.000968	0.000984	-4.1E-05
1ST	D1	DConS20	Combination	Max			0.001939	0.00362	3.8E-05

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
1ST	D1	DConS20	Combination	Min			-0.047483	-0.032138	-5.5E-05
GF	D1	Dead	LinStatic				6.9E-05	0.000436	-1.016E-07
GF	D1	Live	LinStatic				0.000152	0.000493	4.215E-08
GF	D1	PW	LinStatic				2.9E-05	6.9E-05	-8.56E-08
GF	D1	FF	LinStatic				3.2E-05	8.6E-05	-6.755E-08
GF	D1	ROOF LIVE	LinStatic				1E-06	2.1E-05	-1.912E-08
GF	D1	EQ	LinStatic	Max			0.011285	0.008625	1.4E-05
GF	D1	EQ	LinStatic	Min			-0.000627	-0.0006	-1.1E-05
GF	D1	wind	LinStatic	Max			0.009541	0.010038	1.9E-05
GF	D1	wind	LinStatic	Min			-0.001254	-0.007438	-2.2E-05
GF	D1	1.4D	Combination				9.6E-05	0.00061	-1.423E-07
GF	D1	1.2D+1.6L+.5Lr	Combination				0.000327	0.001322	-6.408E-08
GF	D1	1.2D+1.6Lr+L	Combination				0.000236	0.00105	-1.104E-07
GF	D1	1.2D+1.6Lr+.8W	Combination	Max			0.007716	0.008588	1.5E-05
GF	D1	1.2D+1.6Lr+.8W	Combination	Min			-0.00092	-0.005393	-1.7E-05
GF	D1	1.2D+1.6Lr-.8W	Combination	Max			0.001087	0.006508	1.7E-05
GF	D1	1.2D+1.6Lr-.8W	Combination	Min			-0.007549	-0.007474	-1.5E-05
GF	D1	1.2D+1.6W+L+.5Lr	Combination	Max			0.015501	0.017088	3.1E-05
GF	D1	1.2D+1.6W+L+.5Lr	Combination	Min			-0.001771	-0.010875	-3.5E-05
GF	D1	1.2D-1.6W+L+.5Lr	Combination	Max			0.002242	0.012927	3.4E-05
GF	D1	1.2D-1.6W+L+.5Lr	Combination	Min			-0.01503	-0.015035	-3.1E-05
GF	D1	1.246D+1E+1L	Combination	Max			0.011523	0.009661	1.4E-05
GF	D1	1.246D+1E+1L	Combination	Min			-0.000389	0.000436	-1.1E-05
GF	D1	1.246D-1E+1L	Combination	Max			0.000865	0.001636	1E-05
GF	D1	1.246D-1E+1L	Combination	Min			-0.011046	-0.00759	-1.4E-05
GF	D1	0.9D+1.6W	Combination	Max			0.015327	0.016453	3.1E-05
GF	D1	0.9D+1.6W	Combination	Min			-0.001945	-0.011509	-3.5E-05
GF	D1	0.9D-1.6W	Combination	Max			0.002069	0.012293	3.4E-05
GF	D1	0.9D-1.6W	Combination	Min			-0.015203	-0.015669	-3.1E-05
GF	D1	.854D+E	Combination	Max			0.011343	0.008997	1.4E-05
GF	D1	.854D+E	Combination	Min			-0.000568	-0.000228	-1.1E-05
GF	D1	.854D-E	Combination	Max			0.000685	0.000972	1E-05
GF	D1	.854D-E	Combination	Min			-0.011226	-0.008253	-1.4E-05
GF	D1	D+L	Combination				0.000221	0.000928	-5.948E-08
GF	D1	D+.5L	Combination				0.000145	0.000682	-8.055E-08
GF	D1	D+.5L+.7W	Combination	Max			0.006824	0.007709	1.3E-05
GF	D1	D+.5L+.7W	Combination	Min			-0.000733	-0.004525	-1.5E-05
GF	D1	D+.5L-.7W	Combination	Max			0.001023	0.005889	1.5E-05
GF	D1	D+.5L-.7W	Combination	Min			-0.006534	-0.006345	-1.3E-05
GF	D1	DConS1	Combination				0.000181	0.000827	-3.567E-07
GF	D1	DConS2	Combination				0.000399	0.001498	-2.383E-07
GF	D1	DConS3	Combination				0.000399	0.001508	-2.479E-07
GF	D1	DConS4	Combination				0.000309	0.001236	-2.942E-07
GF	D1	DConS5	Combination	Max			0.015573	0.017263	3E-05
GF	D1	DConS5	Combination	Min			-0.001699	-0.010699	-3.5E-05

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 1 of 2, continued)

Story	Diaphragm	Output Case	Case Type	Step Type	Step Number	Step Label	UX in	UY in	RZ rad
GF	D1	DConS6	Combination	Max			0.002314	0.013103	3.4E-05
GF	D1	DConS6	Combination	Min			-0.014958	-0.014859	-3.1E-05
GF	D1	DConS7	Combination	Max			0.015573	0.017274	3E-05
GF	D1	DConS7	Combination	Min			-0.001699	-0.010688	-3.5E-05
GF	D1	DConS8	Combination	Max			0.002315	0.013114	3.4E-05
GF	D1	DConS8	Combination	Min			-0.014957	-0.014848	-3.1E-05
GF	D1	DConS9	Combination	Max			0.007789	0.008774	1.5E-05
GF	D1	DConS9	Combination	Min			-0.000847	-0.005207	-1.8E-05
GF	D1	DConS10	Combination	Max			0.00116	0.006694	1.7E-05
GF	D1	DConS10	Combination	Min			-0.007476	-0.007287	-1.6E-05
GF	D1	DConS11	Combination	Max			0.007788	0.00874	1.5E-05
GF	D1	DConS11	Combination	Min			-0.000848	-0.005241	-1.8E-05
GF	D1	DConS12	Combination	Max			0.001159	0.00666	1.7E-05
GF	D1	DConS12	Combination	Min			-0.007477	-0.007321	-1.6E-05
GF	D1	DConS13	Combination	Max			0.015382	0.016593	3E-05
GF	D1	DConS13	Combination	Min			-0.00189	-0.011369	-3.5E-05
GF	D1	DConS14	Combination	Max			0.002123	0.012433	3.4E-05
GF	D1	DConS14	Combination	Min			-0.015149	-0.015529	-3.1E-05
GF	D1	DConS15	Combination	Max			0.011605	0.009886	1.3E-05
GF	D1	DConS15	Combination	Min			-0.000306	0.000661	-1.1E-05
GF	D1	DConS16	Combination	Max			0.000947	0.001861	1E-05
GF	D1	DConS16	Combination	Min			-0.010964	-0.007364	-1.4E-05
GF	D1	DConS17	Combination	Max			0.011453	0.009394	1.3E-05
GF	D1	DConS17	Combination	Min			-0.000458	0.000168	-1.1E-05
GF	D1	DConS18	Combination	Max			0.000795	0.001368	1E-05
GF	D1	DConS18	Combination	Min			-0.011116	-0.007857	-1.4E-05
GF	D1	DConS19	Combination	Max			0.011388	0.009098	1.4E-05
GF	D1	DConS19	Combination	Min			-0.000523	-0.000127	-1.1E-05
GF	D1	DConS20	Combination	Max			0.00073	0.001073	1E-05
GF	D1	DConS20	Combination	Min			-0.011181	-0.008153	-1.4E-05

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2)

Story	Diaphragm	Point	X ft	Y ft	Z ft
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
ROOF	D1	354	34.7102	26.0181	87

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
ROOF	D1	354	34.7102	26.0181	87
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
7TH	D1	355	34.4005	25.891	77

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
7TH	D1	355	34.4005	25.891	77
7TH	D1	355	34.4005	25.891	77
6TH	D1	356	34.4005	25.891	67

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
6TH	D1	356	34.4005	25.891	67

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
5TH	D1	357	34.4005	25.891	57

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
5TH	D1	357	34.4005	25.891	57
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
4TH	D1	358	34.4005	25.891	47
3RD	D1	359	34.4005	25.891	37

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
3RD	D1	359	34.4005	25.891	37

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
3RD	D1	359	34.4005	25.891	37
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
2ND	D1	360	34.4005	25.891	27

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
2ND	D1	360	34.4005	25.891	27
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17
1ST	D1	361	34.4005	25.891	17

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
1ST	D1	361	34.4005	25.891	17

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
GF	D1	362	34.6407	26.0082	7

Table 5.3 - Diaphragm Center Of Mass Displacements (Part 2 of 2, continued)

Story	Diaphragm	Point	X ft	Y ft	Z ft
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7
GF	D1	362	34.6407	26.0082	7

5.2 Story Results

Table 5.4 - Story Max Over Avg Displacements

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
ROOF	Dead	LinStatic				X	0.015418	0.007905	1.95
ROOF	Dead	LinStatic				Y	0.046743	0.036832	1.269
7TH	Dead	LinStatic				X	0.012767	0.006496	1.965
7TH	Dead	LinStatic				Y	0.038563	0.03029	1.273
6TH	Dead	LinStatic				X	0.010084	0.00512	1.969
6TH	Dead	LinStatic				Y	0.03065	0.024101	1.272
5TH	Dead	LinStatic				X	0.007595	0.003856	1.97
5TH	Dead	LinStatic				Y	0.023255	0.018323	1.269
4TH	Dead	LinStatic				X	0.005334	0.002717	1.963
4TH	Dead	LinStatic				Y	0.016551	0.013098	1.264
3RD	Dead	LinStatic				X	0.003364	0.001729	1.946
3RD	Dead	LinStatic				Y	0.010722	0.008565	1.252
2ND	Dead	LinStatic				X	0.00175	0.00092	1.902
2ND	Dead	LinStatic				Y	0.005959	0.004864	1.225
1ST	Dead	LinStatic				X	0.000577	0.000328	1.76

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
1ST	Dead	LinStatic				Y	0.00246	0.002131	1.154
GF	Dead	LinStatic				X	9.8E-05	7E-05	1.412
GF	Dead	LinStatic				Y	0.000473	0.000435	1.087
ROOF	Live	LinStatic				X	0.020244	0.018093	1.119
ROOF	Live	LinStatic				Y	0.052005	0.049167	1.058
7TH	Live	LinStatic				X	0.0168	0.014942	1.124
7TH	Live	LinStatic				Y	0.042934	0.040482	1.061
6TH	Live	LinStatic				X	0.013456	0.011896	1.131
6TH	Live	LinStatic				Y	0.034177	0.032119	1.064
5TH	Live	LinStatic				X	0.010271	0.009019	1.139
5TH	Live	LinStatic				Y	0.025935	0.024283	1.068
4TH	Live	LinStatic				X	0.007329	0.006389	1.147
4TH	Live	LinStatic				Y	0.018441	0.017202	1.072
3RD	Live	LinStatic				X	0.004713	0.004086	1.153
3RD	Live	LinStatic				Y	0.01192	0.011093	1.075
2ND	Live	LinStatic				X	0.002521	0.002194	1.149
2ND	Live	LinStatic				Y	0.006596	0.006164	1.07
1ST	Live	LinStatic				X	0.000876	0.000816	1.073
1ST	Live	LinStatic				Y	0.00268	0.002601	1.03
GF	Live	LinStatic				X	0.000164	0.000152	1.078
GF	Live	LinStatic				Y	0.000509	0.000493	1.032
ROOF	PW	LinStatic				X	0.004948	0.00205	2.414
ROOF	PW	LinStatic				Y	0.009273	0.005449	1.702
7TH	PW	LinStatic				X	0.004155	0.001718	2.418
7TH	PW	LinStatic				Y	0.007671	0.004457	1.721
6TH	PW	LinStatic				X	0.003335	0.001384	2.409
6TH	PW	LinStatic				Y	0.006113	0.003541	1.727
5TH	PW	LinStatic				X	0.002564	0.001072	2.391
5TH	PW	LinStatic				Y	0.004657	0.002689	1.732
4TH	PW	LinStatic				X	0.001854	0.000785	2.362
4TH	PW	LinStatic				Y	0.003333	0.001922	1.734
3RD	PW	LinStatic				X	0.001223	0.000528	2.317
3RD	PW	LinStatic				Y	0.002176	0.001259	1.728
2ND	PW	LinStatic				X	0.000692	0.000308	2.244
2ND	PW	LinStatic				Y	0.001224	0.000718	1.704
1ST	PW	LinStatic				X	0.000288	0.000137	2.109
1ST	PW	LinStatic				Y	0.000518	0.000318	1.629
GF	PW	LinStatic				X	5.4E-05	3E-05	1.816
GF	PW	LinStatic				Y	0.0001	6.9E-05	1.465
ROOF	FF	LinStatic				X	0.005428	0.002734	1.986
ROOF	FF	LinStatic				Y	0.010611	0.007056	1.504
7TH	FF	LinStatic				X	0.004546	0.002281	1.993
7TH	FF	LinStatic				Y	0.008769	0.005781	1.517
6TH	FF	LinStatic				X	0.003645	0.001832	1.99
6TH	FF	LinStatic				Y	0.006983	0.00459	1.521

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
5TH	FF	LinStatic				X	0.002797	0.00141	1.983
5TH	FF	LinStatic				Y	0.005312	0.003483	1.525
4TH	FF	LinStatic				X	0.002014	0.001022	1.971
4TH	FF	LinStatic				Y	0.003794	0.002485	1.526
3RD	FF	LinStatic				X	0.001317	0.000676	1.948
3RD	FF	LinStatic				Y	0.002469	0.001624	1.521
2ND	FF	LinStatic				X	0.000731	0.000383	1.908
2ND	FF	LinStatic				Y	0.001381	0.000923	1.497
1ST	FF	LinStatic				X	0.000287	0.000158	1.816
1ST	FF	LinStatic				Y	0.000577	0.000407	1.417
GF	FF	LinStatic				X	5.1E-05	3.2E-05	1.594
GF	FF	LinStatic				Y	0.000111	8.6E-05	1.294
ROOF	ROOF LIVE	LinStatic				X	0.00244	0.000731	3.339
ROOF	ROOF LIVE	LinStatic				Y	0.004604	0.002349	1.96
7TH	ROOF LIVE	LinStatic				X	0.001975	0.00058	3.404
7TH	ROOF LIVE	LinStatic				Y	0.003601	0.001761	2.045
6TH	ROOF LIVE	LinStatic				X	0.001358	0.000392	3.464
6TH	ROOF LIVE	LinStatic				Y	0.002677	0.001403	1.908
5TH	ROOF LIVE	LinStatic				X	0.000913	0.00026	3.517
5TH	ROOF LIVE	LinStatic				Y	0.001911	0.001049	1.822
4TH	ROOF LIVE	LinStatic				X	0.000574	0.00016	3.594
4TH	ROOF LIVE	LinStatic				Y	0.001283	0.000736	1.743
3RD	ROOF LIVE	LinStatic				X	0.000325	8.6E-05	3.77
3RD	ROOF LIVE	LinStatic				Y	0.000785	0.00047	1.669
2ND	ROOF LIVE	LinStatic				X	0.000151	3.6E-05	4.212
2ND	ROOF LIVE	LinStatic				Y	0.000412	0.00026	1.584
1ST	ROOF LIVE	LinStatic				Y	0.000159	0.00011	1.451
GF	ROOF LIVE	LinStatic				Y	2.8E-05	2.1E-05	1.334
ROOF	EQ	LinStatic	Max			X	0.583698	0.520929	1.12
ROOF	EQ	LinStatic	Max			Y	0.438794	0.332804	1.318
7TH	EQ	LinStatic	Max			X	0.514354	0.45612	1.128
7TH	EQ	LinStatic	Max			Y	0.397605	0.29705	1.339
6TH	EQ	LinStatic	Max			X	0.43952	0.387182	1.135
6TH	EQ	LinStatic	Max			Y	0.349422	0.257229	1.358
5TH	EQ	LinStatic	Max			X	0.360348	0.315204	1.143
5TH	EQ	LinStatic	Max			Y	0.294631	0.213755	1.378
4TH	EQ	LinStatic	Max			X	0.278794	0.241983	1.152
4TH	EQ	LinStatic	Max			Y	0.234514	0.167689	1.399
3RD	EQ	LinStatic	Max			X	0.198229	0.170518	1.163
3RD	EQ	LinStatic	Max			Y	0.171719	0.120996	1.419
2ND	EQ	LinStatic	Max			X	0.123192	0.1048	1.175
2ND	EQ	LinStatic	Max			Y	0.110133	0.076439	1.441
1ST	EQ	LinStatic	Max			X	0.059458	0.049828	1.193
1ST	EQ	LinStatic	Max			Y	0.05505	0.037659	1.462
GF	EQ	LinStatic	Max			X	0.014333	0.011774	1.217

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
GF	EQ	LinStatic	Max			Y	0.013839	0.009471	1.461
ROOF	EQ	LinStatic	Min			X	0.088908	0.008401	10.583
ROOF	EQ	LinStatic	Min			Y	0.091708	0.009067	10.115
7TH	EQ	LinStatic	Min			X	0.086021	0.009772	8.803
7TH	EQ	LinStatic	Min			Y	0.086825	0.010028	8.659
6TH	EQ	LinStatic	Min			X	0.080215	0.010412	7.704
6TH	EQ	LinStatic	Min			Y	0.079497	0.01037	7.666
5TH	EQ	LinStatic	Min			X	0.071525	0.010367	6.899
5TH	EQ	LinStatic	Min			Y	0.069826	0.010123	6.898
4TH	EQ	LinStatic	Min			X	0.060141	0.009655	6.229
4TH	EQ	LinStatic	Min			Y	0.058033	0.009301	6.239
3RD	EQ	LinStatic	Min			X	0.046604	0.008302	5.613
3RD	EQ	LinStatic	Min			Y	0.044635	0.007931	5.628
2ND	EQ	LinStatic	Min			X	0.0318	0.006356	5.003
2ND	EQ	LinStatic	Min			Y	0.030412	0.006052	5.025
1ST	EQ	LinStatic	Min			X	0.017068	0.003919	4.355
1ST	EQ	LinStatic	Min			Y	0.016484	0.003745	4.402
GF	EQ	LinStatic	Min			X	0.004587	0.001271	3.608
GF	EQ	LinStatic	Min			Y	0.004614	0.001242	3.715
ROOF	wind	LinStatic	Max			X	0.442768	0.395037	1.121
ROOF	wind	LinStatic	Max			Y	0.443167	0.336835	1.316
7TH	wind	LinStatic	Max			X	0.391494	0.348924	1.122
7TH	wind	LinStatic	Max			Y	0.403697	0.303323	1.331
6TH	wind	LinStatic	Max			X	0.336543	0.299595	1.123
6TH	wind	LinStatic	Max			Y	0.357885	0.26582	1.346
5TH	wind	LinStatic	Max			X	0.278364	0.247412	1.125
5TH	wind	LinStatic	Max			Y	0.305458	0.224311	1.362
4TH	wind	LinStatic	Max			X	0.217856	0.193186	1.128
4TH	wind	LinStatic	Max			Y	0.247106	0.179406	1.377
3RD	wind	LinStatic	Max			X	0.157044	0.138769	1.132
3RD	wind	LinStatic	Max			Y	0.184696	0.132561	1.393
2ND	wind	LinStatic	Max			X	0.099071	0.087046	1.138
2ND	wind	LinStatic	Max			Y	0.121183	0.08569	1.414
1ST	wind	LinStatic	Max			X	0.0502	0.04302	1.167
1ST	wind	LinStatic	Max			Y	0.06192	0.043084	1.437
GF	wind	LinStatic	Max			X	0.012845	0.010585	1.214
GF	wind	LinStatic	Max			Y	0.01592	0.011011	1.446
ROOF	wind	LinStatic	Min			X	0.136344	0.050879	2.68
ROOF	wind	LinStatic	Min			Y	0.390959	0.263346	1.485
7TH	wind	LinStatic	Min			X	0.128871	0.047967	2.687
7TH	wind	LinStatic	Min			Y	0.358213	0.23772	1.507
6TH	wind	LinStatic	Min			X	0.118405	0.043985	2.692
6TH	wind	LinStatic	Min			Y	0.319468	0.208892	1.529
5TH	wind	LinStatic	Min			X	0.104766	0.03893	2.691
5TH	wind	LinStatic	Min			Y	0.274487	0.176869	1.552

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
4TH	wind	LinStatic	Min			X	0.087897	0.032798	2.68
4TH	wind	LinStatic	Min			Y	0.223548	0.141998	1.574
3RD	wind	LinStatic	Min			X	0.068218	0.02571	2.653
3RD	wind	LinStatic	Min			Y	0.168182	0.10536	1.596
2ND	wind	LinStatic	Min			X	0.046693	0.017933	2.604
2ND	wind	LinStatic	Min			Y	0.111279	0.068814	1.617
1ST	wind	LinStatic	Min			X	0.025068	0.010389	2.413
1ST	wind	LinStatic	Min			Y	0.057528	0.035216	1.634
GF	wind	LinStatic	Min			X	0.006783	0.003051	2.223
GF	wind	LinStatic	Min			Y	0.015039	0.009272	1.622
ROOF	1.4D	Combination				X	0.021585	0.011066	1.95
ROOF	1.4D	Combination				Y	0.06544	0.051564	1.269
7TH	1.4D	Combination				X	0.017874	0.009094	1.965
7TH	1.4D	Combination				Y	0.053988	0.042405	1.273
6TH	1.4D	Combination				X	0.014118	0.007168	1.969
6TH	1.4D	Combination				Y	0.042909	0.033742	1.272
5TH	1.4D	Combination				X	0.010632	0.005398	1.97
5TH	1.4D	Combination				Y	0.032557	0.025653	1.269
4TH	1.4D	Combination				X	0.007468	0.003804	1.963
4TH	1.4D	Combination				Y	0.023171	0.018337	1.264
3RD	1.4D	Combination				X	0.00471	0.00242	1.946
3RD	1.4D	Combination				Y	0.015011	0.011991	1.252
2ND	1.4D	Combination				X	0.00245	0.001288	1.902
2ND	1.4D	Combination				Y	0.008342	0.00681	1.225
1ST	1.4D	Combination				X	0.000808	0.000459	1.76
1ST	1.4D	Combination				Y	0.003444	0.002984	1.154
GF	1.4D	Combination				X	0.000137	9.7E-05	1.412
GF	1.4D	Combination				Y	0.000662	0.000609	1.087
ROOF	1.2D+1.6L+.5Lr	Combination				X	0.052112	0.0388	1.343
ROOF	1.2D+1.6L+.5Lr	Combination				Y	0.141602	0.12404	1.142
7TH	1.2D+1.6L+.5Lr	Combination				X	0.043189	0.031991	1.35
7TH	1.2D+1.6L+.5Lr	Combination				Y	0.11677	0.101999	1.145
6TH	1.2D+1.6L+.5Lr	Combination				X	0.034311	0.025375	1.352
6TH	1.2D+1.6L+.5Lr	Combination				Y	0.092801	0.081013	1.146
5TH	1.2D+1.6L+.5Lr	Combination				X	0.026004	0.019188	1.355
5TH	1.2D+1.6L+.5Lr	Combination				Y	0.070358	0.061366	1.147
4TH	1.2D+1.6L+.5Lr	Combination				X	0.018414	0.013563	1.358
4TH	1.2D+1.6L+.5Lr	Combination				Y	0.050008	0.043608	1.147
3RD	1.2D+1.6L+.5Lr	Combination				X	0.011741	0.008656	1.356
3RD	1.2D+1.6L+.5Lr	Combination				Y	0.032331	0.028262	1.144
2ND	1.2D+1.6L+.5Lr	Combination				X	0.006209	0.004632	1.341
2ND	1.2D+1.6L+.5Lr	Combination				Y	0.01791	0.015829	1.131
1ST	1.2D+1.6L+.5Lr	Combination				X	0.002116	0.001703	1.243
1ST	1.2D+1.6L+.5Lr	Combination				Y	0.00732	0.006775	1.081
GF	1.2D+1.6L+.5Lr	Combination				X	0.000345	0.000327	1.055

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
GF	1.2D+1.6L+.5Lr	Combination				Y	0.001345	0.001321	1.018
ROOF	1.2D+1.6Lr+L	Combination				X	0.04265	0.028748	1.484
ROOF	1.2D+1.6Lr+L	Combination				Y	0.115463	0.097124	1.189
7TH	1.2D+1.6Lr+L	Combination				X	0.035281	0.023665	1.491
7TH	1.2D+1.6Lr+L	Combination				Y	0.094971	0.079647	1.192
6TH	1.2D+1.6Lr+L	Combination				X	0.027731	0.018668	1.485
6TH	1.2D+1.6Lr+L	Combination				Y	0.07524	0.063285	1.189
5TH	1.2D+1.6Lr+L	Combination				X	0.020845	0.014061	1.482
5TH	1.2D+1.6Lr+L	Combination				Y	0.056898	0.04795	1.187
4TH	1.2D+1.6Lr+L	Combination				X	0.014649	0.009905	1.479
4TH	1.2D+1.6Lr+L	Combination				Y	0.040354	0.034097	1.184
3RD	1.2D+1.6Lr+L	Combination				X	0.00927	0.006299	1.472
3RD	1.2D+1.6Lr+L	Combination				Y	0.026043	0.022123	1.177
2ND	1.2D+1.6Lr+L	Combination				X	0.004863	0.003355	1.449
2ND	1.2D+1.6Lr+L	Combination				Y	0.014405	0.012416	1.16
1ST	1.2D+1.6Lr+L	Combination				X	0.001639	0.00122	1.343
1ST	1.2D+1.6Lr+L	Combination				Y	0.005887	0.005335	1.104
GF	1.2D+1.6Lr+L	Combination				X	0.000268	0.000237	1.131
GF	1.2D+1.6Lr+L	Combination				Y	0.00109	0.001049	1.039
ROOF	1.2D+1.6Lr+.8W	Combination	Max			X	0.37662	0.326685	1.153
ROOF	1.2D+1.6Lr+.8W	Combination	Max			Y	0.386989	0.317424	1.219
7TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.331676	0.287862	1.152
7TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.349251	0.281824	1.239
6TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.283509	0.246447	1.15
6TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.307578	0.243822	1.261
5TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.233265	0.202972	1.149
5TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.260735	0.203115	1.284
4TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.181605	0.158065	1.149
4TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.209562	0.16042	1.306
3RD	1.2D+1.6Lr+.8W	Combination	Max			X	0.130192	0.113228	1.15
3RD	1.2D+1.6Lr+.8W	Combination	Max			Y	0.155695	0.116819	1.333
2ND	1.2D+1.6Lr+.8W	Combination	Max			X	0.081599	0.070799	1.153
2ND	1.2D+1.6Lr+.8W	Combination	Max			Y	0.101642	0.074629	1.362
1ST	1.2D+1.6Lr+.8W	Combination	Max			X	0.040923	0.03482	1.175
1ST	1.2D+1.6Lr+.8W	Combination	Max			Y	0.051795	0.037147	1.394
GF	1.2D+1.6Lr+.8W	Combination	Max			X	0.010404	0.008553	1.216
GF	1.2D+1.6Lr+.8W	Combination	Max			Y	0.013235	0.009358	1.414
ROOF	1.2D+1.6Lr+.8W	Combination	Min			X	0.08667	0.027302	3.174
ROOF	1.2D+1.6Lr+.8W	Combination	Min			Y	0.280312	0.16272	1.723
7TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.084616	0.028135	3.008
7TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.260277	0.151011	1.724
6TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.08045	0.028026	2.871
6TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.234305	0.135947	1.724
5TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.073239	0.026102	2.806
5TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.203221	0.117829	1.725

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
4TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.062997	0.022723	2.772
4TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.166961	0.096703	1.727
3RD	1.2D+1.6Lr+.8W	Combination	Min			X	0.050018	0.018356	2.725
3RD	1.2D+1.6Lr+.8W	Combination	Min			Y	0.126607	0.073258	1.728
2ND	1.2D+1.6Lr+.8W	Combination	Min			X	0.035013	0.013185	2.656
2ND	1.2D+1.6Lr+.8W	Combination	Min			Y	0.084327	0.048799	1.728
1ST	1.2D+1.6Lr+.8W	Combination	Min			X	0.019291	0.007907	2.44
1ST	1.2D+1.6Lr+.8W	Combination	Min			Y	0.043763	0.025439	1.72
GF	1.2D+1.6Lr+.8W	Combination	Min			X	0.005298	0.002354	2.251
GF	1.2D+1.6Lr+.8W	Combination	Min			Y	0.011532	0.006862	1.681
ROOF	1.2D+1.6Lr-.8W	Combination	Max			X	0.131481	0.051358	2.56
ROOF	1.2D+1.6Lr-.8W	Combination	Max			Y	0.345223	0.25738	1.341
7TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.121577	0.047096	2.581
7TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.312864	0.228673	1.368
6TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.108998	0.04196	2.598
6TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.276844	0.198149	1.397
5TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.094386	0.036186	2.608
5TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.235959	0.165161	1.429
4TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.077637	0.029754	2.609
4TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.190715	0.130494	1.461
3RD	1.2D+1.6Lr-.8W	Combination	Max			X	0.05913	0.02278	2.596
3RD	1.2D+1.6Lr-.8W	Combination	Max			Y	0.142484	0.095318	1.495
2ND	1.2D+1.6Lr-.8W	Combination	Max			X	0.039696	0.015508	2.56
2ND	1.2D+1.6Lr-.8W	Combination	Max			Y	0.093719	0.061304	1.529
1ST	1.2D+1.6Lr-.8W	Combination	Max			X	0.020818	0.008715	2.389
1ST	1.2D+1.6Lr-.8W	Combination	Max			Y	0.048282	0.030906	1.562
GF	1.2D+1.6Lr-.8W	Combination	Max			X	0.005554	0.002526	2.199
GF	1.2D+1.6Lr-.8W	Combination	Max			Y	0.01253	0.007973	1.571
ROOF	1.2D+1.6Lr-.8W	Combination	Min			X	0.331809	0.305375	1.087
ROOF	1.2D+1.6Lr-.8W	Combination	Min			Y	0.322078	0.221511	1.454
7TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.294715	0.270416	1.09
7TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.296664	0.203494	1.458
6TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.254961	0.232904	1.095
6TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.265038	0.181489	1.46
5TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.212117	0.192887	1.1
5TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.227997	0.155783	1.464
4TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.166965	0.151033	1.105
4TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.185808	0.126629	1.467
3RD	1.2D+1.6Lr-.8W	Combination	Min			X	0.121079	0.108803	1.113
3RD	1.2D+1.6Lr-.8W	Combination	Min			Y	0.139819	0.095019	1.471
2ND	1.2D+1.6Lr-.8W	Combination	Min			X	0.076916	0.068475	1.123
2ND	1.2D+1.6Lr-.8W	Combination	Min			Y	0.09225	0.062475	1.477
1ST	1.2D+1.6Lr-.8W	Combination	Min			X	0.039397	0.034012	1.158
1ST	1.2D+1.6Lr-.8W	Combination	Min			Y	0.047276	0.031788	1.487
GF	1.2D+1.6Lr-.8W	Combination	Min			X	0.010149	0.008383	1.211

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
GF	1.2D+1.6Lr-.8W	Combination	Min			Y	0.012237	0.00826	1.482
ROOF	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.748394	0.660004	1.134
ROOF	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.787749	0.633476	1.244
7TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.659499	0.581305	1.135
7TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.710326	0.563027	1.262
6TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.564706	0.497589	1.135
6TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.623805	0.487053	1.281
5TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.465224	0.409635	1.136
5TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.527528	0.405694	1.3
4TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.362586	0.318827	1.137
4TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.423002	0.320336	1.32
3RD	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.260183	0.228235	1.14
3RD	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.313547	0.233478	1.343
2ND	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.163211	0.14259	1.145
2ND	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.204202	0.149029	1.37
1ST	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.08191	0.070045	1.169
1ST	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.103787	0.074092	1.401
GF	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.020814	0.017172	1.212
GF	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.026465	0.01864	1.42
ROOF	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.178185	0.05139	3.467
ROOF	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.546854	0.326813	1.673
7TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.173085	0.053499	3.235
7TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.508731	0.302642	1.681
6TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.163211	0.052139	3.13
6TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.45996	0.272485	1.688
5TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.147784	0.048512	3.046
5TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.400385	0.236195	1.695
4TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.126618	0.042748	2.962
4TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.330045	0.193909	1.702
3RD	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.100236	0.034932	2.869
3RD	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.251058	0.14697	1.708
2ND	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.070012	0.025377	2.759
2ND	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.167737	0.097972	1.712
1ST	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.038518	0.01541	2.5
1ST	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.087329	0.051132	1.708
GF	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.010591	0.004646	2.28
GF	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.023069	0.01381	1.671
ROOF	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.258116	0.10935	2.36
ROOF	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.704217	0.515096	1.367
7TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.239302	0.099773	2.398
7TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.637551	0.458062	1.392
6TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.215685	0.088613	2.434
6TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.562337	0.395968	1.42
5TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.187466	0.076064	2.465
5TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.477975	0.329786	1.449

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
4TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.154652	0.062207	2.486
4TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.385308	0.260484	1.479
3RD	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.118061	0.04734	2.494
3RD	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.287124	0.190182	1.51
2ND	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.079405	0.032008	2.481
2ND	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.188355	0.122233	1.541
1ST	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.0417	0.017836	2.338
1ST	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.096761	0.061559	1.572
GF	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.011114	0.005118	2.171
GF	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.025054	0.015861	1.58
ROOF	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.668463	0.604116	1.107
ROOF	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.630386	0.444396	1.419
7TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.593282	0.535252	1.108
7TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.581505	0.407607	1.427
6TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.512232	0.461115	1.111
6TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.521427	0.36357	1.434
5TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.425541	0.382083	1.114
5TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.449938	0.312102	1.442
4TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.334552	0.299368	1.118
4TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.367739	0.253762	1.449
3RD	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.242358	0.215827	1.123
3RD	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.277481	0.190491	1.457
2ND	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.153818	0.135958	1.131
2ND	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.183584	0.125179	1.467
1ST	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.078729	0.067619	1.164
1ST	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.094356	0.063777	1.479
GF	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.020292	0.0167	1.215
GF	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.02448	0.016596	1.475
ROOF	1.246D+1E+1L	Combination	Max			X	0.623153	0.548871	1.135
ROOF	1.246D+1E+1L	Combination	Max			Y	0.518666	0.427864	1.212
7TH	1.246D+1E+1L	Combination	Max			X	0.547062	0.479155	1.142
7TH	1.246D+1E+1L	Combination	Max			Y	0.463067	0.375273	1.234
6TH	1.246D+1E+1L	Combination	Max			X	0.465542	0.405458	1.148
6TH	1.246D+1E+1L	Combination	Max			Y	0.401354	0.319378	1.257
5TH	1.246D+1E+1L	Combination	Max			X	0.380082	0.329027	1.155
5TH	1.246D+1E+1L	Combination	Max			Y	0.333948	0.260869	1.28
4TH	1.246D+1E+1L	Combination	Max			X	0.292769	0.251757	1.163
4TH	1.246D+1E+1L	Combination	Max			Y	0.262494	0.201211	1.305
3RD	1.246D+1E+1L	Combination	Max			X	0.207134	0.176759	1.172
3RD	1.246D+1E+1L	Combination	Max			Y	0.189969	0.142761	1.331
2ND	1.246D+1E+1L	Combination	Max			X	0.127893	0.10814	1.183
2ND	1.246D+1E+1L	Combination	Max			Y	0.120562	0.088663	1.36
1ST	1.246D+1E+1L	Combination	Max			X	0.061053	0.051052	1.196
1ST	1.246D+1E+1L	Combination	Max			Y	0.059818	0.042915	1.394
GF	1.246D+1E+1L	Combination	Max			X	0.014596	0.012013	1.215

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
GF	1.246D+1E+1L	Combination	Max			Y	0.014843	0.010505	1.413
ROOF	1.246D+1E+1L	Combination	Min			X	0.088535	0.019541	4.531
ROOF	1.246D+1E+1L	Combination	Min			Y	0.183821	0.085993	2.138
7TH	1.246D+1E+1L	Combination	Min			X	0.079839	0.013263	6.02
7TH	1.246D+1E+1L	Combination	Min			Y	0.157753	0.068195	2.313
6TH	1.246D+1E+1L	Combination	Min			X	0.069922	0.007865	8.891
6TH	1.246D+1E+1L	Combination	Min			Y	0.131124	0.051779	2.532
5TH	1.246D+1E+1L	Combination	Min			Y	0.104491	0.036991	2.825
4TH	1.246D+1E+1L	Combination	Min			Y	0.078494	0.024221	3.241
3RD	1.246D+1E+1L	Combination	Min			X	0.037699	0.002062	18.284
3RD	1.246D+1E+1L	Combination	Min			Y	0.054054	0.013834	3.907
2ND	1.246D+1E+1L	Combination	Min			X	0.027099	0.003016	8.986
2ND	1.246D+1E+1L	Combination	Min			Y	0.032327	0.006172	5.238
1ST	1.246D+1E+1L	Combination	Min			X	0.015473	0.002694	5.742
1ST	1.246D+1E+1L	Combination	Min			Y	0.01474	0.001512	9.747
GF	1.246D+1E+1L	Combination	Min			X	0.004325	0.001033	4.188
GF	1.246D+1E+1L	Combination	Min			Y	0.00361	0.000207	17.429
ROOF	1.246D-1E+1L	Combination	Max			X	0.128363	0.036343	3.532
ROOF	1.246D-1E+1L	Combination	Max			Y	0.171581	0.104126	1.648
7TH	1.246D-1E+1L	Combination	Max			X	0.118729	0.032807	3.619
7TH	1.246D-1E+1L	Combination	Max			Y	0.152287	0.08825	1.726
6TH	1.246D-1E+1L	Combination	Max			X	0.106237	0.028688	3.703
6TH	1.246D-1E+1L	Combination	Max			Y	0.131429	0.072519	1.812
5TH	1.246D-1E+1L	Combination	Max			X	0.091259	0.024191	3.773
5TH	1.246D-1E+1L	Combination	Max			Y	0.109144	0.057237	1.907
4TH	1.246D-1E+1L	Combination	Max			X	0.074116	0.01943	3.815
4TH	1.246D-1E+1L	Combination	Max			Y	0.086013	0.042823	2.009
3RD	1.246D-1E+1L	Combination	Max			X	0.055509	0.014543	3.817
3RD	1.246D-1E+1L	Combination	Max			Y	0.062885	0.029696	2.118
2ND	1.246D-1E+1L	Combination	Max			X	0.036502	0.009696	3.765
2ND	1.246D-1E+1L	Combination	Max			Y	0.04084	0.018277	2.235
1ST	1.246D-1E+1L	Combination	Max			X	0.018663	0.005144	3.628
1ST	1.246D-1E+1L	Combination	Max			Y	0.021252	0.009001	2.361
GF	1.246D-1E+1L	Combination	Max			X	0.00485	0.00151	3.212
GF	1.246D-1E+1L	Combination	Max			Y	0.005617	0.002277	2.467
ROOF	1.246D-1E+1L	Combination	Min			X	0.544243	0.492987	1.104
ROOF	1.246D-1E+1L	Combination	Min			Y	0.358921	0.237745	1.51
7TH	1.246D-1E+1L	Combination	Min			X	0.481645	0.433085	1.112
7TH	1.246D-1E+1L	Combination	Min			Y	0.332143	0.218827	1.518
6TH	1.246D-1E+1L	Combination	Min			X	0.413499	0.368905	1.121
6TH	1.246D-1E+1L	Combination	Min			Y	0.29749	0.19508	1.525
5TH	1.246D-1E+1L	Combination	Min			X	0.340614	0.30138	1.13
5TH	1.246D-1E+1L	Combination	Min			Y	0.255314	0.16664	1.532
4TH	1.246D-1E+1L	Combination	Min			X	0.264819	0.232208	1.14
4TH	1.246D-1E+1L	Combination	Min			Y	0.206533	0.134168	1.539

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
3RD	1.246D-1E+1L	Combination	Min			X	0.189324	0.164278	1.152
3RD	1.246D-1E+1L	Combination	Min			Y	0.153469	0.099231	1.547
2ND	1.246D-1E+1L	Combination	Min			X	0.11849	0.10146	1.168
2ND	1.246D-1E+1L	Combination	Min			Y	0.099705	0.064215	1.553
1ST	1.246D-1E+1L	Combination	Min			X	0.057863	0.048603	1.191
1ST	1.246D-1E+1L	Combination	Min			Y	0.050281	0.032402	1.552
GF	1.246D-1E+1L	Combination	Min			X	0.014071	0.011536	1.22
GF	1.246D-1E+1L	Combination	Min			Y	0.012836	0.008436	1.522
ROOF	0.9D+1.6W	Combination	Max			X	0.722304	0.639174	1.13
ROOF	0.9D+1.6W	Combination	Max			Y	0.733296	0.572084	1.282
7TH	0.9D+1.6W	Combination	Max			X	0.637881	0.564124	1.131
7TH	0.9D+1.6W	Combination	Max			Y	0.66573	0.512578	1.299
6TH	0.9D+1.6W	Combination	Max			X	0.547545	0.48396	1.131
6TH	0.9D+1.6W	Combination	Max			Y	0.588414	0.447003	1.316
5TH	0.9D+1.6W	Combination	Max			X	0.452218	0.399329	1.132
5TH	0.9D+1.6W	Combination	Max			Y	0.500785	0.375389	1.334
4TH	0.9D+1.6W	Combination	Max			X	0.35337	0.311543	1.134
4TH	0.9D+1.6W	Combination	Max			Y	0.404051	0.298837	1.352
3RD	0.9D+1.6W	Combination	Max			X	0.254298	0.223587	1.137
3RD	0.9D+1.6W	Combination	Max			Y	0.301281	0.219765	1.371
2ND	0.9D+1.6W	Combination	Max			X	0.160089	0.140102	1.143
2ND	0.9D+1.6W	Combination	Max			Y	0.197285	0.14137	1.396
1ST	0.9D+1.6W	Combination	Max			X	0.080839	0.069127	1.169
1ST	0.9D+1.6W	Combination	Max			Y	0.100694	0.070819	1.422
GF	0.9D+1.6W	Combination	Max			X	0.020641	0.016998	1.214
GF	0.9D+1.6W	Combination	Max			Y	0.02583	0.018006	1.435
ROOF	0.9D+1.6W	Combination	Min			X	0.204275	0.073787	2.768
ROOF	0.9D+1.6W	Combination	Min			Y	0.601306	0.388205	1.549
7TH	0.9D+1.6W	Combination	Min			X	0.194703	0.0709	2.746
7TH	0.9D+1.6W	Combination	Min			Y	0.553326	0.353091	1.567
6TH	0.9D+1.6W	Combination	Min			X	0.180372	0.065768	2.743
6TH	0.9D+1.6W	Combination	Min			Y	0.495351	0.312536	1.585
5TH	0.9D+1.6W	Combination	Min			X	0.16079	0.058818	2.734
5TH	0.9D+1.6W	Combination	Min			Y	0.427128	0.2665	1.603
4TH	0.9D+1.6W	Combination	Min			X	0.135834	0.050032	2.715
4TH	0.9D+1.6W	Combination	Min			Y	0.348996	0.215409	1.62
3RD	0.9D+1.6W	Combination	Min			X	0.106121	0.03958	2.681
3RD	0.9D+1.6W	Combination	Min			Y	0.263324	0.160867	1.637
2ND	0.9D+1.6W	Combination	Min			X	0.073133	0.027865	2.625
2ND	0.9D+1.6W	Combination	Min			Y	0.174654	0.105725	1.652
1ST	0.9D+1.6W	Combination	Min			X	0.03959	0.016328	2.425
1ST	0.9D+1.6W	Combination	Min			Y	0.090423	0.054427	1.661
GF	0.9D+1.6W	Combination	Min			X	0.010764	0.00482	2.233
GF	0.9D+1.6W	Combination	Min			Y	0.023704	0.014444	1.641
ROOF	0.9D-1.6W	Combination	Max			X	0.232026	0.08852	2.621

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
ROOF	0.9D-1.6W	Combination	Max			Y	0.649764	0.454488	1.43
7TH	0.9D-1.6W	Combination	Max			X	0.217684	0.082593	2.636
7TH	0.9D-1.6W	Combination	Max			Y	0.592956	0.407612	1.455
6TH	0.9D-1.6W	Combination	Max			X	0.198524	0.074985	2.648
6TH	0.9D-1.6W	Combination	Max			Y	0.526946	0.355918	1.481
5TH	0.9D-1.6W	Combination	Max			X	0.17446	0.065758	2.653
5TH	0.9D-1.6W	Combination	Max			Y	0.451232	0.299481	1.507
4TH	0.9D-1.6W	Combination	Max			X	0.145436	0.054922	2.648
4TH	0.9D-1.6W	Combination	Max			Y	0.366357	0.238985	1.533
3RD	0.9D-1.6W	Combination	Max			X	0.112176	0.042692	2.628
3RD	0.9D-1.6W	Combination	Max			Y	0.274858	0.176284	1.559
2ND	0.9D-1.6W	Combination	Max			X	0.076283	0.029521	2.584
2ND	0.9D-1.6W	Combination	Max			Y	0.181438	0.11448	1.585
1ST	0.9D-1.6W	Combination	Max			X	0.040628	0.016918	2.402
1ST	0.9D-1.6W	Combination	Max			Y	0.093667	0.058264	1.608
GF	0.9D-1.6W	Combination	Max			X	0.010941	0.004945	2.213
GF	0.9D-1.6W	Combination	Max			Y	0.024419	0.015226	1.604
ROOF	0.9D-1.6W	Combination	Min			X	0.694553	0.624945	1.111
ROOF	0.9D-1.6W	Combination	Min			Y	0.684838	0.505787	1.354
7TH	0.9D-1.6W	Combination	Min			X	0.6149	0.552432	1.113
7TH	0.9D-1.6W	Combination	Min			Y	0.626101	0.458057	1.367
6TH	0.9D-1.6W	Combination	Min			X	0.529393	0.474744	1.115
6TH	0.9D-1.6W	Combination	Min			Y	0.556818	0.40362	1.38
5TH	0.9D-1.6W	Combination	Min			X	0.438547	0.392388	1.118
5TH	0.9D-1.6W	Combination	Min			Y	0.476681	0.342407	1.392
4TH	0.9D-1.6W	Combination	Min			X	0.343768	0.306652	1.121
4TH	0.9D-1.6W	Combination	Min			Y	0.38669	0.275261	1.405
3RD	0.9D-1.6W	Combination	Min			X	0.248243	0.220475	1.126
3RD	0.9D-1.6W	Combination	Min			Y	0.289747	0.204389	1.418
2ND	0.9D-1.6W	Combination	Min			X	0.156939	0.138446	1.134
2ND	0.9D-1.6W	Combination	Min			Y	0.1905	0.132837	1.434
1ST	0.9D-1.6W	Combination	Min			X	0.0798	0.068537	1.164
1ST	0.9D-1.6W	Combination	Min			Y	0.097449	0.06705	1.453
GF	0.9D-1.6W	Combination	Min			X	0.020464	0.016873	1.213
GF	0.9D-1.6W	Combination	Min			Y	0.025115	0.017231	1.458
ROOF	.854D+E	Combination	Max			X	0.596865	0.52768	1.131
ROOF	.854D+E	Combination	Max			Y	0.461784	0.364258	1.268
7TH	.854D+E	Combination	Max			X	0.525257	0.461668	1.138
7TH	.854D+E	Combination	Max			Y	0.416407	0.322918	1.29
6TH	.854D+E	Combination	Max			X	0.448132	0.391554	1.144
6TH	.854D+E	Combination	Max			Y	0.364412	0.277811	1.312
5TH	.854D+E	Combination	Max			X	0.366834	0.318497	1.152
5TH	.854D+E	Combination	Max			Y	0.306067	0.229403	1.334
4TH	.854D+E	Combination	Max			X	0.28335	0.244303	1.16
4TH	.854D+E	Combination	Max			Y	0.242751	0.178875	1.357

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
3RD	.854D+E	Combination	Max			X	0.201102	0.171995	1.169
3RD	.854D+E	Combination	Max			Y	0.177191	0.12831	1.381
2ND	.854D+E	Combination	Max			X	0.124686	0.105586	1.181
2ND	.854D+E	Combination	Max			Y	0.113352	0.080593	1.406
1ST	.854D+E	Combination	Max			X	0.059951	0.050108	1.196
1ST	.854D+E	Combination	Max			Y	0.056589	0.039479	1.433
GF	.854D+E	Combination	Max			X	0.014417	0.011834	1.218
GF	.854D+E	Combination	Max			Y	0.014178	0.009842	1.441
ROOF	.854D+E	Combination	Min			Y	0.113493	0.022387	5.069
7TH	.854D+E	Combination	Min			X	0.075117	0.004225	17.78
7TH	.854D+E	Combination	Min			Y	0.099702	0.01584	6.294
6TH	.854D+E	Combination	Min			X	0.071603	0.006039	11.857
6TH	.854D+E	Combination	Min			Y	0.084932	0.010213	8.316
5TH	.854D+E	Combination	Min			X	0.065039	0.007074	9.194
5TH	.854D+E	Combination	Min			Y	0.06944	0.005525	12.568
4TH	.854D+E	Combination	Min			X	0.055585	0.007335	7.578
4TH	.854D+E	Combination	Min			Y	0.053565	0.001885	28.422
3RD	.854D+E	Combination	Min			X	0.043731	0.006826	6.407
2ND	.854D+E	Combination	Min			X	0.030306	0.00557	5.441
2ND	.854D+E	Combination	Min			Y	0.027193	0.001899	14.323
1ST	.854D+E	Combination	Min			X	0.016575	0.003639	4.555
1ST	.854D+E	Combination	Min			Y	0.014944	0.001924	7.765
GF	.854D+E	Combination	Min			X	0.004504	0.001212	3.716
GF	.854D+E	Combination	Min			Y	0.004275	0.000871	4.909
ROOF	.854D-E	Combination	Max			X	0.102074	0.015151	6.737
ROOF	.854D-E	Combination	Max			Y	0.114698	0.040521	2.831
7TH	.854D-E	Combination	Max			X	0.096924	0.015319	6.327
7TH	.854D-E	Combination	Max			Y	0.105627	0.035895	2.943
6TH	.854D-E	Combination	Max			X	0.088827	0.014785	6.008
6TH	.854D-E	Combination	Max			Y	0.094488	0.030952	3.053
5TH	.854D-E	Combination	Max			X	0.078011	0.01366	5.711
5TH	.854D-E	Combination	Max			Y	0.081263	0.025771	3.153
4TH	.854D-E	Combination	Max			X	0.064696	0.011975	5.402
4TH	.854D-E	Combination	Max			Y	0.066269	0.020486	3.235
3RD	.854D-E	Combination	Max			X	0.049477	0.009779	5.06
3RD	.854D-E	Combination	Max			Y	0.050107	0.015245	3.287
2ND	.854D-E	Combination	Max			X	0.033295	0.007142	4.662
2ND	.854D-E	Combination	Max			Y	0.033631	0.010206	3.295
1ST	.854D-E	Combination	Max			X	0.01756	0.004199	4.182
1ST	.854D-E	Combination	Max			Y	0.018023	0.005565	3.239
GF	.854D-E	Combination	Max			X	0.004671	0.001331	3.51
GF	.854D-E	Combination	Max			Y	0.004953	0.001613	3.07
ROOF	.854D-E	Combination	Min			X	0.570531	0.514179	1.11
ROOF	.854D-E	Combination	Min			Y	0.415804	0.30135	1.38
7TH	.854D-E	Combination	Min			X	0.50345	0.450573	1.117

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	.854D-E	Combination	Min			Y	0.378803	0.271183	1.397
6TH	.854D-E	Combination	Min			X	0.430908	0.382809	1.126
6TH	.854D-E	Combination	Min			Y	0.334432	0.236646	1.413
5TH	.854D-E	Combination	Min			X	0.353862	0.311911	1.134
5TH	.854D-E	Combination	Min			Y	0.283195	0.198107	1.43
4TH	.854D-E	Combination	Min			X	0.274239	0.239662	1.144
4TH	.854D-E	Combination	Min			Y	0.226277	0.156504	1.446
3RD	.854D-E	Combination	Min			X	0.195356	0.169042	1.156
3RD	.854D-E	Combination	Min			Y	0.166247	0.113682	1.462
2ND	.854D-E	Combination	Min			X	0.121697	0.104014	1.17
2ND	.854D-E	Combination	Min			Y	0.106914	0.072285	1.479
1ST	.854D-E	Combination	Min			X	0.058966	0.049548	1.19
1ST	.854D-E	Combination	Min			Y	0.05351	0.035838	1.493
GF	.854D-E	Combination	Min			X	0.01425	0.011715	1.216
GF	.854D-E	Combination	Min			Y	0.0135	0.009099	1.484
ROOF	D+L	Combination				X	0.035662	0.025998	1.372
ROOF	D+L	Combination				Y	0.098748	0.085999	1.148
7TH	D+L	Combination				X	0.029568	0.021437	1.379
7TH	D+L	Combination				Y	0.081497	0.070772	1.152
6TH	D+L	Combination				X	0.023541	0.017017	1.383
6TH	D+L	Combination				Y	0.064826	0.05622	1.153
5TH	D+L	Combination				X	0.017866	0.012875	1.388
5TH	D+L	Combination				Y	0.049191	0.042607	1.155
4TH	D+L	Combination				X	0.012663	0.009106	1.391
4TH	D+L	Combination				Y	0.034991	0.0303	1.155
3RD	D+L	Combination				X	0.008077	0.005815	1.389
3RD	D+L	Combination				Y	0.022642	0.019658	1.152
2ND	D+L	Combination				X	0.004271	0.003114	1.372
2ND	D+L	Combination				Y	0.012554	0.011028	1.138
1ST	D+L	Combination				X	0.001453	0.001144	1.27
1ST	D+L	Combination				Y	0.00514	0.004733	1.086
GF	D+L	Combination				X	0.000238	0.000222	1.076
GF	D+L	Combination				Y	0.00095	0.000928	1.024
ROOF	D+.5L	Combination				X	0.02554	0.016951	1.507
ROOF	D+.5L	Combination				Y	0.072745	0.061415	1.184
7TH	D+.5L	Combination				X	0.021168	0.013967	1.516
7TH	D+.5L	Combination				Y	0.06003	0.050531	1.188
6TH	D+.5L	Combination				X	0.016813	0.011069	1.519
6TH	D+.5L	Combination				Y	0.047738	0.040161	1.189
5TH	D+.5L	Combination				X	0.01273	0.008365	1.522
5TH	D+.5L	Combination				Y	0.036223	0.030465	1.189
4TH	D+.5L	Combination				X	0.008999	0.005912	1.522
4TH	D+.5L	Combination				Y	0.025771	0.021699	1.188
3RD	D+.5L	Combination				X	0.005721	0.003772	1.517
3RD	D+.5L	Combination				Y	0.016682	0.014111	1.182

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	D+.5L	Combination				X	0.003011	0.002017	1.493
2ND	D+.5L	Combination				Y	0.009257	0.007946	1.165
1ST	D+.5L	Combination				X	0.001015	0.000736	1.379
1ST	D+.5L	Combination				Y	0.0038	0.003432	1.107
GF	D+.5L	Combination				X	0.000168	0.000146	1.156
GF	D+.5L	Combination				Y	0.000711	0.000681	1.044
ROOF	D+.5L+.7W	Combination	Max			X	0.335477	0.293477	1.143
ROOF	D+.5L+.7W	Combination	Max			Y	0.360302	0.2972	1.212
7TH	D+.5L+.7W	Combination	Max			X	0.295213	0.258213	1.143
7TH	D+.5L+.7W	Combination	Max			Y	0.323619	0.262857	1.231
6TH	D+.5L+.7W	Combination	Max			X	0.252393	0.220785	1.143
6TH	D+.5L+.7W	Combination	Max			Y	0.283103	0.226234	1.251
5TH	D+.5L+.7W	Combination	Max			X	0.207585	0.181554	1.143
5TH	D+.5L+.7W	Combination	Max			Y	0.238528	0.187483	1.272
4TH	D+.5L+.7W	Combination	Max			X	0.161498	0.141142	1.144
4TH	D+.5L+.7W	Combination	Max			Y	0.190601	0.147283	1.294
3RD	D+.5L+.7W	Combination	Max			X	0.115652	0.10091	1.146
3RD	D+.5L+.7W	Combination	Max			Y	0.140828	0.106692	1.32
2ND	D+.5L+.7W	Combination	Max			X	0.072361	0.062949	1.15
2ND	D+.5L+.7W	Combination	Max			Y	0.091463	0.067781	1.349
1ST	D+.5L+.7W	Combination	Max			X	0.036155	0.03085	1.172
1ST	D+.5L+.7W	Combination	Max			Y	0.046407	0.033549	1.383
GF	D+.5L+.7W	Combination	Max			X	0.00916	0.007555	1.212
GF	D+.5L+.7W	Combination	Max			Y	0.011796	0.008386	1.407
ROOF	D+.5L+.7W	Combination	Min			X	0.069901	0.016766	4.169
ROOF	D+.5L+.7W	Combination	Min			Y	0.223586	0.122927	1.819
7TH	D+.5L+.7W	Combination	Min			X	0.069042	0.018682	3.696
7TH	D+.5L+.7W	Combination	Min			Y	0.209718	0.115873	1.81
6TH	D+.5L+.7W	Combination	Min			X	0.066071	0.019624	3.367
6TH	D+.5L+.7W	Combination	Min			Y	0.191044	0.106064	1.801
5TH	D+.5L+.7W	Combination	Min			X	0.060606	0.018886	3.209
5TH	D+.5L+.7W	Combination	Min			Y	0.167434	0.093343	1.794
4TH	D+.5L+.7W	Combination	Min			X	0.052529	0.017047	3.081
4TH	D+.5L+.7W	Combination	Min			Y	0.138857	0.0777	1.787
3RD	D+.5L+.7W	Combination	Min			X	0.042032	0.014225	2.955
3RD	D+.5L+.7W	Combination	Min			Y	0.106187	0.059641	1.78
2ND	D+.5L+.7W	Combination	Min			X	0.029674	0.010536	2.816
2ND	D+.5L+.7W	Combination	Min			Y	0.07126	0.040224	1.772
1ST	D+.5L+.7W	Combination	Min			X	0.016533	0.006537	2.529
1ST	D+.5L+.7W	Combination	Min			Y	0.037206	0.021219	1.753
GF	D+.5L+.7W	Combination	Min			X	0.00458	0.00199	2.301
GF	D+.5L+.7W	Combination	Min			Y	0.009876	0.005809	1.7
ROOF	D+.5L-.7W	Combination	Max			X	0.120981	0.052566	2.301
ROOF	D+.5L-.7W	Combination	Max			Y	0.323757	0.244913	1.322
7TH	D+.5L-.7W	Combination	Max			X	0.111377	0.047543	2.343

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	D+.5L-.7W	Combination	Max			Y	0.291781	0.216549	1.347
6TH	D+.5L-.7W	Combination	Max			X	0.099696	0.041858	2.382
6TH	D+.5L-.7W	Combination	Max			Y	0.256211	0.186385	1.375
5TH	D+.5L-.7W	Combination	Max			X	0.086066	0.035617	2.416
5TH	D+.5L-.7W	Combination	Max			Y	0.216848	0.154273	1.406
4TH	D+.5L-.7W	Combination	Max			X	0.070526	0.02887	2.443
4TH	D+.5L-.7W	Combination	Max			Y	0.17411	0.121097	1.438
3RD	D+.5L-.7W	Combination	Max			X	0.053473	0.021769	2.456
3RD	D+.5L-.7W	Combination	Max			Y	0.129268	0.087863	1.471
2ND	D+.5L-.7W	Combination	Max			X	0.035696	0.01457	2.45
2ND	D+.5L-.7W	Combination	Max			Y	0.08453	0.056116	1.506
1ST	D+.5L-.7W	Combination	Max			X	0.018563	0.008008	2.318
1ST	D+.5L-.7W	Combination	Max			Y	0.043333	0.028083	1.543
GF	D+.5L-.7W	Combination	Max			X	0.004916	0.002281	2.155
GF	D+.5L-.7W	Combination	Max			Y	0.011178	0.007172	1.559
ROOF	D+.5L-.7W	Combination	Min			X	0.284398	0.259575	1.096
ROOF	D+.5L-.7W	Combination	Min			Y	0.260131	0.174369	1.492
7TH	D+.5L-.7W	Combination	Min			X	0.252878	0.23028	1.098
7TH	D+.5L-.7W	Combination	Min			Y	0.241557	0.161796	1.493
6TH	D+.5L-.7W	Combination	Min			X	0.218768	0.198648	1.101
6TH	D+.5L-.7W	Combination	Min			Y	0.217936	0.145913	1.494
5TH	D+.5L-.7W	Combination	Min			X	0.182125	0.164823	1.105
5TH	D+.5L-.7W	Combination	Min			Y	0.189113	0.126553	1.494
4TH	D+.5L-.7W	Combination	Min			X	0.1435	0.129319	1.11
4TH	D+.5L-.7W	Combination	Min			Y	0.155348	0.103885	1.495
3RD	D+.5L-.7W	Combination	Min			X	0.10421	0.093367	1.116
3RD	D+.5L-.7W	Combination	Min			Y	0.117747	0.078681	1.497
2ND	D+.5L-.7W	Combination	Min			X	0.066339	0.058915	1.126
2ND	D+.5L-.7W	Combination	Min			Y	0.078193	0.052185	1.498
1ST	D+.5L-.7W	Combination	Min			X	0.034125	0.029378	1.162
1ST	D+.5L-.7W	Combination	Min			Y	0.04028	0.026769	1.505
GF	D+.5L-.7W	Combination	Min			X	0.008824	0.007264	1.215
GF	D+.5L-.7W	Combination	Min			Y	0.010493	0.00703	1.493
ROOF	DConS1	Combination				X	0.036113	0.017763	2.033
ROOF	DConS1	Combination				Y	0.093278	0.069072	1.35
7TH	DConS1	Combination				X	0.030056	0.014692	2.046
7TH	DConS1	Combination				Y	0.077005	0.056738	1.357
6TH	DConS1	Combination				X	0.02389	0.011671	2.047
6TH	DConS1	Combination				Y	0.061244	0.045125	1.357
5TH	DConS1	Combination				X	0.018137	0.008873	2.044
5TH	DConS1	Combination				Y	0.046514	0.034293	1.356
4TH	DConS1	Combination				X	0.012882	0.006333	2.034
4TH	DConS1	Combination				Y	0.033148	0.024508	1.353
3RD	DConS1	Combination				X	0.008265	0.004105	2.013
3RD	DConS1	Combination				Y	0.021514	0.016026	1.342

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	DConS1	Combination				X	0.004441	0.002256	1.969
2ND	DConS1	Combination				Y	0.01199	0.009107	1.317
1ST	DConS1	Combination				X	0.001612	0.000871	1.851
1ST	DConS1	Combination				Y	0.004977	0.003999	1.245
GF	DConS1	Combination				X	0.000284	0.000184	1.548
GF	DConS1	Combination				Y	0.000957	0.000824	1.161
ROOF	DConS2	Combination				X	0.063345	0.044174	1.434
ROOF	DConS2	Combination				Y	0.163161	0.137873	1.183
7TH	DConS2	Combination				X	0.052642	0.0365	1.442
7TH	DConS2	Combination				Y	0.134698	0.113404	1.188
6TH	DConS2	Combination				X	0.042008	0.029038	1.447
6TH	DConS2	Combination				Y	0.107178	0.090069	1.19
5TH	DConS2	Combination				X	0.03198	0.022036	1.451
5TH	DConS2	Combination				Y	0.081365	0.068248	1.192
4TH	DConS2	Combination				X	0.022768	0.015651	1.455
4TH	DConS2	Combination				Y	0.057918	0.048529	1.193
3RD	DConS2	Combination				X	0.014626	0.010057	1.454
3RD	DConS2	Combination				Y	0.037513	0.031486	1.191
2ND	DConS2	Combination				X	0.007841	0.005443	1.44
2ND	DConS2	Combination				Y	0.02083	0.017668	1.179
1ST	DConS2	Combination				X	0.002784	0.002053	1.356
1ST	DConS2	Combination				Y	0.008554	0.00759	1.127
GF	DConS2	Combination				X	0.000468	0.000401	1.168
GF	DConS2	Combination				Y	0.001584	0.001496	1.059
ROOF	DConS3	Combination				X	0.064565	0.04454	1.45
ROOF	DConS3	Combination				Y	0.165463	0.139047	1.19
7TH	DConS3	Combination				X	0.05363	0.03679	1.458
7TH	DConS3	Combination				Y	0.136499	0.114284	1.194
6TH	DConS3	Combination				X	0.042687	0.029234	1.46
6TH	DConS3	Combination				Y	0.108517	0.09077	1.196
5TH	DConS3	Combination				X	0.032437	0.022166	1.463
5TH	DConS3	Combination				Y	0.082321	0.068772	1.197
4TH	DConS3	Combination				X	0.023055	0.015731	1.466
4TH	DConS3	Combination				Y	0.058559	0.048898	1.198
3RD	DConS3	Combination				X	0.014788	0.0101	1.464
3RD	DConS3	Combination				Y	0.037905	0.031721	1.195
2ND	DConS3	Combination				X	0.007916	0.005461	1.449
2ND	DConS3	Combination				Y	0.021036	0.017798	1.182
1ST	DConS3	Combination				X	0.002806	0.002056	1.365
1ST	DConS3	Combination				Y	0.008634	0.007645	1.129
GF	DConS3	Combination				X	0.000471	0.000401	1.174
GF	DConS3	Combination				Y	0.001599	0.001506	1.061
ROOF	DConS4	Combination				X	0.055102	0.034488	1.598
ROOF	DConS4	Combination				Y	0.139324	0.112131	1.243
7TH	DConS4	Combination				X	0.045722	0.028463	1.606

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	DConS4	Combination				Y	0.114699	0.091932	1.248
6TH	DConS4	Combination				X	0.036107	0.022527	1.603
6TH	DConS4	Combination				Y	0.090956	0.073043	1.245
5TH	DConS4	Combination				X	0.027278	0.01704	1.601
5TH	DConS4	Combination				Y	0.068861	0.055356	1.244
4TH	DConS4	Combination				X	0.01929	0.012073	1.598
4TH	DConS4	Combination				Y	0.048906	0.039386	1.242
3RD	DConS4	Combination				X	0.012317	0.007743	1.591
3RD	DConS4	Combination				Y	0.031617	0.025583	1.236
2ND	DConS4	Combination				X	0.006569	0.004185	1.57
2ND	DConS4	Combination				Y	0.017532	0.014386	1.219
1ST	DConS4	Combination				X	0.002329	0.001574	1.48
1ST	DConS4	Combination				Y	0.007201	0.006205	1.161
GF	DConS4	Combination				X	0.000394	0.000311	1.267
GF	DConS4	Combination				Y	0.001343	0.001234	1.089
ROOF	DConS5	Combination	Max			X	0.759627	0.665378	1.142
ROOF	DConS5	Combination	Max			Y	0.793854	0.647308	1.226
7TH	DConS5	Combination	Max			X	0.668953	0.585813	1.142
7TH	DConS5	Combination	Max			Y	0.715207	0.574432	1.245
6TH	DConS5	Combination	Max			X	0.572403	0.501252	1.142
6TH	DConS5	Combination	Max			Y	0.627539	0.496109	1.265
5TH	DConS5	Combination	Max			X	0.4712	0.412484	1.142
5TH	DConS5	Combination	Max			Y	0.530284	0.412575	1.285
4TH	DConS5	Combination	Max			X	0.36694	0.320915	1.143
4TH	DConS5	Combination	Max			Y	0.424934	0.325257	1.306
3RD	DConS5	Combination	Max			X	0.263068	0.229636	1.146
3RD	DConS5	Combination	Max			Y	0.314813	0.236481	1.331
2ND	DConS5	Combination	Max			X	0.164842	0.143401	1.15
2ND	DConS5	Combination	Max			Y	0.20496	0.150746	1.36
1ST	DConS5	Combination	Max			X	0.082577	0.070395	1.173
1ST	DConS5	Combination	Max			Y	0.104183	0.07486	1.392
GF	DConS5	Combination	Max			X	0.020937	0.017245	1.214
GF	DConS5	Combination	Max			Y	0.026575	0.018807	1.413
ROOF	DConS5	Combination	Min			X	0.166953	0.044271	3.771
ROOF	DConS5	Combination	Min			Y	0.540749	0.312981	1.728
7TH	DConS5	Combination	Min			X	0.163631	0.047518	3.444
7TH	DConS5	Combination	Min			Y	0.50385	0.291237	1.73
6TH	DConS5	Combination	Min			X	0.155514	0.048476	3.208
6TH	DConS5	Combination	Min			Y	0.456225	0.263429	1.732
5TH	DConS5	Combination	Min			X	0.141807	0.045663	3.105
5TH	DConS5	Combination	Min			Y	0.397629	0.229313	1.734
4TH	DConS5	Combination	Min			X	0.122264	0.04066	3.007
4TH	DConS5	Combination	Min			Y	0.328113	0.188988	1.736
3RD	DConS5	Combination	Min			X	0.09735	0.033531	2.903
3RD	DConS5	Combination	Min			Y	0.249791	0.143746	1.738

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	DConS5	Combination	Min			X	0.06838	0.024565	2.784
2ND	DConS5	Combination	Min			Y	0.166979	0.096133	1.737
1ST	DConS5	Combination	Min			X	0.037851	0.01506	2.513
1ST	DConS5	Combination	Min			Y	0.086933	0.050317	1.728
GF	DConS5	Combination	Min			X	0.010469	0.004571	2.29
GF	DConS5	Combination	Min			Y	0.02296	0.013635	1.684
ROOF	DConS6	Combination	Max			X	0.269349	0.114725	2.348
ROOF	DConS6	Combination	Max			Y	0.710322	0.528056	1.345
7TH	DConS6	Combination	Max			X	0.248755	0.104281	2.385
7TH	DConS6	Combination	Max			Y	0.642432	0.4688	1.37
6TH	DConS6	Combination	Max			X	0.223382	0.092276	2.421
6TH	DConS6	Combination	Max			Y	0.566072	0.405024	1.398
5TH	DConS6	Combination	Max			X	0.193443	0.078913	2.451
5TH	DConS6	Combination	Max			Y	0.480731	0.336668	1.428
4TH	DConS6	Combination	Max			X	0.159005	0.064295	2.473
4TH	DConS6	Combination	Max			Y	0.38724	0.265405	1.459
3RD	DConS6	Combination	Max			X	0.120946	0.048741	2.481
3RD	DConS6	Combination	Max			Y	0.28839	0.193406	1.491
2ND	DConS6	Combination	Max			X	0.081036	0.03282	2.469
2ND	DConS6	Combination	Max			Y	0.189113	0.124072	1.524
1ST	DConS6	Combination	Max			X	0.042367	0.018186	2.33
1ST	DConS6	Combination	Max			Y	0.097157	0.062374	1.558
GF	DConS6	Combination	Max			X	0.011236	0.005192	2.164
GF	DConS6	Combination	Max			Y	0.025163	0.016035	1.569
ROOF	DConS6	Combination	Min			X	0.65723	0.598741	1.098
ROOF	DConS6	Combination	Min			Y	0.62428	0.430564	1.45
7TH	DConS6	Combination	Min			X	0.583828	0.530743	1.1
7TH	DConS6	Combination	Min			Y	0.576624	0.396203	1.455
6TH	DConS6	Combination	Min			X	0.504535	0.457452	1.103
6TH	DConS6	Combination	Min			Y	0.517693	0.354514	1.46
5TH	DConS6	Combination	Min			X	0.419565	0.379234	1.106
5TH	DConS6	Combination	Min			Y	0.447182	0.30522	1.465
4TH	DConS6	Combination	Min			X	0.330198	0.29728	1.111
4TH	DConS6	Combination	Min			Y	0.365807	0.248841	1.47
3RD	DConS6	Combination	Min			X	0.239473	0.214426	1.117
3RD	DConS6	Combination	Min			Y	0.276214	0.187267	1.475
2ND	DConS6	Combination	Min			X	0.152186	0.135147	1.126
2ND	DConS6	Combination	Min			Y	0.182826	0.123462	1.481
1ST	DConS6	Combination	Min			X	0.078061	0.067269	1.16
1ST	DConS6	Combination	Min			Y	0.093959	0.063009	1.491
GF	DConS6	Combination	Min			X	0.020169	0.016626	1.213
GF	DConS6	Combination	Min			Y	0.024371	0.016429	1.483
ROOF	DConS7	Combination	Max			X	0.760847	0.665744	1.143
ROOF	DConS7	Combination	Max			Y	0.793901	0.648482	1.224
7TH	DConS7	Combination	Max			X	0.66994	0.586103	1.143

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	DConS7	Combination	Max			Y	0.715167	0.575312	1.243
6TH	DConS7	Combination	Max			X	0.573082	0.501448	1.143
6TH	DConS7	Combination	Max			Y	0.627604	0.496811	1.263
5TH	DConS7	Combination	Max			X	0.471657	0.412613	1.143
5TH	DConS7	Combination	Max			Y	0.530377	0.4131	1.284
4TH	DConS7	Combination	Max			X	0.367227	0.320995	1.144
4TH	DConS7	Combination	Max			Y	0.425029	0.325625	1.305
3RD	DConS7	Combination	Max			X	0.263231	0.229679	1.146
3RD	DConS7	Combination	Max			Y	0.314891	0.236699	1.33
2ND	DConS7	Combination	Max			X	0.164918	0.143419	1.15
2ND	DConS7	Combination	Max			Y	0.205014	0.150867	1.359
1ST	DConS7	Combination	Max			X	0.0826	0.070398	1.173
1ST	DConS7	Combination	Max			Y	0.104213	0.074912	1.391
GF	DConS7	Combination	Max			X	0.02094	0.017246	1.214
GF	DConS7	Combination	Max			Y	0.026582	0.018817	1.413
ROOF	DConS7	Combination	Min			X	0.165732	0.043651	3.797
ROOF	DConS7	Combination	Min			Y	0.540701	0.311806	1.734
7TH	DConS7	Combination	Min			X	0.162644	0.04702	3.459
7TH	DConS7	Combination	Min			Y	0.503889	0.290357	1.735
6TH	DConS7	Combination	Min			X	0.154835	0.04824	3.21
6TH	DConS7	Combination	Min			Y	0.456161	0.262728	1.736
5TH	DConS7	Combination	Min			X	0.141351	0.045534	3.104
5TH	DConS7	Combination	Min			Y	0.397535	0.228788	1.738
4TH	DConS7	Combination	Min			X	0.121977	0.04058	3.006
4TH	DConS7	Combination	Min			Y	0.328018	0.18862	1.739
3RD	DConS7	Combination	Min			X	0.097188	0.033488	2.902
3RD	DConS7	Combination	Min			Y	0.249714	0.14351	1.74
2ND	DConS7	Combination	Min			X	0.068305	0.024548	2.783
2ND	DConS7	Combination	Min			Y	0.166925	0.096003	1.739
1ST	DConS7	Combination	Min			X	0.037829	0.015056	2.512
1ST	DConS7	Combination	Min			Y	0.086903	0.050262	1.729
GF	DConS7	Combination	Min			X	0.010466	0.00457	2.29
GF	DConS7	Combination	Min			Y	0.022953	0.013625	1.685
ROOF	DConS8	Combination	Max			X	0.270569	0.11509	2.351
ROOF	DConS8	Combination	Max			Y	0.710369	0.529103	1.343
7TH	DConS8	Combination	Max			X	0.249743	0.104571	2.388
7TH	DConS8	Combination	Max			Y	0.642393	0.469576	1.368
6TH	DConS8	Combination	Max			X	0.224061	0.092472	2.423
6TH	DConS8	Combination	Max			Y	0.566136	0.405726	1.395
5TH	DConS8	Combination	Max			X	0.193899	0.079043	2.453
5TH	DConS8	Combination	Max			Y	0.480824	0.337192	1.426
4TH	DConS8	Combination	Max			X	0.159293	0.064375	2.474
4TH	DConS8	Combination	Max			Y	0.387335	0.265773	1.457
3RD	DConS8	Combination	Max			X	0.121108	0.048784	2.483
3RD	DConS8	Combination	Max			Y	0.288468	0.193641	1.49

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	DConS8	Combination	Max			X	0.081112	0.032838	2.47
2ND	DConS8	Combination	Max			Y	0.189167	0.124202	1.523
1ST	DConS8	Combination	Max			X	0.042389	0.018189	2.33
1ST	DConS8	Combination	Max			Y	0.097187	0.062429	1.557
GF	DConS8	Combination	Max			X	0.01124	0.005192	2.165
GF	DConS8	Combination	Max			Y	0.025171	0.016046	1.569
ROOF	DConS8	Combination	Min			X	0.65601	0.598375	1.096
ROOF	DConS8	Combination	Min			Y	0.624233	0.429389	1.454
7TH	DConS8	Combination	Min			X	0.582841	0.530453	1.099
7TH	DConS8	Combination	Min			Y	0.576664	0.395322	1.459
6TH	DConS8	Combination	Min			X	0.503856	0.457256	1.102
6TH	DConS8	Combination	Min			Y	0.517628	0.353812	1.463
5TH	DConS8	Combination	Min			X	0.419109	0.379104	1.106
5TH	DConS8	Combination	Min			Y	0.447088	0.304696	1.467
4TH	DConS8	Combination	Min			X	0.329911	0.2972	1.11
4TH	DConS8	Combination	Min			Y	0.365712	0.248472	1.472
3RD	DConS8	Combination	Min			X	0.23931	0.214383	1.116
3RD	DConS8	Combination	Min			Y	0.276137	0.187032	1.476
2ND	DConS8	Combination	Min			X	0.152111	0.135129	1.126
2ND	DConS8	Combination	Min			Y	0.182772	0.12334	1.482
1ST	DConS8	Combination	Min			X	0.078039	0.067266	1.16
1ST	DConS8	Combination	Min			Y	0.093929	0.062957	1.492
GF	DConS8	Combination	Min			X	0.020166	0.016626	1.213
GF	DConS8	Combination	Min			Y	0.024364	0.016419	1.484
ROOF	DConS9	Combination	Max			X	0.389072	0.332425	1.17
ROOF	DConS9	Combination	Max			Y	0.393141	0.332431	1.183
7TH	DConS9	Combination	Max			X	0.342117	0.292661	1.169
7TH	DConS9	Combination	Max			Y	0.354093	0.294109	1.204
6TH	DConS9	Combination	Max			X	0.291885	0.250307	1.166
6TH	DConS9	Combination	Max			Y	0.311376	0.25358	1.228
5TH	DConS9	Combination	Max			X	0.239698	0.20595	1.164
5TH	DConS9	Combination	Max			Y	0.263585	0.210408	1.253
4TH	DConS9	Combination	Max			X	0.186245	0.160233	1.162
4TH	DConS9	Combination	Max			Y	0.211589	0.165384	1.279
3RD	DConS9	Combination	Max			X	0.133239	0.114672	1.162
3RD	DConS9	Combination	Max			Y	0.157039	0.120039	1.308
2ND	DConS9	Combination	Max			X	0.083305	0.071628	1.163
2ND	DConS9	Combination	Max			Y	0.102455	0.076468	1.34
1ST	DConS9	Combination	Max			X	0.041612	0.035173	1.183
1ST	DConS9	Combination	Max			Y	0.052222	0.037967	1.375
GF	DConS9	Combination	Max			X	0.01053	0.008627	1.221
GF	DConS9	Combination	Max			Y	0.013352	0.009536	1.4
ROOF	DConS9	Combination	Min			X	0.074217	0.019563	3.794
ROOF	DConS9	Combination	Min			Y	0.27416	0.147713	1.856
7TH	DConS9	Combination	Min			X	0.074175	0.021656	3.425

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	DConS9	Combination	Min			Y	0.255436	0.138726	1.841
6TH	DConS9	Combination	Min			X	0.072074	0.022821	3.158
6TH	DConS9	Combination	Min			Y	0.230506	0.12619	1.827
5TH	DConS9	Combination	Min			X	0.066806	0.022522	2.966
5TH	DConS9	Combination	Min			Y	0.200371	0.110423	1.815
4TH	DConS9	Combination	Min			X	0.058356	0.020555	2.839
4TH	DConS9	Combination	Min			Y	0.164934	0.091414	1.804
3RD	DConS9	Combination	Min			X	0.04697	0.016911	2.777
3RD	DConS9	Combination	Min			Y	0.125263	0.069799	1.795
2ND	DConS9	Combination	Min			X	0.033306	0.012355	2.696
2ND	DConS9	Combination	Min			Y	0.083515	0.046829	1.783
1ST	DConS9	Combination	Min			X	0.018602	0.007554	2.463
1ST	DConS9	Combination	Min			Y	0.043336	0.024569	1.764
GF	DConS9	Combination	Min			X	0.005173	0.002264	2.284
GF	DConS9	Combination	Min			Y	0.011415	0.006677	1.71
ROOF	DConS10	Combination	Max			X	0.143933	0.057098	2.521
ROOF	DConS10	Combination	Max			Y	0.351375	0.271387	1.295
7TH	DConS10	Combination	Max			X	0.132018	0.051895	2.544
7TH	DConS10	Combination	Max			Y	0.317706	0.240118	1.323
6TH	DConS10	Combination	Max			X	0.117374	0.045819	2.562
6TH	DConS10	Combination	Max			Y	0.280643	0.207233	1.354
5TH	DConS10	Combination	Max			X	0.100819	0.039165	2.574
5TH	DConS10	Combination	Max			Y	0.238809	0.172312	1.386
4TH	DConS10	Combination	Max			X	0.082278	0.031922	2.577
4TH	DConS10	Combination	Max			Y	0.192742	0.135783	1.419
3RD	DConS10	Combination	Max			X	0.062178	0.024225	2.567
3RD	DConS10	Combination	Max			Y	0.143828	0.098777	1.456
2ND	DConS10	Combination	Max			X	0.041403	0.016337	2.534
2ND	DConS10	Combination	Max			Y	0.094531	0.063273	1.494
1ST	DConS10	Combination	Max			X	0.021507	0.009069	2.372
1ST	DConS10	Combination	Max			Y	0.048709	0.031776	1.533
GF	DConS10	Combination	Max			X	0.00568	0.0026	2.185
GF	DConS10	Combination	Max			Y	0.012646	0.008158	1.55
ROOF	DConS10	Combination	Min			X	0.319356	0.299635	1.066
ROOF	DConS10	Combination	Min			Y	0.315926	0.206505	1.53
7TH	DConS10	Combination	Min			X	0.284274	0.265618	1.07
7TH	DConS10	Combination	Min			Y	0.291823	0.191208	1.526
6TH	DConS10	Combination	Min			X	0.246585	0.229045	1.077
6TH	DConS10	Combination	Min			Y	0.261239	0.171732	1.521
5TH	DConS10	Combination	Min			X	0.205685	0.189908	1.083
5TH	DConS10	Combination	Min			Y	0.225148	0.148377	1.517
4TH	DConS10	Combination	Min			X	0.162324	0.148865	1.09
4TH	DConS10	Combination	Min			Y	0.183781	0.12134	1.515
3RD	DConS10	Combination	Min			X	0.118032	0.107359	1.099
3RD	DConS10	Combination	Min			Y	0.138475	0.091559	1.512

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	DConS10	Combination	Min			X	0.075209	0.067646	1.112
2ND	DConS10	Combination	Min			Y	0.091438	0.060608	1.509
1ST	DConS10	Combination	Min			X	0.038707	0.033659	1.15
1ST	DConS10	Combination	Min			Y	0.046849	0.030968	1.513
GF	DConS10	Combination	Min			X	0.010023	0.008309	1.206
GF	DConS10	Combination	Min			Y	0.012121	0.008082	1.5
ROOF	DConS11	Combination	Max			X	0.385168	0.331255	1.163
ROOF	DConS11	Combination	Max			Y	0.392991	0.328673	1.196
7TH	DConS11	Combination	Max			X	0.338957	0.291732	1.162
7TH	DConS11	Combination	Max			Y	0.354219	0.291291	1.216
6TH	DConS11	Combination	Max			X	0.289712	0.249679	1.16
6TH	DConS11	Combination	Max			Y	0.31117	0.251335	1.238
5TH	DConS11	Combination	Max			X	0.238238	0.205535	1.159
5TH	DConS11	Combination	Max			Y	0.263286	0.208843	1.261
4TH	DConS11	Combination	Max			X	0.185327	0.159977	1.158
4TH	DConS11	Combination	Max			Y	0.211286	0.164304	1.286
3RD	DConS11	Combination	Max			X	0.13272	0.114534	1.159
3RD	DConS11	Combination	Max			Y	0.15679	0.119344	1.314
2ND	DConS11	Combination	Max			X	0.083064	0.071571	1.161
2ND	DConS11	Combination	Max			Y	0.102282	0.076079	1.344
1ST	DConS11	Combination	Max			X	0.041542	0.035163	1.181
1ST	DConS11	Combination	Max			Y	0.052125	0.0378	1.379
GF	DConS11	Combination	Max			X	0.01052	0.008625	1.22
GF	DConS11	Combination	Max			Y	0.013329	0.009503	1.403
ROOF	DConS11	Combination	Min			X	0.078122	0.021547	3.626
ROOF	DConS11	Combination	Min			Y	0.274311	0.151472	1.811
7TH	DConS11	Combination	Min			X	0.077335	0.023249	3.326
7TH	DConS11	Combination	Min			Y	0.255309	0.141543	1.804
6TH	DConS11	Combination	Min			X	0.074247	0.023909	3.105
6TH	DConS11	Combination	Min			Y	0.230712	0.128435	1.796
5TH	DConS11	Combination	Min			X	0.068266	0.023249	2.936
5TH	DConS11	Combination	Min			Y	0.200671	0.112101	1.79
4TH	DConS11	Combination	Min			X	0.059275	0.02081	2.848
4TH	DConS11	Combination	Min			Y	0.165237	0.092592	1.785
3RD	DConS11	Combination	Min			X	0.04749	0.017049	2.785
3RD	DConS11	Combination	Min			Y	0.125512	0.070551	1.779
2ND	DConS11	Combination	Min			X	0.033547	0.012413	2.703
2ND	DConS11	Combination	Min			Y	0.083688	0.047245	1.771
1ST	DConS11	Combination	Min			X	0.018673	0.007565	2.468
1ST	DConS11	Combination	Min			Y	0.043433	0.024745	1.755
GF	DConS11	Combination	Min			X	0.005183	0.002268	2.285
GF	DConS11	Combination	Min			Y	0.011438	0.006711	1.704
ROOF	DConS12	Combination	Max			X	0.140029	0.055929	2.504
ROOF	DConS12	Combination	Max			Y	0.351225	0.268035	1.31
7TH	DConS12	Combination	Max			X	0.128859	0.050967	2.528

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	DConS12	Combination	Max			Y	0.317832	0.237633	1.337
6TH	DConS12	Combination	Max			X	0.115201	0.045192	2.549
6TH	DConS12	Combination	Max			Y	0.280437	0.205219	1.367
5TH	DConS12	Combination	Max			X	0.099359	0.03875	2.564
5TH	DConS12	Combination	Max			Y	0.238509	0.170789	1.397
4TH	DConS12	Combination	Max			X	0.081359	0.031667	2.569
4TH	DConS12	Combination	Max			Y	0.192439	0.134605	1.43
3RD	DConS12	Combination	Max			X	0.061658	0.024087	2.56
3RD	DConS12	Combination	Max			Y	0.143579	0.098025	1.465
2ND	DConS12	Combination	Max			X	0.041161	0.01628	2.528
2ND	DConS12	Combination	Max			Y	0.094358	0.062857	1.501
1ST	DConS12	Combination	Max			X	0.021436	0.009058	2.367
1ST	DConS12	Combination	Max			Y	0.048612	0.0316	1.538
GF	DConS12	Combination	Max			X	0.00567	0.002598	2.182
GF	DConS12	Combination	Max			Y	0.012624	0.008124	1.554
ROOF	DConS12	Combination	Min			X	0.323261	0.300804	1.075
ROOF	DConS12	Combination	Min			Y	0.316077	0.210263	1.503
7TH	DConS12	Combination	Min			X	0.287433	0.266546	1.078
7TH	DConS12	Combination	Min			Y	0.291696	0.194026	1.503
6TH	DConS12	Combination	Min			X	0.248757	0.229672	1.083
6TH	DConS12	Combination	Min			Y	0.261446	0.173977	1.503
5TH	DConS12	Combination	Min			X	0.207145	0.190324	1.088
5TH	DConS12	Combination	Min			Y	0.225447	0.150055	1.502
4TH	DConS12	Combination	Min			X	0.163242	0.149121	1.095
4TH	DConS12	Combination	Min			Y	0.184084	0.122518	1.503
3RD	DConS12	Combination	Min			X	0.118551	0.107497	1.103
3RD	DConS12	Combination	Min			Y	0.138724	0.092312	1.503
2ND	DConS12	Combination	Min			X	0.07545	0.067703	1.114
2ND	DConS12	Combination	Min			Y	0.091611	0.061024	1.501
1ST	DConS12	Combination	Min			X	0.038778	0.033669	1.152
1ST	DConS12	Combination	Min			Y	0.046946	0.031134	1.508
GF	DConS12	Combination	Min			X	0.010033	0.00831	1.207
GF	DConS12	Combination	Min			Y	0.012143	0.008115	1.496
ROOF	DConS13	Combination	Max			X	0.731644	0.643479	1.137
ROOF	DConS13	Combination	Max			Y	0.73791	0.583339	1.265
7TH	DConS13	Combination	Max			X	0.645712	0.567723	1.137
7TH	DConS13	Combination	Max			Y	0.669362	0.521792	1.283
6TH	DConS13	Combination	Max			X	0.553827	0.486855	1.138
6TH	DConS13	Combination	Max			Y	0.591263	0.454321	1.301
5TH	DConS13	Combination	Max			X	0.457042	0.401563	1.138
5TH	DConS13	Combination	Max			Y	0.502922	0.380943	1.32
4TH	DConS13	Combination	Max			X	0.356851	0.313169	1.139
4TH	DConS13	Combination	Max			Y	0.405571	0.302804	1.339
3RD	DConS13	Combination	Max			X	0.256584	0.22467	1.142
3RD	DConS13	Combination	Max			Y	0.302289	0.22218	1.361

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	DConS13	Combination	Max			X	0.161369	0.140724	1.147
2ND	DConS13	Combination	Max			Y	0.197894	0.142749	1.386
1ST	DConS13	Combination	Max			X	0.081356	0.069392	1.172
1ST	DConS13	Combination	Max			Y	0.101013	0.071435	1.414
GF	DConS13	Combination	Max			X	0.020735	0.017054	1.216
GF	DConS13	Combination	Max			Y	0.025917	0.018139	1.429
ROOF	DConS13	Combination	Min			X	0.194935	0.067982	2.867
ROOF	DConS13	Combination	Min			Y	0.596692	0.376949	1.583
7TH	DConS13	Combination	Min			X	0.186872	0.067142	2.783
7TH	DConS13	Combination	Min			Y	0.549695	0.343877	1.599
6TH	DConS13	Combination	Min			X	0.17409	0.062874	2.769
6TH	DConS13	Combination	Min			Y	0.492502	0.305218	1.614
5TH	DConS13	Combination	Min			X	0.155965	0.056584	2.756
5TH	DConS13	Combination	Min			Y	0.42499	0.260945	1.629
4TH	DConS13	Combination	Min			X	0.132353	0.048406	2.734
4TH	DConS13	Combination	Min			Y	0.347476	0.211442	1.643
3RD	DConS13	Combination	Min			X	0.103835	0.038497	2.697
3RD	DConS13	Combination	Min			Y	0.262316	0.158273	1.657
2ND	DConS13	Combination	Min			X	0.071853	0.027242	2.638
2ND	DConS13	Combination	Min			Y	0.174045	0.104248	1.67
1ST	DConS13	Combination	Min			X	0.039073	0.016063	2.433
1ST	DConS13	Combination	Min			Y	0.090103	0.053775	1.676
GF	DConS13	Combination	Min			X	0.01067	0.004764	2.24
GF	DConS13	Combination	Min			Y	0.023617	0.014305	1.651
ROOF	DConS14	Combination	Max			X	0.241366	0.092825	2.6
ROOF	DConS14	Combination	Max			Y	0.654378	0.464993	1.407
7TH	DConS14	Combination	Max			X	0.225515	0.086192	2.616
7TH	DConS14	Combination	Max			Y	0.596587	0.416826	1.431
6TH	DConS14	Combination	Max			X	0.204806	0.077879	2.63
6TH	DConS14	Combination	Max			Y	0.529796	0.363236	1.459
5TH	DConS14	Combination	Max			X	0.179285	0.067992	2.637
5TH	DConS14	Combination	Max			Y	0.453369	0.305036	1.486
4TH	DConS14	Combination	Max			X	0.148916	0.056548	2.633
4TH	DConS14	Combination	Max			Y	0.367877	0.242952	1.514
3RD	DConS14	Combination	Max			X	0.114461	0.043775	2.615
3RD	DConS14	Combination	Max			Y	0.275866	0.178878	1.542
2ND	DConS14	Combination	Max			X	0.077563	0.030143	2.573
2ND	DConS14	Combination	Max			Y	0.182048	0.115957	1.57
1ST	DConS14	Combination	Max			X	0.041145	0.017183	2.395
1ST	DConS14	Combination	Max			Y	0.093987	0.058916	1.595
GF	DConS14	Combination	Max			X	0.011035	0.005	2.207
GF	DConS14	Combination	Max			Y	0.024506	0.015365	1.595
ROOF	DConS14	Combination	Min			X	0.685213	0.62064	1.104
ROOF	DConS14	Combination	Min			Y	0.680224	0.494532	1.375
7TH	DConS14	Combination	Min			X	0.607069	0.548833	1.106

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
7TH	DConS14	Combination	Min			Y	0.62247	0.448843	1.387
6TH	DConS14	Combination	Min			X	0.523111	0.471849	1.109
6TH	DConS14	Combination	Min			Y	0.553969	0.396302	1.398
5TH	DConS14	Combination	Min			X	0.433723	0.390154	1.112
5TH	DConS14	Combination	Min			Y	0.474543	0.336852	1.409
4TH	DConS14	Combination	Min			X	0.340287	0.305027	1.116
4TH	DConS14	Combination	Min			Y	0.38517	0.271294	1.42
3RD	DConS14	Combination	Min			X	0.245957	0.219392	1.121
3RD	DConS14	Combination	Min			Y	0.288739	0.201795	1.431
2ND	DConS14	Combination	Min			X	0.155659	0.137824	1.129
2ND	DConS14	Combination	Min			Y	0.189891	0.131458	1.444
1ST	DConS14	Combination	Min			X	0.079283	0.068272	1.161
1ST	DConS14	Combination	Min			Y	0.097129	0.066435	1.462
GF	DConS14	Combination	Min			X	0.02037	0.016818	1.211
GF	DConS14	Combination	Min			Y	0.025028	0.017098	1.464
ROOF	DConS15	Combination	Max			X	0.637475	0.555516	1.148
ROOF	DConS15	Combination	Max			Y	0.526785	0.44611	1.181
7TH	DConS15	Combination	Max			X	0.559063	0.484704	1.153
7TH	DConS15	Combination	Max			Y	0.469501	0.390218	1.203
6TH	DConS15	Combination	Max			X	0.47516	0.409915	1.159
6TH	DConS15	Combination	Max			Y	0.406417	0.33125	1.227
5TH	DConS15	Combination	Max			X	0.387461	0.332463	1.165
5TH	DConS15	Combination	Max			Y	0.337758	0.269882	1.252
4TH	DConS15	Combination	Max			X	0.298085	0.254252	1.172
4TH	DConS15	Combination	Max			Y	0.265211	0.207648	1.277
3RD	DConS15	Combination	Max			X	0.210617	0.178417	1.18
3RD	DConS15	Combination	Max			Y	0.191772	0.146971	1.305
2ND	DConS15	Combination	Max			X	0.129837	0.109088	1.19
2ND	DConS15	Combination	Max			Y	0.121645	0.091059	1.336
1ST	DConS15	Combination	Max			X	0.061831	0.051453	1.202
1ST	DConS15	Combination	Max			Y	0.060378	0.043973	1.373
GF	DConS15	Combination	Max			X	0.014737	0.012097	1.218
GF	DConS15	Combination	Max			Y	0.014991	0.010729	1.397
ROOF	DConS15	Combination	Min			X	0.087503	0.026187	3.342
ROOF	DConS15	Combination	Min			Y	0.212195	0.104239	2.036
7TH	DConS15	Combination	Min			X	0.078936	0.018812	4.196
7TH	DConS15	Combination	Min			Y	0.181208	0.08314	2.18
6TH	DConS15	Combination	Min			X	0.069218	0.012322	5.618
6TH	DConS15	Combination	Min			Y	0.149804	0.063651	2.354
5TH	DConS15	Combination	Min			X	0.058195	0.006892	8.444
5TH	DConS15	Combination	Min			Y	0.118707	0.046004	2.58
4TH	DConS15	Combination	Min			Y	0.088652	0.030658	2.892
3RD	DConS15	Combination	Min			Y	0.060671	0.018044	3.362
2ND	DConS15	Combination	Min			X	0.025155	0.002067	12.168
2ND	DConS15	Combination	Min			Y	0.036036	0.008568	4.206

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
1ST	DConS15	Combination	Min			X	0.014694	0.002294	6.406
1ST	DConS15	Combination	Min			Y	0.016296	0.00257	6.341
GF	DConS15	Combination	Min			X	0.004183	0.000949	4.409
ROOF	DConS16	Combination	Max			X	0.142685	0.042988	3.319
ROOF	DConS16	Combination	Max			Y	0.179699	0.122373	1.468
7TH	DConS16	Combination	Max			X	0.13073	0.038356	3.408
7TH	DConS16	Combination	Max			Y	0.158721	0.103195	1.538
6TH	DConS16	Combination	Max			X	0.115855	0.033145	3.495
6TH	DConS16	Combination	Max			Y	0.136493	0.084391	1.617
5TH	DConS16	Combination	Max			X	0.098638	0.027626	3.571
5TH	DConS16	Combination	Max			Y	0.112954	0.06625	1.705
4TH	DConS16	Combination	Max			X	0.079432	0.021925	3.623
4TH	DConS16	Combination	Max			Y	0.08873	0.04926	1.801
3RD	DConS16	Combination	Max			X	0.058992	0.016201	3.641
3RD	DConS16	Combination	Max			Y	0.064687	0.033906	1.908
2ND	DConS16	Combination	Max			X	0.038446	0.010644	3.612
2ND	DConS16	Combination	Max			Y	0.041924	0.020673	2.028
1ST	DConS16	Combination	Max			X	0.019441	0.005544	3.506
1ST	DConS16	Combination	Max			Y	0.021811	0.010059	2.168
GF	DConS16	Combination	Max			X	0.004991	0.001594	3.132
GF	DConS16	Combination	Max			Y	0.005765	0.002501	2.305
ROOF	DConS16	Combination	Min			X	0.52992	0.486342	1.09
ROOF	DConS16	Combination	Min			Y	0.350802	0.219498	1.598
7TH	DConS16	Combination	Min			X	0.469645	0.427536	1.098
7TH	DConS16	Combination	Min			Y	0.325709	0.203883	1.598
6TH	DConS16	Combination	Min			X	0.40388	0.364448	1.108
6TH	DConS16	Combination	Min			Y	0.292427	0.183208	1.596
5TH	DConS16	Combination	Min			X	0.333235	0.297945	1.118
5TH	DConS16	Combination	Min			Y	0.251503	0.157628	1.596
4TH	DConS16	Combination	Min			X	0.259503	0.229713	1.13
4TH	DConS16	Combination	Min			Y	0.203817	0.12773	1.596
3RD	DConS16	Combination	Min			X	0.185841	0.16262	1.143
3RD	DConS16	Combination	Min			Y	0.151667	0.095021	1.596
2ND	DConS16	Combination	Min			X	0.116547	0.100512	1.16
2ND	DConS16	Combination	Min			Y	0.098622	0.061818	1.595
1ST	DConS16	Combination	Min			X	0.057085	0.048203	1.184
1ST	DConS16	Combination	Min			Y	0.049722	0.031344	1.586
GF	DConS16	Combination	Min			X	0.013929	0.011452	1.216
GF	DConS16	Combination	Min			Y	0.012688	0.008212	1.545
ROOF	DConS17	Combination	Max			X	0.617231	0.537423	1.149
ROOF	DConS17	Combination	Max			Y	0.480456	0.396943	1.21
7TH	DConS17	Combination	Max			X	0.542262	0.469763	1.154
7TH	DConS17	Combination	Max			Y	0.431471	0.349736	1.234
6TH	DConS17	Combination	Max			X	0.461704	0.398019	1.16
6TH	DConS17	Combination	Max			Y	0.376356	0.299131	1.258

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
5TH	DConS17	Combination	Max			X	0.37719	0.323443	1.166
5TH	DConS17	Combination	Max			Y	0.315127	0.245598	1.283
4TH	DConS17	Combination	Max			X	0.290757	0.247863	1.173
4TH	DConS17	Combination	Max			Y	0.249248	0.190446	1.309
3RD	DConS17	Combination	Max			X	0.205903	0.17433	1.181
3RD	DConS17	Combination	Max			Y	0.181505	0.135877	1.336
2ND	DConS17	Combination	Max			X	0.127316	0.106895	1.191
2ND	DConS17	Combination	Max			Y	0.115913	0.084896	1.365
1ST	DConS17	Combination	Max			X	0.060955	0.050637	1.204
1ST	DConS17	Combination	Max			Y	0.057855	0.041372	1.398
GF	DConS17	Combination	Max			X	0.014597	0.011945	1.222
GF	DConS17	Combination	Max			Y	0.014482	0.010236	1.415
ROOF	DConS17	Combination	Min			X	0.071561	0.008093	8.842
ROOF	DConS17	Combination	Min			Y	0.16019	0.055072	2.909
7TH	DConS17	Combination	Min			Y	0.138274	0.042658	3.241
6TH	DConS17	Combination	Min			Y	0.115627	0.031532	3.667
5TH	DConS17	Combination	Min			Y	0.092772	0.021721	4.271
4TH	DConS17	Combination	Min			X	0.048179	0.003775	12.764
4TH	DConS17	Combination	Min			Y	0.070211	0.013456	5.218
3RD	DConS17	Combination	Min			X	0.038929	0.00449	8.67
3RD	DConS17	Combination	Min			Y	0.048751	0.006951	7.014
2ND	DConS17	Combination	Min			X	0.027676	0.004261	6.496
2ND	DConS17	Combination	Min			Y	0.029441	0.002404	12.245
1ST	DConS17	Combination	Min			X	0.015571	0.00311	5.006
GF	DConS17	Combination	Min			X	0.004323	0.001101	3.928
GF	DConS17	Combination	Min			Y	0.003971	0.000476	8.336
ROOF	DConS18	Combination	Max			X	0.122441	0.024895	4.918
ROOF	DConS18	Combination	Max			Y	0.13337	0.073205	1.822
7TH	DConS18	Combination	Max			X	0.113929	0.023415	4.866
7TH	DConS18	Combination	Max			Y	0.120691	0.062713	1.924
6TH	DConS18	Combination	Max			X	0.102399	0.021249	4.819
6TH	DConS18	Combination	Max			Y	0.106432	0.052272	2.036
5TH	DConS18	Combination	Max			X	0.088367	0.018606	4.749
5TH	DConS18	Combination	Max			Y	0.090322	0.041967	2.152
4TH	DConS18	Combination	Max			X	0.072103	0.015536	4.641
4TH	DConS18	Combination	Max			Y	0.072767	0.032058	2.27
3RD	DConS18	Combination	Max			X	0.054278	0.012114	4.481
3RD	DConS18	Combination	Max			Y	0.054421	0.022812	2.386
2ND	DConS18	Combination	Max			X	0.035924	0.008451	4.251
2ND	DConS18	Combination	Max			Y	0.036192	0.014509	2.494
1ST	DConS18	Combination	Max			X	0.018565	0.004728	3.927
1ST	DConS18	Combination	Max			Y	0.019289	0.007458	2.586
GF	DConS18	Combination	Max			X	0.004851	0.001442	3.365
GF	DConS18	Combination	Max			Y	0.005256	0.002008	2.618
ROOF	DConS18	Combination	Min			X	0.550165	0.504435	1.091

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
ROOF	DConS18	Combination	Min			Y	0.397132	0.268666	1.478
7TH	DConS18	Combination	Min			X	0.486445	0.442477	1.099
7TH	DConS18	Combination	Min			Y	0.363739	0.244365	1.489
6TH	DConS18	Combination	Min			X	0.417337	0.376345	1.109
6TH	DConS18	Combination	Min			Y	0.322488	0.215327	1.498
5TH	DConS18	Combination	Min			X	0.343506	0.306965	1.119
5TH	DConS18	Combination	Min			Y	0.274135	0.181911	1.507
4TH	DConS18	Combination	Min			X	0.266832	0.236102	1.13
4TH	DConS18	Combination	Min			Y	0.21978	0.144932	1.516
3RD	DConS18	Combination	Min			X	0.190554	0.166706	1.143
3RD	DConS18	Combination	Min			Y	0.161933	0.106114	1.526
2ND	DConS18	Combination	Min			X	0.119068	0.102705	1.159
2ND	DConS18	Combination	Min			Y	0.104353	0.067982	1.535
1ST	DConS18	Combination	Min			X	0.057961	0.049019	1.182
1ST	DConS18	Combination	Min			Y	0.052244	0.033945	1.539
GF	DConS18	Combination	Min			X	0.014069	0.011604	1.212
GF	DConS18	Combination	Min			Y	0.013197	0.008705	1.516
ROOF	DConS19	Combination	Max			X	0.604334	0.531079	1.138
ROOF	DConS19	Combination	Max			Y	0.464432	0.372274	1.248
7TH	DConS19	Combination	Max			X	0.531528	0.464516	1.144
7TH	DConS19	Combination	Max			Y	0.418446	0.329472	1.27
6TH	DConS19	Combination	Max			X	0.453172	0.393851	1.151
6TH	DConS19	Combination	Max			Y	0.365997	0.283015	1.293
5TH	DConS19	Combination	Max			X	0.370712	0.320274	1.157
5TH	DConS19	Combination	Max			Y	0.307244	0.233351	1.317
4TH	DConS19	Combination	Max			X	0.286156	0.245601	1.165
4TH	DConS19	Combination	Max			Y	0.243581	0.181694	1.341
3RD	DConS19	Combination	Max			X	0.202952	0.172864	1.174
3RD	DConS19	Combination	Max			Y	0.177742	0.130154	1.366
2ND	DConS19	Combination	Max			X	0.12573	0.106089	1.185
2ND	DConS19	Combination	Max			Y	0.11369	0.081643	1.393
1ST	DConS19	Combination	Max			X	0.060379	0.050325	1.2
1ST	DConS19	Combination	Max			Y	0.056776	0.039944	1.421
GF	DConS19	Combination	Max			X	0.014496	0.011879	1.22
GF	DConS19	Combination	Max			Y	0.014235	0.009942	1.432
ROOF	DConS19	Combination	Min			Y	0.126876	0.030403	4.173
7TH	DConS19	Combination	Min			Y	0.110772	0.022394	4.946
6TH	DConS19	Combination	Min			X	0.066563	0.003743	17.785
6TH	DConS19	Combination	Min			Y	0.093754	0.015416	6.082
5TH	DConS19	Combination	Min			X	0.061161	0.005297	11.547
5TH	DConS19	Combination	Min			Y	0.076159	0.009473	8.04
4TH	DConS19	Combination	Min			X	0.052779	0.006036	8.744
4TH	DConS19	Combination	Min			Y	0.058372	0.004703	12.41
3RD	DConS19	Combination	Min			X	0.041881	0.005956	7.031
3RD	DConS19	Combination	Min			Y	0.041067	0.001227	33.467

Table 5.4 - Story Max Over Avg Displacements (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Maximum in	Average in	Ratio
2ND	DConS19	Combination	Min			X	0.029263	0.005067	5.776
2ND	DConS19	Combination	Min			Y	0.026855	0.000848	31.657
1ST	DConS19	Combination	Min			X	0.016146	0.003421	4.719
1ST	DConS19	Combination	Min			Y	0.014757	0.001459	10.111
GF	DConS19	Combination	Min			X	0.004425	0.001166	3.794
GF	DConS19	Combination	Min			Y	0.004218	0.000771	5.472
ROOF	DConS20	Combination	Max			X	0.109543	0.018551	5.905
ROOF	DConS20	Combination	Max			Y	0.117346	0.048536	2.418
7TH	DConS20	Combination	Max			X	0.103195	0.018168	5.68
7TH	DConS20	Combination	Max			Y	0.107666	0.042449	2.536
6TH	DConS20	Combination	Max			X	0.093866	0.017081	5.495
6TH	DConS20	Combination	Max			Y	0.096072	0.036156	2.657
5TH	DConS20	Combination	Max			X	0.081889	0.015437	5.305
5TH	DConS20	Combination	Max			Y	0.082439	0.029719	2.774
4TH	DConS20	Combination	Max			X	0.067502	0.013274	5.085
4TH	DConS20	Combination	Max			Y	0.0671	0.023305	2.879
3RD	DConS20	Combination	Max			X	0.051327	0.010648	4.82
3RD	DConS20	Combination	Max			Y	0.050657	0.017089	2.964
2ND	DConS20	Combination	Max			X	0.034338	0.007645	4.492
2ND	DConS20	Combination	Max			Y	0.033969	0.011257	3.018
1ST	DConS20	Combination	Max			X	0.017989	0.004417	4.073
1ST	DConS20	Combination	Max			Y	0.01821	0.00603	3.02
GF	DConS20	Combination	Max			X	0.00475	0.001376	3.451
GF	DConS20	Combination	Max			Y	0.005009	0.001713	2.924
ROOF	DConS20	Combination	Min			X	0.563062	0.510779	1.102
ROOF	DConS20	Combination	Min			Y	0.413156	0.293334	1.408
7TH	DConS20	Combination	Min			X	0.497179	0.447725	1.11
7TH	DConS20	Combination	Min			Y	0.376764	0.264629	1.424
6TH	DConS20	Combination	Min			X	0.425869	0.380513	1.119
6TH	DConS20	Combination	Min			Y	0.332847	0.231443	1.438
5TH	DConS20	Combination	Min			X	0.349984	0.310134	1.128
5TH	DConS20	Combination	Min			Y	0.282018	0.194159	1.453
4TH	DConS20	Combination	Min			X	0.271433	0.238364	1.139
4TH	DConS20	Combination	Min			Y	0.225447	0.153685	1.467
3RD	DConS20	Combination	Min			X	0.193506	0.168172	1.151
3RD	DConS20	Combination	Min			Y	0.165697	0.111838	1.482
2ND	DConS20	Combination	Min			X	0.120654	0.103511	1.166
2ND	DConS20	Combination	Min			Y	0.106576	0.071235	1.496
1ST	DConS20	Combination	Min			X	0.058537	0.04933	1.187
1ST	DConS20	Combination	Min			Y	0.053323	0.035373	1.507
GF	DConS20	Combination	Min			X	0.014171	0.011669	1.214
GF	DConS20	Combination	Min			Y	0.013444	0.008999	1.494

Table 5.5 - Story Drifts (Part 1 of 2)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
ROOF	Dead	LinStatic				X	2.2E-05		6	40.334
ROOF	Dead	LinStatic				Y	6.8E-05		29	4.334
ROOF	Live	LinStatic				X	2.9E-05		6	40.334
ROOF	Live	LinStatic				Y	7.6E-05		29	4.334
ROOF	PW	LinStatic				X	7E-06		6	40.334
ROOF	PW	LinStatic				Y	1.3E-05		29	4.334
ROOF	FF	LinStatic				X	7E-06		6	40.334
ROOF	FF	LinStatic				Y	1.5E-05		29	4.334
ROOF	ROOF LIVE	LinStatic				X	4E-06		6	40.334
ROOF	ROOF LIVE	LinStatic				Y	8E-06		29	4.334
ROOF	EQ	LinStatic	Max			X	0.000578		6	40.334
ROOF	EQ	LinStatic	Max			Y	0.000343		8	66.334
ROOF	EQ	LinStatic	Min			X	4.7E-05		10	54.334
ROOF	EQ	LinStatic	Min			Y	5.7E-05		29	4.334
ROOF	wind	LinStatic	Max			X	0.000427		6	40.334
ROOF	wind	LinStatic	Max			Y	0.000329		8	66.334
ROOF	wind	LinStatic	Min			Y	0.000273		8	66.334
ROOF	1.4D	Combination				X	3.1E-05		6	40.334
ROOF	1.4D	Combination				Y	9.5E-05		29	4.334
ROOF	1.2D+1.6L+.5Lr	Combination				X	7.4E-05		6	40.334
ROOF	1.2D+1.6L+.5Lr	Combination				Y	0.000207		29	4.334
ROOF	1.2D+1.6Lr+L	Combination				X	6.1E-05		6	40.334
ROOF	1.2D+1.6Lr+L	Combination				Y	0.000171		29	4.334
ROOF	1.2D+1.6Lr+.8W	Combination	Max			X	0.000375		6	40.334
ROOF	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000314		8	66.334
ROOF	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000167		8	66.334
ROOF	1.2D+1.6Lr-.8W	Combination	Max			X	8.3E-05		6	40.334
ROOF	1.2D+1.6Lr-.8W	Combination	Max			Y	0.00027		8	66.334
ROOF	1.2D+1.6Lr-.8W	Combination	Min			X	0.000309		6	40.334
ROOF	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000212		8	66.334
ROOF	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000741		6	40.334
ROOF	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000645		8	66.334
ROOF	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000318		8	66.334
ROOF	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000157		6	40.334
ROOF	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000556		8	66.334
ROOF	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000627		6	40.334
ROOF	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000407		8	66.334
ROOF	1.246D+1E+1L	Combination	Max			X	0.000634		6	40.334
ROOF	1.246D+1E+1L	Combination	Max			Y	0.000463		8	66.334
ROOF	1.246D+1E+1L	Combination	Min			X	7.6E-05		19	40.334
ROOF	1.246D+1E+1L	Combination	Min			Y	0.000217		29	4.334
ROOF	1.246D-1E+1L	Combination	Max			X	8E-05		6	40.334
ROOF	1.246D-1E+1L	Combination	Max			Y	0.000161		8	66.334
ROOF	1.246D-1E+1L	Combination	Min			X	0.000522		6	40.334
ROOF	1.246D-1E+1L	Combination	Min			Y	0.000223		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
ROOF	0.9D+1.6W	Combination	Max			X	0.000704		6	40.334
ROOF	0.9D+1.6W	Combination	Max			Y	0.000563		8	66.334
ROOF	0.9D+1.6W	Combination	Min			Y	0.0004		8	66.334
ROOF	0.9D-1.6W	Combination	Max			X	0.00012		6	40.334
ROOF	0.9D-1.6W	Combination	Max			Y	0.000473		8	66.334
ROOF	0.9D-1.6W	Combination	Min			X	0.000664		6	40.334
ROOF	0.9D-1.6W	Combination	Min			Y	0.000489		8	66.334
ROOF	.854D+E	Combination	Max			X	0.000597		6	40.334
ROOF	.854D+E	Combination	Max			Y	0.000378		8	66.334
ROOF	.854D+E	Combination	Min			X	4.8E-05		10	54.334
ROOF	.854D+E	Combination	Min			Y	0.000115		29	4.334
ROOF	.854D-E	Combination	Max			Y	7.6E-05		8	66.334
ROOF	.854D-E	Combination	Min			X	0.000559		6	40.334
ROOF	.854D-E	Combination	Min			Y	0.000308		8	66.334
ROOF	D+L	Combination				X	5.1E-05		6	40.334
ROOF	D+L	Combination				Y	0.000144		29	4.334
ROOF	D+.5L	Combination				X	3.6E-05		6	40.334
ROOF	D+.5L	Combination				Y	0.000106		29	4.334
ROOF	D+.5L+.7W	Combination	Max			X	0.000336		6	40.334
ROOF	D+.5L+.7W	Combination	Max			Y	0.000306		8	66.334
ROOF	D+.5L+.7W	Combination	Min			X	3.9E-05		19	40.334
ROOF	D+.5L+.7W	Combination	Min			Y	0.000116		8	66.334
ROOF	D+.5L-.7W	Combination	Max			X	8E-05		6	40.334
ROOF	D+.5L-.7W	Combination	Max			Y	0.000266		8	66.334
ROOF	D+.5L-.7W	Combination	Min			X	0.000263		6	40.334
ROOF	D+.5L-.7W	Combination	Min			Y	0.000155		8	66.334
ROOF	DConS1	Combination				X	5E-05		6	40.334
ROOF	DConS1	Combination				Y	0.000136		29	4.334
ROOF	DConS2	Combination				X	8.9E-05		6	40.334
ROOF	DConS2	Combination				Y	0.000237		29	4.334
ROOF	DConS3	Combination				X	9.1E-05		6	40.334
ROOF	DConS3	Combination				Y	0.000241		29	4.334
ROOF	DConS4	Combination				X	7.8E-05		6	40.334
ROOF	DConS4	Combination				Y	0.000205		29	4.334
ROOF	DConS5	Combination	Max			X	0.000756		6	40.334
ROOF	DConS5	Combination	Max			Y	0.000655		8	66.334
ROOF	DConS5	Combination	Min			X	8.2E-05		19	40.334
ROOF	DConS5	Combination	Min			Y	0.000307		8	66.334
ROOF	DConS6	Combination	Max			X	0.000172		6	40.334
ROOF	DConS6	Combination	Max			Y	0.000566		8	66.334
ROOF	DConS6	Combination	Min			X	0.000612		6	40.334
ROOF	DConS6	Combination	Min			Y	0.000397		8	66.334
ROOF	DConS7	Combination	Max			X	0.000758		6	40.334
ROOF	DConS7	Combination	Max			Y	0.000656		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
ROOF	DConS7	Combination	Min			X	8.2E-05		19	40.334
ROOF	DConS7	Combination	Min			Y	0.000307		8	66.334
ROOF	DConS8	Combination	Max			X	0.000174		6	40.334
ROOF	DConS8	Combination	Max			Y	0.000566		8	66.334
ROOF	DConS8	Combination	Min			X	0.00061		6	40.334
ROOF	DConS8	Combination	Min			Y	0.000396		8	66.334
ROOF	DConS9	Combination	Max			X	0.000391		6	40.334
ROOF	DConS9	Combination	Max			Y	0.000325		8	66.334
ROOF	DConS9	Combination	Min			X	3.5E-05		19	40.334
ROOF	DConS9	Combination	Min			Y	0.000156		8	66.334
ROOF	DConS10	Combination	Max			X	9.9E-05		6	40.334
ROOF	DConS10	Combination	Max			Y	0.000281		8	66.334
ROOF	DConS10	Combination	Min			X	0.000298		10	54.334
ROOF	DConS10	Combination	Min			Y	0.000201		8	66.334
ROOF	DConS11	Combination	Max			X	0.000385		6	40.334
ROOF	DConS11	Combination	Max			Y	0.000323		8	66.334
ROOF	DConS11	Combination	Min			X	3.5E-05		19	40.334
ROOF	DConS11	Combination	Min			Y	0.000158		8	66.334
ROOF	DConS12	Combination	Max			X	9.3E-05		6	40.334
ROOF	DConS12	Combination	Max			Y	0.000278		8	66.334
ROOF	DConS12	Combination	Min			X	0.000299		6	40.334
ROOF	DConS12	Combination	Min			Y	0.000203		8	66.334
ROOF	DConS13	Combination	Max			X	0.000716		6	40.334
ROOF	DConS13	Combination	Max			Y	0.000571		8	66.334
ROOF	DConS13	Combination	Min			Y	0.000392		8	66.334
ROOF	DConS14	Combination	Max			X	0.000132		6	40.334
ROOF	DConS14	Combination	Max			Y	0.000482		8	66.334
ROOF	DConS14	Combination	Min			X	0.000651		6	40.334
ROOF	DConS14	Combination	Min			Y	0.000481		8	66.334
ROOF	DConS15	Combination	Max			X	0.000653		6	40.334
ROOF	DConS15	Combination	Max			Y	0.000477		8	66.334
ROOF	DConS15	Combination	Min			X	8.1E-05		19	40.334
ROOF	DConS15	Combination	Min			Y	0.000258		29	4.334
ROOF	DConS16	Combination	Max			X	0.0001		6	40.334
ROOF	DConS16	Combination	Max			Y	0.000175		8	66.334
ROOF	DConS16	Combination	Min			X	0.000502		6	40.334
ROOF	DConS16	Combination	Min			Y	0.000209		8	66.334
ROOF	DConS17	Combination	Max			X	0.000625		6	40.334
ROOF	DConS17	Combination	Max			Y	0.000408		8	66.334
ROOF	DConS17	Combination	Min			X	5.5E-05		19	40.334
ROOF	DConS17	Combination	Min			Y	0.000183		29	4.334
ROOF	DConS18	Combination	Max			X	7.1E-05		6	40.334
ROOF	DConS18	Combination	Max			Y	0.000106		8	66.334
ROOF	DConS18	Combination	Min			X	0.000531		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
ROOF	DConS18	Combination	Min			Y	0.000278		8	66.334
ROOF	DConS19	Combination	Max			X	0.000607		6	40.334
ROOF	DConS19	Combination	Max			Y	0.000383		8	66.334
ROOF	DConS19	Combination	Min			X	5E-05		19	40.334
ROOF	DConS19	Combination	Min			Y	0.000134		29	4.334
ROOF	DConS20	Combination	Max			Y	8.1E-05		8	66.334
ROOF	DConS20	Combination	Min			X	0.000549		6	40.334
ROOF	DConS20	Combination	Min			Y	0.000303		8	66.334
7TH	Dead	LinStatic				X	2.2E-05		6	40.334
7TH	Dead	LinStatic				Y	6.6E-05		29	4.334
7TH	Live	LinStatic				X	2.8E-05		6	40.334
7TH	Live	LinStatic				Y	7.3E-05		29	4.334
7TH	PW	LinStatic				X	7E-06		6	40.334
7TH	PW	LinStatic				Y	1.3E-05		29	4.334
7TH	FF	LinStatic				X	8E-06		6	40.334
7TH	FF	LinStatic				Y	1.5E-05		29	4.334
7TH	ROOF LIVE	LinStatic				X	5E-06		6	40.334
7TH	ROOF LIVE	LinStatic				Y	8E-06		29	4.334
7TH	EQ	LinStatic	Max			X	0.000624		6	40.334
7TH	EQ	LinStatic	Max			Y	0.000402		8	66.334
7TH	EQ	LinStatic	Min			X	5.9E-05		10	54.334
7TH	EQ	LinStatic	Min			Y	6.7E-05		29	4.334
7TH	wind	LinStatic	Max			X	0.000458		6	40.334
7TH	wind	LinStatic	Max			Y	0.000382		8	66.334
7TH	wind	LinStatic	Min			X	8.7E-05		6	40.334
7TH	wind	LinStatic	Min			Y	0.000323		8	66.334
7TH	1.4D	Combination				X	3.1E-05		6	40.334
7TH	1.4D	Combination				Y	9.2E-05		29	4.334
7TH	1.2D+1.6L+.5Lr	Combination				X	7.4E-05		6	40.334
7TH	1.2D+1.6L+.5Lr	Combination				Y	0.0002		29	4.334
7TH	1.2D+1.6Lr+L	Combination				X	6.3E-05		6	40.334
7TH	1.2D+1.6Lr+L	Combination				Y	0.000164		29	4.334
7TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.000401		6	40.334
7TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000347		8	66.334
7TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000216		8	66.334
7TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.000105		6	40.334
7TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.0003		8	66.334
7TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.000331		6	40.334
7TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000264		8	66.334
7TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.00079		6	40.334
7TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000721		8	66.334
7TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000406		8	66.334
7TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000197		6	40.334
7TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000627		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
7TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000675		6	40.334
7TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000501		8	66.334
7TH	1.246D+1E+1L	Combination	Max			X	0.000679		6	40.334
7TH	1.246D+1E+1L	Combination	Max			Y	0.000514		8	66.334
7TH	1.246D+1E+1L	Combination	Min			X	8.3E-05		10	54.334
7TH	1.246D+1E+1L	Combination	Min			Y	0.000222		29	4.334
7TH	1.246D-1E+1L	Combination	Max			X	0.000104		6	40.334
7TH	1.246D-1E+1L	Combination	Max			Y	0.000174		8	66.334
7TH	1.246D-1E+1L	Combination	Min			X	0.000568		6	40.334
7TH	1.246D-1E+1L	Combination	Min			Y	0.000289		8	66.334
7TH	0.9D+1.6W	Combination	Max			X	0.000753		6	40.334
7TH	0.9D+1.6W	Combination	Max			Y	0.000644		8	66.334
7TH	0.9D+1.6W	Combination	Min			Y	0.000483		8	66.334
7TH	0.9D-1.6W	Combination	Max			X	0.00016		6	40.334
7TH	0.9D-1.6W	Combination	Max			Y	0.00055		8	66.334
7TH	0.9D-1.6W	Combination	Min			X	0.000713		6	40.334
7TH	0.9D-1.6W	Combination	Min			Y	0.000577		8	66.334
7TH	.854D+E	Combination	Max			X	0.000643		6	40.334
7TH	.854D+E	Combination	Max			Y	0.000433		8	66.334
7TH	.854D+E	Combination	Min			X	6E-05		10	54.334
7TH	.854D+E	Combination	Min			Y	0.000123		29	4.334
7TH	.854D-E	Combination	Max			X	6.7E-05		6	40.334
7TH	.854D-E	Combination	Max			Y	9.3E-05		8	66.334
7TH	.854D-E	Combination	Min			X	0.000605		6	40.334
7TH	.854D-E	Combination	Min			Y	0.00037		8	66.334
7TH	D+L	Combination				X	5E-05		6	40.334
7TH	D+L	Combination				Y	0.000139		29	4.334
7TH	D+.5L	Combination				X	3.6E-05		6	40.334
7TH	D+.5L	Combination				Y	0.000102		29	4.334
7TH	D+.5L+.7W	Combination	Max			X	0.000357		6	40.334
7TH	D+.5L+.7W	Combination	Max			Y	0.000338		8	66.334
7TH	D+.5L+.7W	Combination	Min			Y	0.000156		8	66.334
7TH	D+.5L-.7W	Combination	Max			X	9.7E-05		6	40.334
7TH	D+.5L-.7W	Combination	Max			Y	0.000296		8	66.334
7TH	D+.5L-.7W	Combination	Min			X	0.000284		6	40.334
7TH	D+.5L-.7W	Combination	Min			Y	0.000197		8	66.334
7TH	DConS1	Combination				X	5.1E-05		6	40.334
7TH	DConS1	Combination				Y	0.000131		29	4.334
7TH	DConS2	Combination				X	8.9E-05		6	40.334
7TH	DConS2	Combination				Y	0.000229		29	4.334
7TH	DConS3	Combination				X	9.1E-05		6	40.334
7TH	DConS3	Combination				Y	0.000233		29	4.334
7TH	DConS4	Combination				X	8E-05		6	40.334
7TH	DConS4	Combination				Y	0.000198		29	4.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
7TH	DConS5	Combination	Max			X	0.000805		6	40.334
7TH	DConS5	Combination	Max			Y	0.000731		8	66.334
7TH	DConS5	Combination	Min			Y	0.000397		8	66.334
7TH	DConS6	Combination	Max			X	0.000211		6	40.334
7TH	DConS6	Combination	Max			Y	0.000636		8	66.334
7TH	DConS6	Combination	Min			X	0.000661		6	40.334
7TH	DConS6	Combination	Min			Y	0.000491		8	66.334
7TH	DConS7	Combination	Max			X	0.000807		6	40.334
7TH	DConS7	Combination	Max			Y	0.00073		8	66.334
7TH	DConS7	Combination	Min			Y	0.000398		8	66.334
7TH	DConS8	Combination	Max			X	0.000214		6	40.334
7TH	DConS8	Combination	Max			Y	0.000635		8	66.334
7TH	DConS8	Combination	Min			X	0.000658		6	40.334
7TH	DConS8	Combination	Min			Y	0.000492		8	66.334
7TH	DConS9	Combination	Max			X	0.000419		6	40.334
7TH	DConS9	Combination	Max			Y	0.000356		8	66.334
7TH	DConS9	Combination	Min			Y	0.000208		8	66.334
7TH	DConS10	Combination	Max			X	0.000122		6	40.334
7TH	DConS10	Combination	Max			Y	0.000309		8	66.334
7TH	DConS10	Combination	Min			X	0.000314		6	40.334
7TH	DConS10	Combination	Min			Y	0.000255		8	66.334
7TH	DConS11	Combination	Max			X	0.00041		6	40.334
7TH	DConS11	Combination	Max			Y	0.000359		8	66.334
7TH	DConS11	Combination	Min			Y	0.000205		8	66.334
7TH	DConS12	Combination	Max			X	0.000114		6	40.334
7TH	DConS12	Combination	Max			Y	0.000312		8	66.334
7TH	DConS12	Combination	Min			X	0.000322		6	40.334
7TH	DConS12	Combination	Min			Y	0.000252		8	66.334
7TH	DConS13	Combination	Max			X	0.000766		6	40.334
7TH	DConS13	Combination	Max			Y	0.000651		8	66.334
7TH	DConS13	Combination	Min			Y	0.000477		8	66.334
7TH	DConS14	Combination	Max			X	0.000173		6	40.334
7TH	DConS14	Combination	Max			Y	0.000557		8	66.334
7TH	DConS14	Combination	Min			X	0.0007		6	40.334
7TH	DConS14	Combination	Min			Y	0.000571		8	66.334
7TH	DConS15	Combination	Max			X	0.000699		6	40.334
7TH	DConS15	Combination	Max			Y	0.000526		8	66.334
7TH	DConS15	Combination	Min			X	8.3E-05		19	40.334
7TH	DConS15	Combination	Min			Y	0.000262		29	4.334
7TH	DConS16	Combination	Max			X	0.000124		6	40.334
7TH	DConS16	Combination	Max			Y	0.000185		8	66.334
7TH	DConS16	Combination	Min			X	0.000548		6	40.334
7TH	DConS16	Combination	Min			Y	0.000277		8	66.334
7TH	DConS17	Combination	Max			X	0.000671		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
7TH	DConS17	Combination	Max			Y	0.000459		8	66.334
7TH	DConS17	Combination	Min			X	5.9E-05		19	40.334
7TH	DConS17	Combination	Min			Y	0.000189		29	4.334
7TH	DConS18	Combination	Max			X	9.6E-05		6	40.334
7TH	DConS18	Combination	Max			Y	0.000119		8	66.334
7TH	DConS18	Combination	Min			X	0.000576		6	40.334
7TH	DConS18	Combination	Min			Y	0.000344		8	66.334
7TH	DConS19	Combination	Max			X	0.000653		6	40.334
7TH	DConS19	Combination	Max			Y	0.000437		8	66.334
7TH	DConS19	Combination	Min			X	5.8E-05		10	54.334
7TH	DConS19	Combination	Min			Y	0.000142		29	4.334
7TH	DConS20	Combination	Max			X	7.8E-05		6	40.334
7TH	DConS20	Combination	Max			Y	9.7E-05		8	66.334
7TH	DConS20	Combination	Min			X	0.000594		6	40.334
7TH	DConS20	Combination	Min			Y	0.000366		8	66.334
6TH	Dead	LinStatic				X	2.1E-05		6	40.334
6TH	Dead	LinStatic				Y	6.2E-05		29	4.334
6TH	Live	LinStatic				X	2.7E-05		6	40.334
6TH	Live	LinStatic				Y	6.9E-05		29	4.334
6TH	PW	LinStatic				X	6E-06		6	40.334
6TH	PW	LinStatic				Y	1.2E-05		29	4.334
6TH	FF	LinStatic				X	7E-06		6	40.334
6TH	FF	LinStatic				Y	1.4E-05		29	4.334
6TH	ROOF LIVE	LinStatic				X	4E-06		6	40.334
6TH	ROOF LIVE	LinStatic				Y	6E-06		29	4.334
6TH	EQ	LinStatic	Max			X	0.00066		6	40.334
6TH	EQ	LinStatic	Max			Y	0.000457		8	66.334
6TH	EQ	LinStatic	Min			X	7.2E-05		6	40.334
6TH	EQ	LinStatic	Min			Y	8.1E-05		4	66.334
6TH	wind	LinStatic	Max			X	0.000485		6	40.334
6TH	wind	LinStatic	Max			Y	0.000437		8	66.334
6TH	wind	LinStatic	Min			X	0.000114		6	40.334
6TH	wind	LinStatic	Min			Y	0.000375		8	66.334
6TH	1.4D	Combination				X	2.9E-05		6	40.334
6TH	1.4D	Combination				Y	8.6E-05		29	4.334
6TH	1.2D+1.6L+.5Lr	Combination				X	6.9E-05		6	40.334
6TH	1.2D+1.6L+.5Lr	Combination				Y	0.000187		29	4.334
6TH	1.2D+1.6Lr+L	Combination				X	5.7E-05		6	40.334
6TH	1.2D+1.6Lr+L	Combination				Y	0.000153		29	4.334
6TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.000419		6	40.334
6TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.00039		8	66.334
6TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000259		8	66.334
6TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.000122		6	40.334
6TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000341		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
6TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.000357		6	40.334
6TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000309		8	66.334
6TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000829		6	40.334
6TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000802		8	66.334
6TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000496		8	66.334
6TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000235		6	40.334
6TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000703		8	66.334
6TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000722		6	40.334
6TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000596		8	66.334
6TH	1.246D+1E+1L	Combination	Max			X	0.000712		6	40.334
6TH	1.246D+1E+1L	Combination	Max			Y	0.000562		8	66.334
6TH	1.246D+1E+1L	Combination	Min			X	9.3E-05		10	54.334
6TH	1.246D+1E+1L	Combination	Min			Y	0.000222		29	4.334
6TH	1.246D-1E+1L	Combination	Max			X	0.000125		6	40.334
6TH	1.246D-1E+1L	Combination	Max			Y	0.000186		4	66.334
6TH	1.246D-1E+1L	Combination	Min			X	0.000607		6	40.334
6TH	1.246D-1E+1L	Combination	Min			Y	0.000351		8	66.334
6TH	0.9D+1.6W	Combination	Max			X	0.000794		6	40.334
6TH	0.9D+1.6W	Combination	Max			Y	0.00073		8	66.334
6TH	0.9D+1.6W	Combination	Min			X	0.000163		6	40.334
6TH	0.9D+1.6W	Combination	Min			Y	0.000569		8	66.334
6TH	0.9D-1.6W	Combination	Max			X	0.000201		6	40.334
6TH	0.9D-1.6W	Combination	Max			Y	0.000631		8	66.334
6TH	0.9D-1.6W	Combination	Min			X	0.000757		6	40.334
6TH	0.9D-1.6W	Combination	Min			Y	0.000668		8	66.334
6TH	.854D+E	Combination	Max			X	0.000677		6	40.334
6TH	.854D+E	Combination	Max			Y	0.000486		8	66.334
6TH	.854D+E	Combination	Min			X	7.2E-05		10	54.334
6TH	.854D+E	Combination	Min			Y	0.000129		29	4.334
6TH	.854D-E	Combination	Max			X	9E-05		6	40.334
6TH	.854D-E	Combination	Max			Y	0.00011		4	66.334
6TH	.854D-E	Combination	Min			X	0.000642		6	40.334
6TH	.854D-E	Combination	Min			Y	0.000427		8	66.334
6TH	D+L	Combination				X	4.7E-05		6	40.334
6TH	D+L	Combination				Y	0.00013		29	4.334
6TH	D+.5L	Combination				X	3.4E-05		6	40.334
6TH	D+.5L	Combination				Y	9.6E-05		29	4.334
6TH	D+.5L+.7W	Combination	Max			X	0.000373		6	40.334
6TH	D+.5L+.7W	Combination	Max			Y	0.000371		8	66.334
6TH	D+.5L+.7W	Combination	Min			Y	0.000197		8	66.334
6TH	D+.5L-.7W	Combination	Max			X	0.000114		6	40.334
6TH	D+.5L-.7W	Combination	Max			Y	0.000328		8	66.334
6TH	D+.5L-.7W	Combination	Min			X	0.000305		6	40.334
6TH	D+.5L-.7W	Combination	Min			Y	0.00024		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
6TH	DConS1	Combination				X	4.8E-05		6	40.334
6TH	DConS1	Combination				Y	0.000123		29	4.334
6TH	DConS2	Combination				X	8.4E-05		6	40.334
6TH	DConS2	Combination				Y	0.000215		29	4.334
6TH	DConS3	Combination				X	8.5E-05		6	40.334
6TH	DConS3	Combination				Y	0.000218		29	4.334
6TH	DConS4	Combination				X	7.4E-05		6	40.334
6TH	DConS4	Combination				Y	0.000184		29	4.334
6TH	DConS5	Combination	Max			X	0.000843		6	40.334
6TH	DConS5	Combination	Max			Y	0.00081		8	66.334
6TH	DConS5	Combination	Min			Y	0.000488		8	66.334
6TH	DConS6	Combination	Max			X	0.000249		6	40.334
6TH	DConS6	Combination	Max			Y	0.000711		8	66.334
6TH	DConS6	Combination	Min			X	0.000708		6	40.334
6TH	DConS6	Combination	Min			Y	0.000588		8	66.334
6TH	DConS7	Combination	Max			X	0.000845		6	40.334
6TH	DConS7	Combination	Max			Y	0.00081		8	66.334
6TH	DConS7	Combination	Min			Y	0.000489		8	66.334
6TH	DConS8	Combination	Max			X	0.000251		6	40.334
6TH	DConS8	Combination	Max			Y	0.000711		8	66.334
6TH	DConS8	Combination	Min			X	0.000706		6	40.334
6TH	DConS8	Combination	Min			Y	0.000588		8	66.334
6TH	DConS9	Combination	Max			X	0.000435		6	40.334
6TH	DConS9	Combination	Max			Y	0.000398		8	66.334
6TH	DConS9	Combination	Min			Y	0.000251		8	66.334
6TH	DConS10	Combination	Max			X	0.000138		6	40.334
6TH	DConS10	Combination	Max			Y	0.000349		8	66.334
6TH	DConS10	Combination	Min			X	0.000341		6	40.334
6TH	DConS10	Combination	Min			Y	0.000301		8	66.334
6TH	DConS11	Combination	Max			X	0.000429		6	40.334
6TH	DConS11	Combination	Max			Y	0.000399		8	66.334
6TH	DConS11	Combination	Min			Y	0.00025		8	66.334
6TH	DConS12	Combination	Max			X	0.000132		6	40.334
6TH	DConS12	Combination	Max			Y	0.000349		8	66.334
6TH	DConS12	Combination	Min			X	0.000347		6	40.334
6TH	DConS12	Combination	Min			Y	0.0003		8	66.334
6TH	DConS13	Combination	Max			X	0.000807		6	40.334
6TH	DConS13	Combination	Max			Y	0.000736		8	66.334
6TH	DConS13	Combination	Min			X	0.000151		6	40.334
6TH	DConS13	Combination	Min			Y	0.000563		8	66.334
6TH	DConS14	Combination	Max			X	0.000213		6	40.334
6TH	DConS14	Combination	Max			Y	0.000637		8	66.334
6TH	DConS14	Combination	Min			X	0.000745		6	40.334
6TH	DConS14	Combination	Min			Y	0.000662		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
6TH	DConS15	Combination	Max			X	0.000731		6	40.334
6TH	DConS15	Combination	Max			Y	0.000572		8	66.334
6TH	DConS15	Combination	Min			X	9.2E-05		10	54.334
6TH	DConS15	Combination	Min			Y	0.000259		29	4.334
6TH	DConS16	Combination	Max			X	0.000143		6	40.334
6TH	DConS16	Combination	Max			Y	0.000196		12	66.334
6TH	DConS16	Combination	Min			X	0.000589		6	40.334
6TH	DConS16	Combination	Min			Y	0.000341		8	66.334
6TH	DConS17	Combination	Max			X	0.000704		6	40.334
6TH	DConS17	Combination	Max			Y	0.00051		8	66.334
6TH	DConS17	Combination	Min			X	7E-05		10	54.334
6TH	DConS17	Combination	Min			Y	0.00019		29	4.334
6TH	DConS18	Combination	Max			X	0.000117		6	40.334
6TH	DConS18	Combination	Max			Y	0.000134		4	66.334
6TH	DConS18	Combination	Min			X	0.000615		6	40.334
6TH	DConS18	Combination	Min			Y	0.000403		8	66.334
6TH	DConS19	Combination	Max			X	0.000687		6	40.334
6TH	DConS19	Combination	Max			Y	0.00049		8	66.334
6TH	DConS19	Combination	Min			X	7.1E-05		10	54.334
6TH	DConS19	Combination	Min			Y	0.000147		29	4.334
6TH	DConS20	Combination	Max			X	0.0001		6	40.334
6TH	DConS20	Combination	Max			Y	0.000114		4	66.334
6TH	DConS20	Combination	Min			X	0.000632		6	40.334
6TH	DConS20	Combination	Min			Y	0.000424		8	66.334
5TH	Dead	LinStatic				X	1.9E-05		6	40.334
5TH	Dead	LinStatic				Y	5.6E-05		29	4.334
5TH	Live	LinStatic				X	2.5E-05		6	40.334
5TH	Live	LinStatic				Y	6.2E-05		29	4.334
5TH	PW	LinStatic				X	6E-06		6	40.334
5TH	PW	LinStatic				Y	1.1E-05		29	4.334
5TH	FF	LinStatic				X	7E-06		6	40.334
5TH	FF	LinStatic				Y	1.3E-05		29	4.334
5TH	ROOF LIVE	LinStatic				X	3E-06		6	40.334
5TH	ROOF LIVE	LinStatic				Y	5E-06		29	4.334
5TH	EQ	LinStatic	Max			X	0.00068		6	40.334
5TH	EQ	LinStatic	Max			Y	0.000501		8	66.334
5TH	EQ	LinStatic	Min			X	9.5E-05		6	40.334
5TH	EQ	LinStatic	Min			Y	9.8E-05		8	66.334
5TH	wind	LinStatic	Max			X	0.000504		6	40.334
5TH	wind	LinStatic	Max			Y	0.000489		8	66.334
5TH	wind	LinStatic	Min			X	0.000141		6	40.334
5TH	wind	LinStatic	Min			Y	0.000424		8	66.334
5TH	1.4D	Combination				X	2.6E-05		6	40.334
5TH	1.4D	Combination				Y	7.8E-05		29	4.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
5TH	1.2D+1.6L+.5Lr	Combination				X	6.3E-05		6	40.334
5TH	1.2D+1.6L+.5Lr	Combination				Y	0.00017		29	4.334
5TH	1.2D+1.6Lr+L	Combination				X	5.2E-05		6	40.334
5TH	1.2D+1.6Lr+L	Combination				Y	0.000138		29	4.334
5TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.000431		6	40.334
5TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000428		8	66.334
5TH	1.2D+1.6Lr+.8W	Combination	Min			X	8.5E-05		6	40.334
5TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000302		8	66.334
5TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.00014		6	40.334
5TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000377		8	66.334
5TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.000376		6	40.334
5TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000353		8	66.334
5TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000855		6	40.334
5TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000875		8	66.334
5TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.000176		6	40.334
5TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000586		8	66.334
5TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000273		6	40.334
5TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000772		8	66.334
5TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000758		6	40.334
5TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000689		8	66.334
5TH	1.246D+1E+1L	Combination	Max			X	0.000728		6	40.334
5TH	1.246D+1E+1L	Combination	Max			Y	0.000595		8	66.334
5TH	1.246D+1E+1L	Combination	Min			X	0.000102		10	54.334
5TH	1.246D+1E+1L	Combination	Min			Y	0.000217		7	4.334
5TH	1.246D-1E+1L	Combination	Max			X	0.000143		6	40.334
5TH	1.246D-1E+1L	Combination	Max			Y	0.000193		8	66.334
5TH	1.246D-1E+1L	Combination	Min			X	0.000632		6	40.334
5TH	1.246D-1E+1L	Combination	Min			Y	0.000407		8	66.334
5TH	0.9D+1.6W	Combination	Max			X	0.000824		6	40.334
5TH	0.9D+1.6W	Combination	Max			Y	0.00081		8	66.334
5TH	0.9D+1.6W	Combination	Min			X	0.000208		6	40.334
5TH	0.9D+1.6W	Combination	Min			Y	0.000651		8	66.334
5TH	0.9D-1.6W	Combination	Max			X	0.000242		6	40.334
5TH	0.9D-1.6W	Combination	Max			Y	0.000707		8	66.334
5TH	0.9D-1.6W	Combination	Min			X	0.00079		6	40.334
5TH	0.9D-1.6W	Combination	Min			Y	0.000754		8	66.334
5TH	.854D+E	Combination	Max			X	0.000696		6	40.334
5TH	.854D+E	Combination	Max			Y	0.000528		8	66.334
5TH	.854D+E	Combination	Min			Y	0.000132		7	4.334
5TH	.854D-E	Combination	Max			X	0.000111		6	40.334
5TH	.854D-E	Combination	Max			Y	0.000125		8	66.334
5TH	.854D-E	Combination	Min			X	0.000664		6	40.334
5TH	.854D-E	Combination	Min			Y	0.000474		8	66.334
5TH	D+L	Combination				X	4.3E-05		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
5TH	D+L	Combination				Y	0.000118		29	4.334
5TH	D+.5L	Combination				X	3.1E-05		6	40.334
5TH	D+.5L	Combination				Y	8.7E-05		29	4.334
5TH	D+.5L+.7W	Combination	Max			X	0.000384		6	40.334
5TH	D+.5L+.7W	Combination	Max			Y	0.000401		8	66.334
5TH	D+.5L+.7W	Combination	Min			Y	0.000238		8	66.334
5TH	D+.5L-.7W	Combination	Max			X	0.000129		6	40.334
5TH	D+.5L-.7W	Combination	Max			Y	0.000356		8	66.334
5TH	D+.5L-.7W	Combination	Min			X	0.000322		6	40.334
5TH	D+.5L-.7W	Combination	Min			Y	0.000283		8	66.334
5TH	DConS1	Combination				X	4.4E-05		6	40.334
5TH	DConS1	Combination				Y	0.000111		29	4.334
5TH	DConS2	Combination				X	7.7E-05		6	40.334
5TH	DConS2	Combination				Y	0.000195		29	4.334
5TH	DConS3	Combination				X	7.8E-05		6	40.334
5TH	DConS3	Combination				Y	0.000198		29	4.334
5TH	DConS4	Combination				X	6.7E-05		6	40.334
5TH	DConS4	Combination				Y	0.000166		29	4.334
5TH	DConS5	Combination	Max			X	0.000869		6	40.334
5TH	DConS5	Combination	Max			Y	0.000882		8	66.334
5TH	DConS5	Combination	Min			X	0.000163		6	40.334
5TH	DConS5	Combination	Min			Y	0.000579		8	66.334
5TH	DConS6	Combination	Max			X	0.000287		6	40.334
5TH	DConS6	Combination	Max			Y	0.000779		8	66.334
5TH	DConS6	Combination	Min			X	0.000745		6	40.334
5TH	DConS6	Combination	Min			Y	0.000682		8	66.334
5TH	DConS7	Combination	Max			X	0.00087		6	40.334
5TH	DConS7	Combination	Max			Y	0.000882		8	66.334
5TH	DConS7	Combination	Min			X	0.000161		6	40.334
5TH	DConS7	Combination	Min			Y	0.000579		8	66.334
5TH	DConS8	Combination	Max			X	0.000288		6	40.334
5TH	DConS8	Combination	Max			Y	0.000779		8	66.334
5TH	DConS8	Combination	Min			X	0.000743		6	40.334
5TH	DConS8	Combination	Min			Y	0.000682		8	66.334
5TH	DConS9	Combination	Max			X	0.000445		6	40.334
5TH	DConS9	Combination	Max			Y	0.000435		8	66.334
5TH	DConS9	Combination	Min			Y	0.000295		8	66.334
5TH	DConS10	Combination	Max			X	0.000155		6	40.334
5TH	DConS10	Combination	Max			Y	0.000384		8	66.334
5TH	DConS10	Combination	Min			X	0.000361		6	40.334
5TH	DConS10	Combination	Min			Y	0.000347		8	66.334
5TH	DConS11	Combination	Max			X	0.000441		6	40.334
5TH	DConS11	Combination	Max			Y	0.000435		8	66.334
5TH	DConS11	Combination	Min			X	7.5E-05		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
5TH	DConS11	Combination	Min			Y	0.000295		8	66.334
5TH	DConS12	Combination	Max			X	0.00015		6	40.334
5TH	DConS12	Combination	Max			Y	0.000384		8	66.334
5TH	DConS12	Combination	Min			X	0.000366		6	40.334
5TH	DConS12	Combination	Min			Y	0.000347		8	66.334
5TH	DConS13	Combination	Max			X	0.000835		6	40.334
5TH	DConS13	Combination	Max			Y	0.000815		8	66.334
5TH	DConS13	Combination	Min			X	0.000197		6	40.334
5TH	DConS13	Combination	Min			Y	0.000646		8	66.334
5TH	DConS14	Combination	Max			X	0.000253		6	40.334
5TH	DConS14	Combination	Max			Y	0.000712		8	66.334
5TH	DConS14	Combination	Min			X	0.000779		6	40.334
5TH	DConS14	Combination	Min			Y	0.000748		15	66.334
5TH	DConS15	Combination	Max			X	0.000745		6	40.334
5TH	DConS15	Combination	Max			Y	0.000605		8	66.334
5TH	DConS15	Combination	Min			X	0.000101		10	54.334
5TH	DConS15	Combination	Min			Y	0.00025		7	4.334
5TH	DConS16	Combination	Max			X	0.00016		6	40.334
5TH	DConS16	Combination	Max			Y	0.000202		8	66.334
5TH	DConS16	Combination	Min			X	0.000614		6	40.334
5TH	DConS16	Combination	Min			Y	0.000397		8	66.334
5TH	DConS17	Combination	Max			X	0.00072		6	40.334
5TH	DConS17	Combination	Max			Y	0.000549		8	66.334
5TH	DConS17	Combination	Min			X	8.2E-05		10	54.334
5TH	DConS17	Combination	Min			Y	0.000188		7	4.334
5TH	DConS18	Combination	Max			X	0.000136		6	40.334
5TH	DConS18	Combination	Max			Y	0.000146		8	66.334
5TH	DConS18	Combination	Min			X	0.000639		6	40.334
5TH	DConS18	Combination	Min			Y	0.000453		8	66.334
5TH	DConS19	Combination	Max			X	0.000705		6	40.334
5TH	DConS19	Combination	Max			Y	0.000531		8	66.334
5TH	DConS19	Combination	Min			X	8.2E-05		10	54.334
5TH	DConS19	Combination	Min			Y	0.000148		7	4.334
5TH	DConS20	Combination	Max			X	0.00012		6	40.334
5TH	DConS20	Combination	Max			Y	0.000128		8	66.334
5TH	DConS20	Combination	Min			X	0.000655		6	40.334
5TH	DConS20	Combination	Min			Y	0.000471		8	66.334
4TH	Dead	LinStatic				X	1.6E-05		6	40.334
4TH	Dead	LinStatic				Y	4.9E-05		29	4.334
4TH	Live	LinStatic				X	2.2E-05		6	40.334
4TH	Live	LinStatic				Y	5.4E-05		29	4.334
4TH	PW	LinStatic				X	5E-06		6	40.334
4TH	PW	LinStatic				Y	1E-05		29	4.334
4TH	FF	LinStatic				X	6E-06		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
4TH	FF	LinStatic				Y	1.1E-05		29	4.334
4TH	ROOF LIVE	LinStatic				X	2E-06		6	40.334
4TH	ROOF LIVE	LinStatic				Y	4E-06		29	4.334
4TH	EQ	LinStatic	Max			X	0.000671		6	40.334
4TH	EQ	LinStatic	Max			Y	0.000523		8	66.334
4TH	EQ	LinStatic	Min			X	0.000113		6	40.334
4TH	EQ	LinStatic	Min			Y	0.000112		8	66.334
4TH	wind	LinStatic	Max			X	0.000507		6	40.334
4TH	wind	LinStatic	Max			Y	0.000525		8	66.334
4TH	wind	LinStatic	Min			X	0.000164		6	40.334
4TH	wind	LinStatic	Min			Y	0.000461		8	66.334
4TH	1.4D	Combination				X	2.3E-05		6	40.334
4TH	1.4D	Combination				Y	6.8E-05		29	4.334
4TH	1.2D+1.6L+.5Lr	Combination				X	5.6E-05		6	40.334
4TH	1.2D+1.6L+.5Lr	Combination				Y	0.000147		29	4.334
4TH	1.2D+1.6Lr+L	Combination				X	4.5E-05		6	40.334
4TH	1.2D+1.6Lr+L	Combination				Y	0.000119		29	4.334
4TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.000428		6	40.334
4TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000453		8	66.334
4TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.000108		6	40.334
4TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000336		8	66.334
4TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.000154		6	40.334
4TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000402		8	66.334
4TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.000382		6	40.334
4TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000387		8	66.334
4TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000853		6	40.334
4TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000919		8	66.334
4TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.00022		6	40.334
4TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000658		8	66.334
4TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000305		6	40.334
4TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000818		8	66.334
4TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000768		6	40.334
4TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.00076		8	66.334
4TH	1.246D+1E+1L	Combination	Max			X	0.000714		6	40.334
4TH	1.246D+1E+1L	Combination	Max			Y	0.000604		8	66.334
4TH	1.246D+1E+1L	Combination	Min			X	0.000107		10	54.334
4TH	1.246D+1E+1L	Combination	Min			Y	0.000204		29	4.334
4TH	1.246D-1E+1L	Combination	Max			X	0.000155		6	40.334
4TH	1.246D-1E+1L	Combination	Max			Y	0.000193		8	66.334
4TH	1.246D-1E+1L	Combination	Min			X	0.000629		6	40.334
4TH	1.246D-1E+1L	Combination	Min			Y	0.000442		8	66.334
4TH	0.9D+1.6W	Combination	Max			X	0.000826		6	40.334
4TH	0.9D+1.6W	Combination	Max			Y	0.000864		8	66.334
4TH	0.9D+1.6W	Combination	Min			X	0.000248		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
4TH	0.9D+1.6W	Combination	Min			Y	0.000714		8	66.334
4TH	0.9D-1.6W	Combination	Max			X	0.000277		6	40.334
4TH	0.9D-1.6W	Combination	Max			Y	0.000762		8	66.334
4TH	0.9D-1.6W	Combination	Min			X	0.000796		6	40.334
4TH	0.9D-1.6W	Combination	Min			Y	0.000815		8	66.334
4TH	.854D+E	Combination	Max			X	0.000685		6	40.334
4TH	.854D+E	Combination	Max			Y	0.000546		8	66.334
4TH	.854D+E	Combination	Min			X	9.9E-05		6	40.334
4TH	.854D+E	Combination	Min			Y	0.00013		29	4.334
4TH	.854D-E	Combination	Max			X	0.000127		6	40.334
4TH	.854D-E	Combination	Max			Y	0.000135		8	66.334
4TH	.854D-E	Combination	Min			X	0.000657		6	40.334
4TH	.854D-E	Combination	Min			Y	0.0005		8	66.334
4TH	D+L	Combination				X	3.8E-05		6	40.334
4TH	D+L	Combination				Y	0.000103		29	4.334
4TH	D+.5L	Combination				X	2.7E-05		6	40.334
4TH	D+.5L	Combination				Y	7.6E-05		29	4.334
4TH	D+.5L+.7W	Combination	Max			X	0.000382		6	40.334
4TH	D+.5L+.7W	Combination	Max			Y	0.000418		8	66.334
4TH	D+.5L+.7W	Combination	Min			X	8.7E-05		6	40.334
4TH	D+.5L+.7W	Combination	Min			Y	0.000272		8	66.334
4TH	D+.5L-.7W	Combination	Max			X	0.000142		6	40.334
4TH	D+.5L-.7W	Combination	Max			Y	0.000374		8	66.334
4TH	D+.5L-.7W	Combination	Min			X	0.000327		6	40.334
4TH	D+.5L-.7W	Combination	Min			Y	0.000317		8	66.334
4TH	DConS1	Combination				X	3.8E-05		6	40.334
4TH	DConS1	Combination				Y	9.7E-05		29	4.334
4TH	DConS2	Combination				X	6.8E-05		6	40.334
4TH	DConS2	Combination				Y	0.00017		29	4.334
4TH	DConS3	Combination				X	6.9E-05		6	40.334
4TH	DConS3	Combination				Y	0.000172		29	4.334
4TH	DConS4	Combination				X	5.8E-05		6	40.334
4TH	DConS4	Combination				Y	0.000144		29	4.334
4TH	DConS5	Combination	Max			X	0.000866		6	40.334
4TH	DConS5	Combination	Max			Y	0.000925		8	66.334
4TH	DConS5	Combination	Min			X	0.000208		6	40.334
4TH	DConS5	Combination	Min			Y	0.000653		8	66.334
4TH	DConS6	Combination	Max			X	0.000317		6	40.334
4TH	DConS6	Combination	Max			Y	0.000824		8	66.334
4TH	DConS6	Combination	Min			X	0.000756		6	40.334
4TH	DConS6	Combination	Min			Y	0.000754		8	66.334
4TH	DConS7	Combination	Max			X	0.000867		6	40.334
4TH	DConS7	Combination	Max			Y	0.000925		8	66.334
4TH	DConS7	Combination	Min			X	0.000207		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
4TH	DConS7	Combination	Min			Y	0.000653		8	66.334
4TH	DConS8	Combination	Max			X	0.000318		6	40.334
4TH	DConS8	Combination	Max			Y	0.000824		8	66.334
4TH	DConS8	Combination	Min			X	0.000755		6	40.334
4TH	DConS8	Combination	Min			Y	0.000754		8	66.334
4TH	DConS9	Combination	Max			X	0.000442		6	40.334
4TH	DConS9	Combination	Max			Y	0.000458		8	66.334
4TH	DConS9	Combination	Min			X	9.5E-05		6	40.334
4TH	DConS9	Combination	Min			Y	0.000331		8	66.334
4TH	DConS10	Combination	Max			X	0.000168		6	40.334
4TH	DConS10	Combination	Max			Y	0.000408		8	66.334
4TH	DConS10	Combination	Min			X	0.000369		6	40.334
4TH	DConS10	Combination	Min			Y	0.000381		8	66.334
4TH	DConS11	Combination	Max			X	0.000438		6	40.334
4TH	DConS11	Combination	Max			Y	0.000458		8	66.334
4TH	DConS11	Combination	Min			X	9.8E-05		6	40.334
4TH	DConS11	Combination	Min			Y	0.000331		8	66.334
4TH	DConS12	Combination	Max			X	0.000164		6	40.334
4TH	DConS12	Combination	Max			Y	0.000407		8	66.334
4TH	DConS12	Combination	Min			X	0.000372		6	40.334
4TH	DConS12	Combination	Min			Y	0.000382		8	66.334
4TH	DConS13	Combination	Max			X	0.000836		6	40.334
4TH	DConS13	Combination	Max			Y	0.000868		8	66.334
4TH	DConS13	Combination	Min			X	0.000238		6	40.334
4TH	DConS13	Combination	Min			Y	0.00071		15	66.334
4TH	DConS14	Combination	Max			X	0.000287		6	40.334
4TH	DConS14	Combination	Max			Y	0.000767		8	66.334
4TH	DConS14	Combination	Min			X	0.000786		6	40.334
4TH	DConS14	Combination	Min			Y	0.000811		15	66.334
4TH	DConS15	Combination	Max			X	0.000729		6	40.334
4TH	DConS15	Combination	Max			Y	0.000612		8	66.334
4TH	DConS15	Combination	Min			X	0.000106		10	54.334
4TH	DConS15	Combination	Min			Y	0.000233		29	4.334
4TH	DConS16	Combination	Max			X	0.00017		6	40.334
4TH	DConS16	Combination	Max			Y	0.0002		8	66.334
4TH	DConS16	Combination	Min			X	0.000614		6	40.334
4TH	DConS16	Combination	Min			Y	0.000435		8	66.334
4TH	DConS17	Combination	Max			X	0.000707		6	40.334
4TH	DConS17	Combination	Max			Y	0.000565		8	66.334
4TH	DConS17	Combination	Min			X	8.9E-05		10	54.334
4TH	DConS17	Combination	Min			Y	0.000179		29	4.334
4TH	DConS18	Combination	Max			X	0.000149		6	40.334
4TH	DConS18	Combination	Max			Y	0.000153		8	66.334
4TH	DConS18	Combination	Min			X	0.000636		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
4TH	DConS18	Combination	Min			Y	0.000482		8	66.334
4TH	DConS19	Combination	Max			X	0.000693		6	40.334
4TH	DConS19	Combination	Max			Y	0.000549		8	66.334
4TH	DConS19	Combination	Min			Y	0.000144		29	4.334
4TH	DConS20	Combination	Max			X	0.000135		6	40.334
4TH	DConS20	Combination	Max			Y	0.000137		8	66.334
4TH	DConS20	Combination	Min			X	0.000649		6	40.334
4TH	DConS20	Combination	Min			Y	0.000498		8	66.334
3RD	Dead	LinStatic				X	1.3E-05		6	40.334
3RD	Dead	LinStatic				Y	4E-05		29	4.334
3RD	Live	LinStatic				X	1.8E-05		6	40.334
3RD	Live	LinStatic				Y	4.4E-05		29	4.334
3RD	PW	LinStatic				X	4E-06		6	40.334
3RD	PW	LinStatic				Y	8E-06		29	4.334
3RD	FF	LinStatic				X	5E-06		6	40.334
3RD	FF	LinStatic				Y	9E-06		29	4.334
3RD	ROOF LIVE	LinStatic				X	1E-06		6	40.334
3RD	ROOF LIVE	LinStatic				Y	3E-06		29	4.334
3RD	EQ	LinStatic	Max			X	0.000625		6	40.334
3RD	EQ	LinStatic	Max			Y	0.000513		8	66.334
3RD	EQ	LinStatic	Min			X	0.000123		6	40.334
3RD	EQ	LinStatic	Min			Y	0.000119		15	66.334
3RD	wind	LinStatic	Max			X	0.000483		6	40.334
3RD	wind	LinStatic	Max			Y	0.000532		8	66.334
3RD	wind	LinStatic	Min			X	0.000179		6	40.334
3RD	wind	LinStatic	Min			Y	0.000474		8	66.334
3RD	1.4D	Combination				X	1.9E-05		6	40.334
3RD	1.4D	Combination				Y	5.6E-05		29	4.334
3RD	1.2D+1.6L+.5Lr	Combination				X	4.6E-05		6	40.334
3RD	1.2D+1.6L+.5Lr	Combination				Y	0.00012		29	4.334
3RD	1.2D+1.6Lr+L	Combination				X	3.7E-05		6	40.334
3RD	1.2D+1.6Lr+L	Combination				Y	9.7E-05		29	4.334
3RD	1.2D+1.6Lr+.8W	Combination	Max			X	0.000405		6	40.334
3RD	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000453		8	66.334
3RD	1.2D+1.6Lr+.8W	Combination	Min			X	0.000125		6	40.334
3RD	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000352		8	66.334
3RD	1.2D+1.6Lr-.8W	Combination	Max			X	0.000162		6	40.334
3RD	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000406		8	66.334
3RD	1.2D+1.6Lr-.8W	Combination	Min			X	0.000368		6	40.334
3RD	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000399		8	66.334
3RD	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000808		6	40.334
3RD	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000916		8	66.334
3RD	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.000252		6	40.334
3RD	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000694		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
3RD	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000322		6	40.334
3RD	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000823		8	66.334
3RD	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000738		6	40.334
3RD	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000787		8	66.334
3RD	1.246D+1E+1L	Combination	Max			X	0.00066		6	40.334
3RD	1.246D+1E+1L	Combination	Max			Y	0.000578		8	66.334
3RD	1.246D+1E+1L	Combination	Min			X	0.000104		10	54.334
3RD	1.246D+1E+1L	Combination	Min			Y	0.000181		29	4.334
3RD	1.246D-1E+1L	Combination	Max			X	0.000158		6	40.334
3RD	1.246D-1E+1L	Combination	Max			Y	0.000184		15	66.334
3RD	1.246D-1E+1L	Combination	Min			X	0.00059		6	40.334
3RD	1.246D-1E+1L	Combination	Min			Y	0.000448		8	66.334
3RD	0.9D+1.6W	Combination	Max			X	0.000785		6	40.334
3RD	0.9D+1.6W	Combination	Max			Y	0.000871		8	66.334
3RD	0.9D+1.6W	Combination	Min			X	0.000275		6	40.334
3RD	0.9D+1.6W	Combination	Min			Y	0.000739		8	66.334
3RD	0.9D-1.6W	Combination	Max			X	0.000299		6	40.334
3RD	0.9D-1.6W	Combination	Max			Y	0.000778		8	66.334
3RD	0.9D-1.6W	Combination	Min			X	0.000761		6	40.334
3RD	0.9D-1.6W	Combination	Min			Y	0.000831		8	66.334
3RD	.854D+E	Combination	Max			X	0.000637		6	40.334
3RD	.854D+E	Combination	Max			Y	0.000532		8	66.334
3RD	.854D+E	Combination	Min			X	0.000112		6	40.334
3RD	.854D+E	Combination	Min			Y	0.000121		29	4.334
3RD	.854D-E	Combination	Max			X	0.000135		6	40.334
3RD	.854D-E	Combination	Max			Y	0.000137		15	66.334
3RD	.854D-E	Combination	Min			X	0.000614		6	40.334
3RD	.854D-E	Combination	Min			Y	0.000494		8	66.334
3RD	D+L	Combination				X	3.2E-05		6	40.334
3RD	D+L	Combination				Y	8.4E-05		29	4.334
3RD	D+.5L	Combination				X	2.3E-05		6	40.334
3RD	D+.5L	Combination				Y	6.2E-05		29	4.334
3RD	D+.5L+.7W	Combination	Max			X	0.000361		6	40.334
3RD	D+.5L+.7W	Combination	Max			Y	0.000413		8	66.334
3RD	D+.5L+.7W	Combination	Min			X	0.000103		6	40.334
3RD	D+.5L+.7W	Combination	Min			Y	0.000291		8	66.334
3RD	D+.5L-.7W	Combination	Max			X	0.000148		6	40.334
3RD	D+.5L-.7W	Combination	Max			Y	0.000373		8	66.334
3RD	D+.5L-.7W	Combination	Min			X	0.000316		6	40.334
3RD	D+.5L-.7W	Combination	Min			Y	0.000332		8	66.334
3RD	DConS1	Combination				X	3.2E-05		6	40.334
3RD	DConS1	Combination				Y	7.9E-05		29	4.334
3RD	DConS2	Combination				X	5.7E-05		6	40.334
3RD	DConS2	Combination				Y	0.000139		29	4.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
3RD	DConS3	Combination				X	5.7E-05		6	40.334
3RD	DConS3	Combination				Y	0.000141		29	4.334
3RD	DConS4	Combination				X	4.8E-05		6	40.334
3RD	DConS4	Combination				Y	0.000117		29	4.334
3RD	DConS5	Combination	Max			X	0.000819		6	40.334
3RD	DConS5	Combination	Max			Y	0.00092		8	66.334
3RD	DConS5	Combination	Min			X	0.000241		6	40.334
3RD	DConS5	Combination	Min			Y	0.00069		8	66.334
3RD	DConS6	Combination	Max			X	0.000333		6	40.334
3RD	DConS6	Combination	Max			Y	0.000827		8	66.334
3RD	DConS6	Combination	Min			X	0.000727		6	40.334
3RD	DConS6	Combination	Min			Y	0.000783		8	66.334
3RD	DConS7	Combination	Max			X	0.000819		6	40.334
3RD	DConS7	Combination	Max			Y	0.00092		8	66.334
3RD	DConS7	Combination	Min			X	0.000241		6	40.334
3RD	DConS7	Combination	Min			Y	0.00069		8	66.334
3RD	DConS8	Combination	Max			X	0.000333		6	40.334
3RD	DConS8	Combination	Max			Y	0.000828		8	66.334
3RD	DConS8	Combination	Min			X	0.000727		6	40.334
3RD	DConS8	Combination	Min			Y	0.000782		8	66.334
3RD	DConS9	Combination	Max			X	0.000416		6	40.334
3RD	DConS9	Combination	Max			Y	0.000457		8	66.334
3RD	DConS9	Combination	Min			X	0.000114		6	40.334
3RD	DConS9	Combination	Min			Y	0.000348		8	66.334
3RD	DConS10	Combination	Max			X	0.000173		6	40.334
3RD	DConS10	Combination	Max			Y	0.000411		8	66.334
3RD	DConS10	Combination	Min			X	0.000357		6	40.334
3RD	DConS10	Combination	Min			Y	0.000394		8	66.334
3RD	DConS11	Combination	Max			X	0.000414		6	40.334
3RD	DConS11	Combination	Max			Y	0.000456		8	66.334
3RD	DConS11	Combination	Min			X	0.000116		6	40.334
3RD	DConS11	Combination	Min			Y	0.000349		8	66.334
3RD	DConS12	Combination	Max			X	0.000171		6	40.334
3RD	DConS12	Combination	Max			Y	0.00041		8	66.334
3RD	DConS12	Combination	Min			X	0.000359		6	40.334
3RD	DConS12	Combination	Min			Y	0.000395		8	66.334
3RD	DConS13	Combination	Max			X	0.000793		6	40.334
3RD	DConS13	Combination	Max			Y	0.000874		8	66.334
3RD	DConS13	Combination	Min			X	0.000267		6	40.334
3RD	DConS13	Combination	Min			Y	0.000736		8	66.334
3RD	DConS14	Combination	Max			X	0.000307		6	40.334
3RD	DConS14	Combination	Max			Y	0.000782		8	66.334
3RD	DConS14	Combination	Min			X	0.000752		6	40.334
3RD	DConS14	Combination	Min			Y	0.000828		8	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
3RD	DConS15	Combination	Max			X	0.000673		6	40.334
3RD	DConS15	Combination	Max			Y	0.000584		8	66.334
3RD	DConS15	Combination	Min			X	0.000103		10	54.334
3RD	DConS15	Combination	Min			Y	0.000205		29	4.334
3RD	DConS16	Combination	Max			X	0.000171		6	40.334
3RD	DConS16	Combination	Max			Y	0.00019		15	66.334
3RD	DConS16	Combination	Min			X	0.000577		6	40.334
3RD	DConS16	Combination	Min			Y	0.000442		8	66.334
3RD	DConS17	Combination	Max			X	0.000655		6	40.334
3RD	DConS17	Combination	Max			Y	0.000547		8	66.334
3RD	DConS17	Combination	Min			Y	0.000161		29	4.334
3RD	DConS18	Combination	Max			X	0.000153		6	40.334
3RD	DConS18	Combination	Max			Y	0.000152		15	66.334
3RD	DConS18	Combination	Min			X	0.000596		6	40.334
3RD	DConS18	Combination	Min			Y	0.00048		8	66.334
3RD	DConS19	Combination	Max			X	0.000644		6	40.334
3RD	DConS19	Combination	Max			Y	0.000534		8	66.334
3RD	DConS19	Combination	Min			X	0.000105		6	40.334
3RD	DConS19	Combination	Min			Y	0.000133		29	4.334
3RD	DConS20	Combination	Max			X	0.000142		6	40.334
3RD	DConS20	Combination	Max			Y	0.000139		15	66.334
3RD	DConS20	Combination	Min			X	0.000607		6	40.334
3RD	DConS20	Combination	Min			Y	0.000493		8	66.334
2ND	Dead	LinStatic				X	1E-05		6	40.334
2ND	Dead	LinStatic				Y	2.9E-05		29	4.334
2ND	Live	LinStatic				X	1.4E-05		6	40.334
2ND	Live	LinStatic				Y	3.3E-05		29	4.334
2ND	PW	LinStatic				X	3E-06		6	40.334
2ND	PW	LinStatic				Y	6E-06		29	4.334
2ND	FF	LinStatic				X	4E-06		6	40.334
2ND	FF	LinStatic				Y	7E-06		29	4.334
2ND	ROOF LIVE	LinStatic				X	1E-06		6	40.334
2ND	ROOF LIVE	LinStatic				Y	2E-06		29	4.334
2ND	EQ	LinStatic	Max			X	0.000531		6	40.334
2ND	EQ	LinStatic	Max			Y	0.000459		8	66.334
2ND	EQ	LinStatic	Min			X	0.000123		6	40.334
2ND	EQ	LinStatic	Min			Y	0.000116		4	66.334
2ND	wind	LinStatic	Max			X	0.000422		6	40.334
2ND	wind	LinStatic	Max			Y	0.000494		8	66.334
2ND	wind	LinStatic	Min			X	0.00018		6	40.334
2ND	wind	LinStatic	Min			Y	0.000448		8	66.334
2ND	1.4D	Combination				X	1.4E-05		6	40.334
2ND	1.4D	Combination				Y	4.1E-05		29	4.334
2ND	1.2D+1.6L+.5Lr	Combination				X	3.4E-05		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
2ND	1.2D+1.6L+.5Lr	Combination				Y	8.8E-05		29	4.334
2ND	1.2D+1.6Lr+L	Combination				X	2.7E-05		6	40.334
2ND	1.2D+1.6Lr+L	Combination				Y	7.1E-05		29	4.334
2ND	1.2D+1.6Lr+.8W	Combination	Max			X	0.000351		6	40.334
2ND	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000415		8	66.334
2ND	1.2D+1.6Lr+.8W	Combination	Min			X	0.000131		6	40.334
2ND	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000338		8	66.334
2ND	1.2D+1.6Lr-.8W	Combination	Max			X	0.000157		6	40.334
2ND	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000379		8	66.334
2ND	1.2D+1.6Lr-.8W	Combination	Min			X	0.000324		6	40.334
2ND	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000375		8	66.334
2ND	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000701		6	40.334
2ND	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000837		8	66.334
2ND	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.000262		6	40.334
2ND	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.00067		8	66.334
2ND	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000314		6	40.334
2ND	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000763		8	66.334
2ND	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000649		6	40.334
2ND	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000744		8	66.334
2ND	1.246D+1E+1L	Combination	Max			X	0.000557		6	40.334
2ND	1.246D+1E+1L	Combination	Max			Y	0.000506		8	66.334
2ND	1.246D+1E+1L	Combination	Min			Y	0.000147		29	4.334
2ND	1.246D-1E+1L	Combination	Max			X	0.000149		6	40.334
2ND	1.246D-1E+1L	Combination	Max			Y	0.000163		4	66.334
2ND	1.246D-1E+1L	Combination	Min			X	0.000505		6	40.334
2ND	1.246D-1E+1L	Combination	Min			Y	0.000412		8	66.334
2ND	0.9D+1.6W	Combination	Max			X	0.000684		6	40.334
2ND	0.9D+1.6W	Combination	Max			Y	0.000805		8	66.334
2ND	0.9D+1.6W	Combination	Min			X	0.00028		6	40.334
2ND	0.9D+1.6W	Combination	Min			Y	0.000702		8	66.334
2ND	0.9D-1.6W	Combination	Max			X	0.000297		6	40.334
2ND	0.9D-1.6W	Combination	Max			Y	0.000731		8	66.334
2ND	0.9D-1.6W	Combination	Min			X	0.000666		6	40.334
2ND	0.9D-1.6W	Combination	Min			Y	0.000775		8	66.334
2ND	.854D+E	Combination	Max			X	0.000539		6	40.334
2ND	.854D+E	Combination	Max			Y	0.000473		8	66.334
2ND	.854D+E	Combination	Min			X	0.000114		6	40.334
2ND	.854D-E	Combination	Max			X	0.000131		6	40.334
2ND	.854D-E	Combination	Max			Y	0.00013		4	66.334
2ND	.854D-E	Combination	Min			X	0.000523		6	40.334
2ND	.854D-E	Combination	Min			Y	0.000445		8	66.334
2ND	D+L	Combination				X	2.3E-05		6	40.334
2ND	D+L	Combination				Y	6.2E-05		29	4.334
2ND	D+.5L	Combination				X	1.7E-05		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
2ND	D+.5L	Combination				Y	4.5E-05		29	4.334
2ND	D+.5L+.7W	Combination	Max			X	0.000312		6	40.334
2ND	D+.5L+.7W	Combination	Max			Y	0.000375		8	66.334
2ND	D+.5L+.7W	Combination	Min			X	0.00011		6	40.334
2ND	D+.5L+.7W	Combination	Min			Y	0.000284		8	66.334
2ND	D+.5L-.7W	Combination	Max			X	0.000143		6	40.334
2ND	D+.5L-.7W	Combination	Max			Y	0.000343		8	66.334
2ND	D+.5L-.7W	Combination	Min			X	0.000279		6	40.334
2ND	D+.5L-.7W	Combination	Min			Y	0.000316		8	66.334
2ND	DConS1	Combination				X	2.4E-05		6	40.334
2ND	DConS1	Combination				Y	5.8E-05		29	4.334
2ND	DConS2	Combination				X	4.2E-05		6	40.334
2ND	DConS2	Combination				Y	0.000102		29	4.334
2ND	DConS3	Combination				X	4.3E-05		6	40.334
2ND	DConS3	Combination				Y	0.000103		29	4.334
2ND	DConS4	Combination				X	3.5E-05		6	40.334
2ND	DConS4	Combination				Y	8.6E-05		29	4.334
2ND	DConS5	Combination	Max			X	0.000709		6	40.334
2ND	DConS5	Combination	Max			Y	0.00084		8	66.334
2ND	DConS5	Combination	Min			X	0.000254		6	40.334
2ND	DConS5	Combination	Min			Y	0.000667		8	66.334
2ND	DConS6	Combination	Max			X	0.000322		6	40.334
2ND	DConS6	Combination	Max			Y	0.000766		8	66.334
2ND	DConS6	Combination	Min			X	0.000641		6	40.334
2ND	DConS6	Combination	Min			Y	0.000741		8	66.334
2ND	DConS7	Combination	Max			X	0.000709		6	40.334
2ND	DConS7	Combination	Max			Y	0.00084		8	66.334
2ND	DConS7	Combination	Min			X	0.000254		6	40.334
2ND	DConS7	Combination	Min			Y	0.000667		8	66.334
2ND	DConS8	Combination	Max			X	0.000323		6	40.334
2ND	DConS8	Combination	Max			Y	0.000766		8	66.334
2ND	DConS8	Combination	Min			X	0.000641		6	40.334
2ND	DConS8	Combination	Min			Y	0.00074		8	66.334
2ND	DConS9	Combination	Max			X	0.000359		6	40.334
2ND	DConS9	Combination	Max			Y	0.000419		8	66.334
2ND	DConS9	Combination	Min			X	0.000123		6	40.334
2ND	DConS9	Combination	Min			Y	0.000335		8	66.334
2ND	DConS10	Combination	Max			X	0.000166		6	40.334
2ND	DConS10	Combination	Max			Y	0.000382		8	66.334
2ND	DConS10	Combination	Min			X	0.000316		6	40.334
2ND	DConS10	Combination	Min			Y	0.000372		8	66.334
2ND	DConS11	Combination	Max			X	0.000358		6	40.334
2ND	DConS11	Combination	Max			Y	0.000418		8	66.334
2ND	DConS11	Combination	Min			X	0.000124		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
2ND	DConS11	Combination	Min			Y	0.000335		8	66.334
2ND	DConS12	Combination	Max			X	0.000164		6	40.334
2ND	DConS12	Combination	Max			Y	0.000381		8	66.334
2ND	DConS12	Combination	Min			X	0.000317		6	40.334
2ND	DConS12	Combination	Min			Y	0.000372		8	66.334
2ND	DConS13	Combination	Max			X	0.00069		6	40.334
2ND	DConS13	Combination	Max			Y	0.000807		8	66.334
2ND	DConS13	Combination	Min			X	0.000273		6	40.334
2ND	DConS13	Combination	Min			Y	0.0007		8	66.334
2ND	DConS14	Combination	Max			X	0.000303		6	40.334
2ND	DConS14	Combination	Max			Y	0.000734		8	66.334
2ND	DConS14	Combination	Min			X	0.00066		6	40.334
2ND	DConS14	Combination	Min			Y	0.000773		8	66.334
2ND	DConS15	Combination	Max			X	0.000567		6	40.334
2ND	DConS15	Combination	Max			Y	0.000511		8	66.334
2ND	DConS15	Combination	Min			Y	0.000165		29	4.334
2ND	DConS16	Combination	Max			X	0.000158		6	40.334
2ND	DConS16	Combination	Max			Y	0.000168		4	66.334
2ND	DConS16	Combination	Min			X	0.000496		6	40.334
2ND	DConS16	Combination	Min			Y	0.000407		8	66.334
2ND	DConS17	Combination	Max			X	0.000553		6	40.334
2ND	DConS17	Combination	Max			Y	0.000484		8	66.334
2ND	DConS17	Combination	Min			X	0.000101		6	40.334
2ND	DConS17	Combination	Min			Y	0.000132		29	4.334
2ND	DConS18	Combination	Max			X	0.000145		6	40.334
2ND	DConS18	Combination	Max			Y	0.000141		4	66.334
2ND	DConS18	Combination	Min			X	0.000509		6	40.334
2ND	DConS18	Combination	Min			Y	0.000434		8	66.334
2ND	DConS19	Combination	Max			X	0.000545		6	40.334
2ND	DConS19	Combination	Max			Y	0.000474		8	66.334
2ND	DConS19	Combination	Min			X	0.000109		6	40.334
2ND	DConS19	Combination	Min			Y	0.000111		29	4.334
2ND	DConS20	Combination	Max			X	0.000136		6	40.334
2ND	DConS20	Combination	Max			Y	0.000131		4	66.334
2ND	DConS20	Combination	Min			X	0.000518		6	40.334
2ND	DConS20	Combination	Min			Y	0.000444		8	66.334
1ST	Dead	LinStatic				X	4E-06		6	40.334
1ST	Dead	LinStatic				Y	1.7E-05		29	4.334
1ST	Live	LinStatic				X	6E-06		6	40.334
1ST	Live	LinStatic				Y	1.8E-05		29	4.334
1ST	PW	LinStatic				X	2E-06		6	40.334
1ST	PW	LinStatic				Y	3E-06		29	4.334
1ST	FF	LinStatic				X	2E-06		6	40.334
1ST	FF	LinStatic				Y	4E-06		29	4.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
1ST	ROOF LIVE	LinStatic				Y	1E-06		29	4.334
1ST	EQ	LinStatic	Max			X	0.000376		6	40.334
1ST	EQ	LinStatic	Max			Y	0.000343		8	66.334
1ST	EQ	LinStatic	Min			X	0.000104		6	40.334
1ST	EQ	LinStatic	Min			Y	9.9E-05		8	66.334
1ST	wind	LinStatic	Max			X	0.000311		6	40.334
1ST	wind	LinStatic	Max			Y	0.000383		8	66.334
1ST	wind	LinStatic	Min			X	0.000152		6	40.334
1ST	wind	LinStatic	Min			Y	0.000354		8	66.334
1ST	1.4D	Combination				X	6E-06		6	40.334
1ST	1.4D	Combination				Y	2.3E-05		29	4.334
1ST	1.2D+1.6L+.5Lr	Combination				X	1.5E-05		6	40.334
1ST	1.2D+1.6L+.5Lr	Combination				Y	5E-05		29	4.334
1ST	1.2D+1.6Lr+L	Combination				X	1.1E-05		6	40.334
1ST	1.2D+1.6Lr+L	Combination				Y	4E-05		29	4.334
1ST	1.2D+1.6Lr+.8W	Combination	Max			X	0.000254		6	40.334
1ST	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000321		8	66.334
1ST	1.2D+1.6Lr+.8W	Combination	Min			X	0.000117		6	40.334
1ST	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000269		8	66.334
1ST	1.2D+1.6Lr-.8W	Combination	Max			X	0.000127		6	40.334
1ST	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000298		8	66.334
1ST	1.2D+1.6Lr-.8W	Combination	Min			X	0.000244		6	40.334
1ST	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000292		8	66.334
1ST	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000509		6	40.334
1ST	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000644		8	66.334
1ST	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.000233		6	40.334
1ST	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000536		8	66.334
1ST	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000255		6	40.334
1ST	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000598		8	66.334
1ST	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000487		6	40.334
1ST	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000582		8	66.334
1ST	1.246D+1E+1L	Combination	Max			X	0.000387		6	40.334
1ST	1.246D+1E+1L	Combination	Max			Y	0.000375		8	66.334
1ST	1.246D+1E+1L	Combination	Min			X	9.3E-05		6	40.334
1ST	1.246D+1E+1L	Combination	Min			Y	9.6E-05		13	4.334
1ST	1.246D-1E+1L	Combination	Max			X	0.000115		6	40.334
1ST	1.246D-1E+1L	Combination	Max			Y	0.00013		8	66.334
1ST	1.246D-1E+1L	Combination	Min			X	0.000365		6	40.334
1ST	1.246D-1E+1L	Combination	Min			Y	0.000312		8	66.334
1ST	0.9D+1.6W	Combination	Max			X	0.000502		6	40.334
1ST	0.9D+1.6W	Combination	Max			Y	0.000624		8	66.334
1ST	0.9D+1.6W	Combination	Min			X	0.00024		6	40.334
1ST	0.9D+1.6W	Combination	Min			Y	0.000556		8	66.334
1ST	0.9D-1.6W	Combination	Max			X	0.000247		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
1ST	0.9D-1.6W	Combination	Max			Y	0.000577		8	66.334
1ST	0.9D-1.6W	Combination	Min			X	0.000494		6	40.334
1ST	0.9D-1.6W	Combination	Min			Y	0.000603		8	66.334
1ST	.854D+E	Combination	Max			X	0.000379		6	40.334
1ST	.854D+E	Combination	Max			Y	0.000353		8	66.334
1ST	.854D+E	Combination	Min			X	0.000101		6	40.334
1ST	.854D+E	Combination	Min			Y	8.9E-05		8	66.334
1ST	.854D-E	Combination	Max			X	0.000107		6	40.334
1ST	.854D-E	Combination	Max			Y	0.000109		8	66.334
1ST	.854D-E	Combination	Min			X	0.000373		6	40.334
1ST	.854D-E	Combination	Min			Y	0.000333		8	66.334
1ST	D+L	Combination				X	1E-05		6	40.334
1ST	D+L	Combination				Y	3.5E-05		29	4.334
1ST	D+.5L	Combination				X	7E-06		6	40.334
1ST	D+.5L	Combination				Y	2.6E-05		29	4.334
1ST	D+.5L+.7W	Combination	Max			X	0.000225		6	40.334
1ST	D+.5L+.7W	Combination	Max			Y	0.000288		8	66.334
1ST	D+.5L+.7W	Combination	Min			X	0.0001		6	40.334
1ST	D+.5L+.7W	Combination	Min			Y	0.000228		8	66.334
1ST	D+.5L-.7W	Combination	Max			X	0.000114		6	40.334
1ST	D+.5L-.7W	Combination	Max			Y	0.000268		8	66.334
1ST	D+.5L-.7W	Combination	Min			X	0.000211		6	40.334
1ST	D+.5L-.7W	Combination	Min			Y	0.000248		8	66.334
1ST	DConS1	Combination				X	1.1E-05		6	40.334
1ST	DConS1	Combination				Y	3.3E-05		29	4.334
1ST	DConS2	Combination				X	1.9E-05		6	40.334
1ST	DConS2	Combination				Y	5.8E-05		29	4.334
1ST	DConS3	Combination				X	1.9E-05		6	40.334
1ST	DConS3	Combination				Y	5.9E-05		29	4.334
1ST	DConS4	Combination				X	1.6E-05		6	40.334
1ST	DConS4	Combination				Y	4.9E-05		29	4.334
1ST	DConS5	Combination	Max			X	0.000514		6	40.334
1ST	DConS5	Combination	Max			Y	0.000647		8	66.334
1ST	DConS5	Combination	Min			X	0.000228		6	40.334
1ST	DConS5	Combination	Min			Y	0.000533		8	66.334
1ST	DConS6	Combination	Max			X	0.000259		6	40.334
1ST	DConS6	Combination	Max			Y	0.0006		8	66.334
1ST	DConS6	Combination	Min			X	0.000482		6	40.334
1ST	DConS6	Combination	Min			Y	0.00058		8	66.334
1ST	DConS7	Combination	Max			X	0.000514		6	40.334
1ST	DConS7	Combination	Max			Y	0.000647		8	66.334
1ST	DConS7	Combination	Min			X	0.000228		6	40.334
1ST	DConS7	Combination	Min			Y	0.000533		8	66.334
1ST	DConS8	Combination	Max			X	0.00026		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
1ST	DConS8	Combination	Max			Y	0.0006		8	66.334
1ST	DConS8	Combination	Min			X	0.000482		6	40.334
1ST	DConS8	Combination	Min			Y	0.00058		8	66.334
1ST	DConS9	Combination	Max			X	0.000259		6	40.334
1ST	DConS9	Combination	Max			Y	0.000324		8	66.334
1ST	DConS9	Combination	Min			X	0.000112		6	40.334
1ST	DConS9	Combination	Min			Y	0.000266		8	66.334
1ST	DConS10	Combination	Max			X	0.000132		6	40.334
1ST	DConS10	Combination	Max			Y	0.000301		8	66.334
1ST	DConS10	Combination	Min			X	0.000239		6	40.334
1ST	DConS10	Combination	Min			Y	0.000289		8	66.334
1ST	DConS11	Combination	Max			X	0.000259		6	40.334
1ST	DConS11	Combination	Max			Y	0.000323		8	66.334
1ST	DConS11	Combination	Min			X	0.000112		6	40.334
1ST	DConS11	Combination	Min			Y	0.000267		8	66.334
1ST	DConS12	Combination	Max			X	0.000131		6	40.334
1ST	DConS12	Combination	Max			Y	0.0003		8	66.334
1ST	DConS12	Combination	Min			X	0.00024		6	40.334
1ST	DConS12	Combination	Min			Y	0.00029		8	66.334
1ST	DConS13	Combination	Max			X	0.000505		6	40.334
1ST	DConS13	Combination	Max			Y	0.000626		8	66.334
1ST	DConS13	Combination	Min			X	0.000237		6	40.334
1ST	DConS13	Combination	Min			Y	0.000554		8	66.334
1ST	DConS14	Combination	Max			X	0.000251		6	40.334
1ST	DConS14	Combination	Max			Y	0.000579		8	66.334
1ST	DConS14	Combination	Min			X	0.000491		6	40.334
1ST	DConS14	Combination	Min			Y	0.000601		8	66.334
1ST	DConS15	Combination	Max			X	0.000392		6	40.334
1ST	DConS15	Combination	Max			Y	0.000378		8	66.334
1ST	DConS15	Combination	Min			X	8.8E-05		6	40.334
1ST	DConS15	Combination	Min			Y	0.000107		29	4.334
1ST	DConS16	Combination	Max			X	0.00012		6	40.334
1ST	DConS16	Combination	Max			Y	0.000134		8	66.334
1ST	DConS16	Combination	Min			X	0.00036		6	40.334
1ST	DConS16	Combination	Min			Y	0.000309		8	66.334
1ST	DConS17	Combination	Max			X	0.000386		6	40.334
1ST	DConS17	Combination	Max			Y	0.000361		8	66.334
1ST	DConS17	Combination	Min			X	9.4E-05		6	40.334
1ST	DConS17	Combination	Min			Y	8.8E-05		13	4.334
1ST	DConS18	Combination	Max			X	0.000114		6	40.334
1ST	DConS18	Combination	Max			Y	0.000117		8	66.334
1ST	DConS18	Combination	Min			X	0.000366		6	40.334
1ST	DConS18	Combination	Min			Y	0.000325		8	66.334
1ST	DConS19	Combination	Max			X	0.000382		6	40.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
1ST	DConS19	Combination	Max			Y	0.000355		8	66.334
1ST	DConS19	Combination	Min			X	9.8E-05		6	40.334
1ST	DConS19	Combination	Min			Y	8.8E-05		8	66.334
1ST	DConS20	Combination	Max			X	0.00011		6	40.334
1ST	DConS20	Combination	Max			Y	0.00011		8	66.334
1ST	DConS20	Combination	Min			X	0.00037		6	40.334
1ST	DConS20	Combination	Min			Y	0.000332		8	66.334
GF	Dead	LinStatic				X	1E-06		12	66.334
GF	Dead	LinStatic				Y	6E-06		29	4.334
GF	Live	LinStatic				X	2E-06		29	4.334
GF	Live	LinStatic				Y	6E-06		15	66.334
GF	PW	LinStatic				X	1E-06		12	66.334
GF	PW	LinStatic				Y	1E-06		29	4.334
GF	FF	LinStatic				X	1E-06		12	66.334
GF	FF	LinStatic				Y	1E-06		29	4.334
GF	ROOF LIVE	LinStatic				Y	3.384E-07		29	4.334
GF	EQ	LinStatic	Max			X	0.000171		12	66.334
GF	EQ	LinStatic	Max			Y	0.000165		15	66.334
GF	EQ	LinStatic	Min			X	5.5E-05		12	66.334
GF	EQ	LinStatic	Min			Y	5.5E-05		15	66.334
GF	wind	LinStatic	Max			X	0.000153		12	66.334
GF	wind	LinStatic	Max			Y	0.00019		15	66.334
GF	wind	LinStatic	Min			X	8.1E-05		12	66.334
GF	wind	LinStatic	Min			Y	0.000179		15	66.334
GF	1.4D	Combination				X	2E-06		12	66.334
GF	1.4D	Combination				Y	8E-06		29	4.334
GF	1.2D+1.6L+.5Lr	Combination				X	4E-06		12	66.334
GF	1.2D+1.6L+.5Lr	Combination				Y	1.6E-05		29	4.334
GF	1.2D+1.6Lr+L	Combination				X	3E-06		12	66.334
GF	1.2D+1.6Lr+L	Combination				Y	1.3E-05		29	4.334
GF	1.2D+1.6Lr+.8W	Combination	Max			X	0.000124		12	66.334
GF	1.2D+1.6Lr+.8W	Combination	Max			Y	0.000158		15	66.334
GF	1.2D+1.6Lr+.8W	Combination	Min			X	6.3E-05		12	66.334
GF	1.2D+1.6Lr+.8W	Combination	Min			Y	0.000137		15	66.334
GF	1.2D+1.6Lr-.8W	Combination	Max			X	6.6E-05		12	66.334
GF	1.2D+1.6Lr-.8W	Combination	Max			Y	0.000149		15	66.334
GF	1.2D+1.6Lr-.8W	Combination	Min			X	0.000121		12	66.334
GF	1.2D+1.6Lr-.8W	Combination	Min			Y	0.000146		15	66.334
GF	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.000248		12	66.334
GF	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.000315		15	66.334
GF	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.000126		12	66.334
GF	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.000275		15	66.334
GF	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.000132		12	66.334
GF	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.000298		15	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
GF	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.000242		12	66.334
GF	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.000291		15	66.334
GF	1.246D+1E+1L	Combination	Max			X	0.000174		12	66.334
GF	1.246D+1E+1L	Combination	Max			Y	0.000177		15	66.334
GF	1.246D+1E+1L	Combination	Min			X	5.1E-05		12	66.334
GF	1.246D+1E+1L	Combination	Min			Y	4.3E-05		15	66.334
GF	1.246D-1E+1L	Combination	Max			X	5.8E-05		12	66.334
GF	1.246D-1E+1L	Combination	Max			Y	6.7E-05		15	66.334
GF	1.246D-1E+1L	Combination	Min			X	0.000168		12	66.334
GF	1.246D-1E+1L	Combination	Min			Y	0.000153		15	66.334
GF	0.9D+1.6W	Combination	Max			X	0.000246		12	66.334
GF	0.9D+1.6W	Combination	Max			Y	0.000308		15	66.334
GF	0.9D+1.6W	Combination	Min			X	0.000128		12	66.334
GF	0.9D+1.6W	Combination	Min			Y	0.000282		15	66.334
GF	0.9D-1.6W	Combination	Max			X	0.00013		12	66.334
GF	0.9D-1.6W	Combination	Max			Y	0.000291		15	66.334
GF	0.9D-1.6W	Combination	Min			X	0.000244		12	66.334
GF	0.9D-1.6W	Combination	Min			Y	0.000299		15	66.334
GF	.854D+E	Combination	Max			X	0.000172		12	66.334
GF	.854D+E	Combination	Max			Y	0.000169		15	66.334
GF	.854D+E	Combination	Min			X	5.4E-05		12	66.334
GF	.854D+E	Combination	Min			Y	5.1E-05		15	66.334
GF	.854D-E	Combination	Max			X	5.6E-05		12	66.334
GF	.854D-E	Combination	Max			Y	5.9E-05		15	66.334
GF	.854D-E	Combination	Min			X	0.00017		12	66.334
GF	.854D-E	Combination	Min			Y	0.000161		15	66.334
GF	D+L	Combination				X	3E-06		12	66.334
GF	D+L	Combination				Y	1.1E-05		29	4.334
GF	D+.5L	Combination				X	2E-06		12	66.334
GF	D+.5L	Combination				Y	8E-06		29	4.334
GF	D+.5L+.7W	Combination	Max			X	0.000109		12	66.334
GF	D+.5L+.7W	Combination	Max			Y	0.00014		15	66.334
GF	D+.5L+.7W	Combination	Min			X	5.5E-05		12	66.334
GF	D+.5L+.7W	Combination	Min			Y	0.000118		15	66.334
GF	D+.5L-.7W	Combination	Max			X	5.9E-05		12	66.334
GF	D+.5L-.7W	Combination	Max			Y	0.000133		15	66.334
GF	D+.5L-.7W	Combination	Min			X	0.000105		12	66.334
GF	D+.5L-.7W	Combination	Min			Y	0.000125		15	66.334
GF	DConS1	Combination				X	3E-06		12	66.334
GF	DConS1	Combination				Y	1.1E-05		29	4.334
GF	DConS2	Combination				X	6E-06		12	66.334
GF	DConS2	Combination				Y	1.9E-05		29	4.334
GF	DConS3	Combination				X	6E-06		12	66.334
GF	DConS3	Combination				Y	1.9E-05		29	4.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
GF	DConS4	Combination				X	5E-06		12	66.334
GF	DConS4	Combination				Y	1.6E-05		29	4.334
GF	DConS5	Combination	Max			X	0.000249		12	66.334
GF	DConS5	Combination	Max			Y	0.000316		15	66.334
GF	DConS5	Combination	Min			X	0.000125		12	66.334
GF	DConS5	Combination	Min			Y	0.000273		15	66.334
GF	DConS6	Combination	Max			X	0.000134		12	66.334
GF	DConS6	Combination	Max			Y	0.0003		15	66.334
GF	DConS6	Combination	Min			X	0.00024		12	66.334
GF	DConS6	Combination	Min			Y	0.00029		15	66.334
GF	DConS7	Combination	Max			X	0.000249		12	66.334
GF	DConS7	Combination	Max			Y	0.000316		15	66.334
GF	DConS7	Combination	Min			X	0.000125		12	66.334
GF	DConS7	Combination	Min			Y	0.000273		15	66.334
GF	DConS8	Combination	Max			X	0.000134		12	66.334
GF	DConS8	Combination	Max			Y	0.0003		15	66.334
GF	DConS8	Combination	Min			X	0.00024		12	66.334
GF	DConS8	Combination	Min			Y	0.00029		15	66.334
GF	DConS9	Combination	Max			X	0.000125		12	66.334
GF	DConS9	Combination	Max			Y	0.000159		15	66.334
GF	DConS9	Combination	Min			X	6.2E-05		12	66.334
GF	DConS9	Combination	Min			Y	0.000136		15	66.334
GF	DConS10	Combination	Max			X	6.8E-05		12	66.334
GF	DConS10	Combination	Max			Y	0.000151		15	66.334
GF	DConS10	Combination	Min			X	0.000119		12	66.334
GF	DConS10	Combination	Min			Y	0.000144		15	66.334
GF	DConS11	Combination	Max			X	0.000125		12	66.334
GF	DConS11	Combination	Max			Y	0.000159		15	66.334
GF	DConS11	Combination	Min			X	6.2E-05		12	66.334
GF	DConS11	Combination	Min			Y	0.000136		15	66.334
GF	DConS12	Combination	Max			X	6.7E-05		12	66.334
GF	DConS12	Combination	Max			Y	0.00015		15	66.334
GF	DConS12	Combination	Min			X	0.000119		12	66.334
GF	DConS12	Combination	Min			Y	0.000145		15	66.334
GF	DConS13	Combination	Max			X	0.000247		12	66.334
GF	DConS13	Combination	Max			Y	0.000309		15	66.334
GF	DConS13	Combination	Min			X	0.000127		12	66.334
GF	DConS13	Combination	Min			Y	0.000281		15	66.334
GF	DConS14	Combination	Max			X	0.000131		12	66.334
GF	DConS14	Combination	Max			Y	0.000292		15	66.334
GF	DConS14	Combination	Min			X	0.000243		12	66.334
GF	DConS14	Combination	Min			Y	0.000298		15	66.334
GF	DConS15	Combination	Max			X	0.000175		12	66.334
GF	DConS15	Combination	Max			Y	0.000178		15	66.334

Table 5.5 - Story Drifts (Part 1 of 2, continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Drift	Drift/	Label	X ft
GF	DConS15	Combination	Min			X	5E-05		12	66.334
GF	DConS16	Combination	Max			X	5.9E-05		12	66.334
GF	DConS16	Combination	Max			Y	6.9E-05		15	66.334
GF	DConS16	Combination	Min			X	0.000166		12	66.334
GF	DConS16	Combination	Min			Y	0.000151		15	66.334
GF	DConS17	Combination	Max			X	0.000174		12	66.334
GF	DConS17	Combination	Max			Y	0.000172		15	66.334
GF	DConS17	Combination	Min			X	5.1E-05		12	66.334
GF	DConS17	Combination	Min			Y	4.7E-05		15	66.334
GF	DConS18	Combination	Max			X	5.8E-05		12	66.334
GF	DConS18	Combination	Max			Y	6.3E-05		15	66.334
GF	DConS18	Combination	Min			X	0.000167		12	66.334
GF	DConS18	Combination	Min			Y	0.000157		15	66.334
GF	DConS19	Combination	Max			X	0.000173		12	66.334
GF	DConS19	Combination	Max			Y	0.000169		15	66.334
GF	DConS19	Combination	Min			X	5.3E-05		12	66.334
GF	DConS19	Combination	Min			Y	5E-05		15	66.334
GF	DConS20	Combination	Max			X	5.7E-05		12	66.334
GF	DConS20	Combination	Max			Y	6E-05		15	66.334
GF	DConS20	Combination	Min			X	0.000169		12	66.334
GF	DConS20	Combination	Min			Y	0.00016		15	66.334

Table 5.5 - Story Drifts (Part 2 of 2)

Story	Y ft	Z ft
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	3.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	3.0833	87
ROOF	3.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
ROOF	17.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	3.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	3.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
ROOF	17.0833	87
ROOF	3.0833	87
ROOF	36.0833	87
ROOF	50.0833	87
ROOF	36.0833	87
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	3.0833	77
7TH	3.0833	77

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	3.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	3.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	17.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	17.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	3.0833	77
7TH	3.0833	77
7TH	50.0833	77
7TH	36.0833	77
7TH	50.0833	77
7TH	36.0833	77
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	3.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
6TH	36.0833	67
6TH	3.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	3.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	50.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	3.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	50.0833	67
6TH	36.0833	67
6TH	3.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	3.0833	67
6TH	50.0833	67
6TH	36.0833	67
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	3.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	3.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	17.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	3.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	3.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
5TH	3.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
5TH	50.0833	57
5TH	36.0833	57
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	3.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	3.0833	47

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	17.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	17.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	3.0833	47
4TH	3.0833	47
4TH	50.0833	47

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	3.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	3.0833	47
4TH	50.0833	47
4TH	36.0833	47
4TH	50.0833	47
4TH	36.0833	47
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	17.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	3.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	17.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	17.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	3.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	17.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	17.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	36.0833	37
3RD	50.0833	37
3RD	3.0833	37
3RD	50.0833	37
3RD	17.0833	37
3RD	50.0833	37
3RD	36.0833	37
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	50.0833	27
2ND	3.0833	27

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	36.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	3.0833	27
2ND	50.0833	27
2ND	36.0833	27
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	17.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	3.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	17.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
1ST	50.0833	17
1ST	36.0833	17
GF	50.0833	7
GF	3.0833	7
GF	3.0833	7
GF	17.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7
GF	3.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7
GF	50.0833	7
GF	3.0833	7

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7

Table 5.5 - Story Drifts (Part 2 of 2, continued)

Story	Y ft	Z ft
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7
GF	50.0833	7
GF	17.0833	7

Table 5.6 - Story Max Over Avg Drifts

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
ROOF	Dead	LinStatic				X	0.00265	0.001409	1.881
ROOF	Dead	LinStatic				Y	0.00818	0.006542	1.25
ROOF	Live	LinStatic				X	0.003444	0.003151	1.093
ROOF	Live	LinStatic				Y	0.009071	0.008686	1.044
ROOF	PW	LinStatic				X	0.000794	0.000332	2.392
ROOF	PW	LinStatic				Y	0.001602	0.000993	1.614
ROOF	FF	LinStatic				X	0.000882	0.000453	1.948
ROOF	FF	LinStatic				Y	0.001842	0.001275	1.444
ROOF	ROOF LIVE	LinStatic				X	0.000465	0.000151	3.085
ROOF	ROOF LIVE	LinStatic				Y	0.001003	0.000588	1.705
ROOF	EQ	LinStatic	Max			X	0.069344	0.064809	1.07
ROOF	EQ	LinStatic	Max			Y	0.041189	0.035754	1.152
ROOF	EQ	LinStatic	Min			X	0.005629	0.001371	4.105
ROOF	EQ	LinStatic	Min			Y	0.006805	0.000961	7.082
ROOF	wind	LinStatic	Max			X	0.051274	0.047883	1.071
ROOF	wind	LinStatic	Max			Y	0.03947	0.033871	1.165
ROOF	wind	LinStatic	Min			Y	0.032746	0.025265	1.296
ROOF	1.4D	Combination				X	0.003711	0.001972	1.881
ROOF	1.4D	Combination				Y	0.011452	0.009159	1.25
ROOF	1.2D+1.6L+.5Lr	Combination				X	0.008924	0.006808	1.311
ROOF	1.2D+1.6L+.5Lr	Combination				Y	0.024832	0.022041	1.127
ROOF	1.2D+1.6Lr+L	Combination				X	0.007369	0.005083	1.45

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
ROOF	1.2D+1.6Lr+L	Combination				Y	0.020492	0.017477	1.173
ROOF	1.2D+1.6Lr+.8W	Combination	Max			X	0.044944	0.040238	1.117
ROOF	1.2D+1.6Lr+.8W	Combination	Max			Y	0.037738	0.035888	1.052
ROOF	1.2D+1.6Lr+.8W	Combination	Min			Y	0.020035	0.011709	1.711
ROOF	1.2D+1.6Lr-.8W	Combination	Max			X	0.009904	0.004219	2.348
ROOF	1.2D+1.6Lr-.8W	Combination	Max			Y	0.032359	0.028706	1.127
ROOF	1.2D+1.6Lr-.8W	Combination	Min			X	0.037094	0.036374	1.02
ROOF	1.2D+1.6Lr-.8W	Combination	Min			Y	0.025413	0.018305	1.388
ROOF	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.088895	0.08153	1.09
ROOF	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.077423	0.071023	1.09
ROOF	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.038123	0.023882	1.596
ROOF	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.018815	0.008882	2.118
ROOF	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.066665	0.056964	1.17
ROOF	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.075181	0.071695	1.049
ROOF	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.04888	0.037363	1.308
ROOF	1.246D+1E+1L	Combination	Max			X	0.07609	0.069716	1.091
ROOF	1.246D+1E+1L	Combination	Max			Y	0.055599	0.052392	1.061
ROOF	1.246D+1E+1L	Combination	Min			X	0.009091	0.006475	1.404
ROOF	1.246D+1E+1L	Combination	Min			Y	0.026069	0.017798	1.465
ROOF	1.246D-1E+1L	Combination	Max			X	0.009633	0.003536	2.725
ROOF	1.246D-1E+1L	Combination	Max			Y	0.019294	0.015876	1.215
ROOF	1.246D-1E+1L	Combination	Min			X	0.062598	0.059902	1.045
ROOF	1.246D-1E+1L	Combination	Min			Y	0.026779	0.018917	1.416
ROOF	0.9D+1.6W	Combination	Max			X	0.084424	0.077881	1.084
ROOF	0.9D+1.6W	Combination	Max			Y	0.067565	0.060081	1.125
ROOF	0.9D+1.6W	Combination	Min			Y	0.04798	0.034702	1.383
ROOF	0.9D-1.6W	Combination	Max			X	0.014343	0.004987	2.876
ROOF	0.9D-1.6W	Combination	Max			Y	0.056808	0.046145	1.231
ROOF	0.9D-1.6W	Combination	Min			X	0.079653	0.075345	1.057
ROOF	0.9D-1.6W	Combination	Min			Y	0.058738	0.048306	1.216
ROOF	.854D+E	Combination	Max			X	0.071608	0.066012	1.085
ROOF	.854D+E	Combination	Max			Y	0.045377	0.041341	1.098
ROOF	.854D+E	Combination	Min			X	0.005772	0.002574	2.242
ROOF	.854D+E	Combination	Min			Y	0.013791	0.006548	2.106
ROOF	.854D-E	Combination	Max			Y	0.009072	0.004626	1.961
ROOF	.854D-E	Combination	Min			X	0.067081	0.063606	1.055
ROOF	.854D-E	Combination	Min			Y	0.037001	0.030167	1.227
ROOF	D+L	Combination				X	0.006094	0.00456	1.336
ROOF	D+L	Combination				Y	0.017251	0.015227	1.133
ROOF	D+.5L	Combination				X	0.004372	0.002985	1.465
ROOF	D+.5L	Combination				Y	0.012715	0.010885	1.168
ROOF	D+.5L+.7W	Combination	Max			X	0.040264	0.036503	1.103
ROOF	D+.5L+.7W	Combination	Max			Y	0.036683	0.034594	1.06
ROOF	D+.5L+.7W	Combination	Min			X	0.004692	0.001917	2.448

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
ROOF	D+.5L+.7W	Combination	Min			Y	0.013868	0.007007	1.979
ROOF	D+.5L-.7W	Combination	Max			X	0.009604	0.00488	1.968
ROOF	D+.5L-.7W	Combination	Max			Y	0.031976	0.028363	1.127
ROOF	D+.5L-.7W	Combination	Min			X	0.031519	0.030534	1.032
ROOF	D+.5L-.7W	Combination	Min			Y	0.018575	0.012825	1.448
ROOF	DConS1	Combination				X	0.006057	0.003071	1.972
ROOF	DConS1	Combination				Y	0.016273	0.012334	1.319
ROOF	DConS2	Combination				X	0.010702	0.007675	1.394
ROOF	DConS2	Combination				Y	0.028463	0.024469	1.163
ROOF	DConS3	Combination				X	0.010935	0.00775	1.411
ROOF	DConS3	Combination				Y	0.028964	0.024763	1.17
ROOF	DConS4	Combination				X	0.00938	0.006025	1.557
ROOF	DConS4	Combination				Y	0.024625	0.020199	1.219
ROOF	DConS5	Combination	Max			X	0.090674	0.082397	1.1
ROOF	DConS5	Combination	Max			Y	0.078647	0.073451	1.071
ROOF	DConS5	Combination	Min			X	0.009816	0.003247	3.023
ROOF	DConS5	Combination	Min			Y	0.036899	0.021591	1.709
ROOF	DConS6	Combination	Max			X	0.020593	0.01002	2.055
ROOF	DConS6	Combination	Max			Y	0.067889	0.059256	1.146
ROOF	DConS6	Combination	Min			X	0.073402	0.070829	1.036
ROOF	DConS6	Combination	Min			Y	0.047656	0.034936	1.364
ROOF	DConS7	Combination	Max			X	0.090907	0.082472	1.102
ROOF	DConS7	Combination	Max			Y	0.078733	0.073745	1.068
ROOF	DConS7	Combination	Min			X	0.009827	0.003369	2.917
ROOF	DConS7	Combination	Min			Y	0.036812	0.02132	1.727
ROOF	DConS8	Combination	Max			X	0.020826	0.010142	2.053
ROOF	DConS8	Combination	Max			Y	0.067976	0.059527	1.142
ROOF	DConS8	Combination	Min			X	0.07317	0.070754	1.034
ROOF	DConS8	Combination	Min			Y	0.04757	0.034642	1.373
ROOF	DConS9	Combination	Max			X	0.046955	0.04118	1.14
ROOF	DConS9	Combination	Max			Y	0.039049	0.03861	1.011
ROOF	DConS9	Combination	Min			X	0.004228	0.002093	2.02
ROOF	DConS9	Combination	Min			Y	0.018724	0.008988	2.083
ROOF	DConS10	Combination	Max			X	0.011915	0.005203	2.29
ROOF	DConS10	Combination	Max			Y	0.03367	0.031269	1.077
ROOF	DConS10	Combination	Min			X	0.035783	0.035433	1.01
ROOF	DConS10	Combination	Min			Y	0.024103	0.015584	1.547
ROOF	DConS11	Combination	Max			X	0.046211	0.040939	1.129
ROOF	DConS11	Combination	Max			Y	0.038771	0.037669	1.029
ROOF	DConS11	Combination	Min			X	0.00419	0.001702	2.462
ROOF	DConS11	Combination	Min			Y	0.019001	0.009929	1.914
ROOF	DConS12	Combination	Max			X	0.01117	0.004962	2.251
ROOF	DConS12	Combination	Max			Y	0.033393	0.030402	1.098
ROOF	DConS12	Combination	Min			X	0.035827	0.035674	1.004

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
ROOF	DConS12	Combination	Min			Y	0.02438	0.016525	1.475
ROOF	DConS13	Combination	Max			X	0.085932	0.078587	1.093
ROOF	DConS13	Combination	Max			Y	0.068548	0.062122	1.103
ROOF	DConS13	Combination	Min			Y	0.046997	0.03278	1.434
ROOF	DConS14	Combination	Max			X	0.015851	0.005932	2.672
ROOF	DConS14	Combination	Max			Y	0.057791	0.048066	1.202
ROOF	DConS14	Combination	Min			X	0.078144	0.074639	1.047
ROOF	DConS14	Combination	Min			Y	0.057755	0.046264	1.248
ROOF	DConS15	Combination	Max			X	0.078412	0.070812	1.107
ROOF	DConS15	Combination	Max			Y	0.057284	0.054989	1.042
ROOF	DConS15	Combination	Min			X	0.009692	0.007937	1.221
ROOF	DConS15	Combination	Min			Y	0.030987	0.021099	1.469
ROOF	DConS16	Combination	Max			X	0.011955	0.004632	2.581
ROOF	DConS16	Combination	Max			Y	0.020978	0.018818	1.115
ROOF	DConS16	Combination	Min			X	0.060276	0.058548	1.03
ROOF	DConS16	Combination	Min			Y	0.025094	0.015615	1.607
ROOF	DConS17	Combination	Max			X	0.074968	0.067661	1.108
ROOF	DConS17	Combination	Max			Y	0.048984	0.046472	1.054
ROOF	DConS17	Combination	Min			X	0.006659	0.004698	1.417
ROOF	DConS17	Combination	Min			Y	0.021916	0.012414	1.765
ROOF	DConS18	Combination	Max			X	0.008511	0.00148	5.749
ROOF	DConS18	Combination	Max			Y	0.012679	0.0103	1.231
ROOF	DConS18	Combination	Min			X	0.06372	0.061787	1.031
ROOF	DConS18	Combination	Min			Y	0.033394	0.024301	1.374
ROOF	DConS19	Combination	Max			X	0.072805	0.066564	1.094
ROOF	DConS19	Combination	Max			Y	0.045986	0.042679	1.077
ROOF	DConS19	Combination	Min			X	0.005993	0.003284	1.825
ROOF	DConS19	Combination	Min			Y	0.016104	0.008009	2.011
ROOF	DConS20	Combination	Max			Y	0.009681	0.006087	1.59
ROOF	DConS20	Combination	Min			X	0.065883	0.063054	1.045
ROOF	DConS20	Combination	Min			Y	0.036392	0.028706	1.268
7TH	Dead	LinStatic				X	0.002683	0.001375	1.951
7TH	Dead	LinStatic				Y	0.007913	0.006188	1.279
7TH	Live	LinStatic				X	0.003344	0.003045	1.098
7TH	Live	LinStatic				Y	0.008757	0.008363	1.047
7TH	PW	LinStatic				X	0.00082	0.000334	2.458
7TH	PW	LinStatic				Y	0.001558	0.000916	1.7
7TH	FF	LinStatic				X	0.000901	0.000449	2.006
7TH	FF	LinStatic				Y	0.001787	0.00119	1.501
7TH	ROOF LIVE	LinStatic				X	0.000617	0.000188	3.279
7TH	ROOF LIVE	LinStatic				Y	0.000923	0.000358	2.581
7TH	EQ	LinStatic	Max			X	0.074833	0.068938	1.086
7TH	EQ	LinStatic	Max			Y	0.048183	0.039822	1.21
7TH	EQ	LinStatic	Min			X	0.007085	0.00064	11.077

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
7TH	EQ	LinStatic	Min			Y	0.008012	0.000342	23.411
7TH	wind	LinStatic	Max			X	0.054951	0.050644	1.085
7TH	wind	LinStatic	Max			Y	0.045812	0.037504	1.222
7TH	wind	LinStatic	Min			X	0.010466	0.003415	3.064
7TH	wind	LinStatic	Min			Y	0.038745	0.028577	1.356
7TH	1.4D	Combination				X	0.003756	0.001926	1.951
7TH	1.4D	Combination				Y	0.011079	0.008664	1.279
7TH	1.2D+1.6L+.5Lr	Combination				X	0.008878	0.006617	1.342
7TH	1.2D+1.6L+.5Lr	Combination				Y	0.023969	0.020986	1.142
7TH	1.2D+1.6Lr+L	Combination				X	0.00755	0.004997	1.511
7TH	1.2D+1.6Lr+L	Combination				Y	0.01973	0.016362	1.206
7TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.048167	0.042467	1.134
7TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.041674	0.038001	1.097
7TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.025972	0.015064	1.724
7TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.012579	0.005137	2.449
7TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.03602	0.030524	1.18
7TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.039754	0.038564	1.031
7TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.031626	0.022004	1.437
7TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.094793	0.085821	1.105
7TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.086521	0.075974	1.139
7TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.048771	0.030066	1.622
7TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.023617	0.010874	2.172
7TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.075214	0.061382	1.225
7TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.081049	0.076241	1.063
7TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.060078	0.044038	1.364
7TH	1.246D+1E+1L	Combination	Max			X	0.08152	0.073697	1.106
7TH	1.246D+1E+1L	Combination	Max			Y	0.061714	0.055895	1.104
7TH	1.246D+1E+1L	Combination	Min			X	0.009916	0.005398	1.837
7TH	1.246D+1E+1L	Combination	Min			Y	0.026629	0.016416	1.622
7TH	1.246D-1E+1L	Combination	Max			X	0.012493	0.004119	3.033
7TH	1.246D-1E+1L	Combination	Max			Y	0.020858	0.015732	1.326
7TH	1.246D-1E+1L	Combination	Min			X	0.068147	0.06418	1.062
7TH	1.246D-1E+1L	Combination	Min			Y	0.034652	0.023748	1.459
7TH	0.9D+1.6W	Combination	Max			X	0.090336	0.082269	1.098
7TH	0.9D+1.6W	Combination	Max			Y	0.077317	0.065575	1.179
7TH	0.9D+1.6W	Combination	Min			Y	0.057975	0.040329	1.438
7TH	0.9D-1.6W	Combination	Max			X	0.01916	0.007053	2.717
7TH	0.9D-1.6W	Combination	Max			Y	0.06601	0.051118	1.291
7TH	0.9D-1.6W	Combination	Min			X	0.085506	0.079793	1.072
7TH	0.9D-1.6W	Combination	Min			Y	0.069282	0.054436	1.273
7TH	.854D+E	Combination	Max			X	0.077125	0.070113	1.1
7TH	.854D+E	Combination	Max			Y	0.051995	0.045106	1.153
7TH	.854D+E	Combination	Min			X	0.007143	0.001814	3.937
7TH	.854D+E	Combination	Min			Y	0.01477	0.005627	2.625

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
7TH	.854D-E	Combination	Max			X	0.008097	0.000535	15.136
7TH	.854D-E	Combination	Max			Y	0.011139	0.004943	2.254
7TH	.854D-E	Combination	Min			X	0.072542	0.067764	1.071
7TH	.854D-E	Combination	Min			Y	0.044371	0.034537	1.285
7TH	D+L	Combination				X	0.006027	0.004421	1.363
7TH	D+L	Combination				Y	0.01667	0.014552	1.146
7TH	D+.5L	Combination				X	0.004355	0.002898	1.503
7TH	D+.5L	Combination				Y	0.012292	0.01037	1.185
7TH	D+.5L+.7W	Combination	Max			X	0.04282	0.038349	1.117
7TH	D+.5L+.7W	Combination	Max			Y	0.040517	0.036622	1.106
7TH	D+.5L+.7W	Combination	Min			Y	0.018674	0.00981	1.904
7TH	D+.5L-.7W	Combination	Max			X	0.011681	0.005685	2.055
7TH	D+.5L-.7W	Combination	Max			Y	0.03557	0.030157	1.179
7TH	D+.5L-.7W	Combination	Min			X	0.034111	0.032553	1.048
7TH	D+.5L-.7W	Combination	Min			Y	0.023621	0.015883	1.487
7TH	DConS1	Combination				X	0.006165	0.003021	2.041
7TH	DConS1	Combination				Y	0.01576	0.011613	1.357
7TH	DConS2	Combination				X	0.010635	0.007462	1.425
7TH	DConS2	Combination				Y	0.02752	0.023335	1.179
7TH	DConS3	Combination				X	0.010943	0.007556	1.448
7TH	DConS3	Combination				Y	0.027982	0.023514	1.19
7TH	DConS4	Combination				X	0.009615	0.005936	1.62
7TH	DConS4	Combination				Y	0.023743	0.01889	1.257
7TH	DConS5	Combination	Max			X	0.09655	0.086666	1.114
7TH	DConS5	Combination	Max			Y	0.087668	0.078323	1.119
7TH	DConS5	Combination	Min			Y	0.047624	0.027808	1.713
7TH	DConS6	Combination	Max			X	0.025374	0.011991	2.116
7TH	DConS6	Combination	Max			Y	0.07636	0.063595	1.201
7TH	DConS6	Combination	Min			X	0.079293	0.075396	1.052
7TH	DConS6	Combination	Min			Y	0.058932	0.041689	1.414
7TH	DConS7	Combination	Max			X	0.096858	0.08676	1.116
7TH	DConS7	Combination	Max			Y	0.087564	0.078502	1.115
7TH	DConS7	Combination	Min			Y	0.047728	0.027629	1.727
7TH	DConS8	Combination	Max			X	0.025682	0.012099	2.123
7TH	DConS8	Combination	Max			Y	0.076257	0.063742	1.196
7TH	DConS8	Combination	Min			X	0.078984	0.075302	1.049
7TH	DConS8	Combination	Min			Y	0.059036	0.04151	1.422
7TH	DConS9	Combination	Max			X	0.050232	0.043406	1.157
7TH	DConS9	Combination	Max			Y	0.042716	0.040529	1.054
7TH	DConS9	Combination	Min			Y	0.02493	0.012536	1.989
7TH	DConS10	Combination	Max			X	0.014644	0.006076	2.41
7TH	DConS10	Combination	Max			Y	0.037063	0.032885	1.127
7TH	DConS10	Combination	Min			X	0.037689	0.037625	1.002
7TH	DConS10	Combination	Min			Y	0.030583	0.019476	1.57

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
7TH	DConS11	Combination	Max			X	0.049245	0.043105	1.142
7TH	DConS11	Combination	Max			Y	0.043049	0.039957	1.077
7TH	DConS11	Combination	Min			Y	0.024597	0.013109	1.876
7TH	DConS12	Combination	Max			X	0.013657	0.005775	2.365
7TH	DConS12	Combination	Max			Y	0.037395	0.032414	1.154
7TH	DConS12	Combination	Min			X	0.038676	0.037926	1.02
7TH	DConS12	Combination	Min			Y	0.030251	0.020049	1.509
7TH	DConS13	Combination	Max			X	0.091885	0.082973	1.107
7TH	DConS13	Combination	Max			Y	0.078099	0.067471	1.158
7TH	DConS13	Combination	Min			Y	0.057193	0.038559	1.483
7TH	DConS14	Combination	Max			X	0.020709	0.008009	2.586
7TH	DConS14	Combination	Max			Y	0.066792	0.052888	1.263
7TH	DConS14	Combination	Min			X	0.083958	0.079089	1.062
7TH	DConS14	Combination	Min			Y	0.0685	0.05254	1.304
7TH	DConS15	Combination	Max			X	0.083902	0.074789	1.122
7TH	DConS15	Combination	Max			Y	0.063084	0.058911	1.071
7TH	DConS15	Combination	Min			X	0.009947	0.006605	1.506
7TH	DConS15	Combination	Min			Y	0.031404	0.019489	1.611
7TH	DConS16	Combination	Max			X	0.014875	0.005211	2.854
7TH	DConS16	Combination	Max			Y	0.022228	0.018795	1.183
7TH	DConS16	Combination	Min			X	0.065765	0.063069	1.043
7TH	DConS16	Combination	Min			Y	0.033282	0.020675	1.61
7TH	DConS17	Combination	Max			X	0.080558	0.071744	1.123
7TH	DConS17	Combination	Max			Y	0.055115	0.050592	1.089
7TH	DConS17	Combination	Min			X	0.007023	0.003471	2.023
7TH	DConS17	Combination	Min			Y	0.022646	0.011126	2.036
7TH	DConS18	Combination	Max			X	0.011531	0.002166	5.324
7TH	DConS18	Combination	Max			Y	0.014259	0.010441	1.366
7TH	DConS18	Combination	Min			X	0.069108	0.066133	1.045
7TH	DConS18	Combination	Min			Y	0.041251	0.029038	1.421
7TH	DConS19	Combination	Max			X	0.078357	0.070665	1.109
7TH	DConS19	Combination	Max			Y	0.052449	0.046457	1.129
7TH	DConS19	Combination	Min			X	0.007015	0.002366	2.965
7TH	DConS19	Combination	Min			Y	0.017018	0.006978	2.439
7TH	DConS20	Combination	Max			X	0.009329	0.001087	8.583
7TH	DConS20	Combination	Max			Y	0.011593	0.006294	1.842
7TH	DConS20	Combination	Min			X	0.07131	0.067212	1.061
7TH	DConS20	Combination	Min			Y	0.043917	0.033186	1.323
6TH	Dead	LinStatic				X	0.00249	0.001265	1.969
6TH	Dead	LinStatic				Y	0.007394	0.005778	1.28
6TH	Live	LinStatic				X	0.003185	0.002877	1.107
6TH	Live	LinStatic				Y	0.008242	0.007835	1.052
6TH	PW	LinStatic				X	0.000771	0.000312	2.469
6TH	PW	LinStatic				Y	0.001457	0.000852	1.71

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
6TH	FF	LinStatic				X	0.000849	0.000422	2.013
6TH	FF	LinStatic				Y	0.001671	0.001108	1.509
6TH	ROOF LIVE	LinStatic				X	0.000445	0.000132	3.361
6TH	ROOF LIVE	LinStatic				Y	0.000767	0.000354	2.165
6TH	EQ	LinStatic	Max			X	0.079172	0.071978	1.1
6TH	EQ	LinStatic	Max			Y	0.054791	0.043474	1.26
6TH	EQ	LinStatic	Min			X	0.00869	4.5E-05	193.926
6TH	EQ	LinStatic	Min			Y	0.009671	0.000247	39.197
6TH	wind	LinStatic	Max			X	0.058179	0.052925	1.099
6TH	wind	LinStatic	Max			Y	0.052427	0.041509	1.263
6TH	wind	LinStatic	Min			X	0.013639	0.004766	2.862
6TH	wind	LinStatic	Min			Y	0.044981	0.031903	1.41
6TH	1.4D	Combination				X	0.003486	0.00177	1.969
6TH	1.4D	Combination				Y	0.010352	0.008089	1.28
6TH	1.2D+1.6L+.5Lr	Combination				X	0.008307	0.006187	1.343
6TH	1.2D+1.6L+.5Lr	Combination				Y	0.022443	0.019647	1.142
6TH	1.2D+1.6Lr+L	Combination				X	0.006885	0.004607	1.495
6TH	1.2D+1.6Lr+L	Combination				Y	0.018342	0.015336	1.196
6TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.050244	0.044069	1.14
6TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.046842	0.040707	1.151
6TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.031084	0.018118	1.716
6TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.014612	0.005773	2.531
6TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.040885	0.032729	1.249
6TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.042843	0.04061	1.055
6TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.037041	0.025707	1.441
6TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.099482	0.089141	1.116
6TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.096277	0.08136	1.183
6TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.059575	0.03629	1.642
6TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.028218	0.012549	2.249
6TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.084363	0.065702	1.284
6TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.086691	0.080219	1.081
6TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.071489	0.051468	1.389
6TH	1.246D+1E+1L	Combination	Max			X	0.08546	0.076431	1.118
6TH	1.246D+1E+1L	Combination	Max			Y	0.067406	0.058509	1.152
6TH	1.246D+1E+1L	Combination	Min			X	0.011218	0.004408	2.545
6TH	1.246D+1E+1L	Combination	Min			Y	0.026632	0.014788	1.801
6TH	1.246D-1E+1L	Combination	Max			X	0.014977	0.004498	3.33
6TH	1.246D-1E+1L	Combination	Max			Y	0.022286	0.015281	1.458
6TH	1.246D-1E+1L	Combination	Min			X	0.072885	0.067525	1.079
6TH	1.246D-1E+1L	Combination	Min			Y	0.042177	0.028439	1.483
6TH	0.9D+1.6W	Combination	Max			X	0.095328	0.085818	1.111
6TH	0.9D+1.6W	Combination	Max			Y	0.087629	0.071614	1.224
6TH	0.9D+1.6W	Combination	Min			X	0.019582	0.006158	3.18
6TH	0.9D+1.6W	Combination	Min			Y	0.068223	0.046009	1.483

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
6TH	0.9D-1.6W	Combination	Max			X	0.024064	0.009091	2.647
6TH	0.9D-1.6W	Combination	Max			Y	0.075714	0.05608	1.35
6TH	0.9D-1.6W	Combination	Min			X	0.090846	0.083542	1.087
6TH	0.9D-1.6W	Combination	Min			Y	0.080138	0.061214	1.309
6TH	.854D+E	Combination	Max			X	0.081298	0.073058	1.113
6TH	.854D+E	Combination	Max			Y	0.058345	0.048408	1.205
6TH	.854D+E	Combination	Min			X	0.008634	0.001035	8.341
6TH	.854D+E	Combination	Min			Y	0.015492	0.004688	3.305
6TH	.854D-E	Combination	Max			X	0.010816	0.001125	9.617
6TH	.854D-E	Combination	Max			Y	0.013225	0.005181	2.553
6TH	.854D-E	Combination	Min			X	0.077046	0.070898	1.087
6TH	.854D-E	Combination	Min			Y	0.051237	0.03854	1.329
6TH	D+L	Combination				X	0.005675	0.004142	1.37
6TH	D+L	Combination				Y	0.015636	0.013613	1.149
6TH	D+.5L	Combination				X	0.004082	0.002703	1.51
6TH	D+.5L	Combination				Y	0.011515	0.009696	1.188
6TH	D+.5L+.7W	Combination	Max			X	0.044808	0.039751	1.127
6TH	D+.5L+.7W	Combination	Max			Y	0.044575	0.038752	1.15
6TH	D+.5L+.7W	Combination	Min			Y	0.02361	0.01272	1.856
6TH	D+.5L-.7W	Combination	Max			X	0.01363	0.006242	2.184
6TH	D+.5L-.7W	Combination	Max			Y	0.039363	0.031822	1.237
6TH	D+.5L-.7W	Combination	Min			X	0.036643	0.034344	1.067
6TH	D+.5L-.7W	Combination	Min			Y	0.028823	0.01936	1.489
6TH	DConS1	Combination				X	0.005753	0.002798	2.056
6TH	DConS1	Combination				Y	0.01473	0.010832	1.36
6TH	DConS2	Combination				X	0.010027	0.007001	1.432
6TH	DConS2	Combination				Y	0.025813	0.021821	1.183
6TH	DConS3	Combination				X	0.01025	0.007068	1.45
6TH	DConS3	Combination				Y	0.026196	0.021998	1.191
6TH	DConS4	Combination				X	0.008828	0.005487	1.609
6TH	DConS4	Combination				Y	0.022095	0.017687	1.249
6TH	DConS5	Combination	Max			X	0.101203	0.089955	1.125
6TH	DConS5	Combination	Max			Y	0.097256	0.083534	1.164
6TH	DConS5	Combination	Min			Y	0.058597	0.034116	1.718
6TH	DConS6	Combination	Max			X	0.029939	0.013363	2.24
6TH	DConS6	Combination	Max			Y	0.085341	0.067741	1.26
6TH	DConS6	Combination	Min			X	0.084971	0.079405	1.07
6TH	DConS6	Combination	Min			Y	0.070511	0.049294	1.43
6TH	DConS7	Combination	Max			X	0.101425	0.090021	1.127
6TH	DConS7	Combination	Max			Y	0.097226	0.083711	1.161
6TH	DConS7	Combination	Min			Y	0.058626	0.033939	1.727
6TH	DConS8	Combination	Max			X	0.030162	0.013429	2.246
6TH	DConS8	Combination	Max			Y	0.085312	0.067895	1.257
6TH	DConS8	Combination	Min			X	0.084748	0.079338	1.068

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
6TH	DConS8	Combination	Min			Y	0.07054	0.049117	1.436
6TH	DConS9	Combination	Max			X	0.052187	0.04495	1.161
6TH	DConS9	Combination	Max			Y	0.047791	0.043058	1.11
6TH	DConS9	Combination	Min			Y	0.030135	0.015767	1.911
6TH	DConS10	Combination	Max			X	0.016555	0.006654	2.488
6TH	DConS10	Combination	Max			Y	0.041834	0.034922	1.198
6TH	DConS10	Combination	Min			X	0.0409	0.03973	1.029
6TH	DConS10	Combination	Min			Y	0.036092	0.023355	1.545
6TH	DConS11	Combination	Max			X	0.051474	0.044738	1.151
6TH	DConS11	Combination	Max			Y	0.047885	0.042492	1.127
6TH	DConS11	Combination	Min			Y	0.030041	0.016333	1.839
6TH	DConS12	Combination	Max			X	0.015842	0.006442	2.459
6TH	DConS12	Combination	Max			Y	0.041928	0.03443	1.218
6TH	DConS12	Combination	Min			X	0.041612	0.039942	1.042
6TH	DConS12	Combination	Min			Y	0.035998	0.023922	1.505
6TH	DConS13	Combination	Max			X	0.096785	0.086478	1.119
6TH	DConS13	Combination	Max			Y	0.088341	0.073377	1.204
6TH	DConS13	Combination	Min			X	0.018125	0.005261	3.445
6TH	DConS13	Combination	Min			Y	0.067512	0.044273	1.525
6TH	DConS14	Combination	Max			X	0.025521	0.009886	2.581
6TH	DConS14	Combination	Max			Y	0.076426	0.057725	1.324
6TH	DConS14	Combination	Min			X	0.089388	0.082881	1.079
6TH	DConS14	Combination	Min			Y	0.079426	0.05945	1.336
6TH	DConS15	Combination	Max			X	0.087699	0.077453	1.132
6TH	DConS15	Combination	Max			Y	0.068659	0.061368	1.119
6TH	DConS15	Combination	Min			X	0.011023	0.00543	2.03
6TH	DConS15	Combination	Min			Y	0.031097	0.017647	1.762
6TH	DConS16	Combination	Max			X	0.017217	0.00552	3.119
6TH	DConS16	Combination	Max			Y	0.023539	0.01814	1.298
6TH	DConS16	Combination	Min			X	0.070645	0.066503	1.062
6TH	DConS16	Combination	Min			Y	0.040923	0.02558	1.6
6TH	DConS17	Combination	Max			X	0.084514	0.074576	1.133
6TH	DConS17	Combination	Max			Y	0.06123	0.053532	1.144
6TH	DConS17	Combination	Min			X	0.008454	0.002553	3.311
6TH	DConS17	Combination	Min			Y	0.022856	0.009812	2.329
6TH	DConS18	Combination	Max			X	0.014032	0.002643	5.31
6TH	DConS18	Combination	Max			Y	0.016109	0.010305	1.563
6TH	DConS18	Combination	Min			X	0.07383	0.06938	1.064
6TH	DConS18	Combination	Min			Y	0.048353	0.033416	1.447
6TH	DConS19	Combination	Max			X	0.082459	0.073576	1.121
6TH	DConS19	Combination	Max			Y	0.058753	0.049664	1.183
6TH	DConS19	Combination	Min			X	0.00851	0.001554	5.477
6TH	DConS19	Combination	Min			Y	0.017595	0.005943	2.961
6TH	DConS20	Combination	Max			X	0.011977	0.001643	7.288

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
6TH	DConS20	Combination	Max			Y	0.013633	0.006436	2.118
6TH	DConS20	Combination	Min			X	0.075885	0.070379	1.078
6TH	DConS20	Combination	Min			Y	0.050829	0.037284	1.363
5TH	Dead	LinStatic				X	0.00226	0.001139	1.985
5TH	Dead	LinStatic				Y	0.006705	0.005226	1.283
5TH	Live	LinStatic				X	0.002943	0.00263	1.119
5TH	Live	LinStatic				Y	0.007494	0.007082	1.058
5TH	PW	LinStatic				X	0.00071	0.000287	2.471
5TH	PW	LinStatic				Y	0.001324	0.000767	1.727
5TH	FF	LinStatic				X	0.000783	0.000388	2.017
5TH	FF	LinStatic				Y	0.001518	0.000997	1.522
5TH	ROOF LIVE	LinStatic				X	0.000339	0.0001	3.394
5TH	ROOF LIVE	LinStatic				Y	0.000628	0.000313	2.008
5TH	EQ	LinStatic	Max			X	0.081554	0.073221	1.114
5TH	EQ	LinStatic	Max			Y	0.060117	0.046065	1.305
5TH	EQ	LinStatic	Min			X	0.011384	0.000712	15.994
5TH	EQ	LinStatic	Min			Y	0.011794	0.000822	14.343
5TH	wind	LinStatic	Max			X	0.060508	0.054308	1.114
5TH	wind	LinStatic	Max			Y	0.058628	0.045044	1.302
5TH	wind	LinStatic	Min			X	0.016869	0.006132	2.751
5TH	wind	LinStatic	Min			Y	0.05094	0.034871	1.461
5TH	1.4D	Combination				X	0.003164	0.001594	1.985
5TH	1.4D	Combination				Y	0.009387	0.007316	1.283
5TH	1.2D+1.6L+.5Lr	Combination				X	0.00759	0.005624	1.349
5TH	1.2D+1.6L+.5Lr	Combination				Y	0.02035	0.017757	1.146
5TH	1.2D+1.6Lr+L	Combination				X	0.006197	0.004156	1.491
5TH	1.2D+1.6Lr+L	Combination				Y	0.016544	0.013852	1.194
5TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.051661	0.044973	1.149
5TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.051394	0.042806	1.201
5TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.010241	0.002884	3.551
5TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.03626	0.021126	1.716
5TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.016749	0.006432	2.604
5TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.045244	0.034434	1.314
5TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.045153	0.04192	1.077
5TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.042411	0.029264	1.449
5TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.102638	0.09094	1.129
5TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.104968	0.085579	1.227
5TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.021166	0.005275	4.013
5TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.07034	0.042285	1.663
5TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.032815	0.013858	2.368
5TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.092667	0.069084	1.341
5TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.090989	0.082847	1.098
5TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.082642	0.058562	1.411
5TH	1.246D+1E+1L	Combination	Max			X	0.087313	0.07727	1.13

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
5TH	1.246D+1E+1L	Combination	Max			Y	0.071454	0.059658	1.198
5TH	1.246D+1E+1L	Combination	Min			X	0.012299	0.003337	3.686
5TH	1.246D+1E+1L	Combination	Min			Y	0.025998	0.01277	2.036
5TH	1.246D-1E+1L	Combination	Max			X	0.017143	0.004761	3.601
5TH	1.246D-1E+1L	Combination	Max			Y	0.023131	0.014415	1.605
5TH	1.246D-1E+1L	Combination	Min			X	0.075795	0.069172	1.096
5TH	1.246D-1E+1L	Combination	Min			Y	0.04878	0.032473	1.502
5TH	0.9D+1.6W	Combination	Max			X	0.098848	0.087918	1.124
5TH	0.9D+1.6W	Combination	Max			Y	0.097177	0.076773	1.266
5TH	0.9D+1.6W	Combination	Min			X	0.024956	0.008525	2.927
5TH	0.9D+1.6W	Combination	Min			Y	0.078132	0.051091	1.529
5TH	0.9D-1.6W	Combination	Max			X	0.029025	0.010836	2.679
5TH	0.9D-1.6W	Combination	Max			Y	0.084875	0.060393	1.405
5TH	0.9D-1.6W	Combination	Min			X	0.094779	0.085868	1.104
5TH	0.9D-1.6W	Combination	Min			Y	0.090433	0.067367	1.342
5TH	.854D+E	Combination	Max			X	0.083484	0.074194	1.125
5TH	.854D+E	Combination	Max			Y	0.063316	0.050528	1.253
5TH	.854D+E	Combination	Min			Y	0.015875	0.00364	4.361
5TH	.854D-E	Combination	Max			X	0.013314	0.001684	7.904
5TH	.854D-E	Combination	Max			Y	0.014993	0.005285	2.837
5TH	.854D-E	Combination	Min			X	0.079624	0.072249	1.102
5TH	.854D-E	Combination	Min			Y	0.056918	0.041603	1.368
5TH	D+L	Combination				X	0.005203	0.003769	1.381
5TH	D+L	Combination				Y	0.014199	0.012307	1.154
5TH	D+.5L	Combination				X	0.003732	0.002454	1.521
5TH	D+.5L	Combination				Y	0.010452	0.008766	1.192
5TH	D+.5L+.7W	Combination	Max			X	0.046087	0.04047	1.139
5TH	D+.5L+.7W	Combination	Max			Y	0.04812	0.040297	1.194
5TH	D+.5L+.7W	Combination	Min			Y	0.028577	0.015643	1.827
5TH	D+.5L-.7W	Combination	Max			X	0.01554	0.006746	2.304
5TH	D+.5L-.7W	Combination	Max			Y	0.042739	0.033006	1.295
5TH	D+.5L-.7W	Combination	Min			X	0.038624	0.035562	1.086
5TH	D+.5L-.7W	Combination	Min			Y	0.033959	0.022764	1.492
5TH	DConS1	Combination				X	0.005255	0.00254	2.069
5TH	DConS1	Combination				Y	0.013366	0.009786	1.366
5TH	DConS2	Combination				X	0.009213	0.006385	1.443
5TH	DConS2	Combination				Y	0.023448	0.019718	1.189
5TH	DConS3	Combination				X	0.009382	0.006435	1.458
5TH	DConS3	Combination				Y	0.023762	0.019874	1.196
5TH	DConS4	Combination				X	0.007989	0.004967	1.608
5TH	DConS4	Combination				Y	0.019955	0.015969	1.25
5TH	DConS5	Combination	Max			X	0.10426	0.0917	1.137
5TH	DConS5	Combination	Max			Y	0.105792	0.087539	1.209
5TH	DConS5	Combination	Min			X	0.019544	0.004257	4.591

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
5TH	DConS5	Combination	Min			Y	0.069516	0.040325	1.724
5TH	DConS6	Combination	Max			X	0.034437	0.014618	2.356
5TH	DConS6	Combination	Max			Y	0.093491	0.070916	1.318
5TH	DConS6	Combination	Min			X	0.089367	0.082086	1.089
5TH	DConS6	Combination	Min			Y	0.081818	0.056601	1.446
5TH	DConS7	Combination	Max			X	0.10443	0.09175	1.138
5TH	DConS7	Combination	Max			Y	0.105791	0.087696	1.206
5TH	DConS7	Combination	Min			X	0.019374	0.004172	4.644
5TH	DConS7	Combination	Min			Y	0.069518	0.040168	1.731
5TH	DConS8	Combination	Max			X	0.034607	0.014668	2.359
5TH	DConS8	Combination	Max			Y	0.09349	0.071055	1.316
5TH	DConS8	Combination	Min			X	0.089197	0.082036	1.087
5TH	DConS8	Combination	Min			Y	0.081819	0.056445	1.45
5TH	DConS9	Combination	Max			X	0.053453	0.045784	1.168
5TH	DConS9	Combination	Max			Y	0.052217	0.044923	1.162
5TH	DConS9	Combination	Min			Y	0.035437	0.019009	1.864
5TH	DConS10	Combination	Max			X	0.018541	0.007243	2.56
5TH	DConS10	Combination	Max			Y	0.046066	0.036405	1.265
5TH	DConS10	Combination	Min			X	0.043361	0.04111	1.055
5TH	DConS10	Combination	Min			Y	0.041588	0.027147	1.532
5TH	DConS11	Combination	Max			X	0.052911	0.045624	1.16
5TH	DConS11	Combination	Max			Y	0.052221	0.044423	1.176
5TH	DConS11	Combination	Min			X	0.008991	0.002055	4.376
5TH	DConS11	Combination	Min			Y	0.035433	0.019509	1.816
5TH	DConS12	Combination	Max			X	0.017999	0.007083	2.541
5TH	DConS12	Combination	Max			Y	0.04607	0.035961	1.281
5TH	DConS12	Combination	Min			X	0.043903	0.041269	1.064
5TH	DConS12	Combination	Min			Y	0.041584	0.027647	1.504
5TH	DConS13	Combination	Max			X	0.100192	0.088526	1.132
5TH	DConS13	Combination	Max			Y	0.097794	0.078361	1.248
5TH	DConS13	Combination	Min			X	0.023612	0.007698	3.067
5TH	DConS13	Combination	Min			Y	0.077515	0.049503	1.566
5TH	DConS14	Combination	Max			X	0.030369	0.011444	2.654
5TH	DConS14	Combination	Max			Y	0.085492	0.061871	1.382
5TH	DConS14	Combination	Min			X	0.093435	0.08526	1.096
5TH	DConS14	Combination	Min			Y	0.089816	0.065779	1.365
5TH	DConS15	Combination	Max			X	0.089376	0.07821	1.143
5TH	DConS15	Combination	Max			Y	0.072547	0.062234	1.166
5TH	DConS15	Combination	Min			X	0.012116	0.004277	2.833
5TH	DConS15	Combination	Min			Y	0.030055	0.015346	1.959
5TH	DConS16	Combination	Max			X	0.019206	0.005701	3.369
5TH	DConS16	Combination	Max			Y	0.024224	0.01699	1.426
5TH	DConS16	Combination	Min			X	0.073732	0.068233	1.081
5TH	DConS16	Combination	Min			Y	0.047686	0.029897	1.595

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
5TH	DConS17	Combination	Max			X	0.086434	0.07558	1.144
5TH	DConS17	Combination	Max			Y	0.065879	0.055152	1.194
5TH	DConS17	Combination	Min			X	0.009799	0.001647	5.949
5TH	DConS17	Combination	Min			Y	0.022561	0.008264	2.73
5TH	DConS18	Combination	Max			X	0.016264	0.003071	5.296
5TH	DConS18	Combination	Max			Y	0.017555	0.009909	1.772
5TH	DConS18	Combination	Min			X	0.076675	0.070862	1.082
5TH	DConS18	Combination	Min			Y	0.054355	0.036979	1.47
5TH	DConS19	Combination	Max			X	0.084557	0.074673	1.132
5TH	DConS19	Combination	Max			Y	0.063663	0.051657	1.232
5TH	DConS19	Combination	Min			X	0.009861	0.00074	13.329
5TH	DConS19	Combination	Min			Y	0.017787	0.00477	3.729
5TH	DConS20	Combination	Max			X	0.014387	0.002163	6.65
5TH	DConS20	Combination	Max			Y	0.015339	0.006414	2.392
5TH	DConS20	Combination	Min			X	0.078551	0.07177	1.094
5TH	DConS20	Combination	Min			Y	0.056571	0.040474	1.398
4TH	Dead	LinStatic				X	0.00197	0.000988	1.994
4TH	Dead	LinStatic				Y	0.005829	0.004533	1.286
4TH	Live	LinStatic				X	0.002615	0.002303	1.136
4TH	Live	LinStatic				Y	0.00652	0.006109	1.067
4TH	PW	LinStatic				X	0.000631	0.000257	2.455
4TH	PW	LinStatic				Y	0.001157	0.000663	1.744
4TH	FF	LinStatic				X	0.000697	0.000346	2.014
4TH	FF	LinStatic				Y	0.001324	0.000862	1.537
4TH	ROOF LIVE	LinStatic				X	0.00025	7.4E-05	3.387
4TH	ROOF LIVE	LinStatic				Y	0.000498	0.000266	1.872
4TH	EQ	LinStatic	Max			X	0.080566	0.071464	1.127
4TH	EQ	LinStatic	Max			Y	0.062795	0.046693	1.345
4TH	EQ	LinStatic	Min			X	0.013537	0.001353	10.006
4TH	EQ	LinStatic	Min			Y	0.013397	0.00137	9.779
4TH	wind	LinStatic	Max			X	0.060812	0.054417	1.118
4TH	wind	LinStatic	Max			Y	0.062962	0.04712	1.336
4TH	wind	LinStatic	Min			X	0.019679	0.007088	2.776
4TH	wind	LinStatic	Min			Y	0.055366	0.036638	1.511
4TH	1.4D	Combination				X	0.002758	0.001383	1.994
4TH	1.4D	Combination				Y	0.00816	0.006346	1.286
4TH	1.2D+1.6L+.5Lr	Combination				X	0.006674	0.004907	1.36
4TH	1.2D+1.6L+.5Lr	Combination				Y	0.017676	0.015346	1.152
4TH	1.2D+1.6Lr+L	Combination				X	0.005379	0.003607	1.491
4TH	1.2D+1.6Lr+L	Combination				Y	0.014312	0.011974	1.195
4TH	1.2D+1.6Lr+.8W	Combination	Max			X	0.051413	0.044837	1.147
4TH	1.2D+1.6Lr+.8W	Combination	Max			Y	0.054309	0.043562	1.247
4TH	1.2D+1.6Lr+.8W	Combination	Min			X	0.012979	0.004204	3.087
4TH	1.2D+1.6Lr+.8W	Combination	Min			Y	0.040353	0.023445	1.721

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
4TH	1.2D+1.6Lr-.8W	Combination	Max			X	0.018507	0.006974	2.654
4TH	1.2D+1.6Lr-.8W	Combination	Max			Y	0.048232	0.035102	1.374
4TH	1.2D+1.6Lr-.8W	Combination	Min			X	0.045886	0.04223	1.087
4TH	1.2D+1.6Lr-.8W	Combination	Min			Y	0.04643	0.031831	1.459
4TH	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.102403	0.090592	1.13
4TH	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.110337	0.087074	1.267
4TH	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.026382	0.007816	3.376
4TH	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.078987	0.04694	1.683
4TH	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.036591	0.014867	2.461
4TH	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.098184	0.070302	1.397
4TH	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.092194	0.083541	1.104
4TH	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.09114	0.063711	1.431
4TH	1.246D+1E+1L	Combination	Max			X	0.085636	0.074999	1.142
4TH	1.246D+1E+1L	Combination	Max			Y	0.072525	0.05845	1.241
4TH	1.246D+1E+1L	Combination	Min			X	0.01283	0.002181	5.882
4TH	1.246D+1E+1L	Combination	Min			Y	0.02444	0.010387	2.353
4TH	1.246D-1E+1L	Combination	Max			X	0.018607	0.004887	3.807
4TH	1.246D-1E+1L	Combination	Max			Y	0.023128	0.013127	1.762
4TH	1.246D-1E+1L	Combination	Min			X	0.075495	0.06793	1.111
4TH	1.246D-1E+1L	Combination	Min			Y	0.053064	0.034937	1.519
4TH	0.9D+1.6W	Combination	Max			X	0.099072	0.087956	1.126
4TH	0.9D+1.6W	Combination	Max			Y	0.103652	0.079472	1.304
4TH	0.9D+1.6W	Combination	Min			X	0.029713	0.010452	2.843
4TH	0.9D+1.6W	Combination	Min			Y	0.085672	0.054541	1.571
4TH	0.9D-1.6W	Combination	Max			X	0.03326	0.012231	2.719
4TH	0.9D-1.6W	Combination	Max			Y	0.091499	0.062701	1.459
4TH	0.9D-1.6W	Combination	Min			X	0.095525	0.086178	1.108
4TH	0.9D-1.6W	Combination	Min			Y	0.097825	0.071313	1.372
4TH	.854D+E	Combination	Max			X	0.082248	0.072308	1.137
4TH	.854D+E	Combination	Max			Y	0.065559	0.050565	1.297
4TH	.854D+E	Combination	Min			X	0.011855	0.000509	23.287
4TH	.854D+E	Combination	Min			Y	0.015635	0.002501	6.251
4TH	.854D-E	Combination	Max			X	0.01522	0.002197	6.928
4TH	.854D-E	Combination	Max			Y	0.016162	0.005241	3.084
4TH	.854D-E	Combination	Min			X	0.078883	0.07062	1.117
4TH	.854D-E	Combination	Min			Y	0.06003	0.042822	1.402
4TH	D+L	Combination				X	0.004586	0.003291	1.393
4TH	D+L	Combination				Y	0.012349	0.010642	1.16
4TH	D+.5L	Combination				X	0.003278	0.00214	1.532
4TH	D+.5L	Combination				Y	0.009089	0.007587	1.198
4TH	D+.5L+.7W	Combination	Max			X	0.045846	0.040231	1.14
4TH	D+.5L+.7W	Combination	Max			Y	0.050159	0.040572	1.236
4TH	D+.5L+.7W	Combination	Min			X	0.010497	0.002721	3.857
4TH	D+.5L+.7W	Combination	Min			Y	0.03267	0.018059	1.809

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
4TH	D+.5L-.7W	Combination	Max			X	0.017053	0.007101	2.401
4TH	D+.5L-.7W	Combination	Max			Y	0.044842	0.03319	1.351
4TH	D+.5L-.7W	Combination	Min			X	0.03929	0.035952	1.093
4TH	D+.5L-.7W	Combination	Min			Y	0.037987	0.025397	1.496
4TH	DConS1	Combination				X	0.004617	0.002228	2.073
4TH	DConS1	Combination				Y	0.011634	0.008481	1.372
4TH	DConS2	Combination				X	0.008142	0.005594	1.455
4TH	DConS2	Combination				Y	0.020405	0.017043	1.197
4TH	DConS3	Combination				X	0.008267	0.005631	1.468
4TH	DConS3	Combination				Y	0.020654	0.017176	1.202
4TH	DConS4	Combination				X	0.006972	0.00433	1.61
4TH	DConS4	Combination				Y	0.017289	0.013804	1.252
4TH	DConS5	Combination	Max			X	0.103872	0.091279	1.138
4TH	DConS5	Combination	Max			Y	0.111003	0.088771	1.25
4TH	DConS5	Combination	Min			X	0.024913	0.00697	3.574
4TH	DConS5	Combination	Min			Y	0.078321	0.045243	1.731
4TH	DConS6	Combination	Max			X	0.038059	0.015554	2.447
4TH	DConS6	Combination	Max			Y	0.098849	0.071934	1.374
4TH	DConS6	Combination	Min			X	0.090725	0.082855	1.095
4TH	DConS6	Combination	Min			Y	0.090474	0.062014	1.459
4TH	DConS7	Combination	Max			X	0.103996	0.091316	1.139
4TH	DConS7	Combination	Max			Y	0.11102	0.088904	1.249
4TH	DConS7	Combination	Min			X	0.024789	0.006907	3.589
4TH	DConS7	Combination	Min			Y	0.078304	0.04511	1.736
4TH	DConS8	Combination	Max			X	0.038184	0.01559	2.449
4TH	DConS8	Combination	Max			Y	0.098866	0.072054	1.372
4TH	DConS8	Combination	Min			X	0.090601	0.082818	1.094
4TH	DConS8	Combination	Min			Y	0.090458	0.061881	1.462
4TH	DConS9	Combination	Max			X	0.053006	0.045561	1.163
4TH	DConS9	Combination	Max			Y	0.054991	0.045392	1.211
4TH	DConS9	Combination	Min			X	0.011386	0.003222	3.534
4TH	DConS9	Combination	Min			Y	0.039671	0.021615	1.835
4TH	DConS10	Combination	Max			X	0.0201	0.007698	2.611
4TH	DConS10	Combination	Max			Y	0.048914	0.036802	1.329
4TH	DConS10	Combination	Min			X	0.044292	0.041506	1.067
4TH	DConS10	Combination	Min			Y	0.045748	0.030001	1.525
4TH	DConS11	Combination	Max			X	0.052607	0.045443	1.158
4TH	DConS11	Combination	Max			Y	0.054937	0.044966	1.222
4TH	DConS11	Combination	Min			X	0.011785	0.003423	3.443
4TH	DConS11	Combination	Min			Y	0.039725	0.022041	1.802
4TH	DConS12	Combination	Max			X	0.019701	0.00758	2.599
4TH	DConS12	Combination	Max			Y	0.04886	0.036418	1.342
4TH	DConS12	Combination	Min			X	0.044691	0.041624	1.074
4TH	DConS12	Combination	Min			Y	0.045802	0.030427	1.505

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
4TH	DConS13	Combination	Max			X	0.100267	0.088499	1.133
4TH	DConS13	Combination	Max			Y	0.104164	0.080845	1.288
4TH	DConS13	Combination	Min			X	0.028518	0.009909	2.878
4TH	DConS13	Combination	Min			Y	0.08516	0.053169	1.602
4TH	DConS14	Combination	Max			X	0.034455	0.012773	2.697
4TH	DConS14	Combination	Max			Y	0.092011	0.064073	1.436
4TH	DConS14	Combination	Min			X	0.09433	0.085635	1.102
4TH	DConS14	Combination	Min			Y	0.097313	0.06994	1.391
4TH	DConS15	Combination	Max			X	0.087468	0.075836	1.153
4TH	DConS15	Combination	Max			Y	0.073439	0.060677	1.21
4TH	DConS15	Combination	Min			X	0.012671	0.003019	4.198
4TH	DConS15	Combination	Min			Y	0.027981	0.012614	2.218
4TH	DConS16	Combination	Max			X	0.02044	0.005724	3.571
4TH	DConS16	Combination	Max			Y	0.024042	0.015354	1.566
4TH	DConS16	Combination	Min			X	0.073663	0.067093	1.098
4TH	DConS16	Combination	Min			Y	0.05215	0.032709	1.594
4TH	DConS17	Combination	Max			X	0.084853	0.073533	1.154
4TH	DConS17	Combination	Max			Y	0.067743	0.054569	1.241
4TH	DConS17	Combination	Min			X	0.010681	0.000716	14.927
4TH	DConS17	Combination	Min			Y	0.02146	0.006505	3.299
4TH	DConS18	Combination	Max			X	0.017825	0.003421	5.21
4TH	DConS18	Combination	Max			Y	0.018345	0.009246	1.984
4TH	DConS18	Combination	Min			X	0.076278	0.069396	1.099
4TH	DConS18	Combination	Min			Y	0.057847	0.038818	1.49
4TH	DConS19	Combination	Max			X	0.083204	0.072737	1.144
4TH	DConS19	Combination	Max			Y	0.06584	0.05154	1.277
4TH	DConS19	Combination	Min			Y	0.017305	0.003476	4.978
4TH	DConS20	Combination	Max			X	0.016176	0.002626	6.16
4TH	DConS20	Combination	Max			Y	0.016442	0.006217	2.645
4TH	DConS20	Combination	Min			X	0.077927	0.070191	1.11
4TH	DConS20	Combination	Min			Y	0.05975	0.041847	1.428
3RD	Dead	LinStatic				X	0.001614	0.000809	1.996
3RD	Dead	LinStatic				Y	0.004763	0.003701	1.287
3RD	Live	LinStatic				X	0.002192	0.001893	1.158
3RD	Live	LinStatic				Y	0.005325	0.00493	1.08
3RD	PW	LinStatic				X	0.000531	0.000219	2.42
3RD	PW	LinStatic				Y	0.000952	0.000541	1.76
3RD	FF	LinStatic				X	0.000586	0.000293	2.002
3RD	FF	LinStatic				Y	0.001088	0.000701	1.552
3RD	ROOF LIVE	LinStatic				X	0.000174	5E-05	3.456
3RD	ROOF LIVE	LinStatic				Y	0.000373	0.00021	1.774
3RD	EQ	LinStatic	Max			X	0.075037	0.065718	1.142
3RD	EQ	LinStatic	Max			Y	0.061586	0.044557	1.382
3RD	EQ	LinStatic	Min			X	0.014803	0.001947	7.605

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
3RD	EQ	LinStatic	Min			Y	0.014223	0.001878	7.572
3RD	wind	LinStatic	Max			X	0.057973	0.051723	1.121
3RD	wind	LinStatic	Max			Y	0.063844	0.046689	1.367
3RD	wind	LinStatic	Min			X	0.021525	0.007777	2.768
3RD	wind	LinStatic	Min			Y	0.056903	0.036546	1.557
3RD	1.4D	Combination				X	0.00226	0.001132	1.996
3RD	1.4D	Combination				Y	0.006668	0.005181	1.287
3RD	1.2D+1.6L+.5Lr	Combination				X	0.005531	0.004024	1.375
3RD	1.2D+1.6L+.5Lr	Combination				Y	0.014422	0.012433	1.16
3RD	1.2D+1.6Lr+L	Combination				X	0.004407	0.002944	1.497
3RD	1.2D+1.6Lr+L	Combination				Y	0.011638	0.009707	1.199
3RD	1.2D+1.6Lr+.8W	Combination	Max			X	0.048593	0.042429	1.145
3RD	1.2D+1.6Lr+.8W	Combination	Max			Y	0.054317	0.042128	1.289
3RD	1.2D+1.6Lr+.8W	Combination	Min			X	0.015005	0.005171	2.902
3RD	1.2D+1.6Lr+.8W	Combination	Min			Y	0.04228	0.024459	1.729
3RD	1.2D+1.6Lr-.8W	Combination	Max			X	0.019435	0.007272	2.672
3RD	1.2D+1.6Lr-.8W	Combination	Max			Y	0.048764	0.034014	1.434
3RD	1.2D+1.6Lr-.8W	Combination	Min			X	0.044164	0.040328	1.095
3RD	1.2D+1.6Lr-.8W	Combination	Min			Y	0.047833	0.032573	1.468
3RD	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.096972	0.085645	1.132
3RD	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.109874	0.084178	1.305
3RD	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.030224	0.009555	3.163
3RD	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.083321	0.048998	1.701
3RD	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.038656	0.015331	2.521
3RD	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.098769	0.067949	1.454
3RD	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.08854	0.079869	1.109
3RD	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.094426	0.065226	1.448
3RD	1.246D+1E+1L	Combination	Max			X	0.07924	0.068618	1.155
3RD	1.246D+1E+1L	Combination	Max			Y	0.069408	0.054098	1.283
3RD	1.246D+1E+1L	Combination	Min			X	0.012507	0.000954	13.113
3RD	1.246D+1E+1L	Combination	Min			Y	0.021726	0.007662	2.835
3RD	1.246D-1E+1L	Combination	Max			X	0.019007	0.004847	3.921
3RD	1.246D-1E+1L	Combination	Max			Y	0.022045	0.011419	1.931
3RD	1.246D-1E+1L	Combination	Min			X	0.070833	0.062818	1.128
3RD	1.246D-1E+1L	Combination	Min			Y	0.053764	0.035016	1.535
3RD	0.9D+1.6W	Combination	Max			X	0.094209	0.083485	1.128
3RD	0.9D+1.6W	Combination	Max			Y	0.104524	0.078033	1.339
3RD	0.9D+1.6W	Combination	Min			X	0.032987	0.011715	2.816
3RD	0.9D+1.6W	Combination	Min			Y	0.08867	0.055142	1.608
3RD	0.9D-1.6W	Combination	Max			X	0.035892	0.013171	2.725
3RD	0.9D-1.6W	Combination	Max			Y	0.093419	0.061804	1.512
3RD	0.9D-1.6W	Combination	Min			X	0.091304	0.082029	1.113
3RD	0.9D-1.6W	Combination	Min			Y	0.099775	0.071371	1.398
3RD	.854D+E	Combination	Max			X	0.076415	0.066409	1.151

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
3RD	.854D+E	Combination	Max			Y	0.063839	0.047718	1.338
3RD	.854D+E	Combination	Min			X	0.013425	0.001256	10.689
3RD	.854D+E	Combination	Min			Y	0.014534	0.001282	11.336
3RD	.854D-E	Combination	Max			X	0.016182	0.002637	6.136
3RD	.854D-E	Combination	Max			Y	0.016476	0.005039	3.27
3RD	.854D-E	Combination	Min			X	0.073659	0.065028	1.133
3RD	.854D-E	Combination	Min			Y	0.059333	0.041397	1.433
3RD	D+L	Combination				X	0.003806	0.002701	1.409
3RD	D+L	Combination				Y	0.010088	0.00863	1.169
3RD	D+.5L	Combination				X	0.00271	0.001755	1.544
3RD	D+.5L	Combination				Y	0.007426	0.006166	1.204
3RD	D+.5L+.7W	Combination	Max			X	0.043291	0.037961	1.14
3RD	D+.5L+.7W	Combination	Max			Y	0.049596	0.038848	1.277
3RD	D+.5L+.7W	Combination	Min			X	0.012357	0.003689	3.35
3RD	D+.5L+.7W	Combination	Min			Y	0.034927	0.019416	1.799
3RD	D+.5L-.7W	Combination	Max			X	0.017778	0.007199	2.47
3RD	D+.5L-.7W	Combination	Max			Y	0.044738	0.031748	1.409
3RD	D+.5L-.7W	Combination	Min			X	0.037871	0.034451	1.099
3RD	D+.5L-.7W	Combination	Min			Y	0.039785	0.026517	1.5
3RD	DConS1	Combination				X	0.003824	0.001849	2.068
3RD	DConS1	Combination				Y	0.009524	0.006919	1.376
3RD	DConS2	Combination				X	0.006785	0.004614	1.471
3RD	DConS2	Combination				Y	0.016683	0.013818	1.207
3RD	DConS3	Combination				X	0.006872	0.004639	1.481
3RD	DConS3	Combination				Y	0.016869	0.013923	1.212
3RD	DConS4	Combination				X	0.005748	0.003558	1.615
3RD	DConS4	Combination				Y	0.014085	0.011197	1.258
3RD	DConS5	Combination	Max			X	0.098226	0.086235	1.139
3RD	DConS5	Combination	Max			Y	0.110382	0.085562	1.29
3RD	DConS5	Combination	Min			X	0.02897	0.008965	3.231
3RD	DConS5	Combination	Min			Y	0.082812	0.047613	1.739
3RD	DConS6	Combination	Max			X	0.03991	0.015921	2.507
3RD	DConS6	Combination	Max			Y	0.099277	0.069333	1.432
3RD	DConS6	Combination	Min			X	0.087286	0.079279	1.101
3RD	DConS6	Combination	Min			Y	0.093917	0.063842	1.471
3RD	DConS7	Combination	Max			X	0.098313	0.08626	1.14
3RD	DConS7	Combination	Max			Y	0.110406	0.085667	1.289
3RD	DConS7	Combination	Min			X	0.028883	0.00894	3.231
3RD	DConS7	Combination	Min			Y	0.082789	0.047508	1.743
3RD	DConS8	Combination	Max			X	0.039997	0.015946	2.508
3RD	DConS8	Combination	Max			Y	0.099301	0.069438	1.43
3RD	DConS8	Combination	Min			X	0.0872	0.079254	1.1
3RD	DConS8	Combination	Min			Y	0.093894	0.063737	1.473
3RD	DConS9	Combination	Max			X	0.049934	0.043044	1.16

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
3RD	DConS9	Combination	Max			Y	0.054849	0.043618	1.257
3RD	DConS9	Combination	Min			X	0.013665	0.004482	3.049
3RD	DConS9	Combination	Min			Y	0.041748	0.022969	1.818
3RD	DConS10	Combination	Max			X	0.020775	0.007887	2.634
3RD	DConS10	Combination	Max			Y	0.049297	0.03547	1.39
3RD	DConS10	Combination	Min			X	0.042823	0.039713	1.078
3RD	DConS10	Combination	Min			Y	0.047301	0.031084	1.522
3RD	DConS11	Combination	Max			X	0.049656	0.042963	1.156
3RD	DConS11	Combination	Max			Y	0.054773	0.043282	1.266
3RD	DConS11	Combination	Min			X	0.013942	0.004622	3.017
3RD	DConS11	Combination	Min			Y	0.041824	0.023306	1.795
3RD	DConS12	Combination	Max			X	0.020497	0.007807	2.626
3RD	DConS12	Combination	Max			Y	0.04922	0.035163	1.4
3RD	DConS12	Combination	Min			X	0.043101	0.039793	1.083
3RD	DConS12	Combination	Min			Y	0.047377	0.03142	1.508
3RD	DConS13	Combination	Max			X	0.095214	0.083946	1.134
3RD	DConS13	Combination	Max			Y	0.104923	0.07915	1.326
3RD	DConS13	Combination	Min			X	0.031982	0.011254	2.842
3RD	DConS13	Combination	Min			Y	0.088271	0.054025	1.634
3RD	DConS14	Combination	Max			X	0.036898	0.013632	2.707
3RD	DConS14	Combination	Max			Y	0.093818	0.062921	1.491
3RD	DConS14	Combination	Min			X	0.090298	0.081568	1.107
3RD	DConS14	Combination	Min			Y	0.099376	0.070254	1.415
3RD	DConS15	Combination	Max			X	0.08078	0.069328	1.165
3RD	DConS15	Combination	Max			Y	0.070126	0.055912	1.254
3RD	DConS15	Combination	Min			X	0.012387	0.001663	7.446
3RD	DConS15	Combination	Min			Y	0.024635	0.009476	2.6
3RD	DConS16	Combination	Max			X	0.020546	0.005557	3.698
3RD	DConS16	Combination	Max			Y	0.022764	0.013233	1.72
3RD	DConS16	Combination	Min			X	0.069294	0.062108	1.116
3RD	DConS16	Combination	Min			Y	0.053045	0.033203	1.598
3RD	DConS17	Combination	Max			X	0.078588	0.067435	1.165
3RD	DConS17	Combination	Max			Y	0.065592	0.050982	1.287
3RD	DConS17	Combination	Min			Y	0.01931	0.004546	4.247
3RD	DConS18	Combination	Max			X	0.018354	0.003664	5.01
3RD	DConS18	Combination	Max			Y	0.018229	0.008303	2.195
3RD	DConS18	Combination	Min			X	0.071486	0.064001	1.117
3RD	DConS18	Combination	Min			Y	0.05758	0.038132	1.51
3RD	DConS19	Combination	Max			X	0.077222	0.066775	1.156
3RD	DConS19	Combination	Max			Y	0.064051	0.048511	1.32
3RD	DConS19	Combination	Min			X	0.012618	0.00089	14.181
3RD	DConS19	Combination	Min			Y	0.015909	0.002075	7.665
3RD	DConS20	Combination	Max			X	0.016988	0.003003	5.657
3RD	DConS20	Combination	Max			Y	0.016689	0.005832	2.862

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
3RD	DConS20	Combination	Min			X	0.072852	0.064661	1.127
3RD	DConS20	Combination	Min			Y	0.059121	0.040603	1.456
2ND	Dead	LinStatic				X	0.001173	0.000592	1.98
2ND	Dead	LinStatic				Y	0.003499	0.002733	1.28
2ND	Live	LinStatic				X	0.001645	0.001377	1.194
2ND	Live	LinStatic				Y	0.003915	0.003562	1.099
2ND	PW	LinStatic				X	0.000403	0.000172	2.351
2ND	PW	LinStatic				Y	0.000706	0.0004	1.764
2ND	FF	LinStatic				X	0.000444	0.000225	1.972
2ND	FF	LinStatic				Y	0.000805	0.000516	1.56
2ND	ROOF LIVE	LinStatic				X	0.000107	2.9E-05	3.664
2ND	ROOF LIVE	LinStatic				Y	0.000252	0.00015	1.682
2ND	EQ	LinStatic	Max			X	0.063734	0.054972	1.159
2ND	EQ	LinStatic	Max			Y	0.055084	0.03878	1.42
2ND	EQ	LinStatic	Min			X	0.014733	0.002437	6.046
2ND	EQ	LinStatic	Min			Y	0.013928	0.002308	6.035
2ND	wind	LinStatic	Max			X	0.05063	0.044905	1.127
2ND	wind	LinStatic	Max			Y	0.059263	0.042446	1.396
2ND	wind	LinStatic	Min			X	0.021625	0.00797	2.713
2ND	wind	LinStatic	Min			Y	0.053751	0.033598	1.6
2ND	1.4D	Combination				X	0.001642	0.000829	1.98
2ND	1.4D	Combination				Y	0.004898	0.003826	1.28
2ND	1.2D+1.6L+.5Lr	Combination				X	0.004093	0.002929	1.397
2ND	1.2D+1.6L+.5Lr	Combination				Y	0.01059	0.009054	1.17
2ND	1.2D+1.6Lr+L	Combination				X	0.003223	0.002135	1.51
2ND	1.2D+1.6Lr+L	Combination				Y	0.008518	0.007082	1.203
2ND	1.2D+1.6Lr+.8W	Combination	Max			X	0.042083	0.036682	1.147
2ND	1.2D+1.6Lr+.8W	Combination	Max			Y	0.049847	0.037476	1.33
2ND	1.2D+1.6Lr+.8W	Combination	Min			X	0.015721	0.005618	2.798
2ND	1.2D+1.6Lr+.8W	Combination	Min			Y	0.040564	0.023359	1.737
2ND	1.2D+1.6Lr-.8W	Combination	Max			X	0.018878	0.007133	2.647
2ND	1.2D+1.6Lr-.8W	Combination	Max			Y	0.045437	0.030398	1.495
2ND	1.2D+1.6Lr-.8W	Combination	Min			X	0.038925	0.035167	1.107
2ND	1.2D+1.6Lr-.8W	Combination	Min			Y	0.044974	0.030437	1.478
2ND	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.084114	0.073951	1.137
2ND	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.100415	0.07483	1.342
2ND	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.031493	0.010649	2.957
2ND	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.080408	0.04684	1.717
2ND	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.037705	0.014854	2.538
2ND	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.091594	0.060674	1.51
2ND	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.077902	0.069746	1.117
2ND	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.089228	0.060997	1.463
2ND	1.246D+1E+1L	Combination	Max			X	0.06684	0.057088	1.171
2ND	1.246D+1E+1L	Combination	Max			Y	0.060743	0.045748	1.328

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
2ND	1.246D+1E+1L	Combination	Min			Y	0.017587	0.004659	3.775
2ND	1.246D-1E+1L	Combination	Max			X	0.01784	0.004552	3.919
2ND	1.246D-1E+1L	Combination	Max			Y	0.019588	0.009275	2.112
2ND	1.246D-1E+1L	Combination	Min			X	0.060627	0.052857	1.147
2ND	1.246D-1E+1L	Combination	Min			Y	0.049424	0.031813	1.554
2ND	0.9D+1.6W	Combination	Max			X	0.082064	0.072382	1.134
2ND	0.9D+1.6W	Combination	Max			Y	0.096591	0.070373	1.373
2ND	0.9D+1.6W	Combination	Min			X	0.033543	0.012218	2.745
2ND	0.9D+1.6W	Combination	Min			Y	0.084231	0.051297	1.642
2ND	0.9D-1.6W	Combination	Max			X	0.035655	0.013285	2.684
2ND	0.9D-1.6W	Combination	Max			Y	0.087771	0.056217	1.561
2ND	0.9D-1.6W	Combination	Min			X	0.079952	0.071315	1.121
2ND	0.9D-1.6W	Combination	Min			Y	0.093051	0.065454	1.422
2ND	.854D+E	Combination	Max			X	0.064736	0.055478	1.167
2ND	.854D+E	Combination	Max			Y	0.056763	0.041114	1.381
2ND	.854D+E	Combination	Min			X	0.013731	0.001931	7.112
2ND	.854D-E	Combination	Max			X	0.015735	0.002943	5.347
2ND	.854D-E	Combination	Max			Y	0.015608	0.004642	3.362
2ND	.854D-E	Combination	Min			X	0.062732	0.054466	1.152
2ND	.854D-E	Combination	Min			Y	0.053404	0.036446	1.465
2ND	D+L	Combination				X	0.002818	0.00197	1.431
2ND	D+L	Combination				Y	0.007414	0.006295	1.178
2ND	D+.5L	Combination				X	0.001996	0.001281	1.558
2ND	D+.5L	Combination				Y	0.005457	0.004514	1.209
2ND	D+.5L+.7W	Combination	Max			X	0.037437	0.032715	1.144
2ND	D+.5L+.7W	Combination	Max			Y	0.045056	0.034226	1.316
2ND	D+.5L+.7W	Combination	Min			X	0.013142	0.004298	3.058
2ND	D+.5L+.7W	Combination	Min			Y	0.034054	0.019005	1.792
2ND	D+.5L-.7W	Combination	Max			X	0.017133	0.00686	2.498
2ND	D+.5L-.7W	Combination	Max			Y	0.041197	0.028033	1.47
2ND	D+.5L-.7W	Combination	Min			X	0.033445	0.030153	1.109
2ND	D+.5L-.7W	Combination	Min			Y	0.037913	0.025198	1.505
2ND	DConS1	Combination				X	0.002829	0.001385	2.043
2ND	DConS1	Combination				Y	0.007013	0.005108	1.373
2ND	DConS2	Combination				X	0.005057	0.003391	1.491
2ND	DConS2	Combination				Y	0.012276	0.010078	1.218
2ND	DConS3	Combination				X	0.00511	0.003405	1.501
2ND	DConS3	Combination				Y	0.012402	0.010153	1.221
2ND	DConS4	Combination				X	0.004241	0.002611	1.624
2ND	DConS4	Combination				Y	0.010331	0.008181	1.263
2ND	DConS5	Combination	Max			X	0.085078	0.074413	1.143
2ND	DConS5	Combination	Max			Y	0.100777	0.075854	1.329
2ND	DConS5	Combination	Min			X	0.03053	0.010187	2.997
2ND	DConS5	Combination	Min			Y	0.080046	0.045816	1.747

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
2ND	DConS6	Combination	Max			X	0.038669	0.015316	2.525
2ND	DConS6	Combination	Max			Y	0.091956	0.061698	1.49
2ND	DConS6	Combination	Min			X	0.076938	0.069284	1.11
2ND	DConS6	Combination	Min			Y	0.088866	0.059972	1.482
2ND	DConS7	Combination	Max			X	0.085131	0.074428	1.144
2ND	DConS7	Combination	Max			Y	0.1008	0.075929	1.328
2ND	DConS7	Combination	Min			X	0.030476	0.010172	2.996
2ND	DConS7	Combination	Min			Y	0.080022	0.045741	1.749
2ND	DConS8	Combination	Max			X	0.038722	0.01533	2.526
2ND	DConS8	Combination	Max			Y	0.09198	0.061773	1.489
2ND	DConS8	Combination	Min			X	0.076885	0.06927	1.11
2ND	DConS8	Combination	Min			Y	0.088842	0.059897	1.483
2ND	DConS9	Combination	Max			X	0.0431	0.037158	1.16
2ND	DConS9	Combination	Max			Y	0.050233	0.0385	1.305
2ND	DConS9	Combination	Min			X	0.014704	0.005142	2.86
2ND	DConS9	Combination	Min			Y	0.040178	0.02226	1.805
2ND	DConS10	Combination	Max			X	0.019895	0.007609	2.615
2ND	DConS10	Combination	Max			Y	0.045823	0.031497	1.455
2ND	DConS10	Combination	Min			X	0.037908	0.034691	1.093
2ND	DConS10	Combination	Min			Y	0.044589	0.029338	1.52
2ND	DConS11	Combination	Max			X	0.042929	0.037111	1.157
2ND	DConS11	Combination	Max			Y	0.050157	0.038279	1.31
2ND	DConS11	Combination	Min			X	0.014875	0.005189	2.867
2ND	DConS11	Combination	Min			Y	0.040255	0.0225	1.789
2ND	DConS12	Combination	Max			X	0.019725	0.007563	2.608
2ND	DConS12	Combination	Max			Y	0.045746	0.031257	1.464
2ND	DConS12	Combination	Min			X	0.038079	0.034737	1.096
2ND	DConS12	Combination	Min			Y	0.044665	0.029578	1.51
2ND	DConS13	Combination	Max			X	0.082827	0.072739	1.139
2ND	DConS13	Combination	Max			Y	0.096881	0.071197	1.361
2ND	DConS13	Combination	Min			X	0.032781	0.011861	2.764
2ND	DConS13	Combination	Min			Y	0.083942	0.050473	1.663
2ND	DConS14	Combination	Max			X	0.036418	0.013642	2.67
2ND	DConS14	Combination	Max			Y	0.08806	0.057041	1.544
2ND	DConS14	Combination	Min			X	0.079189	0.070958	1.116
2ND	DConS14	Combination	Min			Y	0.092762	0.064629	1.435
2ND	DConS15	Combination	Max			X	0.068005	0.057636	1.18
2ND	DConS15	Combination	Max			Y	0.061268	0.047086	1.301
2ND	DConS15	Combination	Min			Y	0.01974	0.005998	3.291
2ND	DConS16	Combination	Max			X	0.019005	0.0051	3.726
2ND	DConS16	Combination	Max			Y	0.020112	0.010614	1.895
2ND	DConS16	Combination	Min			X	0.059462	0.052309	1.137
2ND	DConS16	Combination	Min			Y	0.0489	0.030474	1.605
2ND	DConS17	Combination	Max			X	0.066361	0.056258	1.18

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
2ND	DConS17	Combination	Max			Y	0.058058	0.043524	1.334
2ND	DConS17	Combination	Min			X	0.012106	0.001151	10.522
2ND	DConS17	Combination	Min			Y	0.015825	0.002436	6.497
2ND	DConS18	Combination	Max			X	0.01736	0.003723	4.663
2ND	DConS18	Combination	Max			Y	0.016903	0.007051	2.397
2ND	DConS18	Combination	Min			X	0.061107	0.053686	1.138
2ND	DConS18	Combination	Min			Y	0.052109	0.034037	1.531
2ND	DConS19	Combination	Max			X	0.06535	0.055764	1.172
2ND	DConS19	Combination	Max			Y	0.056914	0.041699	1.365
2ND	DConS19	Combination	Min			X	0.013116	0.001645	7.972
2ND	DConS19	Combination	Min			Y	0.01332	0.000611	21.794
2ND	DConS20	Combination	Max			X	0.016349	0.003228	5.065
2ND	DConS20	Combination	Max			Y	0.015759	0.005227	3.015
2ND	DConS20	Combination	Min			X	0.062117	0.054181	1.146
2ND	DConS20	Combination	Min			Y	0.053253	0.035861	1.485
1ST	Dead	LinStatic				X	0.000479	0.000258	1.854
1ST	Dead	LinStatic				Y	0.001987	0.001696	1.171
1ST	Live	LinStatic				X	0.000736	0.000664	1.108
1ST	Live	LinStatic				Y	0.002203	0.002108	1.045
1ST	PW	LinStatic				X	0.000234	0.000107	2.19
1ST	PW	LinStatic				Y	0.000418	0.00025	1.674
1ST	FF	LinStatic				X	0.000235	0.000126	1.872
1ST	FF	LinStatic				Y	0.000466	0.000321	1.45
1ST	ROOF LIVE	LinStatic				Y	0.000131	8.9E-05	1.479
1ST	EQ	LinStatic	Max			X	0.045125	0.038053	1.186
1ST	EQ	LinStatic	Max			Y	0.04121	0.028188	1.462
1ST	EQ	LinStatic	Min			X	0.01248	0.002648	4.713
1ST	EQ	LinStatic	Min			Y	0.01187	0.002503	4.743
1ST	wind	LinStatic	Max			X	0.037354	0.032435	1.152
1ST	wind	LinStatic	Max			Y	0.045999	0.032073	1.434
1ST	wind	LinStatic	Min			X	0.018285	0.007338	2.492
1ST	wind	LinStatic	Min			Y	0.04249	0.025944	1.638
1ST	1.4D	Combination				X	0.00067	0.000361	1.854
1ST	1.4D	Combination				Y	0.002782	0.002375	1.171
1ST	1.2D+1.6L+.5Lr	Combination				X	0.001771	0.001376	1.287
1ST	1.2D+1.6L+.5Lr	Combination				Y	0.005975	0.005453	1.096
1ST	1.2D+1.6Lr+L	Combination				X	0.001371	0.000983	1.394
1ST	1.2D+1.6Lr+L	Combination				Y	0.004797	0.004286	1.119
1ST	1.2D+1.6Lr+.8W	Combination	Max			X	0.030518	0.026267	1.162
1ST	1.2D+1.6Lr+.8W	Combination	Max			Y	0.03856	0.027789	1.388
1ST	1.2D+1.6Lr+.8W	Combination	Min			X	0.013993	0.005551	2.521
1ST	1.2D+1.6Lr+.8W	Combination	Min			Y	0.032231	0.018578	1.735
1ST	1.2D+1.6Lr-.8W	Combination	Max			X	0.015263	0.006189	2.466
1ST	1.2D+1.6Lr-.8W	Combination	Max			Y	0.035752	0.022933	1.559

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
1ST	1.2D+1.6Lr-.8W	Combination	Min			X	0.029248	0.025629	1.141
1ST	1.2D+1.6Lr-.8W	Combination	Min			Y	0.035039	0.023528	1.489
1ST	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.061096	0.052873	1.156
1ST	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.077322	0.055452	1.394
1ST	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.027927	0.010763	2.595
1ST	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.06426	0.037322	1.722
1ST	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.030586	0.012718	2.405
1ST	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.071707	0.045699	1.569
1ST	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.058437	0.050919	1.148
1ST	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.069875	0.047181	1.481
1ST	1.246D+1E+1L	Combination	Max			X	0.046457	0.039039	1.19
1ST	1.246D+1E+1L	Combination	Max			Y	0.044975	0.03241	1.388
1ST	1.246D+1E+1L	Combination	Min			X	0.011148	0.001662	6.709
1ST	1.246D+1E+1L	Combination	Min			Y	0.011544	0.001719	6.714
1ST	1.246D-1E+1L	Combination	Max			X	0.013813	0.003634	3.801
1ST	1.246D-1E+1L	Combination	Max			Y	0.015635	0.006724	2.325
1ST	1.246D-1E+1L	Combination	Min			X	0.043792	0.037067	1.181
1ST	1.246D-1E+1L	Combination	Min			Y	0.037445	0.023966	1.562
1ST	0.9D+1.6W	Combination	Max			X	0.060197	0.052129	1.155
1ST	0.9D+1.6W	Combination	Max			Y	0.074864	0.052814	1.417
1ST	0.9D+1.6W	Combination	Min			X	0.028826	0.011508	2.505
1ST	0.9D+1.6W	Combination	Min			Y	0.066718	0.039984	1.669
1ST	0.9D-1.6W	Combination	Max			X	0.029687	0.011973	2.48
1ST	0.9D-1.6W	Combination	Max			Y	0.069248	0.043037	1.609
1ST	0.9D-1.6W	Combination	Min			X	0.059336	0.051664	1.148
1ST	0.9D-1.6W	Combination	Min			Y	0.072333	0.049819	1.452
1ST	.854D+E	Combination	Max			X	0.045534	0.038274	1.19
1ST	.854D+E	Combination	Max			Y	0.042411	0.029637	1.431
1ST	.854D+E	Combination	Min			X	0.012071	0.002427	4.973
1ST	.854D+E	Combination	Min			Y	0.01067	0.001054	10.125
1ST	.854D-E	Combination	Max			X	0.012889	0.002868	4.494
1ST	.854D-E	Combination	Max			Y	0.013071	0.003951	3.308
1ST	.854D-E	Combination	Min			X	0.044716	0.037833	1.182
1ST	.854D-E	Combination	Min			Y	0.04001	0.026739	1.496
1ST	D+L	Combination				X	0.001215	0.000923	1.317
1ST	D+L	Combination				Y	0.00419	0.003805	1.101
1ST	D+.5L	Combination				X	0.000847	0.00059	1.434
1ST	D+.5L	Combination				Y	0.003089	0.002751	1.123
1ST	D+.5L+.7W	Combination	Max			X	0.026995	0.023295	1.159
1ST	D+.5L+.7W	Combination	Max			Y	0.034612	0.025163	1.375
1ST	D+.5L+.7W	Combination	Min			X	0.011953	0.004546	2.629
1ST	D+.5L+.7W	Combination	Min			Y	0.02733	0.01541	1.774
1ST	D+.5L-.7W	Combination	Max			X	0.013646	0.005727	2.383
1ST	D+.5L-.7W	Combination	Max			Y	0.032155	0.020911	1.538

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
1ST	D+.5L-.7W	Combination	Min			X	0.025301	0.022114	1.144
1ST	D+.5L-.7W	Combination	Min			Y	0.029787	0.019739	1.509
1ST	DConS1	Combination				X	0.001328	0.000687	1.932
1ST	DConS1	Combination				Y	0.004019	0.003174	1.266
1ST	DConS2	Combination				X	0.002316	0.001652	1.402
1ST	DConS2	Combination				Y	0.00697	0.006094	1.144
1ST	DConS3	Combination				X	0.002335	0.001655	1.411
1ST	DConS3	Combination				Y	0.007035	0.006138	1.146
1ST	DConS4	Combination				X	0.001935	0.001263	1.532
1ST	DConS4	Combination				Y	0.005858	0.004971	1.178
1ST	DConS5	Combination	Max			X	0.061641	0.05315	1.16
1ST	DConS5	Combination	Max			Y	0.077609	0.056053	1.385
1ST	DConS5	Combination	Min			X	0.027382	0.010487	2.611
1ST	DConS5	Combination	Min			Y	0.063973	0.036681	1.744
1ST	DConS6	Combination	Max			X	0.031131	0.012994	2.396
1ST	DConS6	Combination	Max			Y	0.071994	0.046339	1.554
1ST	DConS6	Combination	Min			X	0.057892	0.050643	1.143
1ST	DConS6	Combination	Min			Y	0.069588	0.04658	1.494
1ST	DConS7	Combination	Max			X	0.06166	0.053153	1.16
1ST	DConS7	Combination	Max			Y	0.077632	0.056095	1.384
1ST	DConS7	Combination	Min			X	0.027363	0.010484	2.61
1ST	DConS7	Combination	Min			Y	0.06395	0.036637	1.746
1ST	DConS8	Combination	Max			X	0.03115	0.012997	2.397
1ST	DConS8	Combination	Max			Y	0.072017	0.046384	1.553
1ST	DConS8	Combination	Min			X	0.057873	0.05064	1.143
1ST	DConS8	Combination	Min			Y	0.069565	0.046538	1.495
1ST	DConS9	Combination	Max			X	0.031082	0.026547	1.171
1ST	DConS9	Combination	Max			Y	0.03887	0.028432	1.367
1ST	DConS9	Combination	Min			X	0.013429	0.005272	2.547
1ST	DConS9	Combination	Min			Y	0.031921	0.017893	1.784
1ST	DConS10	Combination	Max			X	0.015827	0.006469	2.447
1ST	DConS10	Combination	Max			Y	0.036062	0.023618	1.527
1ST	DConS10	Combination	Min			X	0.028684	0.02535	1.132
1ST	DConS10	Combination	Min			Y	0.034729	0.022885	1.518
1ST	DConS11	Combination	Max			X	0.031022	0.026537	1.169
1ST	DConS11	Combination	Max			Y	0.038796	0.028297	1.371
1ST	DConS11	Combination	Min			X	0.01349	0.005281	2.554
1ST	DConS11	Combination	Min			Y	0.031995	0.018034	1.774
1ST	DConS12	Combination	Max			X	0.015766	0.006459	2.441
1ST	DConS12	Combination	Max			Y	0.035988	0.023476	1.533
1ST	DConS12	Combination	Min			X	0.028745	0.025359	1.134
1ST	DConS12	Combination	Min			Y	0.034803	0.023019	1.512
1ST	DConS13	Combination	Max			X	0.06062	0.052338	1.158
1ST	DConS13	Combination	Max			Y	0.075096	0.053296	1.409

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
1ST	DConS13	Combination	Min			X	0.028403	0.011299	2.514
1ST	DConS13	Combination	Min			Y	0.066486	0.03947	1.684
1ST	DConS14	Combination	Max			X	0.03011	0.012182	2.472
1ST	DConS14	Combination	Max			Y	0.069481	0.043551	1.595
1ST	DConS14	Combination	Min			X	0.058913	0.051454	1.145
1ST	DConS14	Combination	Min			Y	0.072101	0.049337	1.461
1ST	DConS15	Combination	Max			X	0.047094	0.039356	1.197
1ST	DConS15	Combination	Max			Y	0.045387	0.033244	1.365
1ST	DConS15	Combination	Min			X	0.010511	0.001345	7.814
1ST	DConS15	Combination	Min			Y	0.0128	0.002553	5.013
1ST	DConS16	Combination	Max			X	0.014449	0.00395	3.658
1ST	DConS16	Combination	Max			Y	0.016047	0.007558	2.123
1ST	DConS16	Combination	Min			X	0.043156	0.036751	1.174
1ST	DConS16	Combination	Min			Y	0.037034	0.023132	1.601
1ST	DConS17	Combination	Max			X	0.046358	0.038692	1.198
1ST	DConS17	Combination	Max			Y	0.043373	0.031136	1.393
1ST	DConS17	Combination	Min			X	0.011247	0.002009	5.597
1ST	DConS17	Combination	Min			Y	0.010597	0.000445	23.809
1ST	DConS18	Combination	Max			X	0.013713	0.003286	4.173
1ST	DConS18	Combination	Max			Y	0.014033	0.00545	2.575
1ST	DConS18	Combination	Min			X	0.043892	0.037415	1.173
1ST	DConS18	Combination	Min			Y	0.039048	0.02524	1.547
1ST	DConS19	Combination	Max			X	0.045884	0.038446	1.193
1ST	DConS19	Combination	Max			Y	0.042541	0.030002	1.418
1ST	DConS19	Combination	Min			X	0.011721	0.002255	5.198
1ST	DConS19	Combination	Min			Y	0.010539	0.000689	15.305
1ST	DConS20	Combination	Max			X	0.013239	0.003041	4.354
1ST	DConS20	Combination	Max			Y	0.013201	0.004316	3.058
1ST	DConS20	Combination	Min			X	0.044366	0.037661	1.178
1ST	DConS20	Combination	Min			Y	0.039879	0.026374	1.512
GF	Dead	LinStatic				X	9.8E-05	7E-05	1.412
GF	Dead	LinStatic				Y	0.000473	0.000435	1.087
GF	Live	LinStatic				X	0.000164	0.000152	1.078
GF	Live	LinStatic				Y	0.000509	0.000493	1.032
GF	PW	LinStatic				X	5.4E-05	3E-05	1.816
GF	PW	LinStatic				Y	0.0001	6.9E-05	1.465
GF	FF	LinStatic				X	5.1E-05	3.2E-05	1.594
GF	FF	LinStatic				Y	0.000111	8.6E-05	1.294
GF	ROOF LIVE	LinStatic				Y	2.8E-05	2.1E-05	1.334
GF	EQ	LinStatic	Max			X	0.014333	0.011774	1.217
GF	EQ	LinStatic	Max			Y	0.013839	0.009471	1.461
GF	EQ	LinStatic	Min			X	0.004587	0.001271	3.608
GF	EQ	LinStatic	Min			Y	0.004614	0.001242	3.715
GF	wind	LinStatic	Max			X	0.012845	0.010585	1.214

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
GF	wind	LinStatic	Max			Y	0.01592	0.011011	1.446
GF	wind	LinStatic	Min			X	0.006783	0.003051	2.223
GF	wind	LinStatic	Min			Y	0.015039	0.009272	1.622
GF	1.4D	Combination				X	0.000137	9.7E-05	1.412
GF	1.4D	Combination				Y	0.000662	0.000609	1.087
GF	1.2D+1.6L+.5Lr	Combination				X	0.000345	0.000327	1.055
GF	1.2D+1.6L+.5Lr	Combination				Y	0.001345	0.001321	1.018
GF	1.2D+1.6Lr+L	Combination				X	0.000268	0.000237	1.131
GF	1.2D+1.6Lr+L	Combination				Y	0.00109	0.001049	1.039
GF	1.2D+1.6Lr+.8W	Combination	Max			X	0.010404	0.008553	1.216
GF	1.2D+1.6Lr+.8W	Combination	Max			Y	0.013235	0.009358	1.414
GF	1.2D+1.6Lr+.8W	Combination	Min			X	0.005298	0.002354	2.251
GF	1.2D+1.6Lr+.8W	Combination	Min			Y	0.011532	0.006862	1.681
GF	1.2D+1.6Lr-.8W	Combination	Max			X	0.005554	0.002526	2.199
GF	1.2D+1.6Lr-.8W	Combination	Max			Y	0.01253	0.007973	1.571
GF	1.2D+1.6Lr-.8W	Combination	Min			X	0.010149	0.008383	1.211
GF	1.2D+1.6Lr-.8W	Combination	Min			Y	0.012237	0.00826	1.482
GF	1.2D+1.6W+L+.5Lr	Combination	Max			X	0.020814	0.017172	1.212
GF	1.2D+1.6W+L+.5Lr	Combination	Max			Y	0.026465	0.01864	1.42
GF	1.2D+1.6W+L+.5Lr	Combination	Min			X	0.010591	0.004646	2.28
GF	1.2D+1.6W+L+.5Lr	Combination	Min			Y	0.023069	0.01381	1.671
GF	1.2D-1.6W+L+.5Lr	Combination	Max			X	0.011114	0.005118	2.171
GF	1.2D-1.6W+L+.5Lr	Combination	Max			Y	0.025054	0.015861	1.58
GF	1.2D-1.6W+L+.5Lr	Combination	Min			X	0.020292	0.0167	1.215
GF	1.2D-1.6W+L+.5Lr	Combination	Min			Y	0.02448	0.016596	1.475
GF	1.246D+1E+1L	Combination	Max			X	0.014596	0.012013	1.215
GF	1.246D+1E+1L	Combination	Max			Y	0.014843	0.010505	1.413
GF	1.246D+1E+1L	Combination	Min			X	0.004325	0.001033	4.188
GF	1.246D+1E+1L	Combination	Min			Y	0.00361	0.000207	17.429
GF	1.246D-1E+1L	Combination	Max			X	0.00485	0.00151	3.212
GF	1.246D-1E+1L	Combination	Max			Y	0.005617	0.002277	2.467
GF	1.246D-1E+1L	Combination	Min			X	0.014071	0.011536	1.22
GF	1.246D-1E+1L	Combination	Min			Y	0.012836	0.008436	1.522
GF	0.9D+1.6W	Combination	Max			X	0.020641	0.016998	1.214
GF	0.9D+1.6W	Combination	Max			Y	0.02583	0.018006	1.435
GF	0.9D+1.6W	Combination	Min			X	0.010764	0.00482	2.233
GF	0.9D+1.6W	Combination	Min			Y	0.023704	0.014444	1.641
GF	0.9D-1.6W	Combination	Max			X	0.010941	0.004945	2.213
GF	0.9D-1.6W	Combination	Max			Y	0.024419	0.015226	1.604
GF	0.9D-1.6W	Combination	Min			X	0.020464	0.016873	1.213
GF	0.9D-1.6W	Combination	Min			Y	0.025115	0.017231	1.458
GF	.854D+E	Combination	Max			X	0.014417	0.011834	1.218
GF	.854D+E	Combination	Max			Y	0.014178	0.009842	1.441
GF	.854D+E	Combination	Min			X	0.004504	0.001212	3.716

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
GF	.854D+E	Combination	Min			Y	0.004275	0.000871	4.909
GF	.854D-E	Combination	Max			X	0.004671	0.001331	3.51
GF	.854D-E	Combination	Max			Y	0.004953	0.001613	3.07
GF	.854D-E	Combination	Min			X	0.01425	0.011715	1.216
GF	.854D-E	Combination	Min			Y	0.0135	0.009099	1.484
GF	D+L	Combination				X	0.000238	0.000222	1.076
GF	D+L	Combination				Y	0.00095	0.000928	1.024
GF	D+.5L	Combination				X	0.000168	0.000146	1.156
GF	D+.5L	Combination				Y	0.000711	0.000681	1.044
GF	D+.5L+.7W	Combination	Max			X	0.00916	0.007555	1.212
GF	D+.5L+.7W	Combination	Max			Y	0.011796	0.008386	1.407
GF	D+.5L+.7W	Combination	Min			X	0.00458	0.00199	2.301
GF	D+.5L+.7W	Combination	Min			Y	0.009876	0.005809	1.7
GF	D+.5L-.7W	Combination	Max			X	0.004916	0.002281	2.155
GF	D+.5L-.7W	Combination	Max			Y	0.011178	0.007172	1.559
GF	D+.5L-.7W	Combination	Min			X	0.008824	0.007264	1.215
GF	D+.5L-.7W	Combination	Min			Y	0.010493	0.00703	1.493
GF	DConS1	Combination				X	0.000284	0.000184	1.548
GF	DConS1	Combination				Y	0.000957	0.000824	1.161
GF	DConS2	Combination				X	0.000468	0.000401	1.168
GF	DConS2	Combination				Y	0.001584	0.001496	1.059
GF	DConS3	Combination				X	0.000471	0.000401	1.174
GF	DConS3	Combination				Y	0.001599	0.001506	1.061
GF	DConS4	Combination				X	0.000394	0.000311	1.267
GF	DConS4	Combination				Y	0.001343	0.001234	1.089
GF	DConS5	Combination	Max			X	0.020937	0.017245	1.214
GF	DConS5	Combination	Max			Y	0.026575	0.018807	1.413
GF	DConS5	Combination	Min			X	0.010469	0.004571	2.29
GF	DConS5	Combination	Min			Y	0.02296	0.013635	1.684
GF	DConS6	Combination	Max			X	0.011236	0.005192	2.164
GF	DConS6	Combination	Max			Y	0.025163	0.016035	1.569
GF	DConS6	Combination	Min			X	0.020169	0.016626	1.213
GF	DConS6	Combination	Min			Y	0.024371	0.016429	1.483
GF	DConS7	Combination	Max			X	0.02094	0.017246	1.214
GF	DConS7	Combination	Max			Y	0.026582	0.018817	1.413
GF	DConS7	Combination	Min			X	0.010466	0.00457	2.29
GF	DConS7	Combination	Min			Y	0.022953	0.013625	1.685
GF	DConS8	Combination	Max			X	0.01124	0.005192	2.165
GF	DConS8	Combination	Max			Y	0.025171	0.016046	1.569
GF	DConS8	Combination	Min			X	0.020166	0.016626	1.213
GF	DConS8	Combination	Min			Y	0.024364	0.016419	1.484
GF	DConS9	Combination	Max			X	0.01053	0.008627	1.221
GF	DConS9	Combination	Max			Y	0.013352	0.009536	1.4
GF	DConS9	Combination	Min			X	0.005173	0.002264	2.284

Table 5.6 - Story Max Over Avg Drifts (continued)

Story	Output Case	Case Type	Step Type	Step Number	Step Label	Direction	Max Drift in	Avg Drift in	Ratio
GF	DConS9	Combination	Min			Y	0.011415	0.006677	1.71
GF	DConS10	Combination	Max			X	0.00568	0.0026	2.185
GF	DConS10	Combination	Max			Y	0.012646	0.008158	1.55
GF	DConS10	Combination	Min			X	0.010023	0.008309	1.206
GF	DConS10	Combination	Min			Y	0.012121	0.008082	1.5
GF	DConS11	Combination	Max			X	0.01052	0.008625	1.22
GF	DConS11	Combination	Max			Y	0.013329	0.009503	1.403
GF	DConS11	Combination	Min			X	0.005183	0.002268	2.285
GF	DConS11	Combination	Min			Y	0.011438	0.006711	1.704
GF	DConS12	Combination	Max			X	0.00567	0.002598	2.182
GF	DConS12	Combination	Max			Y	0.012624	0.008124	1.554
GF	DConS12	Combination	Min			X	0.010033	0.00831	1.207
GF	DConS12	Combination	Min			Y	0.012143	0.008115	1.496
GF	DConS13	Combination	Max			X	0.020735	0.017054	1.216
GF	DConS13	Combination	Max			Y	0.025917	0.018139	1.429
GF	DConS13	Combination	Min			X	0.01067	0.004764	2.24
GF	DConS13	Combination	Min			Y	0.023617	0.014305	1.651
GF	DConS14	Combination	Max			X	0.011035	0.005	2.207
GF	DConS14	Combination	Max			Y	0.024506	0.015365	1.595
GF	DConS14	Combination	Min			X	0.02037	0.016818	1.211
GF	DConS14	Combination	Min			Y	0.025028	0.017098	1.464
GF	DConS15	Combination	Max			X	0.014737	0.012097	1.218
GF	DConS15	Combination	Max			Y	0.014991	0.010729	1.397
GF	DConS15	Combination	Min			X	0.004183	0.000949	4.409
GF	DConS16	Combination	Max			X	0.004991	0.001594	3.132
GF	DConS16	Combination	Max			Y	0.005765	0.002501	2.305
GF	DConS16	Combination	Min			X	0.013929	0.011452	1.216
GF	DConS16	Combination	Min			Y	0.012688	0.008212	1.545
GF	DConS17	Combination	Max			X	0.014597	0.011945	1.222
GF	DConS17	Combination	Max			Y	0.014482	0.010236	1.415
GF	DConS17	Combination	Min			X	0.004323	0.001101	3.928
GF	DConS17	Combination	Min			Y	0.003971	0.000476	8.336
GF	DConS18	Combination	Max			X	0.004851	0.001442	3.365
GF	DConS18	Combination	Max			Y	0.005256	0.002008	2.618
GF	DConS18	Combination	Min			X	0.014069	0.011604	1.212
GF	DConS18	Combination	Min			Y	0.013197	0.008705	1.516
GF	DConS19	Combination	Max			X	0.014496	0.011879	1.22
GF	DConS19	Combination	Max			Y	0.014235	0.009942	1.432
GF	DConS19	Combination	Min			X	0.004425	0.001166	3.794
GF	DConS19	Combination	Min			Y	0.004218	0.000771	5.472
GF	DConS20	Combination	Max			X	0.00475	0.001376	3.451
GF	DConS20	Combination	Max			Y	0.005009	0.001713	2.924
GF	DConS20	Combination	Min			X	0.014171	0.011669	1.214
GF	DConS20	Combination	Min			Y	0.013444	0.008999	1.494

Table 5.7 - Story Forces (Part 1 of 2)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
ROOF	Top	Dead	LinStatic				324.512	0	0	0
ROOF	Bottom	Dead	LinStatic				489.004	0	0	0
ROOF	Top	Live	LinStatic				150.548	0	0	0
ROOF	Bottom	Live	LinStatic				160.001	0	0	0
ROOF	Top	PW	LinStatic				67.562	0	0	0
ROOF	Bottom	PW	LinStatic				68.385	0	0	0
ROOF	Top	FF	LinStatic				68.8	0	0	0
ROOF	Bottom	FF	LinStatic				71.157	0	0	0
ROOF	Top	ROOF LIVE	LinStatic				262.354	0	0	0
ROOF	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
ROOF	Top	EQ	LinStatic	Max			0	0	0	1117.9
ROOF	Bottom	EQ	LinStatic	Max			0	0	0	1117.9
ROOF	Top	EQ	LinStatic	Min			0	-39.376	-39.376	-1487.9597
ROOF	Bottom	EQ	LinStatic	Min			0	-39.376	-39.376	-1487.9597
ROOF	Top	wind	LinStatic	Max			0	0	29.888	1658.3555
ROOF	Bottom	wind	LinStatic	Max			0	0	29.888	1658.3555
ROOF	Top	wind	LinStatic	Min			0	-30.209	-40.781	-1440.9618
ROOF	Bottom	wind	LinStatic	Min			0	-30.209	-40.781	-1440.9618
ROOF	Top	1.4D	Combination				454.317	0	0	0
ROOF	Bottom	1.4D	Combination				684.605	0	0	0
ROOF	Top	1.2D+1.6L+.5Lr	Combination				761.469	0	0	0
ROOF	Bottom	1.2D+1.6L+.5Lr	Combination				973.983	0	0	0
ROOF	Top	1.2D+1.6Lr+L	Combination				959.73	0	0	0
ROOF	Bottom	1.2D+1.6Lr+L	Combination				1166.573	0	0	0
ROOF	Top	1.2D+1.6Lr+.8W	Combination	Max			809.182	0	23.91	1326.6844
ROOF	Bottom	1.2D+1.6Lr+.8W	Combination	Max			1006.571	0	23.91	1326.6844
ROOF	Top	1.2D+1.6Lr+.8W	Combination	Min			809.182	-24.167	-32.625	-1152.7695
ROOF	Bottom	1.2D+1.6Lr+.8W	Combination	Min			1006.571	-24.167	-32.625	-1152.7695
ROOF	Top	1.2D+1.6Lr-.8W	Combination	Max			809.182	24.167	32.625	1152.7695
ROOF	Bottom	1.2D+1.6Lr-.8W	Combination	Max			1006.571	24.167	32.625	1152.7695
ROOF	Top	1.2D+1.6Lr-.8W	Combination	Min			809.182	0	-23.91	-1326.6844
ROOF	Bottom	1.2D+1.6Lr-.8W	Combination	Min			1006.571	0	-23.91	-1326.6844
ROOF	Top	1.2D+1.6W+L+.5Lr	Combination	Max			671.14	0	47.821	2653.3689
ROOF	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			877.983	0	47.821	2653.3689
ROOF	Top	1.2D+1.6W+L+.5Lr	Combination	Min			671.14	-48.335	-65.25	-2305.5389
ROOF	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			877.983	-48.335	-65.25	-2305.5389
ROOF	Top	1.2D-1.6W+L+.5Lr	Combination	Max			671.14	48.335	65.25	2305.5389
ROOF	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			877.983	48.335	65.25	2305.5389
ROOF	Top	1.2D-1.6W+L+.5Lr	Combination	Min			671.14	0	-47.821	-2653.3689
ROOF	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			877.983	0	-47.821	-2653.3689
ROOF	Top	1.246D+1E+1L	Combination	Max			554.891	0	0	1117.9
ROOF	Bottom	1.246D+1E+1L	Combination	Max			769.3	0	0	1117.9
ROOF	Top	1.246D+1E+1L	Combination	Min			554.891	-39.376	-39.376	-1487.9597
ROOF	Bottom	1.246D+1E+1L	Combination	Min			769.3	-39.376	-39.376	-1487.9597
ROOF	Top	1.246D-1E+1L	Combination	Max			554.891	39.376	39.376	1487.9597

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
ROOF	Bottom	1.246D-1E+1L	Combination	Max			769.3	39.376	39.376	1487.9597
ROOF	Top	1.246D-1E+1L	Combination	Min			554.891	0	0	-1117.9
ROOF	Bottom	1.246D-1E+1L	Combination	Min			769.3	0	0	-1117.9
ROOF	Top	0.9D+1.6W	Combination	Max			292.061	0	47.821	2653.3689
ROOF	Bottom	0.9D+1.6W	Combination	Max			440.103	0	47.821	2653.3689
ROOF	Top	0.9D+1.6W	Combination	Min			292.061	-48.335	-65.25	-2305.5389
ROOF	Bottom	0.9D+1.6W	Combination	Min			440.103	-48.335	-65.25	-2305.5389
ROOF	Top	0.9D-1.6W	Combination	Max			292.061	48.335	65.25	2305.5389
ROOF	Bottom	0.9D-1.6W	Combination	Max			440.103	48.335	65.25	2305.5389
ROOF	Top	0.9D-1.6W	Combination	Min			292.061	0	-47.821	-2653.3689
ROOF	Bottom	0.9D-1.6W	Combination	Min			440.103	0	-47.821	-2653.3689
ROOF	Top	.854D+E	Combination	Max			277.134	0	0	1117.9
ROOF	Bottom	.854D+E	Combination	Max			417.609	0	0	1117.9
ROOF	Top	.854D+E	Combination	Min			277.134	-39.376	-39.376	-1487.9597
ROOF	Bottom	.854D+E	Combination	Min			417.609	-39.376	-39.376	-1487.9597
ROOF	Top	.854D-E	Combination	Max			277.134	39.376	39.376	1487.9597
ROOF	Bottom	.854D-E	Combination	Max			417.609	39.376	39.376	1487.9597
ROOF	Top	.854D-E	Combination	Min			277.134	0	0	-1117.9
ROOF	Bottom	.854D-E	Combination	Min			417.609	0	0	-1117.9
ROOF	Top	D+L	Combination				475.061	0	0	0
ROOF	Bottom	D+L	Combination				649.005	0	0	0
ROOF	Top	D+.5L	Combination				399.787	0	0	0
ROOF	Bottom	D+.5L	Combination				569.004	0	0	0
ROOF	Top	D+.5L+.7W	Combination	Max			399.787	0	20.922	1160.8489
ROOF	Bottom	D+.5L+.7W	Combination	Max			569.004	0	20.922	1160.8489
ROOF	Top	D+.5L+.7W	Combination	Min			399.787	-21.146	-28.547	-1008.6733
ROOF	Bottom	D+.5L+.7W	Combination	Min			569.004	-21.146	-28.547	-1008.6733
ROOF	Top	D+.5L-.7W	Combination	Max			399.787	21.146	28.547	1008.6733
ROOF	Bottom	D+.5L-.7W	Combination	Max			569.004	21.146	28.547	1008.6733
ROOF	Top	D+.5L-.7W	Combination	Min			399.787	0	-20.922	-1160.8489
ROOF	Bottom	D+.5L-.7W	Combination	Min			569.004	0	-20.922	-1160.8489
ROOF	Top	DConS1	Combination				645.225	0	0	0
ROOF	Bottom	DConS1	Combination				879.964	0	0	0
ROOF	Top	DConS2	Combination				793.927	0	0	0
ROOF	Bottom	DConS2	Combination				1010.257	0	0	0
ROOF	Top	DConS3	Combination				925.104	0	0	0
ROOF	Bottom	DConS3	Combination				1141.434	0	0	0
ROOF	Top	DConS4	Combination				1123.365	0	0	0
ROOF	Bottom	DConS4	Combination				1334.023	0	0	0
ROOF	Top	DConS5	Combination	Max			703.598	0	47.821	2653.3689
ROOF	Bottom	DConS5	Combination	Max			914.256	0	47.821	2653.3689
ROOF	Top	DConS5	Combination	Min			703.598	-48.335	-65.25	-2305.5389
ROOF	Bottom	DConS5	Combination	Min			914.256	-48.335	-65.25	-2305.5389
ROOF	Top	DConS6	Combination	Max			703.598	48.335	65.25	2305.5389

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
ROOF	Bottom	DConS6	Combination	Max			914.256	48.335	65.25	2305.5389
ROOF	Top	DConS6	Combination	Min			703.598	0	-47.821	-2653.3689
ROOF	Bottom	DConS6	Combination	Min			914.256	0	-47.821	-2653.3689
ROOF	Top	DConS7	Combination	Max			834.775	0	47.821	2653.3689
ROOF	Bottom	DConS7	Combination	Max			1045.433	0	47.821	2653.3689
ROOF	Top	DConS7	Combination	Min			834.775	-48.335	-65.25	-2305.5389
ROOF	Bottom	DConS7	Combination	Min			1045.433	-48.335	-65.25	-2305.5389
ROOF	Top	DConS8	Combination	Max			834.775	48.335	65.25	2305.5389
ROOF	Bottom	DConS8	Combination	Max			1045.433	48.335	65.25	2305.5389
ROOF	Top	DConS8	Combination	Min			834.775	0	-47.821	-2653.3689
ROOF	Bottom	DConS8	Combination	Min			1045.433	0	-47.821	-2653.3689
ROOF	Top	DConS9	Combination	Max			972.817	0	23.91	1326.6844
ROOF	Bottom	DConS9	Combination	Max			1174.022	0	23.91	1326.6844
ROOF	Top	DConS9	Combination	Min			972.817	-24.167	-32.625	-1152.7695
ROOF	Bottom	DConS9	Combination	Min			1174.022	-24.167	-32.625	-1152.7695
ROOF	Top	DConS10	Combination	Max			972.817	24.167	32.625	1152.7695
ROOF	Bottom	DConS10	Combination	Max			1174.022	24.167	32.625	1152.7695
ROOF	Top	DConS10	Combination	Min			972.817	0	-23.91	-1326.6844
ROOF	Bottom	DConS10	Combination	Min			1174.022	0	-23.91	-1326.6844
ROOF	Top	DConS11	Combination	Max			553.05	0	23.91	1326.6844
ROOF	Bottom	DConS11	Combination	Max			754.255	0	23.91	1326.6844
ROOF	Top	DConS11	Combination	Min			553.05	-24.167	-32.625	-1152.7695
ROOF	Bottom	DConS11	Combination	Min			754.255	-24.167	-32.625	-1152.7695
ROOF	Top	DConS12	Combination	Max			553.05	24.167	32.625	1152.7695
ROOF	Bottom	DConS12	Combination	Max			754.255	24.167	32.625	1152.7695
ROOF	Top	DConS12	Combination	Min			553.05	0	-23.91	-1326.6844
ROOF	Bottom	DConS12	Combination	Min			754.255	0	-23.91	-1326.6844
ROOF	Top	DConS13	Combination	Max			414.787	0	47.821	2653.3689
ROOF	Bottom	DConS13	Combination	Max			565.691	0	47.821	2653.3689
ROOF	Top	DConS13	Combination	Min			414.787	-48.335	-65.25	-2305.5389
ROOF	Bottom	DConS13	Combination	Min			565.691	-48.335	-65.25	-2305.5389
ROOF	Top	DConS14	Combination	Max			414.787	48.335	65.25	2305.5389
ROOF	Bottom	DConS14	Combination	Max			565.691	48.335	65.25	2305.5389
ROOF	Top	DConS14	Combination	Min			414.787	0	-47.821	-2653.3689
ROOF	Bottom	DConS14	Combination	Min			565.691	0	-47.821	-2653.3689
ROOF	Top	DConS15	Combination	Max			749.686	0	0	1117.9
ROOF	Bottom	DConS15	Combination	Max			977.111	0	0	1117.9
ROOF	Top	DConS15	Combination	Min			749.686	-39.376	-39.376	-1487.9597
ROOF	Bottom	DConS15	Combination	Min			977.111	-39.376	-39.376	-1487.9597
ROOF	Top	DConS16	Combination	Max			749.686	39.376	39.376	1487.9597
ROOF	Bottom	DConS16	Combination	Max			977.111	39.376	39.376	1487.9597
ROOF	Top	DConS16	Combination	Min			749.686	0	0	-1117.9
ROOF	Bottom	DConS16	Combination	Min			977.111	0	0	-1117.9
ROOF	Top	DConS17	Combination	Max			599.137	0	0	1117.9

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
ROOF	Bottom	DConS17	Combination	Max			817.11	0	0	1117.9
ROOF	Top	DConS17	Combination	Min			599.137	-39.376	-39.376	-1487.9597
ROOF	Bottom	DConS17	Combination	Min			817.11	-39.376	-39.376	-1487.9597
ROOF	Top	DConS18	Combination	Max			599.137	39.376	39.376	1487.9597
ROOF	Bottom	DConS18	Combination	Max			817.11	39.376	39.376	1487.9597
ROOF	Top	DConS18	Combination	Min			599.137	0	0	-1117.9
ROOF	Bottom	DConS18	Combination	Min			817.11	0	0	-1117.9
ROOF	Top	DConS19	Combination	Max			368.7	0	0	1117.9
ROOF	Bottom	DConS19	Combination	Max			502.837	0	0	1117.9
ROOF	Top	DConS19	Combination	Min			368.7	-39.376	-39.376	-1487.9597
ROOF	Bottom	DConS19	Combination	Min			502.837	-39.376	-39.376	-1487.9597
ROOF	Top	DConS20	Combination	Max			368.7	39.376	39.376	1487.9597
ROOF	Bottom	DConS20	Combination	Max			502.837	39.376	39.376	1487.9597
ROOF	Top	DConS20	Combination	Min			368.7	0	0	-1117.9
ROOF	Bottom	DConS20	Combination	Min			502.837	0	0	-1117.9
7TH	Top	Dead	LinStatic				813.516	0	0	0
7TH	Bottom	Dead	LinStatic				978.007	0	0	0
7TH	Top	Live	LinStatic				593.849	0	0	0
7TH	Bottom	Live	LinStatic				603.302	0	0	0
7TH	Top	PW	LinStatic				135.947	0	0	0
7TH	Bottom	PW	LinStatic				136.77	0	0	0
7TH	Top	FF	LinStatic				139.957	0	0	0
7TH	Bottom	FF	LinStatic				142.315	0	0	0
7TH	Top	ROOF LIVE	LinStatic				262.354	0	0	0
7TH	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
7TH	Top	EQ	LinStatic	Max			0	0	0	2335.9841
7TH	Bottom	EQ	LinStatic	Max			0	0	0	2335.9841
7TH	Top	EQ	LinStatic	Min			0	-82.479	-82.479	-3103.7314
7TH	Bottom	EQ	LinStatic	Min			0	-82.479	-82.479	-3103.7314
7TH	Top	wind	LinStatic	Max			0	0	56.358	3127.058
7TH	Bottom	wind	LinStatic	Max			0	0	56.358	3127.058
7TH	Top	wind	LinStatic	Min			0	-56.964	-77.936	-2753.7759
7TH	Bottom	wind	LinStatic	Min			0	-56.964	-77.936	-2753.7759
7TH	Top	1.4D	Combination				1138.922	0	0	0
7TH	Bottom	1.4D	Combination				1369.21	0	0	0
7TH	Top	1.2D+1.6L+.5Lr	Combination				2057.555	0	0	0
7TH	Bottom	1.2D+1.6L+.5Lr	Combination				2270.07	0	0	0
7TH	Top	1.2D+1.6Lr+L	Combination				1989.836	0	0	0
7TH	Bottom	1.2D+1.6Lr+L	Combination				2196.678	0	0	0
7TH	Top	1.2D+1.6Lr+.8W	Combination	Max			1395.986	0	45.086	2501.6464
7TH	Bottom	1.2D+1.6Lr+.8W	Combination	Max			1593.376	0	45.086	2501.6464
7TH	Top	1.2D+1.6Lr+.8W	Combination	Min			1395.986	-45.571	-62.348	-2203.0208
7TH	Bottom	1.2D+1.6Lr+.8W	Combination	Min			1593.376	-45.571	-62.348	-2203.0208
7TH	Top	1.2D+1.6Lr-.8W	Combination	Max			1395.986	45.571	62.348	2203.0208

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
7TH	Bottom	1.2D+1.6Lr-.8W	Combination	Max			1593.376	45.571	62.348	2203.0208
7TH	Top	1.2D+1.6Lr-.8W	Combination	Min			1395.986	0	-45.086	-2501.6464
7TH	Bottom	1.2D+1.6Lr-.8W	Combination	Min			1593.376	0	-45.086	-2501.6464
7TH	Top	1.2D+1.6W+L+.5Lr	Combination	Max			1701.246	0	90.172	5003.2927
7TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			1908.088	0	90.172	5003.2927
7TH	Top	1.2D+1.6W+L+.5Lr	Combination	Min			1701.246	-91.142	-124.697	-4406.0415
7TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			1908.088	-91.142	-124.697	-4406.0415
7TH	Top	1.2D-1.6W+L+.5Lr	Combination	Max			1701.246	91.142	124.697	4406.0415
7TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			1908.088	91.142	124.697	4406.0415
7TH	Top	1.2D-1.6W+L+.5Lr	Combination	Min			1701.246	0	-90.172	-5003.2927
7TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			1908.088	0	-90.172	-5003.2927
7TH	Top	1.246D+1E+1L	Combination	Max			1607.49	0	0	2335.9841
7TH	Bottom	1.246D+1E+1L	Combination	Max			1821.899	0	0	2335.9841
7TH	Top	1.246D+1E+1L	Combination	Min			1607.49	-82.479	-82.479	-3103.7314
7TH	Bottom	1.246D+1E+1L	Combination	Min			1821.899	-82.479	-82.479	-3103.7314
7TH	Top	1.246D-1E+1L	Combination	Max			1607.49	82.479	82.479	3103.7314
7TH	Bottom	1.246D-1E+1L	Combination	Max			1821.899	82.479	82.479	3103.7314
7TH	Top	1.246D-1E+1L	Combination	Min			1607.49	0	0	-2335.9841
7TH	Bottom	1.246D-1E+1L	Combination	Min			1821.899	0	0	-2335.9841
7TH	Top	0.9D+1.6W	Combination	Max			732.164	0	90.172	5003.2927
7TH	Bottom	0.9D+1.6W	Combination	Max			880.206	0	90.172	5003.2927
7TH	Top	0.9D+1.6W	Combination	Min			732.164	-91.142	-124.697	-4406.0415
7TH	Bottom	0.9D+1.6W	Combination	Min			880.206	-91.142	-124.697	-4406.0415
7TH	Top	0.9D-1.6W	Combination	Max			732.164	91.142	124.697	4406.0415
7TH	Bottom	0.9D-1.6W	Combination	Max			880.206	91.142	124.697	4406.0415
7TH	Top	0.9D-1.6W	Combination	Min			732.164	0	-90.172	-5003.2927
7TH	Bottom	0.9D-1.6W	Combination	Min			880.206	0	-90.172	-5003.2927
7TH	Top	.854D+E	Combination	Max			694.743	0	0	2335.9841
7TH	Bottom	.854D+E	Combination	Max			835.218	0	0	2335.9841
7TH	Top	.854D+E	Combination	Min			694.743	-82.479	-82.479	-3103.7314
7TH	Bottom	.854D+E	Combination	Min			835.218	-82.479	-82.479	-3103.7314
7TH	Top	.854D-E	Combination	Max			694.743	82.479	82.479	3103.7314
7TH	Bottom	.854D-E	Combination	Max			835.218	82.479	82.479	3103.7314
7TH	Top	.854D-E	Combination	Min			694.743	0	0	-2335.9841
7TH	Bottom	.854D-E	Combination	Min			835.218	0	0	-2335.9841
7TH	Top	D+L	Combination				1407.365	0	0	0
7TH	Bottom	D+L	Combination				1581.309	0	0	0
7TH	Top	D+.5L	Combination				1110.441	0	0	0
7TH	Bottom	D+.5L	Combination				1279.658	0	0	0
7TH	Top	D+.5L+.7W	Combination	Max			1110.441	0	39.45	2188.9406
7TH	Bottom	D+.5L+.7W	Combination	Max			1279.658	0	39.45	2188.9406
7TH	Top	D+.5L+.7W	Combination	Min			1110.441	-39.875	-54.555	-1927.6432
7TH	Bottom	D+.5L+.7W	Combination	Min			1279.658	-39.875	-54.555	-1927.6432
7TH	Top	D+.5L-.7W	Combination	Max			1110.441	39.875	54.555	1927.6432

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
7TH	Bottom	D+.5L-.7W	Combination	Max			1279.658	39.875	54.555	1927.6432
7TH	Top	D+.5L-.7W	Combination	Min			1110.441	0	-39.45	-2188.9406
7TH	Bottom	D+.5L-.7W	Combination	Min			1279.658	0	-39.45	-2188.9406
7TH	Top	DConS1	Combination				1525.189	0	0	0
7TH	Bottom	DConS1	Combination				1759.928	0	0	0
7TH	Top	DConS2	Combination				2257.464	0	0	0
7TH	Bottom	DConS2	Combination				2473.794	0	0	0
7TH	Top	DConS3	Combination				2388.641	0	0	0
7TH	Bottom	DConS3	Combination				2604.971	0	0	0
7TH	Top	DConS4	Combination				2320.921	0	0	0
7TH	Bottom	DConS4	Combination				2531.58	0	0	0
7TH	Top	DConS5	Combination	Max			1901.154	0	90.172	5003.2927
7TH	Bottom	DConS5	Combination	Max			2111.812	0	90.172	5003.2927
7TH	Top	DConS5	Combination	Min			1901.154	-91.142	-124.697	-4406.0415
7TH	Bottom	DConS5	Combination	Min			2111.812	-91.142	-124.697	-4406.0415
7TH	Top	DConS6	Combination	Max			1901.154	91.142	124.697	4406.0415
7TH	Bottom	DConS6	Combination	Max			2111.812	91.142	124.697	4406.0415
7TH	Top	DConS6	Combination	Min			1901.154	0	-90.172	-5003.2927
7TH	Bottom	DConS6	Combination	Min			2111.812	0	-90.172	-5003.2927
7TH	Top	DConS7	Combination	Max			2032.332	0	90.172	5003.2927
7TH	Bottom	DConS7	Combination	Max			2242.99	0	90.172	5003.2927
7TH	Top	DConS7	Combination	Min			2032.332	-91.142	-124.697	-4406.0415
7TH	Bottom	DConS7	Combination	Min			2242.99	-91.142	-124.697	-4406.0415
7TH	Top	DConS8	Combination	Max			2032.332	91.142	124.697	4406.0415
7TH	Bottom	DConS8	Combination	Max			2242.99	91.142	124.697	4406.0415
7TH	Top	DConS8	Combination	Min			2032.332	0	-90.172	-5003.2927
7TH	Bottom	DConS8	Combination	Min			2242.99	0	-90.172	-5003.2927
7TH	Top	DConS9	Combination	Max			1727.072	0	45.086	2501.6464
7TH	Bottom	DConS9	Combination	Max			1928.277	0	45.086	2501.6464
7TH	Top	DConS9	Combination	Min			1727.072	-45.571	-62.348	-2203.0208
7TH	Bottom	DConS9	Combination	Min			1928.277	-45.571	-62.348	-2203.0208
7TH	Top	DConS10	Combination	Max			1727.072	45.571	62.348	2203.0208
7TH	Bottom	DConS10	Combination	Max			1928.277	45.571	62.348	2203.0208
7TH	Top	DConS10	Combination	Min			1727.072	0	-45.086	-2501.6464
7TH	Bottom	DConS10	Combination	Min			1928.277	0	-45.086	-2501.6464
7TH	Top	DConS11	Combination	Max			1307.305	0	45.086	2501.6464
7TH	Bottom	DConS11	Combination	Max			1508.51	0	45.086	2501.6464
7TH	Top	DConS11	Combination	Min			1307.305	-45.571	-62.348	-2203.0208
7TH	Bottom	DConS11	Combination	Min			1508.51	-45.571	-62.348	-2203.0208
7TH	Top	DConS12	Combination	Max			1307.305	45.571	62.348	2203.0208
7TH	Bottom	DConS12	Combination	Max			1508.51	45.571	62.348	2203.0208
7TH	Top	DConS12	Combination	Min			1307.305	0	-45.086	-2501.6464
7TH	Bottom	DConS12	Combination	Min			1508.51	0	-45.086	-2501.6464
7TH	Top	DConS13	Combination	Max			980.479	0	90.172	5003.2927

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
7TH	Bottom	DConS13	Combination	Max			1131.383	0	90.172	5003.2927
7TH	Top	DConS13	Combination	Min			980.479	-91.142	-124.697	-4406.0415
7TH	Bottom	DConS13	Combination	Min			1131.383	-91.142	-124.697	-4406.0415
7TH	Top	DConS14	Combination	Max			980.479	91.142	124.697	4406.0415
7TH	Bottom	DConS14	Combination	Max			1131.383	91.142	124.697	4406.0415
7TH	Top	DConS14	Combination	Min			980.479	0	-90.172	-5003.2927
7TH	Bottom	DConS14	Combination	Min			1131.383	0	-90.172	-5003.2927
7TH	Top	DConS15	Combination	Max			2010.096	0	0	2335.9841
7TH	Bottom	DConS15	Combination	Max			2237.522	0	0	2335.9841
7TH	Top	DConS15	Combination	Min			2010.096	-82.479	-82.479	-3103.7314
7TH	Bottom	DConS15	Combination	Min			2237.522	-82.479	-82.479	-3103.7314
7TH	Top	DConS16	Combination	Max			2010.096	82.479	82.479	3103.7314
7TH	Bottom	DConS16	Combination	Max			2237.522	82.479	82.479	3103.7314
7TH	Top	DConS16	Combination	Min			2010.096	0	0	-2335.9841
7TH	Bottom	DConS16	Combination	Min			2237.522	0	0	-2335.9841
7TH	Top	DConS17	Combination	Max			1416.247	0	0	2335.9841
7TH	Bottom	DConS17	Combination	Max			1634.219	0	0	2335.9841
7TH	Top	DConS17	Combination	Min			1416.247	-82.479	-82.479	-3103.7314
7TH	Bottom	DConS17	Combination	Min			1634.219	-82.479	-82.479	-3103.7314
7TH	Top	DConS18	Combination	Max			1416.247	82.479	82.479	3103.7314
7TH	Bottom	DConS18	Combination	Max			1634.219	82.479	82.479	3103.7314
7TH	Top	DConS18	Combination	Min			1416.247	0	0	-2335.9841
7TH	Bottom	DConS18	Combination	Min			1634.219	0	0	-2335.9841
7TH	Top	DConS19	Combination	Max			871.537	0	0	2335.9841
7TH	Bottom	DConS19	Combination	Max			1005.673	0	0	2335.9841
7TH	Top	DConS19	Combination	Min			871.537	-82.479	-82.479	-3103.7314
7TH	Bottom	DConS19	Combination	Min			1005.673	-82.479	-82.479	-3103.7314
7TH	Top	DConS20	Combination	Max			871.537	82.479	82.479	3103.7314
7TH	Bottom	DConS20	Combination	Max			1005.673	82.479	82.479	3103.7314
7TH	Top	DConS20	Combination	Min			871.537	0	0	-2335.9841
7TH	Bottom	DConS20	Combination	Min			1005.673	0	0	-2335.9841
6TH	Top	Dead	LinStatic				1302.52	0	0	0
6TH	Bottom	Dead	LinStatic				1467.011	0	0	0
6TH	Top	Live	LinStatic				1037.15	0	0	0
6TH	Bottom	Live	LinStatic				1046.604	0	0	0
6TH	Top	PW	LinStatic				204.332	0	0	0
6TH	Bottom	PW	LinStatic				205.155	0	0	0
6TH	Top	FF	LinStatic				211.115	0	0	0
6TH	Bottom	FF	LinStatic				213.472	0	0	0
6TH	Top	ROOF LIVE	LinStatic				262.354	0	0	0
6TH	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
6TH	Top	EQ	LinStatic	Max			0	0	0	3367.5102
6TH	Bottom	EQ	LinStatic	Max			0	0	0	3367.5102
6TH	Top	EQ	LinStatic	Min			0	-118.981	-118.981	-4472.0365

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
6TH	Bottom	EQ	LinStatic	Min			0	-118.981	-118.981	-4472.0365
6TH	Top	wind	LinStatic	Max			0	0	82.187	4560.2304
6TH	Bottom	wind	LinStatic	Max			0	0	82.187	4560.2304
6TH	Top	wind	LinStatic	Min			0	-83.071	-114.236	-4036.4222
6TH	Bottom	wind	LinStatic	Min			0	-83.071	-114.236	-4036.4222
6TH	Top	1.4D	Combination				1823.527	0	0	0
6TH	Bottom	1.4D	Combination				2053.815	0	0	0
6TH	Top	1.2D+1.6L+.5Lr	Combination				3353.641	0	0	0
6TH	Bottom	1.2D+1.6L+.5Lr	Combination				3566.156	0	0	0
6TH	Top	1.2D+1.6Lr+L	Combination				3019.941	0	0	0
6TH	Bottom	1.2D+1.6Lr+L	Combination				3226.783	0	0	0
6TH	Top	1.2D+1.6Lr+.8W	Combination	Max			1982.791	0	65.75	3648.1843
6TH	Bottom	1.2D+1.6Lr+.8W	Combination	Max			2180.18	0	65.75	3648.1843
6TH	Top	1.2D+1.6Lr+.8W	Combination	Min			1982.791	-66.457	-91.389	-3229.1378
6TH	Bottom	1.2D+1.6Lr+.8W	Combination	Min			2180.18	-66.457	-91.389	-3229.1378
6TH	Top	1.2D+1.6Lr-.8W	Combination	Max			1982.791	66.457	91.389	3229.1378
6TH	Bottom	1.2D+1.6Lr-.8W	Combination	Max			2180.18	66.457	91.389	3229.1378
6TH	Top	1.2D+1.6Lr-.8W	Combination	Min			1982.791	0	-65.75	-3648.1843
6TH	Bottom	1.2D+1.6Lr-.8W	Combination	Min			2180.18	0	-65.75	-3648.1843
6TH	Top	1.2D+1.6W+L+.5Lr	Combination	Max			2731.351	0	131.5	7296.3686
6TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			2938.194	0	131.5	7296.3686
6TH	Top	1.2D+1.6W+L+.5Lr	Combination	Min			2731.351	-132.914	-182.778	-6458.2755
6TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			2938.194	-132.914	-182.778	-6458.2755
6TH	Top	1.2D-1.6W+L+.5Lr	Combination	Max			2731.351	132.914	182.778	6458.2755
6TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			2938.194	132.914	182.778	6458.2755
6TH	Top	1.2D-1.6W+L+.5Lr	Combination	Min			2731.351	0	-131.5	-7296.3686
6TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			2938.194	0	-131.5	-7296.3686
6TH	Top	1.246D+1E+1L	Combination	Max			2660.09	0	0	3367.5102
6TH	Bottom	1.246D+1E+1L	Combination	Max			2874.499	0	0	3367.5102
6TH	Top	1.246D+1E+1L	Combination	Min			2660.09	-118.981	-118.981	-4472.0365
6TH	Bottom	1.246D+1E+1L	Combination	Min			2874.499	-118.981	-118.981	-4472.0365
6TH	Top	1.246D-1E+1L	Combination	Max			2660.09	118.981	118.981	4472.0365
6TH	Bottom	1.246D-1E+1L	Combination	Max			2874.499	118.981	118.981	4472.0365
6TH	Top	1.246D-1E+1L	Combination	Min			2660.09	0	0	-3367.5102
6TH	Bottom	1.246D-1E+1L	Combination	Min			2874.499	0	0	-3367.5102
6TH	Top	0.9D+1.6W	Combination	Max			1172.268	0	131.5	7296.3686
6TH	Bottom	0.9D+1.6W	Combination	Max			1320.31	0	131.5	7296.3686
6TH	Top	0.9D+1.6W	Combination	Min			1172.268	-132.914	-182.778	-6458.2755
6TH	Bottom	0.9D+1.6W	Combination	Min			1320.31	-132.914	-182.778	-6458.2755
6TH	Top	0.9D-1.6W	Combination	Max			1172.268	132.914	182.778	6458.2755
6TH	Bottom	0.9D-1.6W	Combination	Max			1320.31	132.914	182.778	6458.2755
6TH	Top	0.9D-1.6W	Combination	Min			1172.268	0	-131.5	-7296.3686
6TH	Bottom	0.9D-1.6W	Combination	Min			1320.31	0	-131.5	-7296.3686
6TH	Top	.854D+E	Combination	Max			1112.352	0	0	3367.5102

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
6TH	Bottom	.854D+E	Combination	Max			1252.827	0	0	3367.5102
6TH	Top	.854D+E	Combination	Min			1112.352	-118.981	-118.981	-4472.0365
6TH	Bottom	.854D+E	Combination	Min			1252.827	-118.981	-118.981	-4472.0365
6TH	Top	.854D-E	Combination	Max			1112.352	118.981	118.981	4472.0365
6TH	Bottom	.854D-E	Combination	Max			1252.827	118.981	118.981	4472.0365
6TH	Top	.854D-E	Combination	Min			1112.352	0	0	-3367.5102
6TH	Bottom	.854D-E	Combination	Min			1252.827	0	0	-3367.5102
6TH	Top	D+L	Combination				2339.67	0	0	0
6TH	Bottom	D+L	Combination				2513.614	0	0	0
6TH	Top	D+.5L	Combination				1821.095	0	0	0
6TH	Bottom	D+.5L	Combination				1990.312	0	0	0
6TH	Top	D+.5L+.7W	Combination	Max			1821.095	0	57.531	3192.1613
6TH	Bottom	D+.5L+.7W	Combination	Max			1990.312	0	57.531	3192.1613
6TH	Top	D+.5L+.7W	Combination	Min			1821.095	-58.15	-79.965	-2825.4956
6TH	Bottom	D+.5L+.7W	Combination	Min			1990.312	-58.15	-79.965	-2825.4956
6TH	Top	D+.5L-.7W	Combination	Max			1821.095	58.15	79.965	2825.4956
6TH	Bottom	D+.5L-.7W	Combination	Max			1990.312	58.15	79.965	2825.4956
6TH	Top	D+.5L-.7W	Combination	Min			1821.095	0	-57.531	-3192.1613
6TH	Bottom	D+.5L-.7W	Combination	Min			1990.312	0	-57.531	-3192.1613
6TH	Top	DConS1	Combination				2405.153	0	0	0
6TH	Bottom	DConS1	Combination				2639.893	0	0	0
6TH	Top	DConS2	Combination				3721.001	0	0	0
6TH	Bottom	DConS2	Combination				3937.331	0	0	0
6TH	Top	DConS3	Combination				3852.178	0	0	0
6TH	Bottom	DConS3	Combination				4068.508	0	0	0
6TH	Top	DConS4	Combination				3518.478	0	0	0
6TH	Bottom	DConS4	Combination				3729.136	0	0	0
6TH	Top	DConS5	Combination	Max			3098.71	0	131.5	7296.3686
6TH	Bottom	DConS5	Combination	Max			3309.369	0	131.5	7296.3686
6TH	Top	DConS5	Combination	Min			3098.71	-132.914	-182.778	-6458.2755
6TH	Bottom	DConS5	Combination	Min			3309.369	-132.914	-182.778	-6458.2755
6TH	Top	DConS6	Combination	Max			3098.71	132.914	182.778	6458.2755
6TH	Bottom	DConS6	Combination	Max			3309.369	132.914	182.778	6458.2755
6TH	Top	DConS6	Combination	Min			3098.71	0	-131.5	-7296.3686
6TH	Bottom	DConS6	Combination	Min			3309.369	0	-131.5	-7296.3686
6TH	Top	DConS7	Combination	Max			3229.888	0	131.5	7296.3686
6TH	Bottom	DConS7	Combination	Max			3440.546	0	131.5	7296.3686
6TH	Top	DConS7	Combination	Min			3229.888	-132.914	-182.778	-6458.2755
6TH	Bottom	DConS7	Combination	Min			3440.546	-132.914	-182.778	-6458.2755
6TH	Top	DConS8	Combination	Max			3229.888	132.914	182.778	6458.2755
6TH	Bottom	DConS8	Combination	Max			3440.546	132.914	182.778	6458.2755
6TH	Top	DConS8	Combination	Min			3229.888	0	-131.5	-7296.3686
6TH	Bottom	DConS8	Combination	Min			3440.546	0	-131.5	-7296.3686
6TH	Top	DConS9	Combination	Max			2481.327	0	65.75	3648.1843

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
6TH	Bottom	DConS9	Combination	Max			2682.532	0	65.75	3648.1843
6TH	Top	DConS9	Combination	Min			2481.327	-66.457	-91.389	-3229.1378
6TH	Bottom	DConS9	Combination	Min			2682.532	-66.457	-91.389	-3229.1378
6TH	Top	DConS10	Combination	Max			2481.327	66.457	91.389	3229.1378
6TH	Bottom	DConS10	Combination	Max			2682.532	66.457	91.389	3229.1378
6TH	Top	DConS10	Combination	Min			2481.327	0	-65.75	-3648.1843
6TH	Bottom	DConS10	Combination	Min			2682.532	0	-65.75	-3648.1843
6TH	Top	DConS11	Combination	Max			2061.56	0	65.75	3648.1843
6TH	Bottom	DConS11	Combination	Max			2262.765	0	65.75	3648.1843
6TH	Top	DConS11	Combination	Min			2061.56	-66.457	-91.389	-3229.1378
6TH	Bottom	DConS11	Combination	Min			2262.765	-66.457	-91.389	-3229.1378
6TH	Top	DConS12	Combination	Max			2061.56	66.457	91.389	3229.1378
6TH	Bottom	DConS12	Combination	Max			2262.765	66.457	91.389	3229.1378
6TH	Top	DConS12	Combination	Min			2061.56	0	-65.75	-3648.1843
6TH	Bottom	DConS12	Combination	Min			2262.765	0	-65.75	-3648.1843
6TH	Top	DConS13	Combination	Max			1546.17	0	131.5	7296.3686
6TH	Bottom	DConS13	Combination	Max			1697.074	0	131.5	7296.3686
6TH	Top	DConS13	Combination	Min			1546.17	-132.914	-182.778	-6458.2755
6TH	Bottom	DConS13	Combination	Min			1697.074	-132.914	-182.778	-6458.2755
6TH	Top	DConS14	Combination	Max			1546.17	132.914	182.778	6458.2755
6TH	Bottom	DConS14	Combination	Max			1697.074	132.914	182.778	6458.2755
6TH	Top	DConS14	Combination	Min			1546.17	0	-131.5	-7296.3686
6TH	Bottom	DConS14	Combination	Min			1697.074	0	-131.5	-7296.3686
6TH	Top	DConS15	Combination	Max			3270.507	0	0	3367.5102
6TH	Bottom	DConS15	Combination	Max			3497.932	0	0	3367.5102
6TH	Top	DConS15	Combination	Min			3270.507	-118.981	-118.981	-4472.0365
6TH	Bottom	DConS15	Combination	Min			3497.932	-118.981	-118.981	-4472.0365
6TH	Top	DConS16	Combination	Max			3270.507	118.981	118.981	4472.0365
6TH	Bottom	DConS16	Combination	Max			3497.932	118.981	118.981	4472.0365
6TH	Top	DConS16	Combination	Min			3270.507	0	0	-3367.5102
6TH	Bottom	DConS16	Combination	Min			3497.932	0	0	-3367.5102
6TH	Top	DConS17	Combination	Max			2233.357	0	0	3367.5102
6TH	Bottom	DConS17	Combination	Max			2451.329	0	0	3367.5102
6TH	Top	DConS17	Combination	Min			2233.357	-118.981	-118.981	-4472.0365
6TH	Bottom	DConS17	Combination	Min			2451.329	-118.981	-118.981	-4472.0365
6TH	Top	DConS18	Combination	Max			2233.357	118.981	118.981	4472.0365
6TH	Bottom	DConS18	Combination	Max			2451.329	118.981	118.981	4472.0365
6TH	Top	DConS18	Combination	Min			2233.357	0	0	-3367.5102
6TH	Bottom	DConS18	Combination	Min			2451.329	0	0	-3367.5102
6TH	Top	DConS19	Combination	Max			1374.373	0	0	3367.5102
6TH	Bottom	DConS19	Combination	Max			1508.51	0	0	3367.5102
6TH	Top	DConS19	Combination	Min			1374.373	-118.981	-118.981	-4472.0365
6TH	Bottom	DConS19	Combination	Min			1508.51	-118.981	-118.981	-4472.0365
6TH	Top	DConS20	Combination	Max			1374.373	118.981	118.981	4472.0365

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
6TH	Bottom	DConS20	Combination	Max			1508.51	118.981	118.981	4472.0365
6TH	Top	DConS20	Combination	Min			1374.373	0	0	-3367.5102
6TH	Bottom	DConS20	Combination	Min			1508.51	0	0	-3367.5102
5TH	Top	Dead	LinStatic				1791.523	0	0	0
5TH	Bottom	Dead	LinStatic				1956.014	0	0	0
5TH	Top	Live	LinStatic				1480.452	0	0	0
5TH	Bottom	Live	LinStatic				1489.905	0	0	0
5TH	Top	PW	LinStatic				272.717	0	0	0
5TH	Bottom	PW	LinStatic				273.54	0	0	0
5TH	Top	FF	LinStatic				282.272	0	0	0
5TH	Bottom	FF	LinStatic				284.63	0	0	0
5TH	Top	ROOF LIVE	LinStatic				262.354	0	0	0
5TH	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
5TH	Top	EQ	LinStatic	Max			0	0	0	4217.8476
5TH	Bottom	EQ	LinStatic	Max			0	0	0	4217.8476
5TH	Top	EQ	LinStatic	Min			0	-149.071	-149.071	-5599.9973
5TH	Bottom	EQ	LinStatic	Min			0	-149.071	-149.071	-5599.9973
5TH	Top	wind	LinStatic	Max			0	0	107.264	5951.6482
5TH	Bottom	wind	LinStatic	Max			0	0	107.264	5951.6482
5TH	Top	wind	LinStatic	Min			0	-108.418	-149.533	-5283.6155
5TH	Bottom	wind	LinStatic	Min			0	-108.418	-149.533	-5283.6155
5TH	Top	1.4D	Combination				2508.132	0	0	0
5TH	Bottom	1.4D	Combination				2738.42	0	0	0
5TH	Top	1.2D+1.6L+.5Lr	Combination				4649.728	0	0	0
5TH	Bottom	1.2D+1.6L+.5Lr	Combination				4862.242	0	0	0
5TH	Top	1.2D+1.6Lr+L	Combination				4050.047	0	0	0
5TH	Bottom	1.2D+1.6Lr+L	Combination				4256.889	0	0	0
5TH	Top	1.2D+1.6Lr+.8W	Combination	Max			2569.595	0	85.811	4761.3186
5TH	Bottom	1.2D+1.6Lr+.8W	Combination	Max			2766.984	0	85.811	4761.3186
5TH	Top	1.2D+1.6Lr+.8W	Combination	Min			2569.595	-86.734	-119.627	-4226.8924
5TH	Bottom	1.2D+1.6Lr+.8W	Combination	Min			2766.984	-86.734	-119.627	-4226.8924
5TH	Top	1.2D+1.6Lr-.8W	Combination	Max			2569.595	86.734	119.627	4226.8924
5TH	Bottom	1.2D+1.6Lr-.8W	Combination	Max			2766.984	86.734	119.627	4226.8924
5TH	Top	1.2D+1.6Lr-.8W	Combination	Min			2569.595	0	-85.811	-4761.3186
5TH	Bottom	1.2D+1.6Lr-.8W	Combination	Min			2766.984	0	-85.811	-4761.3186
5TH	Top	1.2D+1.6W+L+.5Lr	Combination	Max			3761.457	0	171.623	9522.6372
5TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			3968.299	0	171.623	9522.6372
5TH	Top	1.2D+1.6W+L+.5Lr	Combination	Min			3761.457	-173.468	-239.254	-8453.7848
5TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			3968.299	-173.468	-239.254	-8453.7848
5TH	Top	1.2D-1.6W+L+.5Lr	Combination	Max			3761.457	173.468	239.254	8453.7848
5TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			3968.299	173.468	239.254	8453.7848
5TH	Top	1.2D-1.6W+L+.5Lr	Combination	Min			3761.457	0	-171.623	-9522.6372
5TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			3968.299	0	-171.623	-9522.6372
5TH	Top	1.246D+1E+1L	Combination	Max			3712.689	0	0	4217.8476

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
5TH	Bottom	1.246D+1E+1L	Combination	Max			3927.098	0	0	4217.8476
5TH	Top	1.246D+1E+1L	Combination	Min			3712.689	-149.071	-149.071	-5599.9973
5TH	Bottom	1.246D+1E+1L	Combination	Min			3927.098	-149.071	-149.071	-5599.9973
5TH	Top	1.246D-1E+1L	Combination	Max			3712.689	149.071	149.071	5599.9973
5TH	Bottom	1.246D-1E+1L	Combination	Max			3927.098	149.071	149.071	5599.9973
5TH	Top	1.246D-1E+1L	Combination	Min			3712.689	0	0	-4217.8476
5TH	Bottom	1.246D-1E+1L	Combination	Min			3927.098	0	0	-4217.8476
5TH	Top	0.9D+1.6W	Combination	Max			1612.371	0	171.623	9522.6372
5TH	Bottom	0.9D+1.6W	Combination	Max			1760.413	0	171.623	9522.6372
5TH	Top	0.9D+1.6W	Combination	Min			1612.371	-173.468	-239.254	-8453.7848
5TH	Bottom	0.9D+1.6W	Combination	Min			1760.413	-173.468	-239.254	-8453.7848
5TH	Top	0.9D-1.6W	Combination	Max			1612.371	173.468	239.254	8453.7848
5TH	Bottom	0.9D-1.6W	Combination	Max			1760.413	173.468	239.254	8453.7848
5TH	Top	0.9D-1.6W	Combination	Min			1612.371	0	-171.623	-9522.6372
5TH	Bottom	0.9D-1.6W	Combination	Min			1760.413	0	-171.623	-9522.6372
5TH	Top	.854D+E	Combination	Max			1529.961	0	0	4217.8476
5TH	Bottom	.854D+E	Combination	Max			1670.436	0	0	4217.8476
5TH	Top	.854D+E	Combination	Min			1529.961	-149.071	-149.071	-5599.9973
5TH	Bottom	.854D+E	Combination	Min			1670.436	-149.071	-149.071	-5599.9973
5TH	Top	.854D-E	Combination	Max			1529.961	149.071	149.071	5599.9973
5TH	Bottom	.854D-E	Combination	Max			1670.436	149.071	149.071	5599.9973
5TH	Top	.854D-E	Combination	Min			1529.961	0	0	-4217.8476
5TH	Bottom	.854D-E	Combination	Min			1670.436	0	0	-4217.8476
5TH	Top	D+L	Combination				3271.975	0	0	0
5TH	Bottom	D+L	Combination				3445.919	0	0	0
5TH	Top	D+.5L	Combination				2531.749	0	0	0
5TH	Bottom	D+.5L	Combination				2700.967	0	0	0
5TH	Top	D+.5L+.7W	Combination	Max			2531.749	0	75.085	4166.1538
5TH	Bottom	D+.5L+.7W	Combination	Max			2700.967	0	75.085	4166.1538
5TH	Top	D+.5L+.7W	Combination	Min			2531.749	-75.892	-104.673	-3698.5308
5TH	Bottom	D+.5L+.7W	Combination	Min			2700.967	-75.892	-104.673	-3698.5308
5TH	Top	D+.5L-.7W	Combination	Max			2531.749	75.892	104.673	3698.5308
5TH	Bottom	D+.5L-.7W	Combination	Max			2700.967	75.892	104.673	3698.5308
5TH	Top	D+.5L-.7W	Combination	Min			2531.749	0	-75.085	-4166.1538
5TH	Bottom	D+.5L-.7W	Combination	Min			2700.967	0	-75.085	-4166.1538
5TH	Top	DConS1	Combination				3285.118	0	0	0
5TH	Bottom	DConS1	Combination				3519.857	0	0	0
5TH	Top	DConS2	Combination				5184.538	0	0	0
5TH	Bottom	DConS2	Combination				5400.868	0	0	0
5TH	Top	DConS3	Combination				5315.715	0	0	0
5TH	Bottom	DConS3	Combination				5532.045	0	0	0
5TH	Top	DConS4	Combination				4716.034	0	0	0
5TH	Bottom	DConS4	Combination				4926.692	0	0	0
5TH	Top	DConS5	Combination	Max			4296.267	0	171.623	9522.6372

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
5TH	Bottom	DConS5	Combination	Max			4506.925	0	171.623	9522.6372
5TH	Top	DConS5	Combination	Min			4296.267	-173.468	-239.254	-8453.7848
5TH	Bottom	DConS5	Combination	Min			4506.925	-173.468	-239.254	-8453.7848
5TH	Top	DConS6	Combination	Max			4296.267	173.468	239.254	8453.7848
5TH	Bottom	DConS6	Combination	Max			4506.925	173.468	239.254	8453.7848
5TH	Top	DConS6	Combination	Min			4296.267	0	-171.623	-9522.6372
5TH	Bottom	DConS6	Combination	Min			4506.925	0	-171.623	-9522.6372
5TH	Top	DConS7	Combination	Max			4427.444	0	171.623	9522.6372
5TH	Bottom	DConS7	Combination	Max			4638.102	0	171.623	9522.6372
5TH	Top	DConS7	Combination	Min			4427.444	-173.468	-239.254	-8453.7848
5TH	Bottom	DConS7	Combination	Min			4638.102	-173.468	-239.254	-8453.7848
5TH	Top	DConS8	Combination	Max			4427.444	173.468	239.254	8453.7848
5TH	Bottom	DConS8	Combination	Max			4638.102	173.468	239.254	8453.7848
5TH	Top	DConS8	Combination	Min			4427.444	0	-171.623	-9522.6372
5TH	Bottom	DConS8	Combination	Min			4638.102	0	-171.623	-9522.6372
5TH	Top	DConS9	Combination	Max			3235.582	0	85.811	4761.3186
5TH	Bottom	DConS9	Combination	Max			3436.787	0	85.811	4761.3186
5TH	Top	DConS9	Combination	Min			3235.582	-86.734	-119.627	-4226.8924
5TH	Bottom	DConS9	Combination	Min			3436.787	-86.734	-119.627	-4226.8924
5TH	Top	DConS10	Combination	Max			3235.582	86.734	119.627	4226.8924
5TH	Bottom	DConS10	Combination	Max			3436.787	86.734	119.627	4226.8924
5TH	Top	DConS10	Combination	Min			3235.582	0	-85.811	-4761.3186
5TH	Bottom	DConS10	Combination	Min			3436.787	0	-85.811	-4761.3186
5TH	Top	DConS11	Combination	Max			2815.815	0	85.811	4761.3186
5TH	Bottom	DConS11	Combination	Max			3017.02	0	85.811	4761.3186
5TH	Top	DConS11	Combination	Min			2815.815	-86.734	-119.627	-4226.8924
5TH	Bottom	DConS11	Combination	Min			3017.02	-86.734	-119.627	-4226.8924
5TH	Top	DConS12	Combination	Max			2815.815	86.734	119.627	4226.8924
5TH	Bottom	DConS12	Combination	Max			3017.02	86.734	119.627	4226.8924
5TH	Top	DConS12	Combination	Min			2815.815	0	-85.811	-4761.3186
5TH	Bottom	DConS12	Combination	Min			3017.02	0	-85.811	-4761.3186
5TH	Top	DConS13	Combination	Max			2111.861	0	171.623	9522.6372
5TH	Bottom	DConS13	Combination	Max			2262.765	0	171.623	9522.6372
5TH	Top	DConS13	Combination	Min			2111.861	-173.468	-239.254	-8453.7848
5TH	Bottom	DConS13	Combination	Min			2262.765	-173.468	-239.254	-8453.7848
5TH	Top	DConS14	Combination	Max			2111.861	173.468	239.254	8453.7848
5TH	Bottom	DConS14	Combination	Max			2262.765	173.468	239.254	8453.7848
5TH	Top	DConS14	Combination	Min			2111.861	0	-171.623	-9522.6372
5TH	Bottom	DConS14	Combination	Min			2262.765	0	-171.623	-9522.6372
5TH	Top	DConS15	Combination	Max			4530.918	0	0	4217.8476
5TH	Bottom	DConS15	Combination	Max			4758.343	0	0	4217.8476
5TH	Top	DConS15	Combination	Min			4530.918	-149.071	-149.071	-5599.9973
5TH	Bottom	DConS15	Combination	Min			4758.343	-149.071	-149.071	-5599.9973
5TH	Top	DConS16	Combination	Max			4530.918	149.071	149.071	5599.9973

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
5TH	Bottom	DConS16	Combination	Max			4758.343	149.071	149.071	5599.9973
5TH	Top	DConS16	Combination	Min			4530.918	0	0	-4217.8476
5TH	Bottom	DConS16	Combination	Min			4758.343	0	0	-4217.8476
5TH	Top	DConS17	Combination	Max			3050.466	0	0	4217.8476
5TH	Bottom	DConS17	Combination	Max			3268.438	0	0	4217.8476
5TH	Top	DConS17	Combination	Min			3050.466	-149.071	-149.071	-5599.9973
5TH	Bottom	DConS17	Combination	Min			3268.438	-149.071	-149.071	-5599.9973
5TH	Top	DConS18	Combination	Max			3050.466	149.071	149.071	5599.9973
5TH	Bottom	DConS18	Combination	Max			3268.438	149.071	149.071	5599.9973
5TH	Top	DConS18	Combination	Min			3050.466	0	0	-4217.8476
5TH	Bottom	DConS18	Combination	Min			3268.438	0	0	-4217.8476
5TH	Top	DConS19	Combination	Max			1877.21	0	0	4217.8476
5TH	Bottom	DConS19	Combination	Max			2011.347	0	0	4217.8476
5TH	Top	DConS19	Combination	Min			1877.21	-149.071	-149.071	-5599.9973
5TH	Bottom	DConS19	Combination	Min			2011.347	-149.071	-149.071	-5599.9973
5TH	Top	DConS20	Combination	Max			1877.21	149.071	149.071	5599.9973
5TH	Bottom	DConS20	Combination	Max			2011.347	149.071	149.071	5599.9973
5TH	Top	DConS20	Combination	Min			1877.21	0	0	-4217.8476
5TH	Bottom	DConS20	Combination	Min			2011.347	0	0	-4217.8476
4TH	Top	Dead	LinStatic				2280.527	0	0	0
4TH	Bottom	Dead	LinStatic				2445.018	0	0	0
4TH	Top	Live	LinStatic				1923.753	0	0	0
4TH	Bottom	Live	LinStatic				1933.206	0	0	0
4TH	Top	PW	LinStatic				341.102	0	0	0
4TH	Bottom	PW	LinStatic				341.925	0	0	0
4TH	Top	FF	LinStatic				353.43	0	0	0
4TH	Bottom	FF	LinStatic				355.787	0	0	0
4TH	Top	ROOF LIVE	LinStatic				262.354	0	0	0
4TH	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
4TH	Top	EQ	LinStatic	Max			0	0	0	4893.118
4TH	Bottom	EQ	LinStatic	Max			0	0	0	4893.118
4TH	Top	EQ	LinStatic	Min			0	-172.966	-172.966	-6495.7343
4TH	Bottom	EQ	LinStatic	Min			0	-172.966	-172.966	-6495.7343
4TH	Top	wind	LinStatic	Max			0	0	131.418	7291.8368
4TH	Bottom	wind	LinStatic	Max			0	0	131.418	7291.8368
4TH	Top	wind	LinStatic	Min			0	-132.831	-183.6	-6487.3109
4TH	Bottom	wind	LinStatic	Min			0	-132.831	-183.6	-6487.3109
4TH	Top	1.4D	Combination				3192.737	0	0	0
4TH	Bottom	1.4D	Combination				3423.025	0	0	0
4TH	Top	1.2D+1.6L+.5Lr	Combination				5945.814	0	0	0
4TH	Bottom	1.2D+1.6L+.5Lr	Combination				6158.328	0	0	0
4TH	Top	1.2D+1.6Lr+L	Combination				5080.152	0	0	0
4TH	Bottom	1.2D+1.6Lr+L	Combination				5286.994	0	0	0
4TH	Top	1.2D+1.6Lr+.8W	Combination	Max			3156.399	0	105.134	5833.4695

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
4TH	Bottom	1.2D+1.6Lr+.8W	Combination	Max			3353.788	0	105.134	5833.4695
4TH	Top	1.2D+1.6Lr+.8W	Combination	Min			3156.399	-106.265	-146.88	-5189.8488
4TH	Bottom	1.2D+1.6Lr+.8W	Combination	Min			3353.788	-106.265	-146.88	-5189.8488
4TH	Top	1.2D+1.6Lr-.8W	Combination	Max			3156.399	106.265	146.88	5189.8488
4TH	Bottom	1.2D+1.6Lr-.8W	Combination	Max			3353.788	106.265	146.88	5189.8488
4TH	Top	1.2D+1.6Lr-.8W	Combination	Min			3156.399	0	-105.134	-5833.4695
4TH	Bottom	1.2D+1.6Lr-.8W	Combination	Min			3353.788	0	-105.134	-5833.4695
4TH	Top	1.2D+1.6W+L+.5Lr	Combination	Max			4791.562	0	210.269	11666.9389
4TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			4998.404	0	210.269	11666.9389
4TH	Top	1.2D+1.6W+L+.5Lr	Combination	Min			4791.562	-212.53	-293.759	-10379.6975
4TH	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			4998.404	-212.53	-293.759	-10379.6975
4TH	Top	1.2D-1.6W+L+.5Lr	Combination	Max			4791.562	212.53	293.759	10379.6975
4TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			4998.404	212.53	293.759	10379.6975
4TH	Top	1.2D-1.6W+L+.5Lr	Combination	Min			4791.562	0	-210.269	-11666.9389
4TH	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			4998.404	0	-210.269	-11666.9389
4TH	Top	1.246D+1E+1L	Combination	Max			4765.289	0	0	4893.118
4TH	Bottom	1.246D+1E+1L	Combination	Max			4979.698	0	0	4893.118
4TH	Top	1.246D+1E+1L	Combination	Min			4765.289	-172.966	-172.966	-6495.7343
4TH	Bottom	1.246D+1E+1L	Combination	Min			4979.698	-172.966	-172.966	-6495.7343
4TH	Top	1.246D-1E+1L	Combination	Max			4765.289	172.966	172.966	6495.7343
4TH	Bottom	1.246D-1E+1L	Combination	Max			4979.698	172.966	172.966	6495.7343
4TH	Top	1.246D-1E+1L	Combination	Min			4765.289	0	0	-4893.118
4TH	Bottom	1.246D-1E+1L	Combination	Min			4979.698	0	0	-4893.118
4TH	Top	0.9D+1.6W	Combination	Max			2052.474	0	210.269	11666.9389
4TH	Bottom	0.9D+1.6W	Combination	Max			2200.516	0	210.269	11666.9389
4TH	Top	0.9D+1.6W	Combination	Min			2052.474	-212.53	-293.759	-10379.6975
4TH	Bottom	0.9D+1.6W	Combination	Min			2200.516	-212.53	-293.759	-10379.6975
4TH	Top	0.9D-1.6W	Combination	Max			2052.474	212.53	293.759	10379.6975
4TH	Bottom	0.9D-1.6W	Combination	Max			2200.516	212.53	293.759	10379.6975
4TH	Top	0.9D-1.6W	Combination	Min			2052.474	0	-210.269	-11666.9389
4TH	Bottom	0.9D-1.6W	Combination	Min			2200.516	0	-210.269	-11666.9389
4TH	Top	.854D+E	Combination	Max			1947.57	0	0	4893.118
4TH	Bottom	.854D+E	Combination	Max			2088.045	0	0	4893.118
4TH	Top	.854D+E	Combination	Min			1947.57	-172.966	-172.966	-6495.7343
4TH	Bottom	.854D+E	Combination	Min			2088.045	-172.966	-172.966	-6495.7343
4TH	Top	.854D-E	Combination	Max			1947.57	172.966	172.966	6495.7343
4TH	Bottom	.854D-E	Combination	Max			2088.045	172.966	172.966	6495.7343
4TH	Top	.854D-E	Combination	Min			1947.57	0	0	-4893.118
4TH	Bottom	.854D-E	Combination	Min			2088.045	0	0	-4893.118
4TH	Top	D+L	Combination				4204.279	0	0	0
4TH	Bottom	D+L	Combination				4378.224	0	0	0
4TH	Top	D+.5L	Combination				3242.403	0	0	0
4TH	Bottom	D+.5L	Combination				3411.621	0	0	0
4TH	Top	D+.5L+.7W	Combination	Max			3242.403	0	91.993	5104.2858

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
4TH	Bottom	D+.5L+.7W	Combination	Max			3411.621	0	91.993	5104.2858
4TH	Top	D+.5L+.7W	Combination	Min			3242.403	-92.982	-128.52	-4541.1177
4TH	Bottom	D+.5L+.7W	Combination	Min			3411.621	-92.982	-128.52	-4541.1177
4TH	Top	D+.5L-.7W	Combination	Max			3242.403	92.982	128.52	4541.1177
4TH	Bottom	D+.5L-.7W	Combination	Max			3411.621	92.982	128.52	4541.1177
4TH	Top	D+.5L-.7W	Combination	Min			3242.403	0	-91.993	-5104.2858
4TH	Bottom	D+.5L-.7W	Combination	Min			3411.621	0	-91.993	-5104.2858
4TH	Top	DConS1	Combination				4165.082	0	0	0
4TH	Bottom	DConS1	Combination				4399.821	0	0	0
4TH	Top	DConS2	Combination				6648.075	0	0	0
4TH	Bottom	DConS2	Combination				6864.405	0	0	0
4TH	Top	DConS3	Combination				6779.252	0	0	0
4TH	Bottom	DConS3	Combination				6995.582	0	0	0
4TH	Top	DConS4	Combination				5913.59	0	0	0
4TH	Bottom	DConS4	Combination				6124.248	0	0	0
4TH	Top	DConS5	Combination	Max			5493.823	0	210.269	11666.9389
4TH	Bottom	DConS5	Combination	Max			5704.481	0	210.269	11666.9389
4TH	Top	DConS5	Combination	Min			5493.823	-212.53	-293.759	-10379.6975
4TH	Bottom	DConS5	Combination	Min			5704.481	-212.53	-293.759	-10379.6975
4TH	Top	DConS6	Combination	Max			5493.823	212.53	293.759	10379.6975
4TH	Bottom	DConS6	Combination	Max			5704.481	212.53	293.759	10379.6975
4TH	Top	DConS6	Combination	Min			5493.823	0	-210.269	-11666.9389
4TH	Bottom	DConS6	Combination	Min			5704.481	0	-210.269	-11666.9389
4TH	Top	DConS7	Combination	Max			5625	0	210.269	11666.9389
4TH	Bottom	DConS7	Combination	Max			5835.658	0	210.269	11666.9389
4TH	Top	DConS7	Combination	Min			5625	-212.53	-293.759	-10379.6975
4TH	Bottom	DConS7	Combination	Min			5835.658	-212.53	-293.759	-10379.6975
4TH	Top	DConS8	Combination	Max			5625	212.53	293.759	10379.6975
4TH	Bottom	DConS8	Combination	Max			5835.658	212.53	293.759	10379.6975
4TH	Top	DConS8	Combination	Min			5625	0	-210.269	-11666.9389
4TH	Bottom	DConS8	Combination	Min			5835.658	0	-210.269	-11666.9389
4TH	Top	DConS9	Combination	Max			3989.837	0	105.134	5833.4695
4TH	Bottom	DConS9	Combination	Max			4191.042	0	105.134	5833.4695
4TH	Top	DConS9	Combination	Min			3989.837	-106.265	-146.88	-5189.8488
4TH	Bottom	DConS9	Combination	Min			4191.042	-106.265	-146.88	-5189.8488
4TH	Top	DConS10	Combination	Max			3989.837	106.265	146.88	5189.8488
4TH	Bottom	DConS10	Combination	Max			4191.042	106.265	146.88	5189.8488
4TH	Top	DConS10	Combination	Min			3989.837	0	-105.134	-5833.4695
4TH	Bottom	DConS10	Combination	Min			4191.042	0	-105.134	-5833.4695
4TH	Top	DConS11	Combination	Max			3570.07	0	105.134	5833.4695
4TH	Bottom	DConS11	Combination	Max			3771.275	0	105.134	5833.4695
4TH	Top	DConS11	Combination	Min			3570.07	-106.265	-146.88	-5189.8488
4TH	Bottom	DConS11	Combination	Min			3771.275	-106.265	-146.88	-5189.8488
4TH	Top	DConS12	Combination	Max			3570.07	106.265	146.88	5189.8488

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
4TH	Bottom	DConS12	Combination	Max			3771.275	106.265	146.88	5189.8488
4TH	Top	DConS12	Combination	Min			3570.07	0	-105.134	-5833.4695
4TH	Bottom	DConS12	Combination	Min			3771.275	0	-105.134	-5833.4695
4TH	Top	DConS13	Combination	Max			2677.553	0	210.269	11666.9389
4TH	Bottom	DConS13	Combination	Max			2828.456	0	210.269	11666.9389
4TH	Top	DConS13	Combination	Min			2677.553	-212.53	-293.759	-10379.6975
4TH	Bottom	DConS13	Combination	Min			2828.456	-212.53	-293.759	-10379.6975
4TH	Top	DConS14	Combination	Max			2677.553	212.53	293.759	10379.6975
4TH	Bottom	DConS14	Combination	Max			2828.456	212.53	293.759	10379.6975
4TH	Top	DConS14	Combination	Min			2677.553	0	-210.269	-11666.9389
4TH	Bottom	DConS14	Combination	Min			2828.456	0	-210.269	-11666.9389
4TH	Top	DConS15	Combination	Max			5791.329	0	0	4893.118
4TH	Bottom	DConS15	Combination	Max			6018.754	0	0	4893.118
4TH	Top	DConS15	Combination	Min			5791.329	-172.966	-172.966	-6495.7343
4TH	Bottom	DConS15	Combination	Min			6018.754	-172.966	-172.966	-6495.7343
4TH	Top	DConS16	Combination	Max			5791.329	172.966	172.966	6495.7343
4TH	Bottom	DConS16	Combination	Max			6018.754	172.966	172.966	6495.7343
4TH	Top	DConS16	Combination	Min			5791.329	0	0	-4893.118
4TH	Bottom	DConS16	Combination	Min			6018.754	0	0	-4893.118
4TH	Top	DConS17	Combination	Max			3867.576	0	0	4893.118
4TH	Bottom	DConS17	Combination	Max			4085.548	0	0	4893.118
4TH	Top	DConS17	Combination	Min			3867.576	-172.966	-172.966	-6495.7343
4TH	Bottom	DConS17	Combination	Min			4085.548	-172.966	-172.966	-6495.7343
4TH	Top	DConS18	Combination	Max			3867.576	172.966	172.966	6495.7343
4TH	Bottom	DConS18	Combination	Max			4085.548	172.966	172.966	6495.7343
4TH	Top	DConS18	Combination	Min			3867.576	0	0	-4893.118
4TH	Bottom	DConS18	Combination	Min			4085.548	0	0	-4893.118
4TH	Top	DConS19	Combination	Max			2380.047	0	0	4893.118
4TH	Bottom	DConS19	Combination	Max			2514.183	0	0	4893.118
4TH	Top	DConS19	Combination	Min			2380.047	-172.966	-172.966	-6495.7343
4TH	Bottom	DConS19	Combination	Min			2514.183	-172.966	-172.966	-6495.7343
4TH	Top	DConS20	Combination	Max			2380.047	172.966	172.966	6495.7343
4TH	Bottom	DConS20	Combination	Max			2514.183	172.966	172.966	6495.7343
4TH	Top	DConS20	Combination	Min			2380.047	0	0	-4893.118
4TH	Bottom	DConS20	Combination	Min			2514.183	0	0	-4893.118
3RD	Top	Dead	LinStatic				2769.53	0	0	0
3RD	Bottom	Dead	LinStatic				2934.021	0	0	0
3RD	Top	Live	LinStatic				2367.054	0	0	0
3RD	Bottom	Live	LinStatic				2376.507	0	0	0
3RD	Top	PW	LinStatic				409.487	0	0	0
3RD	Bottom	PW	LinStatic				410.31	0	0	0
3RD	Top	FF	LinStatic				424.587	0	0	0
3RD	Bottom	FF	LinStatic				426.944	0	0	0
3RD	Top	ROOF LIVE	LinStatic				262.354	0	0	0

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
3RD	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
3RD	Top	EQ	LinStatic	Max			0	0	0	5400.4847
3RD	Bottom	EQ	LinStatic	Max			0	0	0	5400.4847
3RD	Top	EQ	LinStatic	Min			0	-190.92	-190.92	-7168.7491
3RD	Bottom	EQ	LinStatic	Min			0	-190.92	-190.92	-7168.7491
3RD	Top	wind	LinStatic	Max			0	0	154.388	8566.3635
3RD	Bottom	wind	LinStatic	Max			0	0	154.388	8566.3635
3RD	Top	wind	LinStatic	Min			0	-156.048	-216.088	-7635.2541
3RD	Bottom	wind	LinStatic	Min			0	-156.048	-216.088	-7635.2541
3RD	Top	1.4D	Combination				3877.342	0	0	0
3RD	Bottom	1.4D	Combination				4107.63	0	0	0
3RD	Top	1.2D+1.6L+.5Lr	Combination				7241.9	0	0	0
3RD	Bottom	1.2D+1.6L+.5Lr	Combination				7454.414	0	0	0
3RD	Top	1.2D+1.6Lr+L	Combination				6110.257	0	0	0
3RD	Bottom	1.2D+1.6Lr+L	Combination				6317.1	0	0	0
3RD	Top	1.2D+1.6Lr+.8W	Combination	Max			3743.203	0	123.511	6853.0908
3RD	Bottom	1.2D+1.6Lr+.8W	Combination	Max			3940.593	0	123.511	6853.0908
3RD	Top	1.2D+1.6Lr+.8W	Combination	Min			3743.203	-124.839	-172.87	-6108.2033
3RD	Bottom	1.2D+1.6Lr+.8W	Combination	Min			3940.593	-124.839	-172.87	-6108.2033
3RD	Top	1.2D+1.6Lr-.8W	Combination	Max			3743.203	124.839	172.87	6108.2033
3RD	Bottom	1.2D+1.6Lr-.8W	Combination	Max			3940.593	124.839	172.87	6108.2033
3RD	Top	1.2D+1.6Lr-.8W	Combination	Min			3743.203	0	-123.511	-6853.0908
3RD	Bottom	1.2D+1.6Lr-.8W	Combination	Min			3940.593	0	-123.511	-6853.0908
3RD	Top	1.2D+1.6W+L+.5Lr	Combination	Max			5821.667	0	247.021	13706.1816
3RD	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			6028.51	0	247.021	13706.1816
3RD	Top	1.2D+1.6W+L+.5Lr	Combination	Min			5821.667	-249.677	-345.741	-12216.4066
3RD	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			6028.51	-249.677	-345.741	-12216.4066
3RD	Top	1.2D-1.6W+L+.5Lr	Combination	Max			5821.667	249.677	345.741	12216.4066
3RD	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			6028.51	249.677	345.741	12216.4066
3RD	Top	1.2D-1.6W+L+.5Lr	Combination	Min			5821.667	0	-247.021	-13706.1816
3RD	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			6028.51	0	-247.021	-13706.1816
3RD	Top	1.246D+1E+1L	Combination	Max			5817.889	0	0	5400.4847
3RD	Bottom	1.246D+1E+1L	Combination	Max			6032.298	0	0	5400.4847
3RD	Top	1.246D+1E+1L	Combination	Min			5817.889	-190.92	-190.92	-7168.7491
3RD	Bottom	1.246D+1E+1L	Combination	Min			6032.298	-190.92	-190.92	-7168.7491
3RD	Top	1.246D-1E+1L	Combination	Max			5817.889	190.92	190.92	7168.7491
3RD	Bottom	1.246D-1E+1L	Combination	Max			6032.298	190.92	190.92	7168.7491
3RD	Top	1.246D-1E+1L	Combination	Min			5817.889	0	0	-5400.4847
3RD	Bottom	1.246D-1E+1L	Combination	Min			6032.298	0	0	-5400.4847
3RD	Top	0.9D+1.6W	Combination	Max			2492.577	0	247.021	13706.1816
3RD	Bottom	0.9D+1.6W	Combination	Max			2640.619	0	247.021	13706.1816
3RD	Top	0.9D+1.6W	Combination	Min			2492.577	-249.677	-345.741	-12216.4066
3RD	Bottom	0.9D+1.6W	Combination	Min			2640.619	-249.677	-345.741	-12216.4066
3RD	Top	0.9D-1.6W	Combination	Max			2492.577	249.677	345.741	12216.4066

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
3RD	Bottom	0.9D-1.6W	Combination	Max			2640.619	249.677	345.741	12216.4066
3RD	Top	0.9D-1.6W	Combination	Min			2492.577	0	-247.021	-13706.1816
3RD	Bottom	0.9D-1.6W	Combination	Min			2640.619	0	-247.021	-13706.1816
3RD	Top	.854D+E	Combination	Max			2365.179	0	0	5400.4847
3RD	Bottom	.854D+E	Combination	Max			2505.654	0	0	5400.4847
3RD	Top	.854D+E	Combination	Min			2365.179	-190.92	-190.92	-7168.7491
3RD	Bottom	.854D+E	Combination	Min			2505.654	-190.92	-190.92	-7168.7491
3RD	Top	.854D-E	Combination	Max			2365.179	190.92	190.92	7168.7491
3RD	Bottom	.854D-E	Combination	Max			2505.654	190.92	190.92	7168.7491
3RD	Top	.854D-E	Combination	Min			2365.179	0	0	-5400.4847
3RD	Bottom	.854D-E	Combination	Min			2505.654	0	0	-5400.4847
3RD	Top	D+L	Combination				5136.584	0	0	0
3RD	Bottom	D+L	Combination				5310.528	0	0	0
3RD	Top	D+.5L	Combination				3953.057	0	0	0
3RD	Bottom	D+.5L	Combination				4122.275	0	0	0
3RD	Top	D+.5L+.7W	Combination	Max			3953.057	0	108.072	5996.4545
3RD	Bottom	D+.5L+.7W	Combination	Max			4122.275	0	108.072	5996.4545
3RD	Top	D+.5L+.7W	Combination	Min			3953.057	-109.234	-151.262	-5344.6779
3RD	Bottom	D+.5L+.7W	Combination	Min			4122.275	-109.234	-151.262	-5344.6779
3RD	Top	D+.5L-.7W	Combination	Max			3953.057	109.234	151.262	5344.6779
3RD	Bottom	D+.5L-.7W	Combination	Max			4122.275	109.234	151.262	5344.6779
3RD	Top	D+.5L-.7W	Combination	Min			3953.057	0	-108.072	-5996.4545
3RD	Bottom	D+.5L-.7W	Combination	Min			4122.275	0	-108.072	-5996.4545
3RD	Top	DConS1	Combination				5045.046	0	0	0
3RD	Bottom	DConS1	Combination				5279.785	0	0	0
3RD	Top	DConS2	Combination				8111.612	0	0	0
3RD	Bottom	DConS2	Combination				8327.942	0	0	0
3RD	Top	DConS3	Combination				8242.789	0	0	0
3RD	Bottom	DConS3	Combination				8459.119	0	0	0
3RD	Top	DConS4	Combination				7111.146	0	0	0
3RD	Bottom	DConS4	Combination				7321.804	0	0	0
3RD	Top	DConS5	Combination	Max			6691.379	0	247.021	13706.1816
3RD	Bottom	DConS5	Combination	Max			6902.037	0	247.021	13706.1816
3RD	Top	DConS5	Combination	Min			6691.379	-249.677	-345.741	-12216.4066
3RD	Bottom	DConS5	Combination	Min			6902.037	-249.677	-345.741	-12216.4066
3RD	Top	DConS6	Combination	Max			6691.379	249.677	345.741	12216.4066
3RD	Bottom	DConS6	Combination	Max			6902.037	249.677	345.741	12216.4066
3RD	Top	DConS6	Combination	Min			6691.379	0	-247.021	-13706.1816
3RD	Bottom	DConS6	Combination	Min			6902.037	0	-247.021	-13706.1816
3RD	Top	DConS7	Combination	Max			6822.556	0	247.021	13706.1816
3RD	Bottom	DConS7	Combination	Max			7033.215	0	247.021	13706.1816
3RD	Top	DConS7	Combination	Min			6822.556	-249.677	-345.741	-12216.4066
3RD	Bottom	DConS7	Combination	Min			7033.215	-249.677	-345.741	-12216.4066
3RD	Top	DConS8	Combination	Max			6822.556	249.677	345.741	12216.4066

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
3RD	Bottom	DConS8	Combination	Max			7033.215	249.677	345.741	12216.4066
3RD	Top	DConS8	Combination	Min			6822.556	0	-247.021	-13706.1816
3RD	Bottom	DConS8	Combination	Min			7033.215	0	-247.021	-13706.1816
3RD	Top	DConS9	Combination	Max			4744.092	0	123.511	6853.0908
3RD	Bottom	DConS9	Combination	Max			4945.297	0	123.511	6853.0908
3RD	Top	DConS9	Combination	Min			4744.092	-124.839	-172.87	-6108.2033
3RD	Bottom	DConS9	Combination	Min			4945.297	-124.839	-172.87	-6108.2033
3RD	Top	DConS10	Combination	Max			4744.092	124.839	172.87	6108.2033
3RD	Bottom	DConS10	Combination	Max			4945.297	124.839	172.87	6108.2033
3RD	Top	DConS10	Combination	Min			4744.092	0	-123.511	-6853.0908
3RD	Bottom	DConS10	Combination	Min			4945.297	0	-123.511	-6853.0908
3RD	Top	DConS11	Combination	Max			4324.325	0	123.511	6853.0908
3RD	Bottom	DConS11	Combination	Max			4525.53	0	123.511	6853.0908
3RD	Top	DConS11	Combination	Min			4324.325	-124.839	-172.87	-6108.2033
3RD	Bottom	DConS11	Combination	Min			4525.53	-124.839	-172.87	-6108.2033
3RD	Top	DConS12	Combination	Max			4324.325	124.839	172.87	6108.2033
3RD	Bottom	DConS12	Combination	Max			4525.53	124.839	172.87	6108.2033
3RD	Top	DConS12	Combination	Min			4324.325	0	-123.511	-6853.0908
3RD	Bottom	DConS12	Combination	Min			4525.53	0	-123.511	-6853.0908
3RD	Top	DConS13	Combination	Max			3243.244	0	247.021	13706.1816
3RD	Bottom	DConS13	Combination	Max			3394.148	0	247.021	13706.1816
3RD	Top	DConS13	Combination	Min			3243.244	-249.677	-345.741	-12216.4066
3RD	Bottom	DConS13	Combination	Min			3394.148	-249.677	-345.741	-12216.4066
3RD	Top	DConS14	Combination	Max			3243.244	249.677	345.741	12216.4066
3RD	Bottom	DConS14	Combination	Max			3394.148	249.677	345.741	12216.4066
3RD	Top	DConS14	Combination	Min			3243.244	0	-247.021	-13706.1816
3RD	Bottom	DConS14	Combination	Min			3394.148	0	-247.021	-13706.1816
3RD	Top	DConS15	Combination	Max			7051.74	0	0	5400.4847
3RD	Bottom	DConS15	Combination	Max			7279.165	0	0	5400.4847
3RD	Top	DConS15	Combination	Min			7051.74	-190.92	-190.92	-7168.7491
3RD	Bottom	DConS15	Combination	Min			7279.165	-190.92	-190.92	-7168.7491
3RD	Top	DConS16	Combination	Max			7051.74	190.92	190.92	7168.7491
3RD	Bottom	DConS16	Combination	Max			7279.165	190.92	190.92	7168.7491
3RD	Top	DConS16	Combination	Min			7051.74	0	0	-5400.4847
3RD	Bottom	DConS16	Combination	Min			7279.165	0	0	-5400.4847
3RD	Top	DConS17	Combination	Max			4684.685	0	0	5400.4847
3RD	Bottom	DConS17	Combination	Max			4902.658	0	0	5400.4847
3RD	Top	DConS17	Combination	Min			4684.685	-190.92	-190.92	-7168.7491
3RD	Bottom	DConS17	Combination	Min			4902.658	-190.92	-190.92	-7168.7491
3RD	Top	DConS18	Combination	Max			4684.685	190.92	190.92	7168.7491
3RD	Bottom	DConS18	Combination	Max			4902.658	190.92	190.92	7168.7491
3RD	Top	DConS18	Combination	Min			4684.685	0	0	-5400.4847
3RD	Bottom	DConS18	Combination	Min			4902.658	0	0	-5400.4847
3RD	Top	DConS19	Combination	Max			2882.883	0	0	5400.4847

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
3RD	Bottom	DConS19	Combination	Max			3017.02	0	0	5400.4847
3RD	Top	DConS19	Combination	Min			2882.883	-190.92	-190.92	-7168.7491
3RD	Bottom	DConS19	Combination	Min			3017.02	-190.92	-190.92	-7168.7491
3RD	Top	DConS20	Combination	Max			2882.883	190.92	190.92	7168.7491
3RD	Bottom	DConS20	Combination	Max			3017.02	190.92	190.92	7168.7491
3RD	Top	DConS20	Combination	Min			2882.883	0	0	-5400.4847
3RD	Bottom	DConS20	Combination	Min			3017.02	0	0	-5400.4847
2ND	Top	Dead	LinStatic				3258.534	0	0	0
2ND	Bottom	Dead	LinStatic				3423.025	0	0	0
2ND	Top	Live	LinStatic				2810.355	0	0	0
2ND	Bottom	Live	LinStatic				2819.808	0	0	0
2ND	Top	PW	LinStatic				477.872	0	0	0
2ND	Bottom	PW	LinStatic				478.695	0	0	0
2ND	Top	FF	LinStatic				495.744	0	0	0
2ND	Bottom	FF	LinStatic				498.102	0	0	0
2ND	Top	ROOF LIVE	LinStatic				262.354	0	0	0
2ND	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
2ND	Top	EQ	LinStatic	Max			0	0	0	5748.662
2ND	Bottom	EQ	LinStatic	Max			0	0	0	5748.662
2ND	Top	EQ	LinStatic	Min			0	-203.241	-203.241	-7630.6015
2ND	Bottom	EQ	LinStatic	Min			0	-203.241	-203.241	-7630.6015
2ND	Top	wind	LinStatic	Max			0	0	176.612	9799.4922
2ND	Bottom	wind	LinStatic	Max			0	0	176.612	9799.4922
2ND	Top	wind	LinStatic	Min			0	-178.511	-247.582	-8748.047
2ND	Bottom	wind	LinStatic	Min			0	-178.511	-247.582	-8748.047
2ND	Top	1.4D	Combination				4561.947	0	0	0
2ND	Bottom	1.4D	Combination				4792.235	0	0	0
2ND	Top	1.2D+1.6L+.5Lr	Combination				8537.986	0	0	0
2ND	Bottom	1.2D+1.6L+.5Lr	Combination				8750.5	0	0	0
2ND	Top	1.2D+1.6Lr+L	Combination				7140.363	0	0	0
2ND	Bottom	1.2D+1.6Lr+L	Combination				7347.205	0	0	0
2ND	Top	1.2D+1.6Lr+.8W	Combination	Max			4330.008	0	141.29	7839.5938
2ND	Bottom	1.2D+1.6Lr+.8W	Combination	Max			4527.397	0	141.29	7839.5938
2ND	Top	1.2D+1.6Lr+.8W	Combination	Min			4330.008	-142.809	-198.065	-6998.4376
2ND	Bottom	1.2D+1.6Lr+.8W	Combination	Min			4527.397	-142.809	-198.065	-6998.4376
2ND	Top	1.2D+1.6Lr-.8W	Combination	Max			4330.008	142.809	198.065	6998.4376
2ND	Bottom	1.2D+1.6Lr-.8W	Combination	Max			4527.397	142.809	198.065	6998.4376
2ND	Top	1.2D+1.6Lr-.8W	Combination	Min			4330.008	0	-141.29	-7839.5938
2ND	Bottom	1.2D+1.6Lr-.8W	Combination	Min			4527.397	0	-141.29	-7839.5938
2ND	Top	1.2D+1.6W+L+.5Lr	Combination	Max			6851.773	0	282.58	15679.1876
2ND	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			7058.615	0	282.58	15679.1876
2ND	Top	1.2D+1.6W+L+.5Lr	Combination	Min			6851.773	-285.618	-396.131	-13996.8752
2ND	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			7058.615	-285.618	-396.131	-13996.8752
2ND	Top	1.2D-1.6W+L+.5Lr	Combination	Max			6851.773	285.618	396.131	13996.8752

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
2ND	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			7058.615	285.618	396.131	13996.8752
2ND	Top	1.2D-1.6W+L+.5Lr	Combination	Min			6851.773	0	-282.58	-15679.1876
2ND	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			7058.615	0	-282.58	-15679.1876
2ND	Top	1.246D+1E+1L	Combination	Max			6870.488	0	0	5748.662
2ND	Bottom	1.246D+1E+1L	Combination	Max			7084.897	0	0	5748.662
2ND	Top	1.246D+1E+1L	Combination	Min			6870.488	-203.241	-203.241	-7630.6015
2ND	Bottom	1.246D+1E+1L	Combination	Min			7084.897	-203.241	-203.241	-7630.6015
2ND	Top	1.246D-1E+1L	Combination	Max			6870.488	203.241	203.241	7630.6015
2ND	Bottom	1.246D-1E+1L	Combination	Max			7084.897	203.241	203.241	7630.6015
2ND	Top	1.246D-1E+1L	Combination	Min			6870.488	0	0	-5748.662
2ND	Bottom	1.246D-1E+1L	Combination	Min			7084.897	0	0	-5748.662
2ND	Top	0.9D+1.6W	Combination	Max			2932.68	0	282.58	15679.1876
2ND	Bottom	0.9D+1.6W	Combination	Max			3080.722	0	282.58	15679.1876
2ND	Top	0.9D+1.6W	Combination	Min			2932.68	-285.618	-396.131	-13996.8752
2ND	Bottom	0.9D+1.6W	Combination	Min			3080.722	-285.618	-396.131	-13996.8752
2ND	Top	0.9D-1.6W	Combination	Max			2932.68	285.618	396.131	13996.8752
2ND	Bottom	0.9D-1.6W	Combination	Max			3080.722	285.618	396.131	13996.8752
2ND	Top	0.9D-1.6W	Combination	Min			2932.68	0	-282.58	-15679.1876
2ND	Bottom	0.9D-1.6W	Combination	Min			3080.722	0	-282.58	-15679.1876
2ND	Top	.854D+E	Combination	Max			2782.788	0	0	5748.662
2ND	Bottom	.854D+E	Combination	Max			2923.263	0	0	5748.662
2ND	Top	.854D+E	Combination	Min			2782.788	-203.241	-203.241	-7630.6015
2ND	Bottom	.854D+E	Combination	Min			2923.263	-203.241	-203.241	-7630.6015
2ND	Top	.854D-E	Combination	Max			2782.788	203.241	203.241	7630.6015
2ND	Bottom	.854D-E	Combination	Max			2923.263	203.241	203.241	7630.6015
2ND	Top	.854D-E	Combination	Min			2782.788	0	0	-5748.662
2ND	Bottom	.854D-E	Combination	Min			2923.263	0	0	-5748.662
2ND	Top	D+L	Combination				6068.889	0	0	0
2ND	Bottom	D+L	Combination				6242.833	0	0	0
2ND	Top	D+.5L	Combination				4663.711	0	0	0
2ND	Bottom	D+.5L	Combination				4832.929	0	0	0
2ND	Top	D+.5L+.7W	Combination	Max			4663.711	0	123.629	6859.6446
2ND	Bottom	D+.5L+.7W	Combination	Max			4832.929	0	123.629	6859.6446
2ND	Top	D+.5L+.7W	Combination	Min			4663.711	-124.958	-173.307	-6123.6329
2ND	Bottom	D+.5L+.7W	Combination	Min			4832.929	-124.958	-173.307	-6123.6329
2ND	Top	D+.5L-.7W	Combination	Max			4663.711	124.958	173.307	6123.6329
2ND	Bottom	D+.5L-.7W	Combination	Max			4832.929	124.958	173.307	6123.6329
2ND	Top	D+.5L-.7W	Combination	Min			4663.711	0	-123.629	-6859.6446
2ND	Bottom	D+.5L-.7W	Combination	Min			4832.929	0	-123.629	-6859.6446
2ND	Top	DConS1	Combination				5925.01	0	0	0
2ND	Bottom	DConS1	Combination				6159.749	0	0	0
2ND	Top	DConS2	Combination				9575.149	0	0	0
2ND	Bottom	DConS2	Combination				9791.479	0	0	0
2ND	Top	DConS3	Combination				9706.326	0	0	0

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
2ND	Bottom	DConS3	Combination				9922.656	0	0	0
2ND	Top	DConS4	Combination				8308.703	0	0	0
2ND	Bottom	DConS4	Combination				8519.361	0	0	0
2ND	Top	DConS5	Combination	Max			7888.935	0	282.58	15679.1876
2ND	Bottom	DConS5	Combination	Max			8099.594	0	282.58	15679.1876
2ND	Top	DConS5	Combination	Min			7888.935	-285.618	-396.131	-13996.8752
2ND	Bottom	DConS5	Combination	Min			8099.594	-285.618	-396.131	-13996.8752
2ND	Top	DConS6	Combination	Max			7888.935	285.618	396.131	13996.8752
2ND	Bottom	DConS6	Combination	Max			8099.594	285.618	396.131	13996.8752
2ND	Top	DConS6	Combination	Min			7888.935	0	-282.58	-15679.1876
2ND	Bottom	DConS6	Combination	Min			8099.594	0	-282.58	-15679.1876
2ND	Top	DConS7	Combination	Max			8020.113	0	282.58	15679.1876
2ND	Bottom	DConS7	Combination	Max			8230.771	0	282.58	15679.1876
2ND	Top	DConS7	Combination	Min			8020.113	-285.618	-396.131	-13996.8752
2ND	Bottom	DConS7	Combination	Min			8230.771	-285.618	-396.131	-13996.8752
2ND	Top	DConS8	Combination	Max			8020.113	285.618	396.131	13996.8752
2ND	Bottom	DConS8	Combination	Max			8230.771	285.618	396.131	13996.8752
2ND	Top	DConS8	Combination	Min			8020.113	0	-282.58	-15679.1876
2ND	Bottom	DConS8	Combination	Min			8230.771	0	-282.58	-15679.1876
2ND	Top	DConS9	Combination	Max			5498.347	0	141.29	7839.5938
2ND	Bottom	DConS9	Combination	Max			5699.552	0	141.29	7839.5938
2ND	Top	DConS9	Combination	Min			5498.347	-142.809	-198.065	-6998.4376
2ND	Bottom	DConS9	Combination	Min			5699.552	-142.809	-198.065	-6998.4376
2ND	Top	DConS10	Combination	Max			5498.347	142.809	198.065	6998.4376
2ND	Bottom	DConS10	Combination	Max			5699.552	142.809	198.065	6998.4376
2ND	Top	DConS10	Combination	Min			5498.347	0	-141.29	-7839.5938
2ND	Bottom	DConS10	Combination	Min			5699.552	0	-141.29	-7839.5938
2ND	Top	DConS11	Combination	Max			5078.58	0	141.29	7839.5938
2ND	Bottom	DConS11	Combination	Max			5279.785	0	141.29	7839.5938
2ND	Top	DConS11	Combination	Min			5078.58	-142.809	-198.065	-6998.4376
2ND	Bottom	DConS11	Combination	Min			5279.785	-142.809	-198.065	-6998.4376
2ND	Top	DConS12	Combination	Max			5078.58	142.809	198.065	6998.4376
2ND	Bottom	DConS12	Combination	Max			5279.785	142.809	198.065	6998.4376
2ND	Top	DConS12	Combination	Min			5078.58	0	-141.29	-7839.5938
2ND	Bottom	DConS12	Combination	Min			5279.785	0	-141.29	-7839.5938
2ND	Top	DConS13	Combination	Max			3808.935	0	282.58	15679.1876
2ND	Bottom	DConS13	Combination	Max			3959.839	0	282.58	15679.1876
2ND	Top	DConS13	Combination	Min			3808.935	-285.618	-396.131	-13996.8752
2ND	Bottom	DConS13	Combination	Min			3959.839	-285.618	-396.131	-13996.8752
2ND	Top	DConS14	Combination	Max			3808.935	285.618	396.131	13996.8752
2ND	Bottom	DConS14	Combination	Max			3959.839	285.618	396.131	13996.8752
2ND	Top	DConS14	Combination	Min			3808.935	0	-282.58	-15679.1876
2ND	Bottom	DConS14	Combination	Min			3959.839	0	-282.58	-15679.1876
2ND	Top	DConS15	Combination	Max			8312.15	0	0	5748.662

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
2ND	Bottom	DConS15	Combination	Max			8539.576	0	0	5748.662
2ND	Top	DConS15	Combination	Min			8312.15	-203.241	-203.241	-7630.6015
2ND	Bottom	DConS15	Combination	Min			8539.576	-203.241	-203.241	-7630.6015
2ND	Top	DConS16	Combination	Max			8312.15	203.241	203.241	7630.6015
2ND	Bottom	DConS16	Combination	Max			8539.576	203.241	203.241	7630.6015
2ND	Top	DConS16	Combination	Min			8312.15	0	0	-5748.662
2ND	Bottom	DConS16	Combination	Min			8539.576	0	0	-5748.662
2ND	Top	DConS17	Combination	Max			5501.795	0	0	5748.662
2ND	Bottom	DConS17	Combination	Max			5719.767	0	0	5748.662
2ND	Top	DConS17	Combination	Min			5501.795	-203.241	-203.241	-7630.6015
2ND	Bottom	DConS17	Combination	Min			5719.767	-203.241	-203.241	-7630.6015
2ND	Top	DConS18	Combination	Max			5501.795	203.241	203.241	7630.6015
2ND	Bottom	DConS18	Combination	Max			5719.767	203.241	203.241	7630.6015
2ND	Top	DConS18	Combination	Min			5501.795	0	0	-5748.662
2ND	Bottom	DConS18	Combination	Min			5719.767	0	0	-5748.662
2ND	Top	DConS19	Combination	Max			3385.72	0	0	5748.662
2ND	Bottom	DConS19	Combination	Max			3519.857	0	0	5748.662
2ND	Top	DConS19	Combination	Min			3385.72	-203.241	-203.241	-7630.6015
2ND	Bottom	DConS19	Combination	Min			3519.857	-203.241	-203.241	-7630.6015
2ND	Top	DConS20	Combination	Max			3385.72	203.241	203.241	7630.6015
2ND	Bottom	DConS20	Combination	Max			3519.857	203.241	203.241	7630.6015
2ND	Top	DConS20	Combination	Min			3385.72	0	0	-5748.662
2ND	Bottom	DConS20	Combination	Min			3519.857	0	0	-5748.662
1ST	Top	Dead	LinStatic				3747.537	0	0	0
1ST	Bottom	Dead	LinStatic				3912.028	0	0	0
1ST	Top	Live	LinStatic				3253.657	0	0	0
1ST	Bottom	Live	LinStatic				3263.11	0	0	0
1ST	Top	PW	LinStatic				546.257	0	0	0
1ST	Bottom	PW	LinStatic				547.08	0	0	0
1ST	Top	FF	LinStatic				566.902	0	0	0
1ST	Bottom	FF	LinStatic				569.259	0	0	0
1ST	Top	ROOF LIVE	LinStatic				262.354	0	0	0
1ST	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
1ST	Top	EQ	LinStatic	Max			0	0	0	5948.9742
1ST	Bottom	EQ	LinStatic	Max			0	0	0	5948.9742
1ST	Top	EQ	LinStatic	Min			0	-210.329	-210.329	-7896.3128
1ST	Bottom	EQ	LinStatic	Min			0	-210.329	-210.329	-7896.3128
1ST	Top	wind	LinStatic	Max			0	0	187.707	10415.0861
1ST	Bottom	wind	LinStatic	Max			0	0	187.707	10415.0861
1ST	Top	wind	LinStatic	Min			0	-189.725	-263.305	-9303.6194
1ST	Bottom	wind	LinStatic	Min			0	-189.725	-263.305	-9303.6194
1ST	Top	1.4D	Combination				5246.552	0	0	0
1ST	Bottom	1.4D	Combination				5476.84	0	0	0
1ST	Top	1.2D+1.6L+.5Lr	Combination				9834.072	0	0	0

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
1ST	Bottom	1.2D+1.6L+.5Lr	Combination				10046.586	0	0	0
1ST	Top	1.2D+1.6Lr+L	Combination				8170.468	0	0	0
1ST	Bottom	1.2D+1.6Lr+L	Combination				8377.311	0	0	0
1ST	Top	1.2D+1.6Lr+.8W	Combination	Max			4916.812	0	150.166	8332.0689
1ST	Bottom	1.2D+1.6Lr+.8W	Combination	Max			5114.201	0	150.166	8332.0689
1ST	Top	1.2D+1.6Lr+.8W	Combination	Min			4916.812	-151.78	-210.644	-7442.8955
1ST	Bottom	1.2D+1.6Lr+.8W	Combination	Min			5114.201	-151.78	-210.644	-7442.8955
1ST	Top	1.2D+1.6Lr-.8W	Combination	Max			4916.812	151.78	210.644	7442.8955
1ST	Bottom	1.2D+1.6Lr-.8W	Combination	Max			5114.201	151.78	210.644	7442.8955
1ST	Top	1.2D+1.6Lr-.8W	Combination	Min			4916.812	0	-150.166	-8332.0689
1ST	Bottom	1.2D+1.6Lr-.8W	Combination	Min			5114.201	0	-150.166	-8332.0689
1ST	Top	1.2D+1.6W+L+.5Lr	Combination	Max			7881.878	0	300.331	16664.1377
1ST	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			8088.721	0	300.331	16664.1377
1ST	Top	1.2D+1.6W+L+.5Lr	Combination	Min			7881.878	-303.561	-421.288	-14885.7911
1ST	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			8088.721	-303.561	-421.288	-14885.7911
1ST	Top	1.2D-1.6W+L+.5Lr	Combination	Max			7881.878	303.561	421.288	14885.7911
1ST	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			8088.721	303.561	421.288	14885.7911
1ST	Top	1.2D-1.6W+L+.5Lr	Combination	Min			7881.878	0	-300.331	-16664.1377
1ST	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			8088.721	0	-300.331	-16664.1377
1ST	Top	1.246D+1E+1L	Combination	Max			7923.088	0	0	5948.9742
1ST	Bottom	1.246D+1E+1L	Combination	Max			8137.497	0	0	5948.9742
1ST	Top	1.246D+1E+1L	Combination	Min			7923.088	-210.329	-210.329	-7896.3128
1ST	Bottom	1.246D+1E+1L	Combination	Min			8137.497	-210.329	-210.329	-7896.3128
1ST	Top	1.246D-1E+1L	Combination	Max			7923.088	210.329	210.329	7896.3128
1ST	Bottom	1.246D-1E+1L	Combination	Max			8137.497	210.329	210.329	7896.3128
1ST	Top	1.246D-1E+1L	Combination	Min			7923.088	0	0	-5948.9742
1ST	Bottom	1.246D-1E+1L	Combination	Min			8137.497	0	0	-5948.9742
1ST	Top	0.9D+1.6W	Combination	Max			3372.783	0	300.331	16664.1377
1ST	Bottom	0.9D+1.6W	Combination	Max			3520.825	0	300.331	16664.1377
1ST	Top	0.9D+1.6W	Combination	Min			3372.783	-303.561	-421.288	-14885.7911
1ST	Bottom	0.9D+1.6W	Combination	Min			3520.825	-303.561	-421.288	-14885.7911
1ST	Top	0.9D-1.6W	Combination	Max			3372.783	303.561	421.288	14885.7911
1ST	Bottom	0.9D-1.6W	Combination	Max			3520.825	303.561	421.288	14885.7911
1ST	Top	0.9D-1.6W	Combination	Min			3372.783	0	-300.331	-16664.1377
1ST	Bottom	0.9D-1.6W	Combination	Min			3520.825	0	-300.331	-16664.1377
1ST	Top	.854D+E	Combination	Max			3200.397	0	0	5948.9742
1ST	Bottom	.854D+E	Combination	Max			3340.872	0	0	5948.9742
1ST	Top	.854D+E	Combination	Min			3200.397	-210.329	-210.329	-7896.3128
1ST	Bottom	.854D+E	Combination	Min			3340.872	-210.329	-210.329	-7896.3128
1ST	Top	.854D-E	Combination	Max			3200.397	210.329	210.329	7896.3128
1ST	Bottom	.854D-E	Combination	Max			3340.872	210.329	210.329	7896.3128
1ST	Top	.854D-E	Combination	Min			3200.397	0	0	-5948.9742
1ST	Bottom	.854D-E	Combination	Min			3340.872	0	0	-5948.9742
1ST	Top	D+L	Combination				7001.194	0	0	0

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
1ST	Bottom	D+L	Combination				7175.138	0	0	0
1ST	Top	D+.5L	Combination				5374.365	0	0	0
1ST	Bottom	D+.5L	Combination				5543.583	0	0	0
1ST	Top	D+.5L+.7W	Combination	Max			5374.365	0	131.395	7290.5602
1ST	Bottom	D+.5L+.7W	Combination	Max			5543.583	0	131.395	7290.5602
1ST	Top	D+.5L+.7W	Combination	Min			5374.365	-132.808	-184.314	-6512.5336
1ST	Bottom	D+.5L+.7W	Combination	Min			5543.583	-132.808	-184.314	-6512.5336
1ST	Top	D+.5L-.7W	Combination	Max			5374.365	132.808	184.314	6512.5336
1ST	Bottom	D+.5L-.7W	Combination	Max			5543.583	132.808	184.314	6512.5336
1ST	Top	D+.5L-.7W	Combination	Min			5374.365	0	-131.395	-7290.5602
1ST	Bottom	D+.5L-.7W	Combination	Min			5543.583	0	-131.395	-7290.5602
1ST	Top	DConS1	Combination				6804.974	0	0	0
1ST	Bottom	DConS1	Combination				7039.713	0	0	0
1ST	Top	DConS2	Combination				11038.686	0	0	0
1ST	Bottom	DConS2	Combination				11255.015	0	0	0
1ST	Top	DConS3	Combination				11169.863	0	0	0
1ST	Bottom	DConS3	Combination				11386.193	0	0	0
1ST	Top	DConS4	Combination				9506.259	0	0	0
1ST	Bottom	DConS4	Combination				9716.917	0	0	0
1ST	Top	DConS5	Combination	Max			9086.492	0	300.331	16664.1377
1ST	Bottom	DConS5	Combination	Max			9297.15	0	300.331	16664.1377
1ST	Top	DConS5	Combination	Min			9086.492	-303.561	-421.288	-14885.7911
1ST	Bottom	DConS5	Combination	Min			9297.15	-303.561	-421.288	-14885.7911
1ST	Top	DConS6	Combination	Max			9086.492	303.561	421.288	14885.7911
1ST	Bottom	DConS6	Combination	Max			9297.15	303.561	421.288	14885.7911
1ST	Top	DConS6	Combination	Min			9086.492	0	-300.331	-16664.1377
1ST	Bottom	DConS6	Combination	Min			9297.15	0	-300.331	-16664.1377
1ST	Top	DConS7	Combination	Max			9217.669	0	300.331	16664.1377
1ST	Bottom	DConS7	Combination	Max			9428.327	0	300.331	16664.1377
1ST	Top	DConS7	Combination	Min			9217.669	-303.561	-421.288	-14885.7911
1ST	Bottom	DConS7	Combination	Min			9428.327	-303.561	-421.288	-14885.7911
1ST	Top	DConS8	Combination	Max			9217.669	303.561	421.288	14885.7911
1ST	Bottom	DConS8	Combination	Max			9428.327	303.561	421.288	14885.7911
1ST	Top	DConS8	Combination	Min			9217.669	0	-300.331	-16664.1377
1ST	Bottom	DConS8	Combination	Min			9428.327	0	-300.331	-16664.1377
1ST	Top	DConS9	Combination	Max			6252.602	0	150.166	8332.0689
1ST	Bottom	DConS9	Combination	Max			6453.807	0	150.166	8332.0689
1ST	Top	DConS9	Combination	Min			6252.602	-151.78	-210.644	-7442.8955
1ST	Bottom	DConS9	Combination	Min			6453.807	-151.78	-210.644	-7442.8955
1ST	Top	DConS10	Combination	Max			6252.602	151.78	210.644	7442.8955
1ST	Bottom	DConS10	Combination	Max			6453.807	151.78	210.644	7442.8955
1ST	Top	DConS10	Combination	Min			6252.602	0	-150.166	-8332.0689
1ST	Bottom	DConS10	Combination	Min			6453.807	0	-150.166	-8332.0689
1ST	Top	DConS11	Combination	Max			5832.835	0	150.166	8332.0689

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
1ST	Bottom	DConS11	Combination	Max			6034.04	0	150.166	8332.0689
1ST	Top	DConS11	Combination	Min			5832.835	-151.78	-210.644	-7442.8955
1ST	Bottom	DConS11	Combination	Min			6034.04	-151.78	-210.644	-7442.8955
1ST	Top	DConS12	Combination	Max			5832.835	151.78	210.644	7442.8955
1ST	Bottom	DConS12	Combination	Max			6034.04	151.78	210.644	7442.8955
1ST	Top	DConS12	Combination	Min			5832.835	0	-150.166	-8332.0689
1ST	Bottom	DConS12	Combination	Min			6034.04	0	-150.166	-8332.0689
1ST	Top	DConS13	Combination	Max			4374.626	0	300.331	16664.1377
1ST	Bottom	DConS13	Combination	Max			4525.53	0	300.331	16664.1377
1ST	Top	DConS13	Combination	Min			4374.626	-303.561	-421.288	-14885.7911
1ST	Bottom	DConS13	Combination	Min			4525.53	-303.561	-421.288	-14885.7911
1ST	Top	DConS14	Combination	Max			4374.626	303.561	421.288	14885.7911
1ST	Bottom	DConS14	Combination	Max			4525.53	303.561	421.288	14885.7911
1ST	Top	DConS14	Combination	Min			4374.626	0	-300.331	-16664.1377
1ST	Bottom	DConS14	Combination	Min			4525.53	0	-300.331	-16664.1377
1ST	Top	DConS15	Combination	Max			9572.561	0	0	5948.9742
1ST	Bottom	DConS15	Combination	Max			9799.986	0	0	5948.9742
1ST	Top	DConS15	Combination	Min			9572.561	-210.329	-210.329	-7896.3128
1ST	Bottom	DConS15	Combination	Min			9799.986	-210.329	-210.329	-7896.3128
1ST	Top	DConS16	Combination	Max			9572.561	210.329	210.329	7896.3128
1ST	Bottom	DConS16	Combination	Max			9799.986	210.329	210.329	7896.3128
1ST	Top	DConS16	Combination	Min			9572.561	0	0	-5948.9742
1ST	Bottom	DConS16	Combination	Min			9799.986	0	0	-5948.9742
1ST	Top	DConS17	Combination	Max			6318.905	0	0	5948.9742
1ST	Bottom	DConS17	Combination	Max			6536.877	0	0	5948.9742
1ST	Top	DConS17	Combination	Min			6318.905	-210.329	-210.329	-7896.3128
1ST	Bottom	DConS17	Combination	Min			6536.877	-210.329	-210.329	-7896.3128
1ST	Top	DConS18	Combination	Max			6318.905	210.329	210.329	7896.3128
1ST	Bottom	DConS18	Combination	Max			6536.877	210.329	210.329	7896.3128
1ST	Top	DConS18	Combination	Min			6318.905	0	0	-5948.9742
1ST	Bottom	DConS18	Combination	Min			6536.877	0	0	-5948.9742
1ST	Top	DConS19	Combination	Max			3888.557	0	0	5948.9742
1ST	Bottom	DConS19	Combination	Max			4022.693	0	0	5948.9742
1ST	Top	DConS19	Combination	Min			3888.557	-210.329	-210.329	-7896.3128
1ST	Bottom	DConS19	Combination	Min			4022.693	-210.329	-210.329	-7896.3128
1ST	Top	DConS20	Combination	Max			3888.557	210.329	210.329	7896.3128
1ST	Bottom	DConS20	Combination	Max			4022.693	210.329	210.329	7896.3128
1ST	Top	DConS20	Combination	Min			3888.557	0	0	-5948.9742
1ST	Bottom	DConS20	Combination	Min			4022.693	0	0	-5948.9742
GF	Top	Dead	LinStatic				4266.67	0	0	0
GF	Bottom	Dead	LinStatic				4374.062	0	0	0
GF	Top	Live	LinStatic				3676.958	0	0	0
GF	Bottom	Live	LinStatic				3676.958	0	0	0
GF	Top	PW	LinStatic				614.642	0	0	0

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
GF	Bottom	PW	LinStatic				614.642	0	0	0
GF	Top	FF	LinStatic				638.059	0	0	0
GF	Bottom	FF	LinStatic				638.059	0	0	0
GF	Top	ROOF LIVE	LinStatic				262.354	0	0	0
GF	Bottom	ROOF LIVE	LinStatic				262.354	0	0	0
GF	Top	EQ	LinStatic	Max			0	0	0	6018.0336
GF	Bottom	EQ	LinStatic	Max			0	0	0	6018.0336
GF	Top	EQ	LinStatic	Min			0	-212.763	-212.763	-7988.1228
GF	Bottom	EQ	LinStatic	Min			0	-212.763	-212.763	-7988.1228
GF	Top	wind	LinStatic	Max			0	0	187.707	10415.0861
GF	Bottom	wind	LinStatic	Max			0	0	187.707	10415.0861
GF	Top	wind	LinStatic	Min			0	-189.725	-263.305	-9303.6194
GF	Bottom	wind	LinStatic	Min			0	-189.725	-263.305	-9303.6194
GF	Top	1.4D	Combination				5973.338	0	0	0
GF	Bottom	1.4D	Combination				6123.687	0	0	0
GF	Top	1.2D+1.6L+.5Lr	Combination				11134.314	0	0	0
GF	Bottom	1.2D+1.6L+.5Lr	Combination				11263.184	0	0	0
GF	Top	1.2D+1.6Lr+L	Combination				9216.729	0	0	0
GF	Bottom	1.2D+1.6Lr+L	Combination				9345.599	0	0	0
GF	Top	1.2D+1.6Lr+.8W	Combination	Max			5539.771	0	150.166	8332.0689
GF	Bottom	1.2D+1.6Lr+.8W	Combination	Max			5668.641	0	150.166	8332.0689
GF	Top	1.2D+1.6Lr+.8W	Combination	Min			5539.771	-151.78	-210.644	-7442.8955
GF	Bottom	1.2D+1.6Lr+.8W	Combination	Min			5668.641	-151.78	-210.644	-7442.8955
GF	Top	1.2D+1.6Lr-.8W	Combination	Max			5539.771	151.78	210.644	7442.8955
GF	Bottom	1.2D+1.6Lr-.8W	Combination	Max			5668.641	151.78	210.644	7442.8955
GF	Top	1.2D+1.6Lr-.8W	Combination	Min			5539.771	0	-150.166	-8332.0689
GF	Bottom	1.2D+1.6Lr-.8W	Combination	Min			5668.641	0	-150.166	-8332.0689
GF	Top	1.2D+1.6W+L+.5Lr	Combination	Max			8928.139	0	300.331	16664.1377
GF	Bottom	1.2D+1.6W+L+.5Lr	Combination	Max			9057.009	0	300.331	16664.1377
GF	Top	1.2D+1.6W+L+.5Lr	Combination	Min			8928.139	-303.561	-421.288	-14885.7911
GF	Bottom	1.2D+1.6W+L+.5Lr	Combination	Min			9057.009	-303.561	-421.288	-14885.7911
GF	Top	1.2D-1.6W+L+.5Lr	Combination	Max			8928.139	303.561	421.288	14885.7911
GF	Bottom	1.2D-1.6W+L+.5Lr	Combination	Max			9057.009	303.561	421.288	14885.7911
GF	Top	1.2D-1.6W+L+.5Lr	Combination	Min			8928.139	0	-300.331	-16664.1377
GF	Bottom	1.2D-1.6W+L+.5Lr	Combination	Min			9057.009	0	-300.331	-16664.1377
GF	Top	1.246D+1E+1L	Combination	Max			8993.229	0	0	6018.0336
GF	Bottom	1.246D+1E+1L	Combination	Max			9127.039	0	0	6018.0336
GF	Top	1.246D+1E+1L	Combination	Min			8993.229	-212.763	-212.763	-7988.1228
GF	Bottom	1.246D+1E+1L	Combination	Min			9127.039	-212.763	-212.763	-7988.1228
GF	Top	1.246D-1E+1L	Combination	Max			8993.229	212.763	212.763	7988.1228
GF	Bottom	1.246D-1E+1L	Combination	Max			9127.039	212.763	212.763	7988.1228
GF	Top	1.246D-1E+1L	Combination	Min			8993.229	0	0	-6018.0336
GF	Bottom	1.246D-1E+1L	Combination	Min			9127.039	0	0	-6018.0336
GF	Top	0.9D+1.6W	Combination	Max			3840.003	0	300.331	16664.1377

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
GF	Bottom	0.9D+1.6W	Combination	Max			3936.656	0	300.331	16664.1377
GF	Top	0.9D+1.6W	Combination	Min			3840.003	-303.561	-421.288	-14885.7911
GF	Bottom	0.9D+1.6W	Combination	Min			3936.656	-303.561	-421.288	-14885.7911
GF	Top	0.9D-1.6W	Combination	Max			3840.003	303.561	421.288	14885.7911
GF	Bottom	0.9D-1.6W	Combination	Max			3936.656	303.561	421.288	14885.7911
GF	Top	0.9D-1.6W	Combination	Min			3840.003	0	-300.331	-16664.1377
GF	Bottom	0.9D-1.6W	Combination	Min			3936.656	0	-300.331	-16664.1377
GF	Top	.854D+E	Combination	Max			3643.736	0	0	6018.0336
GF	Bottom	.854D+E	Combination	Max			3735.449	0	0	6018.0336
GF	Top	.854D+E	Combination	Min			3643.736	-212.763	-212.763	-7988.1228
GF	Bottom	.854D+E	Combination	Min			3735.449	-212.763	-212.763	-7988.1228
GF	Top	.854D-E	Combination	Max			3643.736	212.763	212.763	7988.1228
GF	Bottom	.854D-E	Combination	Max			3735.449	212.763	212.763	7988.1228
GF	Top	.854D-E	Combination	Min			3643.736	0	0	-6018.0336
GF	Bottom	.854D-E	Combination	Min			3735.449	0	0	-6018.0336
GF	Top	D+L	Combination				7943.628	0	0	0
GF	Bottom	D+L	Combination				8051.02	0	0	0
GF	Top	D+.5L	Combination				6105.149	0	0	0
GF	Bottom	D+.5L	Combination				6212.541	0	0	0
GF	Top	D+.5L+.7W	Combination	Max			6105.149	0	131.395	7290.5602
GF	Bottom	D+.5L+.7W	Combination	Max			6212.541	0	131.395	7290.5602
GF	Top	D+.5L+.7W	Combination	Min			6105.149	-132.808	-184.314	-6512.5336
GF	Bottom	D+.5L+.7W	Combination	Min			6212.541	-132.808	-184.314	-6512.5336
GF	Top	D+.5L-.7W	Combination	Max			6105.149	132.808	184.314	6512.5336
GF	Bottom	D+.5L-.7W	Combination	Max			6212.541	132.808	184.314	6512.5336
GF	Top	D+.5L-.7W	Combination	Min			6105.149	0	-131.395	-7290.5602
GF	Bottom	D+.5L-.7W	Combination	Min			6212.541	0	-131.395	-7290.5602
GF	Top	DConS1	Combination				7727.12	0	0	0
GF	Bottom	DConS1	Combination				7877.468	0	0	0
GF	Top	DConS2	Combination				12506.378	0	0	0
GF	Bottom	DConS2	Combination				12635.248	0	0	0
GF	Top	DConS3	Combination				12637.555	0	0	0
GF	Bottom	DConS3	Combination				12766.425	0	0	0
GF	Top	DConS4	Combination				10719.97	0	0	0
GF	Bottom	DConS4	Combination				10848.84	0	0	0
GF	Top	DConS5	Combination	Max			10300.203	0	300.331	16664.1377
GF	Bottom	DConS5	Combination	Max			10429.073	0	300.331	16664.1377
GF	Top	DConS5	Combination	Min			10300.203	-303.561	-421.288	-14885.7911
GF	Bottom	DConS5	Combination	Min			10429.073	-303.561	-421.288	-14885.7911
GF	Top	DConS6	Combination	Max			10300.203	303.561	421.288	14885.7911
GF	Bottom	DConS6	Combination	Max			10429.073	303.561	421.288	14885.7911
GF	Top	DConS6	Combination	Min			10300.203	0	-300.331	-16664.1377
GF	Bottom	DConS6	Combination	Min			10429.073	0	-300.331	-16664.1377
GF	Top	DConS7	Combination	Max			10431.38	0	300.331	16664.1377

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
GF	Bottom	DConS7	Combination	Max			10560.25	0	300.331	16664.1377
GF	Top	DConS7	Combination	Min			10431.38	-303.561	-421.288	-14885.7911
GF	Bottom	DConS7	Combination	Min			10560.25	-303.561	-421.288	-14885.7911
GF	Top	DConS8	Combination	Max			10431.38	303.561	421.288	14885.7911
GF	Bottom	DConS8	Combination	Max			10560.25	303.561	421.288	14885.7911
GF	Top	DConS8	Combination	Min			10431.38	0	-300.331	-16664.1377
GF	Bottom	DConS8	Combination	Min			10560.25	0	-300.331	-16664.1377
GF	Top	DConS9	Combination	Max			7043.013	0	150.166	8332.0689
GF	Bottom	DConS9	Combination	Max			7171.883	0	150.166	8332.0689
GF	Top	DConS9	Combination	Min			7043.013	-151.78	-210.644	-7442.8955
GF	Bottom	DConS9	Combination	Min			7171.883	-151.78	-210.644	-7442.8955
GF	Top	DConS10	Combination	Max			7043.013	151.78	210.644	7442.8955
GF	Bottom	DConS10	Combination	Max			7171.883	151.78	210.644	7442.8955
GF	Top	DConS10	Combination	Min			7043.013	0	-150.166	-8332.0689
GF	Bottom	DConS10	Combination	Min			7171.883	0	-150.166	-8332.0689
GF	Top	DConS11	Combination	Max			6623.245	0	150.166	8332.0689
GF	Bottom	DConS11	Combination	Max			6752.115	0	150.166	8332.0689
GF	Top	DConS11	Combination	Min			6623.245	-151.78	-210.644	-7442.8955
GF	Bottom	DConS11	Combination	Min			6752.115	-151.78	-210.644	-7442.8955
GF	Top	DConS12	Combination	Max			6623.245	151.78	210.644	7442.8955
GF	Bottom	DConS12	Combination	Max			6752.115	151.78	210.644	7442.8955
GF	Top	DConS12	Combination	Min			6623.245	0	-150.166	-8332.0689
GF	Bottom	DConS12	Combination	Min			6752.115	0	-150.166	-8332.0689
GF	Top	DConS13	Combination	Max			4967.434	0	300.331	16664.1377
GF	Bottom	DConS13	Combination	Max			5064.087	0	300.331	16664.1377
GF	Top	DConS13	Combination	Min			4967.434	-303.561	-421.288	-14885.7911
GF	Bottom	DConS13	Combination	Min			5064.087	-303.561	-421.288	-14885.7911
GF	Top	DConS14	Combination	Max			4967.434	303.561	421.288	14885.7911
GF	Bottom	DConS14	Combination	Max			5064.087	303.561	421.288	14885.7911
GF	Top	DConS14	Combination	Min			4967.434	0	-300.331	-16664.1377
GF	Bottom	DConS14	Combination	Min			5064.087	0	-300.331	-16664.1377
GF	Top	DConS15	Combination	Max			10852.14	0	0	6018.0336
GF	Bottom	DConS15	Combination	Max			10991.75	0	0	6018.0336
GF	Top	DConS15	Combination	Min			10852.14	-212.763	-212.763	-7988.1228
GF	Bottom	DConS15	Combination	Min			10991.75	-212.763	-212.763	-7988.1228
GF	Top	DConS16	Combination	Max			10852.14	212.763	212.763	7988.1228
GF	Bottom	DConS16	Combination	Max			10991.75	212.763	212.763	7988.1228
GF	Top	DConS16	Combination	Min			10852.14	0	0	-6018.0336
GF	Bottom	DConS16	Combination	Min			10991.75	0	0	-6018.0336
GF	Top	DConS17	Combination	Max			7175.183	0	0	6018.0336
GF	Bottom	DConS17	Combination	Max			7314.792	0	0	6018.0336
GF	Top	DConS17	Combination	Min			7175.183	-212.763	-212.763	-7988.1228
GF	Bottom	DConS17	Combination	Min			7314.792	-212.763	-212.763	-7988.1228
GF	Top	DConS18	Combination	Max			7175.183	212.763	212.763	7988.1228

Table 5.7 - Story Forces (Part 1 of 2, continued)

Story	Location	Output Case	Case Type	Step Type	Step Number	Step Label	P kip	VX kip	VY kip	T kip-ft
GF	Bottom	DConS18	Combination	Max			7314.792	212.763	212.763	7988.1228
GF	Top	DConS18	Combination	Min			7175.183	0	0	-6018.0336
GF	Bottom	DConS18	Combination	Min			7314.792	0	0	-6018.0336
GF	Top	DConS19	Combination	Max			4415.497	0	0	6018.0336
GF	Bottom	DConS19	Combination	Max			4501.41	0	0	6018.0336
GF	Top	DConS19	Combination	Min			4415.497	-212.763	-212.763	-7988.1228
GF	Bottom	DConS19	Combination	Min			4501.41	-212.763	-212.763	-7988.1228
GF	Top	DConS20	Combination	Max			4415.497	212.763	212.763	7988.1228
GF	Bottom	DConS20	Combination	Max			4501.41	212.763	212.763	7988.1228
GF	Top	DConS20	Combination	Min			4415.497	0	0	-6018.0336
GF	Bottom	DConS20	Combination	Min			4501.41	0	0	-6018.0336

Table 5.7 - Story Forces (Part 2 of 2)

Story	Location	MX kip-ft	MY kip-ft
ROOF	Top	8623.1501	-11457.9219
ROOF	Bottom	12428.2709	-16611.6691
ROOF	Top	3992.9763	-5317.5299
ROOF	Bottom	4423.4182	-5656.2722
ROOF	Top	1754.2123	-2384.6096
ROOF	Bottom	1790.6052	-2412.2304
ROOF	Top	1802.2685	-2428.9542
ROOF	Bottom	1909.6106	-2513.4285
ROOF	Top	6765.8273	-9255.1452
ROOF	Bottom	6765.8273	-9255.1452
ROOF	Top	0	0
ROOF	Bottom	393.7608	0
ROOF	Top	0	0
ROOF	Bottom	0	-393.7608
ROOF	Top	0	0
ROOF	Bottom	407.8117	0
ROOF	Top	0	0
ROOF	Bottom	-298.879	-302.0927
ROOF	Top	12072.4101	-16041.0906
ROOF	Bottom	17399.5793	-23256.3368
ROOF	Top	20119.4558	-26885.1267
ROOF	Bottom	25374.3079	-33611.611
ROOF	Top	25166.08	-33875.2685
ROOF	Bottom	30162.667	-40398.5074
ROOF	Top	21173.1037	-28557.7385
ROOF	Bottom	26065.4981	-34742.2352
ROOF	Top	21173.1037	-28557.7385
ROOF	Bottom	25500.1456	-34983.9094
ROOF	Top	21173.1037	-28557.7385
ROOF	Bottom	25978.3519	-34500.5611

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
ROOF	Top	21173.1037	-28557.7385
ROOF	Bottom	25412.9994	-34742.2352
ROOF	Top	17723.67	-23694.6088
ROOF	Bottom	23372.7557	-30217.8477
ROOF	Top	17723.67	-23694.6088
ROOF	Bottom	22242.0506	-30701.196
ROOF	Top	17723.67	-23694.6088
ROOF	Bottom	23198.4633	-29734.4993
ROOF	Top	17723.67	-23694.6088
ROOF	Bottom	22067.7583	-30217.8477
ROOF	Top	14737.4213	-19594.1006
ROOF	Bottom	20302.8046	-26354.4119
ROOF	Top	14737.4213	-19594.1006
ROOF	Bottom	19909.0438	-26748.1727
ROOF	Top	14737.4213	-19594.1006
ROOF	Bottom	19909.0438	-25960.6511
ROOF	Top	14737.4213	-19594.1006
ROOF	Bottom	19515.283	-26354.4119
ROOF	Top	7760.8351	-10312.1297
ROOF	Bottom	11837.9425	-14950.5022
ROOF	Top	7760.8351	-10312.1297
ROOF	Bottom	10707.2375	-15433.8506
ROOF	Top	7760.8351	-10312.1297
ROOF	Bottom	11663.6502	-14467.1539
ROOF	Top	7760.8351	-10312.1297
ROOF	Bottom	10532.9451	-14950.5022
ROOF	Top	7364.1702	-9785.0653
ROOF	Bottom	11007.5042	-14186.3654
ROOF	Top	7364.1702	-9785.0653
ROOF	Bottom	10613.7434	-14580.1262
ROOF	Top	7364.1702	-9785.0653
ROOF	Bottom	10613.7434	-13792.6046
ROOF	Top	7364.1702	-9785.0653
ROOF	Bottom	10219.9826	-14186.3654
ROOF	Top	12616.1264	-16775.4518
ROOF	Bottom	16851.6891	-22267.9413
ROOF	Top	10619.6382	-14116.6868
ROOF	Bottom	14639.98	-19439.8052
ROOF	Top	10619.6382	-14116.6868
ROOF	Bottom	14925.4482	-19439.8052
ROOF	Top	10619.6382	-14116.6868
ROOF	Bottom	14430.7648	-19651.2701
ROOF	Top	10619.6382	-14116.6868
ROOF	Bottom	14849.1953	-19228.3403
ROOF	Top	10619.6382	-14116.6868

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
ROOF	Bottom	14354.5119	-19439.8052
ROOF	Top	17051.4833	-22780.08
ROOF	Bottom	22579.8814	-30152.2593
ROOF	Top	21004.3192	-28033.8307
ROOF	Bottom	26431.6532	-34894.8291
ROOF	Top	24387.2328	-32661.4033
ROOF	Bottom	29814.5668	-39522.4017
ROOF	Top	29433.8571	-39651.5451
ROOF	Bottom	34602.9259	-46309.2981
ROOF	Top	18608.5334	-24843.3128
ROOF	Bottom	24430.101	-31501.0658
ROOF	Top	18608.5334	-24843.3128
ROOF	Bottom	23299.3959	-31984.4141
ROOF	Top	18608.5334	-24843.3128
ROOF	Bottom	24255.8086	-31017.7174
ROOF	Top	18608.5334	-24843.3128
ROOF	Bottom	23125.1036	-31501.0658
ROOF	Top	21991.4471	-29470.8854
ROOF	Bottom	27813.0146	-36128.6384
ROOF	Top	21991.4471	-29470.8854
ROOF	Bottom	26682.3096	-36611.9867
ROOF	Top	21991.4471	-29470.8854
ROOF	Bottom	27638.7223	-35645.29
ROOF	Top	21991.4471	-29470.8854
ROOF	Bottom	26508.0172	-36128.6384
ROOF	Top	25440.8808	-34334.0151
ROOF	Bottom	30505.7571	-40653.0259
ROOF	Top	25440.8808	-34334.0151
ROOF	Bottom	29940.4046	-40894.7001
ROOF	Top	25440.8808	-34334.0151
ROOF	Bottom	30418.6109	-40411.3518
ROOF	Top	25440.8808	-34334.0151
ROOF	Bottom	29853.2584	-40653.0259
ROOF	Top	14615.5571	-19525.7828
ROOF	Bottom	19680.4334	-25844.7936
ROOF	Top	14615.5571	-19525.7828
ROOF	Bottom	19115.0809	-26086.4678
ROOF	Top	14615.5571	-19525.7828
ROOF	Bottom	19593.2873	-25603.1195
ROOF	Top	14615.5571	-19525.7828
ROOF	Bottom	19027.9347	-25844.7936
ROOF	Top	10961.6679	-14644.3371
ROOF	Bottom	15168.1368	-19383.5952
ROOF	Top	10961.6679	-14644.3371
ROOF	Bottom	14037.4317	-19866.9436

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
ROOF	Top	10961.6679	-14644.3371
ROOF	Bottom	14993.8444	-18900.2469
ROOF	Top	10961.6679	-14644.3371
ROOF	Bottom	13863.1394	-19383.5952
ROOF	Top	19826.4965	-26470.4613
ROOF	Bottom	25784.2118	-33654.7986
ROOF	Top	19826.4965	-26470.4613
ROOF	Bottom	25390.451	-34048.5594
ROOF	Top	19826.4965	-26470.4613
ROOF	Bottom	25390.451	-33261.0378
ROOF	Top	19826.4965	-26470.4613
ROOF	Bottom	24996.6902	-33654.7986
ROOF	Top	15833.5202	-21152.9314
ROOF	Bottom	21360.7936	-27998.5265
ROOF	Top	15833.5202	-21152.9314
ROOF	Bottom	20967.0328	-28392.2872
ROOF	Top	15833.5202	-21152.9314
ROOF	Bottom	20967.0328	-27604.7657
ROOF	Top	15833.5202	-21152.9314
ROOF	Bottom	20573.272	-27998.5265
ROOF	Top	9743.7048	-13017.1885
ROOF	Bottom	13296.5502	-17229.8624
ROOF	Top	9743.7048	-13017.1885
ROOF	Bottom	12902.7894	-17623.6232
ROOF	Top	9743.7048	-13017.1885
ROOF	Bottom	12902.7894	-16836.1016
ROOF	Top	9743.7048	-13017.1885
ROOF	Bottom	12509.0286	-17229.8624
7TH	Top	21051.421	-28069.591
7TH	Bottom	24856.5419	-33223.3383
7TH	Top	16156.944	-21008.4252
7TH	Bottom	16587.386	-21347.1674
7TH	Top	3544.8176	-4796.84
7TH	Bottom	3581.2105	-4824.4608
7TH	Top	3711.8791	-4942.3827
7TH	Bottom	3819.2211	-5026.857
7TH	Top	6765.8273	-9255.1452
7TH	Bottom	6765.8273	-9255.1452
7TH	Top	393.7608	0
7TH	Bottom	1218.5545	0
7TH	Top	0	-393.7608
7TH	Bottom	0	-1218.5545
7TH	Top	407.8117	0
7TH	Bottom	1187.1675	0
7TH	Top	-298.879	-302.0927

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
7TH	Bottom	-862.4565	-871.7302
7TH	Top	29471.9894	-39297.4274
7TH	Bottom	34799.1586	-46512.6736
7TH	Top	54495.7293	-71924.562
7TH	Bottom	59750.5814	-78651.0463
7TH	Top	52243.9729	-69500.1666
7TH	Bottom	57240.5598	-76023.4056
7TH	Top	36413.2782	-48491.7415
7TH	Bottom	41602.9079	-54676.2382
7TH	Top	35847.9257	-48733.4156
7TH	Bottom	39963.2087	-55373.6223
7TH	Top	36326.132	-48250.0673
7TH	Bottom	41343.139	-53978.8541
7TH	Top	35760.7795	-48491.7415
7TH	Bottom	39703.4399	-54676.2382
7TH	Top	45454.0616	-59319.5069
7TH	Bottom	51697.6179	-65842.7459
7TH	Top	44323.3566	-59802.8553
7TH	Bottom	48418.2195	-67237.5142
7TH	Top	45279.7693	-58836.1586
7TH	Bottom	51178.0802	-64447.9776
7TH	Top	44149.0642	-59319.5069
7TH	Bottom	47898.6818	-65842.7459
7TH	Top	42780.7754	-55983.1355
7TH	Bottom	48777.1916	-62743.4468
7TH	Top	42387.0146	-56376.8963
7TH	Bottom	47558.6371	-63962.0013
7TH	Top	42387.0146	-55589.3747
7TH	Bottom	47558.6371	-61524.8924
7TH	Top	41993.2538	-55983.1355
7TH	Bottom	46340.0827	-62743.4468
7TH	Top	19598.7776	-25262.6319
7TH	Bottom	24270.3557	-29901.0044
7TH	Top	18468.0726	-25745.9802
7TH	Bottom	20990.9574	-31295.7727
7TH	Top	19424.4853	-24779.2835
7TH	Bottom	23750.818	-28506.2361
7TH	Top	18293.7802	-25262.6319
7TH	Bottom	20471.4196	-29901.0044
7TH	Top	18371.6744	-23971.4307
7TH	Bottom	22446.0412	-28372.7309
7TH	Top	17977.9136	-24365.1915
7TH	Bottom	21227.4868	-29591.2853
7TH	Top	17977.9136	-23577.6699
7TH	Bottom	21227.4868	-27154.1764

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
7TH	Top	17584.1528	-23971.4307
7TH	Bottom	20008.9323	-28372.7309
7TH	Top	37208.3651	-49078.0162
7TH	Bottom	41443.9278	-54570.5056
7TH	Top	29129.893	-38573.8036
7TH	Bottom	33150.2349	-43896.9219
7TH	Top	29415.3612	-38573.8036
7TH	Bottom	33981.2521	-43896.9219
7TH	Top	28920.6778	-38785.2685
7TH	Bottom	32546.5153	-44507.1331
7TH	Top	29339.1083	-38362.3387
7TH	Bottom	33753.9544	-43286.7108
7TH	Top	28844.4249	-38573.8036
7TH	Bottom	32319.2176	-43896.9219
7TH	Top	39631.3648	-52932.3392
7TH	Bottom	45159.7629	-60304.5185
7TH	Top	59820.8517	-78984.0567
7TH	Bottom	65248.1857	-85845.0551
7TH	Top	63203.7653	-83611.6293
7TH	Bottom	68631.0994	-90472.6277
7TH	Top	60952.0089	-81187.2339
7TH	Bottom	66121.0778	-87844.987
7TH	Top	50779.184	-66379.0016
7TH	Bottom	57195.2222	-73036.7547
7TH	Top	49648.4789	-66862.35
7TH	Bottom	53915.8238	-74431.523
7TH	Top	50604.8916	-65895.6533
7TH	Bottom	56675.6845	-71641.9864
7TH	Top	49474.1866	-66379.0016
7TH	Bottom	53396.2861	-73036.7547
7TH	Top	54162.0976	-71006.5742
7TH	Bottom	60578.1358	-77664.3273
7TH	Top	53031.3926	-71489.9226
7TH	Bottom	57298.7375	-79059.0955
7TH	Top	53987.8053	-70523.2259
7TH	Bottom	60058.5981	-76269.559
7TH	Top	52857.1002	-71006.5742
7TH	Bottom	56779.1997	-77664.3273
7TH	Top	45121.3142	-60178.8088
7TH	Bottom	50483.4258	-66497.8196
7TH	Top	44555.9617	-60420.4829
7TH	Bottom	48843.7267	-67195.2037
7TH	Top	45034.1681	-59937.1346
7TH	Bottom	50223.657	-65800.4354
7TH	Top	44468.8155	-60178.8088

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
7TH	Bottom	48583.9578	-66497.8196
7TH	Top	34295.9906	-45370.5765
7TH	Bottom	39658.1022	-51689.5873
7TH	Top	33730.6381	-45612.2506
7TH	Bottom	38018.403	-52386.9714
7TH	Top	34208.8444	-45128.9023
7TH	Bottom	39398.3333	-50992.2032
7TH	Top	33643.4919	-45370.5765
7TH	Bottom	37758.6342	-51689.5873
7TH	Top	26129.8046	-34027.9323
7TH	Bottom	30930.7442	-38767.1905
7TH	Top	24999.0996	-34511.2807
7TH	Bottom	27651.3458	-40161.9588
7TH	Top	25955.5123	-33544.584
7TH	Bottom	30411.2065	-37372.4222
7TH	Top	24824.8072	-34027.9323
7TH	Bottom	27131.8081	-38767.1905
7TH	Top	53351.2578	-70159.883
7TH	Bottom	59740.006	-77344.2203
7TH	Top	52957.4971	-70553.6438
7TH	Bottom	58521.4515	-78562.7747
7TH	Top	52957.4971	-69766.1222
7TH	Bottom	58521.4515	-76125.6658
7TH	Top	52563.7363	-70159.883
7TH	Bottom	57302.897	-77344.2203
7TH	Top	37194.3138	-49151.4578
7TH	Bottom	43152.62	-55997.0529
7TH	Top	36800.553	-49545.2186
7TH	Bottom	41934.0655	-57215.6074
7TH	Top	36800.553	-48757.697
7TH	Bottom	41934.0655	-54778.4984
7TH	Top	36406.7922	-49151.4578
7TH	Bottom	40715.5111	-55997.0529
7TH	Top	23040.255	-30247.051
7TH	Bottom	27024.1332	-34459.7249
7TH	Top	22646.4942	-30640.8118
7TH	Bottom	25805.5788	-35678.2793
7TH	Top	22646.4942	-29853.2902
7TH	Bottom	25805.5788	-33241.1704
7TH	Top	22252.7334	-30247.051
7TH	Bottom	24587.0243	-34459.7249
6TH	Top	33479.692	-44681.2601
6TH	Bottom	37284.8128	-49835.0074
6TH	Top	28320.9118	-36699.3204
6TH	Bottom	28751.3537	-37038.0626

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
6TH	Top	5335.4228	-7209.0705
6TH	Bottom	5371.8157	-7236.6913
6TH	Top	5621.4897	-7455.8112
6TH	Bottom	5728.8317	-7540.2855
6TH	Top	6765.8273	-9255.1452
6TH	Bottom	6765.8273	-9255.1452
6TH	Top	1218.5545	0
6TH	Bottom	2408.3653	0
6TH	Top	0	-1218.5545
6TH	Bottom	0	-2408.3653
6TH	Top	1187.1675	0
6TH	Bottom	2329.5296	0
6TH	Top	-862.4565	-871.7302
6TH	Bottom	-1684.329	-1702.4401
6TH	Top	46871.5687	-62553.7642
6TH	Bottom	52198.7379	-69769.0103
6TH	Top	88872.0029	-116963.9974
6TH	Bottom	94126.855	-123690.4816
6TH	Top	79321.8658	-105125.0648
6TH	Bottom	84318.4527	-111648.3037
6TH	Top	51950.688	-68425.7444
6TH	Bottom	57430.7227	-74610.2412
6TH	Top	50310.9888	-69123.1286
6TH	Bottom	54219.6358	-75972.1932
6TH	Top	51690.9192	-67728.3603
6TH	Bottom	56914.5622	-73248.2891
6TH	Top	50051.22	-68425.7444
6TH	Bottom	53703.4753	-74610.2412
6TH	Top	73778.9239	-94944.4051
6TH	Bottom	80603.2901	-101467.644
6TH	Top	70499.5255	-96339.1734
6TH	Bottom	74181.1163	-104191.5482
6TH	Top	73259.3861	-93549.6368
6TH	Bottom	79570.9692	-98743.7399
6TH	Top	69979.9877	-94944.4051
6TH	Bottom	73148.7953	-101467.644
6TH	Top	71255.1625	-92372.1705
6TH	Bottom	77616.5958	-99132.4818
6TH	Top	70036.608	-93590.725
6TH	Bottom	75208.2305	-101540.8471
6TH	Top	70036.608	-91153.616
6TH	Bottom	75208.2305	-96724.1164
6TH	Top	68818.0535	-92372.1705
6TH	Bottom	72799.8651	-99132.4818
6TH	Top	32031.1908	-40213.1341

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
6TH	Bottom	37283.5789	-44851.5066
6TH	Top	28751.7924	-41607.9024
6TH	Bottom	30861.4051	-47575.4108
6TH	Top	31511.6531	-38818.3658
6TH	Bottom	36251.258	-42127.6025
6TH	Top	28232.2547	-40213.1341
6TH	Bottom	29829.0841	-44851.5066
6TH	Top	29810.2114	-38157.7961
6TH	Bottom	34249.5955	-42559.0963
6TH	Top	28591.6569	-39376.3506
6TH	Bottom	31841.2301	-44967.4617
6TH	Top	28591.6569	-36939.2417
6TH	Bottom	31841.2301	-40150.731
6TH	Top	27373.1025	-38157.7961
6TH	Bottom	29432.8648	-42559.0963
6TH	Top	61800.6038	-81380.5805
6TH	Bottom	66036.1665	-86873.07
6TH	Top	47640.1479	-63030.9203
6TH	Bottom	51660.4897	-68354.0387
6TH	Top	48471.1651	-63030.9203
6TH	Bottom	53291.1604	-68354.0387
6TH	Top	47036.4283	-63641.1314
6TH	Bottom	50481.4593	-69545.7467
6TH	Top	48243.8674	-62420.7092
6TH	Bottom	52839.52	-67162.3306
6TH	Top	46809.1306	-63030.9203
6TH	Bottom	50029.8189	-68354.0387
6TH	Top	62211.2462	-83084.5985
6TH	Bottom	67739.6443	-90456.7778
6TH	Top	98637.3842	-129934.2827
6TH	Bottom	104064.7182	-136795.2811
6TH	Top	102020.2979	-134561.8553
6TH	Bottom	107447.6319	-141422.8537
6TH	Top	92470.1608	-122722.9228
6TH	Bottom	97639.2296	-129380.6758
6TH	Top	83544.3052	-107914.6905
6TH	Bottom	90541.1534	-114572.4435
6TH	Top	80264.9068	-109309.4588
6TH	Bottom	84118.9796	-117296.3477
6TH	Top	83024.7675	-106519.9222
6TH	Bottom	89508.8325	-111848.5394
6TH	Top	79745.3691	-107914.6905
6TH	Bottom	83086.6586	-114572.4435
6TH	Top	86927.2188	-112542.2631
6TH	Bottom	93924.067	-119200.0161

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
6TH	Top	83647.8205	-113937.0314
6TH	Bottom	87501.8932	-121923.9203
6TH	Top	86407.6811	-111147.4948
6TH	Bottom	92891.7461	-116476.112
6TH	Top	83128.2827	-112542.2631
6TH	Bottom	86469.5722	-119200.0161
6TH	Top	65098.983	-86023.6024
6TH	Bottom	70751.4996	-92342.6132
6TH	Top	63459.2838	-86720.9865
6TH	Bottom	67540.4127	-93704.5653
6TH	Top	64839.2141	-85326.2183
6TH	Bottom	70235.3391	-90980.6612
6TH	Top	63199.5149	-86023.6024
6TH	Bottom	67024.2522	-92342.6132
6TH	Top	54273.6594	-71215.3701
6TH	Bottom	59926.176	-77534.3809
6TH	Top	52633.9602	-71912.7543
6TH	Bottom	56715.089	-78896.333
6TH	Top	54013.8905	-70517.986
6TH	Bottom	59410.0155	-76172.4289
6TH	Top	52374.1913	-71215.3701
6TH	Bottom	56198.9286	-77534.3809
6TH	Top	41892.412	-53411.5276
6TH	Bottom	47274.1616	-58150.7857
6TH	Top	38613.0137	-54806.2959
6TH	Bottom	40851.9878	-60874.6899
6TH	Top	41372.8743	-52016.7593
6TH	Bottom	46241.8407	-55426.8816
6TH	Top	38093.4759	-53411.5276
6TH	Bottom	39819.6668	-58150.7857
6TH	Top	87307.052	-113849.3047
6TH	Bottom	94060.8174	-121033.6419
6TH	Top	86088.4976	-115067.8591
6TH	Bottom	91652.452	-123442.0073
6TH	Top	86088.4976	-112630.7502
6TH	Bottom	91652.452	-118625.2766
6TH	Top	84869.9431	-113849.3047
6TH	Bottom	89244.0867	-121033.6419
6TH	Top	58986.1402	-77149.9843
6TH	Bottom	65309.4636	-83995.5794
6TH	Top	57767.5858	-78368.5387
6TH	Bottom	62901.0983	-86403.9447
6TH	Top	57767.5858	-75931.4298
6TH	Bottom	62901.0983	-81587.214
6TH	Top	56549.0313	-77149.9843

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
6TH	Bottom	60492.7329	-83995.5794
6TH	Top	36767.838	-47476.9134
6TH	Bottom	41116.7335	-51689.5873
6TH	Top	35549.2836	-48695.4679
6TH	Bottom	38708.3682	-54097.9526
6TH	Top	35549.2836	-46258.3589
6TH	Bottom	38708.3682	-49281.2219
6TH	Top	34330.7291	-47476.9134
6TH	Bottom	36300.0028	-51689.5873
5TH	Top	45907.9629	-61292.9292
5TH	Bottom	49713.0837	-66446.6765
5TH	Top	40484.8796	-52390.2156
5TH	Bottom	40915.3215	-52728.9578
5TH	Top	7126.028	-9621.3009
5TH	Bottom	7162.4209	-9648.9217
5TH	Top	7531.1003	-9969.2397
5TH	Bottom	7638.4423	-10053.714
5TH	Top	6765.8273	-9255.1452
5TH	Bottom	6765.8273	-9255.1452
5TH	Top	2408.3653	0
5TH	Bottom	3899.0778	0
5TH	Top	0	-2408.3653
5TH	Bottom	0	-3899.0778
5TH	Top	2329.5296	0
5TH	Bottom	3824.8643	0
5TH	Top	-1684.329	-1702.4401
5TH	Bottom	-2756.9714	-2786.6163
5TH	Top	64271.148	-85810.1009
5TH	Bottom	69598.3172	-93025.3471
5TH	Top	123248.2764	-162003.4327
5TH	Bottom	128503.1285	-168729.9169
5TH	Top	106399.7587	-140749.963
5TH	Bottom	111396.3456	-147273.2019
5TH	Top	67778.5028	-88359.7474
5TH	Bottom	73540.9156	-94544.2441
5TH	Top	64567.4159	-89721.6995
5TH	Bottom	68275.447	-96773.5371
5TH	Top	67262.3423	-86997.7953
5TH	Bottom	72686.6013	-92314.9511
5TH	Top	64051.2554	-88359.7474
5TH	Bottom	67421.1327	-94544.2441
5TH	Top	102684.5961	-130569.3033
5TH	Bottom	110073.7185	-137092.5422
5TH	Top	96262.4222	-133293.2074
5TH	Bottom	99542.7813	-141551.1283

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
5TH	Top	101652.2751	-127845.3991
5TH	Bottom	108365.0899	-132633.9562
5TH	Top	95230.1013	-130569.3033
5TH	Bottom	97834.1528	-137092.5422
5TH	Top	100094.5667	-128761.2054
5TH	Bottom	106756.9016	-135521.5167
5TH	Top	97686.2013	-131169.5708
5TH	Bottom	102857.8238	-139420.5945
5TH	Top	97686.2013	-126352.8401
5TH	Bottom	102857.8238	-131622.439
5TH	Top	95277.836	-128761.2054
5TH	Bottom	98958.7461	-135521.5167
5TH	Top	45044.414	-55163.6363
5TH	Bottom	50861.5582	-59802.0089
5TH	Top	38622.2402	-57887.5405
5TH	Bottom	40330.6211	-64260.5949
5TH	Top	44012.093	-52439.7322
5TH	Bottom	49152.9297	-55343.4228
5TH	Top	37589.9192	-55163.6363
5TH	Bottom	38621.9925	-59802.0089
5TH	Top	41613.7657	-52344.1616
5TH	Bottom	46354.0513	-56745.4617
5TH	Top	39205.4003	-54752.5269
5TH	Bottom	42454.9735	-60644.5395
5TH	Top	39205.4003	-49935.7962
5TH	Bottom	42454.9735	-52846.384
5TH	Top	36797.035	-52344.1616
5TH	Bottom	38555.8957	-56745.4617
5TH	Top	86392.8425	-113683.1449
5TH	Bottom	90628.4052	-119175.6343
5TH	Top	66150.4027	-87488.037
5TH	Bottom	70170.7445	-92811.1554
5TH	Top	67781.0734	-87488.037
5TH	Bottom	72848.1495	-92811.1554
5TH	Top	64971.3724	-88679.7451
5TH	Bottom	68240.8645	-94761.7868
5TH	Top	67329.433	-86296.329
5TH	Bottom	72100.6245	-90860.524
5TH	Top	64519.7319	-87488.037
5TH	Bottom	67493.3395	-92811.1554
5TH	Top	84791.1277	-113236.8577
5TH	Bottom	90319.5258	-120609.037
5TH	Top	137453.9168	-180884.5087
5TH	Bottom	142881.2508	-187745.5071
5TH	Top	140836.8304	-185512.0813

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
5TH	Bottom	146264.1644	-192373.0797
5TH	Top	123988.3126	-164258.6117
5TH	Bottom	129157.3815	-170916.3647
5TH	Top	116890.2364	-149450.3794
5TH	Bottom	124451.8407	-156108.1324
5TH	Top	110468.0626	-152174.2835
5TH	Bottom	113920.9036	-160566.7185
5TH	Top	115857.9154	-146726.4752
5TH	Bottom	122743.2122	-151649.5463
5TH	Top	109435.7416	-149450.3794
5TH	Bottom	112212.275	-156108.1324
5TH	Top	120273.15	-154077.952
5TH	Bottom	127834.7544	-160735.705
5TH	Top	113850.9762	-156801.8561
5TH	Bottom	117303.8172	-165194.291
5TH	Top	119240.8291	-151354.0478
5TH	Bottom	126126.1258	-156277.1189
5TH	Top	112818.6552	-154077.952
5TH	Bottom	115595.1887	-160735.705
5TH	Top	85367.0568	-111868.396
5TH	Bottom	91301.9514	-118187.4069
5TH	Top	82155.9698	-113230.3481
5TH	Bottom	86036.4829	-120416.6999
5TH	Top	84850.8963	-110506.444
5TH	Bottom	90447.6371	-115958.1139
5TH	Top	81639.8094	-111868.396
5TH	Bottom	85182.1686	-118187.4069
5TH	Top	74541.7331	-97060.1638
5TH	Bottom	80476.6278	-103379.1746
5TH	Top	71330.6462	-98422.1158
5TH	Bottom	75211.1592	-105608.4676
5TH	Top	74025.5726	-95698.2117
5TH	Bottom	79622.3135	-101149.8816
5TH	Top	70814.4857	-97060.1638
5TH	Bottom	74356.8449	-103379.1746
5TH	Top	58235.8295	-72795.1228
5TH	Bottom	64182.3351	-77534.3809
5TH	Top	51813.6556	-75519.027
5TH	Bottom	53651.398	-81992.967
5TH	Top	57203.5085	-70071.2187
5TH	Bottom	62473.7066	-73075.7949
5TH	Top	50781.3347	-72795.1228
5TH	Bottom	51942.7694	-77534.3809
5TH	Top	121627.8635	-157538.7263
5TH	Bottom	128682.5304	-164723.0636

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
5TH	Top	119219.4981	-159947.0917
5TH	Bottom	124783.4526	-168622.1414
5TH	Top	119219.4981	-155130.361
5TH	Bottom	124783.4526	-160823.9858
5TH	Top	116811.1328	-157538.7263
5TH	Bottom	120884.3748	-164723.0636
5TH	Top	81142.9839	-105148.5107
5TH	Bottom	87767.2088	-111994.1058
5TH	Top	78734.6185	-107556.8761
5TH	Bottom	83868.1311	-115893.1836
5TH	Top	78734.6185	-102740.1454
5TH	Bottom	83868.1311	-108095.028
5TH	Top	76326.2532	-105148.5107
5TH	Bottom	79969.0533	-111994.1058
5TH	Top	50860.4383	-64706.7758
5TH	Bottom	55510.2354	-68919.4497
5TH	Top	48452.0729	-67115.1412
5TH	Bottom	51611.1576	-72818.5275
5TH	Top	48452.0729	-62298.4105
5TH	Bottom	51611.1576	-65020.3719
5TH	Top	46043.7076	-64706.7758
5TH	Bottom	47712.0798	-68919.4497
4TH	Top	58336.2338	-77904.5984
4TH	Bottom	62141.3547	-83058.3456
4TH	Top	52648.8474	-68081.1108
4TH	Bottom	53079.2893	-68419.853
4TH	Top	8916.6333	-12033.5313
4TH	Bottom	8953.0262	-12061.1521
4TH	Top	9440.7108	-12482.6682
4TH	Bottom	9548.0529	-12567.1424
4TH	Top	6765.8273	-9255.1452
4TH	Bottom	6765.8273	-9255.1452
4TH	Top	3899.0778	0
4TH	Bottom	5628.7424	0
4TH	Top	0	-3899.0778
4TH	Bottom	0	-5628.7424
4TH	Top	3824.8643	0
4TH	Bottom	5660.861	0
4TH	Top	-2756.9714	-2786.6163
4TH	Bottom	-4071.1508	-4114.9266
4TH	Top	81670.7274	-109066.4377
4TH	Bottom	86997.8965	-116281.6839
4TH	Top	157624.55	-207042.868
4TH	Bottom	162879.4021	-213769.3522
4TH	Top	133477.6516	-176374.8612

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
4TH	Bottom	138474.2385	-182898.1001
4TH	Top	83888.6957	-108293.7503
4TH	Bottom	89923.6381	-114478.2471
4TH	Top	78623.2271	-110523.0434
4TH	Bottom	82138.0286	-117770.1884
4TH	Top	83034.3814	-106064.4573
4TH	Bottom	88651.8699	-111186.3058
4TH	Top	77768.9128	-108293.7503
4TH	Bottom	80866.2604	-114478.2471
4TH	Top	132155.0244	-166194.2015
4TH	Bottom	140089.2062	-172717.4404
4TH	Top	121624.0873	-170652.7875
4TH	Bottom	124517.9872	-179301.323
4TH	Top	130446.3959	-161735.6154
4TH	Bottom	137545.6698	-166133.5578
4TH	Top	119915.4587	-166194.2015
4TH	Bottom	121974.4509	-172717.4404
4TH	Top	129234.8725	-165150.2404
4TH	Bottom	136136.1596	-171910.5517
4TH	Top	125335.7947	-169049.3182
4TH	Bottom	130507.4172	-177539.2941
4TH	Top	125335.7947	-161251.1626
4TH	Bottom	130507.4172	-166281.8093
4TH	Top	121436.7169	-165150.2404
4TH	Bottom	124878.6748	-171910.5517
4TH	Top	58622.3933	-70114.1385
4TH	Bottom	64984.5969	-74752.5111
4TH	Top	48091.4562	-74572.7246
4TH	Bottom	49413.3779	-81336.3937
4TH	Top	56913.7647	-65655.5525
4TH	Bottom	62441.0605	-68168.6285
4TH	Top	46382.8276	-70114.1385
4TH	Bottom	46869.8415	-74752.5111
4TH	Top	53718.2215	-66530.527
4TH	Bottom	58697.4592	-70931.8272
4TH	Top	49819.1437	-70429.6048
4TH	Bottom	53068.7169	-76560.5695
4TH	Top	49819.1437	-62631.4492
4TH	Bottom	53068.7169	-65303.0848
4TH	Top	45920.0659	-66530.527
4TH	Bottom	47439.9745	-70931.8272
4TH	Top	110985.0812	-145985.7092
4TH	Bottom	115220.6439	-151478.1987
4TH	Top	84660.6575	-111945.1538
4TH	Bottom	88680.9993	-117268.2722

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
4TH	Top	87338.0625	-111945.1538
4TH	Bottom	92643.602	-117268.2722
4TH	Top	82730.7775	-113895.7852
4TH	Bottom	85831.1937	-120148.7208
4TH	Top	86590.5375	-109994.5224
4TH	Bottom	91530.8049	-114387.8235
4TH	Top	81983.2525	-111945.1538
4TH	Bottom	84718.3966	-117268.2722
4TH	Top	107371.0091	-143389.117
4TH	Bottom	112899.4072	-150761.2963
4TH	Top	176270.4493	-231834.7347
4TH	Bottom	181697.7833	-238695.7331
4TH	Top	179653.3629	-236462.3073
4TH	Bottom	185080.6969	-243323.3057
4TH	Top	155506.4645	-205794.3005
4TH	Bottom	160675.5334	-212452.0536
4TH	Top	150800.9237	-190986.0682
4TH	Bottom	158907.5874	-197643.8213
4TH	Top	140269.9866	-195444.6543
4TH	Bottom	143336.3684	-204227.7039
4TH	Top	149092.2952	-186527.4822
4TH	Bottom	156364.051	-191059.9387
4TH	Top	138561.358	-190986.0682
4TH	Bottom	140792.8321	-197643.8213
4TH	Top	154183.8374	-195613.6408
4TH	Bottom	162290.501	-202271.3939
4TH	Top	143652.9002	-200072.2269
4TH	Bottom	146719.2821	-208855.2765
4TH	Top	152475.2088	-191155.0548
4TH	Bottom	159746.9647	-195687.5113
4TH	Top	141944.2716	-195613.6408
4TH	Bottom	144175.7457	-202271.3939
4TH	Top	105917.5086	-137713.1897
4TH	Bottom	112124.9329	-144032.2005
4TH	Top	100652.04	-139942.4827
4TH	Bottom	104339.3234	-147324.1418
4TH	Top	105063.1943	-135483.8967
4TH	Bottom	110853.1647	-140740.2592
4TH	Top	99797.7257	-137713.1897
4TH	Bottom	103067.5553	-144032.2005
4TH	Top	95092.1849	-122904.9574
4TH	Bottom	101299.6093	-129223.9682
4TH	Top	89826.7164	-125134.2504
4TH	Bottom	93513.9998	-132515.9095
4TH	Top	94237.8707	-120675.6644

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
4TH	Bottom	100027.8411	-125932.0269
4TH	Top	88972.4021	-122904.9574
4TH	Bottom	92242.2316	-129223.9682
4TH	Top	75144.003	-92178.7181
4TH	Bottom	81635.568	-96917.9762
4TH	Top	64613.0658	-96637.3041
4TH	Bottom	66064.349	-103501.8588
4TH	Top	73435.3744	-87720.132
4TH	Bottom	79092.0316	-90334.0936
4TH	Top	62904.4373	-92178.7181
4TH	Bottom	63520.8127	-96917.9762
4TH	Top	156249.5764	-201228.148
4TH	Bottom	163543.1955	-208412.4853
4TH	Top	152350.4987	-205127.2258
4TH	Bottom	157914.4531	-214041.2276
4TH	Top	152350.4987	-197329.0702
4TH	Bottom	157914.4531	-202783.7429
4TH	Top	148451.4209	-201228.148
4TH	Bottom	152285.7107	-208412.4853
4TH	Top	103600.7291	-133147.0372
4TH	Bottom	110463.9062	-139992.6323
4TH	Top	99701.6513	-137046.115
4TH	Bottom	104835.1638	-145621.3746
4TH	Top	99701.6513	-129247.9594
4TH	Bottom	104835.1638	-134363.8899
4TH	Top	95802.5735	-133147.0372
4TH	Bottom	99206.4215	-139992.6323
4TH	Top	65253.9401	-81936.6383
4TH	Bottom	70142.6893	-86149.3122
4TH	Top	61354.8623	-85835.7161
4TH	Bottom	64513.947	-91778.0545
4TH	Top	61354.8623	-78037.5605
4TH	Bottom	64513.947	-80520.5698
4TH	Top	57455.7846	-81936.6383
4TH	Bottom	58885.2046	-86149.3122
3RD	Top	70764.5048	-94516.2675
3RD	Bottom	74569.6256	-99670.0148
3RD	Top	64812.8151	-83772.0061
3RD	Bottom	65243.257	-84110.7483
3RD	Top	10707.2385	-14445.7617
3RD	Bottom	10743.6314	-14473.3825
3RD	Top	11350.3214	-14996.0966
3RD	Bottom	11457.6634	-15080.5709
3RD	Top	6765.8273	-9255.1452
3RD	Bottom	6765.8273	-9255.1452

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
3RD	Top	5628.7424	0
3RD	Bottom	7537.9444	0
3RD	Top	0	-5628.7424
3RD	Bottom	0	-7537.9444
3RD	Top	5660.861	0
3RD	Bottom	7821.7412	0
3RD	Top	-4071.1508	-4114.9266
3RD	Bottom	-5615.0332	-5675.4099
3RD	Top	99070.3067	-132322.7745
3RD	Bottom	104397.4758	-139538.0207
3RD	Top	192000.8235	-252082.3033
3RD	Bottom	197255.6756	-258808.7875
3RD	Top	160555.5445	-211999.7593
3RD	Bottom	165552.1314	-218522.9983
3RD	Top	100271.4182	-128227.7533
3RD	Bottom	106566.2674	-134412.25
3RD	Top	92485.8087	-131519.6946
3RD	Bottom	95816.8478	-138952.5779
3RD	Top	98999.65	-124935.812
3RD	Bottom	104800.9009	-129871.9221
3RD	Top	91214.0405	-128227.7533
3RD	Bottom	94051.4814	-134412.25
3RD	Top	162170.5121	-201819.0996
3RD	Bottom	170624.5074	-208342.3386
3RD	Top	146599.2932	-208402.9822
3RD	Bottom	149125.6683	-217422.9944
3RD	Top	159626.9758	-195235.217
3RD	Bottom	167093.7745	-199261.6828
3RD	Top	144055.7568	-201819.0996
3RD	Bottom	145594.9354	-208342.3386
3RD	Top	158614.1304	-201539.2754
3RD	Bottom	165694.9549	-208299.5866
3RD	Top	152985.3881	-207168.0177
3RD	Bottom	158157.0105	-215837.531
3RD	Top	152985.3881	-195910.533
3RD	Bottom	158157.0105	-200761.6423
3RD	Top	147356.6457	-201539.2754
3RD	Bottom	150619.0662	-208299.5866
3RD	Top	72745.432	-85064.6407
3RD	Bottom	79627.449	-89703.0133
3RD	Top	57174.213	-91648.5233
3RD	Bottom	58128.61	-98783.6691
3RD	Top	70201.8956	-78480.7581
3RD	Bottom	76096.7161	-80622.3575
3RD	Top	54630.6766	-85064.6407

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
3RD	Bottom	54597.8771	-89703.0133
3RD	Top	66061.6294	-80716.8924
3RD	Bottom	71220.4046	-85118.1926
3RD	Top	60432.8871	-86345.6348
3RD	Bottom	63682.4603	-92656.137
3RD	Top	60432.8871	-75088.1501
3RD	Bottom	63682.4603	-77580.2482
3RD	Top	54804.1447	-80716.8924
3RD	Bottom	56144.5159	-85118.1926
3RD	Top	135577.3199	-178288.2735
3RD	Bottom	139812.8827	-183780.763
3RD	Top	103170.9123	-136402.2705
3RD	Bottom	107191.2541	-141725.3889
3RD	Top	107133.5151	-136402.2705
3RD	Bottom	112666.473	-141725.3889
3RD	Top	100321.1068	-139282.7192
3RD	Bottom	103260.7309	-145698.1758
3RD	Top	106020.7179	-133521.8219
3RD	Bottom	111121.7773	-137752.602
3RD	Top	99208.3096	-136402.2705
3RD	Bottom	101716.0353	-141725.3889
3RD	Top	129950.8905	-173541.3762
3RD	Bottom	135479.2886	-180913.5555
3RD	Top	215086.9818	-282784.9607
3RD	Bottom	220514.3158	-289645.9591
3RD	Top	218469.8954	-287412.5333
3RD	Bottom	223897.2295	-294273.5317
3RD	Top	187024.6164	-247329.9894
3RD	Bottom	192193.6852	-253987.7424
3RD	Top	185256.6704	-232521.7571
3RD	Bottom	193883.1476	-239179.5101
3RD	Top	169685.4514	-239105.6397
3RD	Bottom	172384.3085	-248260.1659
3RD	Top	182713.134	-225937.8745
3RD	Bottom	190352.4147	-230098.8543
3RD	Top	167141.9151	-232521.7571
3RD	Bottom	168853.5756	-239179.5101
3RD	Top	188639.584	-237149.3297
3RD	Bottom	197266.0612	-243807.0827
3RD	Top	173068.3651	-243733.2123
3RD	Bottom	175767.2221	-252887.7385
3RD	Top	186096.0477	-230565.4471
3RD	Bottom	193735.3283	-234726.4269
3RD	Top	170524.8287	-237149.3297
3RD	Bottom	172236.4892	-243807.0827

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
3RD	Top	126740.4901	-163557.9833
3RD	Bottom	133207.8212	-169876.9942
3RD	Top	118954.8806	-166849.9246
3RD	Bottom	122458.4016	-174417.3221
3RD	Top	125468.7219	-160266.042
3RD	Bottom	131442.4547	-165336.6663
3RD	Top	117683.1124	-163557.9833
3RD	Bottom	120693.0352	-169876.9942
3RD	Top	115915.1664	-148749.7511
3RD	Bottom	122382.4975	-155068.7619
3RD	Top	108129.557	-152041.6924
3RD	Bottom	111633.078	-159609.0898
3RD	Top	114643.3982	-145457.8097
3RD	Bottom	120617.1311	-150528.434
3RD	Top	106857.7888	-148749.7511
3RD	Bottom	109867.7116	-155068.7619
3RD	Top	92597.2359	-111562.3133
3RD	Bottom	99608.6144	-116301.5714
3RD	Top	77026.0169	-118146.1959
3RD	Bottom	78109.7753	-125382.2272
3RD	Top	90053.6995	-104978.4307
3RD	Bottom	96077.8815	-107220.9156
3RD	Top	74482.4805	-111562.3133
3RD	Bottom	74579.0424	-116301.5714
3RD	Top	191110.2415	-244917.5697
3RD	Bottom	198583.398	-252101.907
3RD	Top	185481.4992	-250546.312
3RD	Bottom	191045.4536	-259639.8513
3RD	Top	185481.4992	-239288.8273
3RD	Bottom	191045.4536	-244563.9626
3RD	Top	179852.7568	-244917.5697
3RD	Bottom	183507.5093	-252101.907
3RD	Top	126297.4264	-161145.5636
3RD	Bottom	133340.141	-167991.1587
3RD	Top	120668.6841	-166774.306
3RD	Bottom	125802.1966	-175529.1031
3RD	Top	120668.6841	-155516.8213
3RD	Bottom	125802.1966	-160453.2143
3RD	Top	115039.9417	-161145.5636
3RD	Bottom	118264.2522	-167991.1587
3RD	Top	79886.3941	-99166.5007
3RD	Bottom	84954.6807	-103379.1746
3RD	Top	74257.6517	-104795.2431
3RD	Bottom	77416.7364	-110917.119
3RD	Top	74257.6517	-93537.7583

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
3RD	Bottom	77416.7364	-95841.2302
3RD	Top	68628.9094	-99166.5007
3RD	Bottom	69878.792	-103379.1746
2ND	Top	83192.7757	-111127.9366
2ND	Bottom	86997.8965	-116281.6839
2ND	Top	76976.7829	-99462.9013
2ND	Bottom	77407.2248	-99801.6435
2ND	Top	12497.8437	-16857.9922
2ND	Bottom	12534.2367	-16885.613
2ND	Top	13259.932	-17509.5251
2ND	Bottom	13367.274	-17593.9994
2ND	Top	6765.8273	-9255.1452
2ND	Bottom	6765.8273	-9255.1452
2ND	Top	7537.9444	0
2ND	Bottom	9570.3529	0
2ND	Top	0	-7537.9444
2ND	Bottom	0	-9570.3529
2ND	Top	7821.7412	0
2ND	Bottom	10297.5569	0
2ND	Top	-5615.0332	-5675.4099
2ND	Bottom	-7381.1575	-7460.5248
2ND	Top	116469.886	-155579.1113
2ND	Bottom	121797.0552	-162794.3574
2ND	Top	226377.0971	-297121.7386
2ND	Bottom	231631.9492	-303848.2228
2ND	Top	187633.4374	-247624.6575
2ND	Bottom	192630.0243	-254147.8964
2ND	Top	116914.0475	-148161.7562
2ND	Bottom	123460.845	-154346.253
2ND	Top	106164.6279	-152702.0841
2ND	Bottom	109317.8735	-160314.6728
2ND	Top	115148.681	-143621.4283
2ND	Bottom	121127.7255	-148377.8331
2ND	Top	104399.2615	-148161.7562
2ND	Bottom	106984.754	-154346.253
2ND	Top	192705.8134	-237443.9978
2ND	Bottom	201663.7053	-243967.2367
2ND	Top	171206.9743	-246524.6536
2ND	Bottom	173377.7623	-255904.0764
2ND	Top	189175.0804	-228363.342
2ND	Bottom	196997.4663	-232030.397
2ND	Top	167676.2414	-237443.9978
2ND	Bottom	168711.5233	-243967.2367
2ND	Top	188172.9258	-237928.3103
2ND	Bottom	195376.9568	-244688.6216

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
2ND	Top	180634.9814	-245466.2547
2ND	Bottom	185806.6039	-254258.9745
2ND	Top	180634.9814	-230390.3659
2ND	Bottom	185806.6039	-235118.2687
2ND	Top	173097.037	-237928.3103
2ND	Bottom	176236.251	-244688.6216
2ND	Top	87388.2841	-100015.143
2ND	Bottom	94774.1979	-104653.5155
2ND	Top	65889.445	-109095.7988
2ND	Bottom	66488.2548	-116590.3552
2ND	Top	83857.5512	-90934.4872
2ND	Bottom	90107.9589	-92716.6758
2ND	Top	62358.7121	-100015.143
2ND	Bottom	61822.0159	-104653.5155
2ND	Top	78584.5748	-94903.2579
2ND	Bottom	83866.5565	-99304.558
2ND	Top	71046.6304	-102441.2022
2ND	Bottom	74296.2036	-108874.9109
2ND	Top	71046.6304	-87365.3135
2ND	Bottom	74296.2036	-89734.2052
2ND	Top	63508.6861	-94903.2579
2ND	Bottom	64725.8508	-99304.558
2ND	Top	160169.5586	-210590.8379
2ND	Bottom	164405.1214	-216083.3274
2ND	Top	121681.1671	-160859.3873
2ND	Bottom	125701.5089	-166182.5056
2ND	Top	127156.386	-160859.3873
2ND	Bottom	132909.7988	-166182.5056
2ND	Top	117750.6439	-164832.1742
2ND	Bottom	120534.6987	-171404.873
2ND	Top	125611.6904	-156886.6003
2ND	Bottom	130868.3192	-160960.1383
2ND	Top	116205.9483	-160859.3873
2ND	Bottom	118493.2191	-166182.5056
2ND	Top	152530.772	-203693.6355
2ND	Bottom	158059.1701	-211065.8148
2ND	Top	253903.5143	-333735.1867
2ND	Bottom	259330.8483	-340596.1851
2ND	Top	257286.428	-338362.7593
2ND	Bottom	262713.762	-345223.7577
2ND	Top	218542.7682	-288865.6783
2ND	Bottom	223711.8371	-295523.4313
2ND	Top	220232.2306	-274057.446
2ND	Bottom	229362.6045	-280715.199
2ND	Top	198733.3915	-283138.1018

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
2ND	Bottom	201076.6614	-292652.0387
2ND	Top	216701.4977	-264976.7902
2ND	Bottom	224696.3655	-268778.3593
2ND	Top	195202.6586	-274057.446
2ND	Bottom	196410.4224	-280715.199
2ND	Top	223615.1442	-278685.0186
2ND	Bottom	232745.5181	-285342.7716
2ND	Top	202116.3051	-287765.6744
2ND	Bottom	204459.575	-297279.6113
2ND	Top	220084.4113	-269604.3628
2ND	Bottom	228079.2791	-273405.9319
2ND	Top	198585.5722	-278685.0186
2ND	Bottom	199793.3361	-285342.7716
2ND	Top	147823.3783	-189402.777
2ND	Bottom	154542.6578	-195721.7878
2ND	Top	137073.9588	-193943.1049
2ND	Bottom	140399.6863	-201690.2077
2ND	Top	146058.0119	-184862.4491
2ND	Bottom	152209.5383	-189753.368
2ND	Top	135308.5923	-189402.777
2ND	Bottom	138066.5668	-195721.7878
2ND	Top	136998.0547	-174594.5447
2ND	Bottom	143717.3341	-180913.5555
2ND	Top	126248.6352	-179134.8726
2ND	Bottom	129574.3626	-186881.9754
2ND	Top	135232.6882	-170054.2168
2ND	Bottom	141384.2147	-174945.1357
2ND	Top	124483.2687	-174594.5447
2ND	Bottom	127241.2431	-180913.5555
2ND	Top	110570.2823	-130945.9085
2ND	Bottom	118085.5575	-135685.1666
2ND	Top	89071.4432	-140026.5643
2ND	Bottom	89799.6144	-147622.0063
2ND	Top	107039.5493	-121865.2527
2ND	Bottom	113419.3185	-123748.327
2ND	Top	85540.7103	-130945.9085
2ND	Bottom	85133.3755	-135685.1666
2ND	Top	226150.4441	-288606.9914
2ND	Bottom	233746.8071	-295791.3286
2ND	Top	218612.4997	-296144.9357
2ND	Bottom	224176.4542	-305361.6815
2ND	Top	218612.4997	-281069.047
2ND	Bottom	224176.4542	-286220.9757
2ND	Top	211074.5554	-288606.9914
2ND	Bottom	214606.1013	-295791.3286

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
2ND	Top	149173.6612	-189144.0901
2ND	Bottom	156339.5822	-195989.6852
2ND	Top	141635.7168	-196682.0345
2ND	Bottom	146769.2294	-205560.038
2ND	Top	141635.7168	-181606.1457
2ND	Bottom	146769.2294	-186419.3323
2ND	Top	134097.7725	-189144.0901
2ND	Bottom	137198.8765	-195989.6852
2ND	Top	94698.3855	-116396.3631
2ND	Bottom	99889.8786	-120609.037
2ND	Top	87160.4411	-123934.3075
2ND	Bottom	90319.5258	-130179.3899
2ND	Top	87160.4411	-108858.4188
2ND	Bottom	90319.5258	-111038.6841
2ND	Top	79622.4968	-116396.3631
2ND	Bottom	80749.1729	-120609.037
1ST	Top	95621.0466	-127739.6058
1ST	Bottom	99426.1675	-132893.353
1ST	Top	89140.7507	-115153.7965
1ST	Bottom	89571.1926	-115492.5387
1ST	Top	14288.449	-19270.2226
1ST	Bottom	14324.8419	-19297.8434
1ST	Top	15169.5425	-20022.9536
1ST	Bottom	15276.8846	-20107.4279
1ST	Top	6765.8273	-9255.1452
1ST	Bottom	6765.8273	-9255.1452
1ST	Top	9570.3529	0
1ST	Bottom	11673.6441	0
1ST	Top	0	-9570.3529
1ST	Bottom	0	-11673.6441
1ST	Top	10297.5569	0
1ST	Bottom	12930.607	0
1ST	Top	-7381.1575	-7460.5248
1ST	Bottom	-9258.228	-9357.7788
1ST	Top	133869.4653	-178835.4481
1ST	Bottom	139196.6345	-186050.6942
1ST	Top	260753.3707	-342161.1739
1ST	Bottom	266008.2227	-348887.6581
1ST	Top	214711.3303	-283249.5557
1ST	Bottom	219707.9172	-289772.7946
1ST	Top	133808.6251	-168095.7592
1ST	Bottom	140481.2102	-174280.2559
1ST	Top	119665.6536	-174064.179
1ST	Bottom	122730.1422	-181766.479
1ST	Top	131475.5056	-162127.3393

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
1ST	Bottom	137543.307	-166794.0329
1ST	Top	117332.5341	-168095.7592
1ST	Bottom	119792.239	-174280.2559
1ST	Top	223745.0113	-273068.896
1ST	Bottom	232954.4785	-279592.1349
1ST	Top	195459.0682	-285005.7357
1ST	Bottom	197452.3425	-294564.581
1ST	Top	219078.7723	-261132.0563
1ST	Bottom	227078.6719	-264619.6888
1ST	Top	190792.8292	-273068.896
1ST	Bottom	191576.5359	-279592.1349
1ST	Top	217854.9277	-274317.3453
1ST	Bottom	225129.8414	-281077.6566
1ST	Top	208284.5748	-283887.6982
1ST	Bottom	213456.1973	-292751.3007
1ST	Top	208284.5748	-264746.9924
1ST	Bottom	213456.1973	-269404.0124
1ST	Top	198714.2219	-274317.3453
1ST	Bottom	201782.5531	-281077.6566
1ST	Top	102535.033	-114965.6452
1ST	Bottom	110172.522	-119604.0177
1ST	Top	74249.0899	-126902.4849
1ST	Bottom	74670.386	-134576.4638
1ST	Top	97868.794	-103028.8055
1ST	Bottom	104296.7155	-104631.5716
1ST	Top	69582.8509	-114965.6452
1ST	Bottom	68794.5795	-119604.0177
1ST	Top	91230.7267	-109089.6233
1ST	Bottom	96583.5912	-113490.9235
1ST	Top	81660.3738	-118659.9762
1ST	Bottom	84909.947	-125164.5676
1ST	Top	81660.3738	-99519.2704
1ST	Bottom	84909.947	-101817.2793
1ST	Top	72090.0209	-109089.6233
1ST	Bottom	73236.3029	-113490.9235
1ST	Top	184761.7973	-242893.4022
1ST	Bottom	188997.3601	-248385.8917
1ST	Top	140191.422	-185316.504
1ST	Bottom	144211.7638	-190639.6224
1ST	Top	147399.7118	-185316.504
1ST	Bottom	153263.1887	-190639.6224
1ST	Top	135024.6117	-190538.8714
1ST	Bottom	137731.0042	-197190.0675
1ST	Top	145358.2322	-180094.1366
1ST	Bottom	150692.5233	-184089.1772

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
1ST	Top	132983.1321	-185316.504
1ST	Bottom	135160.3388	-190639.6224
1ST	Top	175110.6534	-233845.8947
1ST	Bottom	180639.0515	-241218.074
1ST	Top	292720.0468	-384685.4127
1ST	Bottom	298147.3809	-391546.4111
1ST	Top	296102.9605	-389312.9853
1ST	Bottom	301530.2945	-396173.9837
1ST	Top	250060.9201	-330401.3671
1ST	Bottom	255229.9889	-337059.1202
1ST	Top	255711.6875	-315593.1348
1ST	Bottom	265093.6366	-322250.8879
1ST	Top	227425.7444	-327529.9745
1ST	Bottom	229591.5006	-337223.3339
1ST	Top	251045.4485	-303656.2951
1ST	Bottom	259217.83	-307278.4418
1ST	Top	222759.5054	-315593.1348
1ST	Bottom	223715.694	-322250.8879
1ST	Top	259094.6011	-320220.7074
1ST	Bottom	268476.5502	-326878.4605
1ST	Top	230808.658	-332157.5471
1ST	Bottom	232974.4142	-341850.9065
1ST	Top	254428.3621	-308283.8677
1ST	Bottom	262600.7437	-311906.0144
1ST	Top	226142.4191	-320220.7074
1ST	Bottom	227098.6077	-326878.4605
1ST	Top	169158.2149	-215247.5706
1ST	Bottom	176003.282	-221566.5815
1ST	Top	155015.2434	-221215.9905
1ST	Bottom	158252.214	-229052.8045
1ST	Top	166825.0954	-209279.1508
1ST	Bottom	173065.3787	-214080.3584
1ST	Top	152682.1239	-215247.5706
1ST	Bottom	155314.3107	-221566.5815
1ST	Top	158332.8913	-200439.3383
1ST	Bottom	165177.9584	-206758.3492
1ST	Top	144189.9198	-206407.7582
1ST	Bottom	147426.8904	-214244.5722
1ST	Top	155999.7718	-194470.9185
1ST	Bottom	162240.0551	-199272.1261
1ST	Top	141856.8003	-200439.3383
1ST	Bottom	144488.9871	-206758.3492
1ST	Top	129047.2254	-150329.5038
1ST	Bottom	136814.0758	-155068.7619
1ST	Top	100761.2823	-162266.3435

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
1ST	Bottom	101311.9398	-170041.208
1ST	Top	124380.9864	-138392.6641
1ST	Bottom	130938.2693	-140096.3158
1ST	Top	96095.0433	-150329.5038
1ST	Bottom	95436.1333	-155068.7619
1ST	Top	261313.8532	-332296.413
1ST	Bottom	268981.0989	-339480.7503
1ST	Top	251743.5003	-341866.7659
1ST	Bottom	257307.4547	-351154.3944
1ST	Top	251743.5003	-322726.0601
1ST	Bottom	257307.4547	-327807.1061
1ST	Top	242173.1474	-332296.413
1ST	Bottom	245633.8106	-339480.7503
1ST	Top	172173.1025	-217142.6165
1ST	Bottom	179409.9063	-223988.2116
1ST	Top	162602.7496	-226712.9694
1ST	Bottom	167736.2621	-235661.8558
1ST	Top	162602.7496	-207572.2636
1ST	Bottom	167736.2621	-212314.5675
1ST	Top	153032.3967	-217142.6165
1ST	Bottom	156062.618	-223988.2116
1ST	Top	109633.5834	-133626.2256
1ST	Bottom	114895.9593	-137838.8994
1ST	Top	100063.2305	-143196.5785
1ST	Bottom	103222.3151	-149512.5436
1ST	Top	100063.2305	-124055.8727
1ST	Bottom	103222.3151	-126165.2553
1ST	Top	90492.8776	-133626.2256
1ST	Bottom	91548.671	-137838.8994
GF	Top	108866.4531	-145414.7374
GF	Bottom	111178.53	-148744.5727
GF	Top	101243.0524	-130418.0117
GF	Bottom	101243.0524	-130418.0117
GF	Top	16079.0542	-21682.453
GF	Bottom	16079.0542	-21682.453
GF	Top	17079.153	-22536.382
GF	Bottom	17079.153	-22536.382
GF	Top	6765.8273	-9255.1452
GF	Bottom	6765.8273	-9255.1452
GF	Top	11673.6441	0
GF	Bottom	13162.9841	0
GF	Top	0	-11673.6441
GF	Bottom	0	-13162.9841
GF	Top	12930.607	0
GF	Bottom	14773.7422	0

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
GF	Top	-9258.228	-9357.7788
GF	Bottom	-10572.1773	-10685.8566
GF	Top	152413.0344	-203580.6324
GF	Bottom	155649.9419	-208242.4018
GF	Top	296011.5413	-387794.0762
GF	Bottom	298786.0335	-391789.8786
GF	Top	242708.1198	-319723.9289
GF	Bottom	245482.612	-323719.7312
GF	Top	151809.553	-189305.9172
GF	Bottom	156058.5533	-193301.7195
GF	Top	134058.485	-196792.1402
GF	Bottom	135781.8178	-201850.4048
GF	Top	148871.6498	-181819.6942
GF	Bottom	152697.3014	-184753.0343
GF	Top	131120.5818	-189305.9172
GF	Bottom	132420.5659	-193301.7195
GF	Top	255954.6811	-309543.2692
GF	Bottom	261678.1895	-313539.0715
GF	Top	220452.5451	-324515.7153
GF	Bottom	221124.7184	-330636.4421
GF	Top	250078.8746	-294570.8231
GF	Bottom	254955.6856	-296441.701
GF	Top	214576.7385	-309543.2692
GF	Bottom	214402.2146	-313539.0715
GF	Top	248564.2972	-311604.7745
GF	Bottom	252934.4849	-315753.7493
GF	Top	236890.653	-323278.4187
GF	Bottom	239771.5008	-328916.7334
GF	Top	236890.653	-299931.1304
GF	Bottom	239771.5008	-302590.7652
GF	Top	225217.0089	-311604.7745
GF	Bottom	226608.5166	-315753.7493
GF	Top	118668.7791	-130873.2637
GF	Bottom	123698.6644	-133870.1154
GF	Top	83166.6431	-145845.7098
GF	Bottom	83145.1933	-150967.486
GF	Top	112792.9725	-115900.8176
GF	Bottom	116976.1606	-116772.7449
GF	Top	77290.8365	-130873.2637
GF	Bottom	76422.6895	-133870.1154
GF	Top	104645.5951	-124184.1858
GF	Bottom	108109.4487	-127027.8651
GF	Top	92971.951	-135857.8299
GF	Bottom	94946.4646	-140190.8492
GF	Top	92971.951	-112510.5416

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
GF	Bottom	94946.4646	-113864.881
GF	Top	81298.3068	-124184.1858
GF	Bottom	81783.4805	-127027.8651
GF	Top	210109.5056	-275832.7491
GF	Bottom	212421.5824	-279162.5844
GF	Top	159487.9793	-210623.7433
GF	Bottom	161800.0562	-213953.5786
GF	Top	168539.4043	-210623.7433
GF	Bottom	172141.6757	-213953.5786
GF	Top	153007.2198	-217174.1884
GF	Bottom	154399.5321	-221433.6782
GF	Top	165968.7389	-204073.2981
GF	Bottom	169200.5803	-206473.4789
GF	Top	150436.5544	-210623.7433
GF	Bottom	151458.4367	-213953.5786
GF	Top	198834.5245	-265487.0014
GF	Bottom	202071.432	-270148.7707
GF	Top	332418.4763	-436229.1056
GF	Bottom	335192.9685	-440224.9079
GF	Top	335801.3899	-440856.6782
GF	Bottom	338575.8821	-444852.4805
GF	Top	282497.9685	-372786.5309
GF	Bottom	285272.4607	-376782.3332
GF	Top	292361.6161	-357978.2986
GF	Bottom	298085.1245	-361974.1009
GF	Top	256859.4801	-372950.7447
GF	Bottom	257531.6534	-379071.4714
GF	Top	286485.8096	-343005.8525
GF	Bottom	291362.6207	-344876.7304
GF	Top	250983.6736	-357978.2986
GF	Bottom	250809.1496	-361974.1009
GF	Top	295744.5298	-362605.8712
GF	Bottom	301468.0381	-366601.6735
GF	Top	260242.3938	-377578.3172
GF	Bottom	260914.5671	-383699.044
GF	Top	289868.7232	-347633.4251
GF	Bottom	294745.5343	-349504.303
GF	Top	254366.5872	-362605.8712
GF	Bottom	254192.0632	-366601.6735
GF	Top	191599.4017	-242368.5192
GF	Bottom	195848.402	-246364.3215
GF	Top	173848.3337	-249854.7422
GF	Bottom	175571.6664	-254913.0068
GF	Top	188661.4984	-234882.2961
GF	Bottom	192487.1501	-237815.6362

Table 5.7 - Story Forces (Part 2 of 2, continued)

Story	Location	MX kip-ft	MY kip-ft
GF	Top	170910.4304	-242368.5192
GF	Bottom	172210.4145	-246364.3215
GF	Top	180774.0781	-227560.2869
GF	Bottom	185023.0783	-231556.0892
GF	Top	163023.0101	-235046.5099
GF	Bottom	164746.3428	-240104.7745
GF	Top	177836.1748	-220074.0638
GF	Bottom	181661.8264	-223007.4039
GF	Top	160085.1068	-227560.2869
GF	Bottom	161385.0909	-231556.0892
GF	Top	148511.1656	-170670.2152
GF	Bottom	153541.0509	-173667.0669
GF	Top	113009.0296	-185642.6612
GF	Bottom	112987.5798	-190764.4374
GF	Top	142635.359	-155697.7691
GF	Bottom	146818.5471	-156569.6964
GF	Top	107133.223	-170670.2152
GF	Bottom	106265.076	-173667.0669
GF	Top	297548.755	-376941.6558
GF	Bottom	302043.7949	-381270.4417
GF	Top	285875.1109	-388615.3
GF	Bottom	288880.8108	-394433.4258
GF	Top	285875.1109	-365268.0117
GF	Bottom	288880.8108	-368107.4575
GF	Top	274201.4667	-376941.6558
GF	Bottom	275717.8266	-381270.4417
GF	Top	196305.7026	-246523.6441
GF	Bottom	200800.7425	-250852.43
GF	Top	184632.0585	-258197.2883
GF	Bottom	187637.7583	-264015.4141
GF	Top	184632.0585	-234850
GF	Bottom	187637.7583	-237689.4458
GF	Top	172958.4143	-246523.6441
GF	Bottom	174474.7742	-250852.43
GF	Top	125293.3724	-151706.8579
GF	Bottom	128632.3739	-154370.7261
GF	Top	113619.7283	-163380.5021
GF	Bottom	115469.3897	-167533.7103
GF	Top	113619.7283	-140033.2138
GF	Bottom	115469.3897	-141207.742
GF	Top	101946.0841	-151706.8579
GF	Bottom	102306.4056	-154370.7261

5.3 Point Results

Table 5.8 - Joint Reactions (Part 1 of 2)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	4	1	Dead	LinStatic				-0.68	0.956	98.313
Base	4	1	Live	LinStatic				-1.079	1.489	119.068
Base	4	1	PW	LinStatic				-0.112	0.162	10.632
Base	4	1	FF	LinStatic				-0.114	0.157	10.584
Base	4	1	ROOF LIVE	LinStatic				-0.01	0.017	5.36
Base	4	1	EQ	LinStatic	Max			-0.606	1.488	36.843
Base	4	1	EQ	LinStatic	Min			-2.577	-4.21	-18.533
Base	4	1	wind	LinStatic	Max			-0.01	4.722	35.049
Base	4	1	wind	LinStatic	Min			-2.451	-4.948	-19.199
Base	4	1	1.4D	Combination				-0.952	1.338	137.638
Base	4	1	1.2D+1.6L+.5Lr	Combination				-2.548	3.538	311.164
Base	4	1	1.2D+1.6Lr+L	Combination				-1.911	2.664	245.618
Base	4	1	1.2D+1.6Lr+.8W	Combination	Max			-0.84	4.952	154.59
Base	4	1	1.2D+1.6Lr+.8W	Combination	Min			-2.793	-2.784	111.191
Base	4	1	1.2D+1.6Lr-.8W	Combination	Max			1.128	5.133	141.91
Base	4	1	1.2D+1.6Lr-.8W	Combination	Min			-0.824	-2.602	98.511
Base	4	1	1.2D+1.6W+L+.5Lr	Combination	Max			-1.917	10.199	295.801
Base	4	1	1.2D+1.6W+L+.5Lr	Combination	Min			-5.821	-5.272	209.004
Base	4	1	1.2D-1.6W+L+.5Lr	Combination	Max			2.021	10.561	270.441
Base	4	1	1.2D-1.6W+L+.5Lr	Combination	Min			-1.883	-4.91	183.645
Base	4	1	1.246D+1E+1L	Combination	Max			-2.532	4.168	278.408
Base	4	1	1.246D+1E+1L	Combination	Min			-4.503	-1.53	223.032
Base	4	1	1.246D-1E+1L	Combination	Max			0.65	6.89	260.099
Base	4	1	1.246D-1E+1L	Combination	Min			-1.32	1.192	204.723
Base	4	1	0.9D+1.6W	Combination	Max			-0.629	8.415	144.56
Base	4	1	0.9D+1.6W	Combination	Min			-4.533	-7.057	57.763
Base	4	1	0.9D-1.6W	Combination	Max			3.309	8.777	119.2
Base	4	1	0.9D-1.6W	Combination	Min			-0.595	-6.694	32.403
Base	4	1	.854D+E	Combination	Max			-1.186	2.304	120.802
Base	4	1	.854D+E	Combination	Min			-3.157	-3.394	65.426
Base	4	1	.854D-E	Combination	Max			1.996	5.026	102.492
Base	4	1	.854D-E	Combination	Min			0.026	-0.672	47.116
Base	4	1	D+L	Combination				-1.759	2.445	217.381
Base	4	1	D+.5L	Combination				-1.219	1.7	157.847
Base	4	1	D+.5L+.7W	Combination	Max			-1.227	5.005	182.381
Base	4	1	D+.5L+.7W	Combination	Min			-2.935	-1.763	144.407
Base	4	1	D+.5L-.7W	Combination	Max			0.496	5.164	171.286
Base	4	1	D+.5L-.7W	Combination	Min			-1.212	-1.605	133.312
Base	4	1	DConS1	Combination				-1.268	1.785	167.34
Base	4	1	DConS2	Combination				-2.814	3.912	333.943
Base	4	1	DConS3	Combination				-2.819	3.921	336.623
Base	4	1	DConS4	Combination				-2.182	3.047	271.077
Base	4	1	DConS5	Combination	Max			-2.183	10.573	318.58
Base	4	1	DConS5	Combination	Min			-6.087	-4.898	231.784

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	4	1	DConS6	Combination	Max			1.755	10.936	293.221
Base	4	1	DConS6	Combination	Min			-2.149	-4.536	206.424
Base	4	1	DConS7	Combination	Max			-2.188	10.582	321.26
Base	4	1	DConS7	Combination	Min			-6.092	-4.889	234.463
Base	4	1	DConS8	Combination	Max			1.75	10.945	295.9
Base	4	1	DConS8	Combination	Min			-2.154	-4.527	209.104
Base	4	1	DConS9	Combination	Max			-1.111	5.335	180.049
Base	4	1	DConS9	Combination	Min			-3.064	-2.401	136.65
Base	4	1	DConS10	Combination	Max			0.858	5.516	167.369
Base	4	1	DConS10	Combination	Min			-1.095	-2.219	123.97
Base	4	1	DConS11	Combination	Max			-1.095	5.307	171.473
Base	4	1	DConS11	Combination	Min			-3.047	-2.429	128.075
Base	4	1	DConS12	Combination	Max			0.874	5.488	158.793
Base	4	1	DConS12	Combination	Min			-1.078	-2.247	115.395
Base	4	1	DConS13	Combination	Max			-0.832	8.702	163.654
Base	4	1	DConS13	Combination	Min			-4.736	-6.769	76.857
Base	4	1	DConS14	Combination	Max			3.106	9.064	138.294
Base	4	1	DConS14	Combination	Min			-0.798	-6.407	51.497
Base	4	1	DConS15	Combination	Max			-2.863	4.634	311.298
Base	4	1	DConS15	Combination	Min			-4.833	-1.064	255.922
Base	4	1	DConS16	Combination	Max			0.32	7.356	292.988
Base	4	1	DConS16	Combination	Min			-1.651	1.659	237.612
Base	4	1	DConS17	Combination	Max			-1.783	3.145	192.23
Base	4	1	DConS17	Combination	Min			-3.754	-2.553	136.854
Base	4	1	DConS18	Combination	Max			1.4	5.868	173.92
Base	4	1	DConS18	Combination	Min			-0.571	0.17	118.544
Base	4	1	DConS19	Combination	Max			-1.33	2.508	132.465
Base	4	1	DConS19	Combination	Min			-3.301	-3.19	77.089
Base	4	1	DConS20	Combination	Max			1.852	5.23	114.156
Base	4	1	DConS20	Combination	Min			-0.118	-0.468	58.78
Base	5	2	Dead	LinStatic				-4.261	-0.273	214.284
Base	5	2	Live	LinStatic				-6.08	-0.142	234.579
Base	5	2	PW	LinStatic				-0.749	-0.081	26.217
Base	5	2	FF	LinStatic				-0.775	-0.067	31.331
Base	5	2	ROOF LIVE	LinStatic				-0.023	0.056	10.949
Base	5	2	EQ	LinStatic	Max			2.378	0.318	79.043
Base	5	2	EQ	LinStatic	Min			-6.411	-2.185	-89.756
Base	5	2	wind	LinStatic	Max			3.523	2.071	81.095
Base	5	2	wind	LinStatic	Min			-6.227	-2.646	-109.462
Base	5	2	1.4D	Combination				-5.966	-0.383	299.998
Base	5	2	1.2D+1.6L+.5Lr	Combination				-14.853	-0.527	637.943
Base	5	2	1.2D+1.6Lr+L	Combination				-11.231	-0.379	509.239
Base	5	2	1.2D+1.6Lr+.8W	Combination	Max			-2.333	1.419	339.535
Base	5	2	1.2D+1.6Lr+.8W	Combination	Min			-10.133	-2.355	187.09
Base	5	2	1.2D+1.6Lr-.8W	Combination	Max			-0.169	1.879	362.229

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	5	2	1.2D+1.6Lr-.8W	Combination	Min			-7.97	-1.895	209.784
Base	5	2	1.2D+1.6W+L+.5Lr	Combination	Max			-5.568	2.872	626.946
Base	5	2	1.2D+1.6W+L+.5Lr	Combination	Min			-21.168	-4.675	322.056
Base	5	2	1.2D-1.6W+L+.5Lr	Combination	Max			-1.242	3.792	672.334
Base	5	2	1.2D-1.6W+L+.5Lr	Combination	Min			-16.842	-3.755	367.444
Base	5	2	1.246D+1E+1L	Combination	Max			-9.011	-0.165	580.621
Base	5	2	1.246D+1E+1L	Combination	Min			-17.8	-2.667	411.822
Base	5	2	1.246D-1E+1L	Combination	Max			-4.978	1.702	591.333
Base	5	2	1.246D-1E+1L	Combination	Min			-13.767	-0.8	422.534
Base	5	2	0.9D+1.6W	Combination	Max			1.802	3.068	322.607
Base	5	2	0.9D+1.6W	Combination	Min			-13.798	-4.48	17.717
Base	5	2	0.9D-1.6W	Combination	Max			6.128	3.988	367.995
Base	5	2	0.9D-1.6W	Combination	Min			-9.472	-3.56	63.104
Base	5	2	.854D+E	Combination	Max			-1.261	0.084	262.042
Base	5	2	.854D+E	Combination	Min			-10.05	-2.418	93.243
Base	5	2	.854D-E	Combination	Max			2.772	1.951	272.754
Base	5	2	.854D-E	Combination	Min			-6.017	-0.551	103.955
Base	5	2	D+L	Combination				-10.341	-0.415	448.864
Base	5	2	D+.5L	Combination				-7.301	-0.344	331.574
Base	5	2	D+.5L+.7W	Combination	Max			-4.835	1.106	388.34
Base	5	2	D+.5L+.7W	Combination	Min			-11.66	-2.197	254.951
Base	5	2	D+.5L-.7W	Combination	Max			-2.942	1.508	408.197
Base	5	2	D+.5L-.7W	Combination	Min			-9.767	-1.794	274.808
Base	5	2	DConS1	Combination				-8.101	-0.59	380.565
Base	5	2	DConS2	Combination				-16.671	-0.733	701.526
Base	5	2	DConS3	Combination				-16.682	-0.704	707
Base	5	2	DConS4	Combination				-13.06	-0.557	578.296
Base	5	2	DConS5	Combination	Max			-7.386	2.666	690.529
Base	5	2	DConS5	Combination	Min			-22.986	-4.881	385.639
Base	5	2	DConS6	Combination	Max			-3.06	3.586	735.917
Base	5	2	DConS6	Combination	Min			-18.66	-3.961	431.027
Base	5	2	DConS7	Combination	Max			-7.398	2.694	696.004
Base	5	2	DConS7	Combination	Min			-22.998	-4.853	391.113
Base	5	2	DConS8	Combination	Max			-3.071	3.614	741.392
Base	5	2	DConS8	Combination	Min			-18.671	-3.933	436.501
Base	5	2	DConS9	Combination	Max			-4.162	1.241	408.592
Base	5	2	DConS9	Combination	Min			-11.963	-2.532	256.147
Base	5	2	DConS10	Combination	Max			-1.999	1.701	431.286
Base	5	2	DConS10	Combination	Min			-9.799	-2.072	278.841
Base	5	2	DConS11	Combination	Max			-4.125	1.151	391.074
Base	5	2	DConS11	Combination	Min			-11.925	-2.623	238.629
Base	5	2	DConS12	Combination	Max			-1.962	1.611	413.768
Base	5	2	DConS12	Combination	Min			-9.762	-2.163	261.323
Base	5	2	DConS13	Combination	Max			0.429	2.934	374.4
Base	5	2	DConS13	Combination	Min			-15.171	-4.613	69.51

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	5	2	DConS14	Combination	Max			4.756	3.854	419.788
Base	5	2	DConS14	Combination	Min			-10.844	-3.693	114.898
Base	5	2	DConS15	Combination	Max			-11.224	-0.372	667.005
Base	5	2	DConS15	Combination	Min			-20.012	-2.874	498.206
Base	5	2	DConS16	Combination	Max			-7.191	1.495	677.717
Base	5	2	DConS16	Combination	Min			-15.979	-1.007	508.918
Base	5	2	DConS17	Combination	Max			-5.144	-0.23	432.425
Base	5	2	DConS17	Combination	Min			-13.933	-2.733	263.626
Base	5	2	DConS18	Combination	Max			-1.111	1.637	443.137
Base	5	2	DConS18	Combination	Min			-9.9	-0.866	274.338
Base	5	2	DConS19	Combination	Max			-2.251	-0.02	296.509
Base	5	2	DConS19	Combination	Min			-11.04	-2.522	127.71
Base	5	2	DConS20	Combination	Max			1.782	1.847	307.221
Base	5	2	DConS20	Combination	Min			-7.007	-0.655	138.422
Base	6	3	Dead	LinStatic				3.722	-1.488	216.966
Base	6	3	Live	LinStatic				5.351	-1.29	237.931
Base	6	3	PW	LinStatic				0.706	-0.144	26.928
Base	6	3	FF	LinStatic				0.685	-0.266	32.466
Base	6	3	ROOF LIVE	LinStatic				0.006	-0.013	11.869
Base	6	3	EQ	LinStatic	Max			2.372	0.471	89.079
Base	6	3	EQ	LinStatic	Min			-5.889	-3.503	52.262
Base	6	3	wind	LinStatic	Max			3.437	3.147	98.334
Base	6	3	wind	LinStatic	Min			-5.879	-4.088	1.477
Base	6	3	1.4D	Combination				5.211	-2.083	303.752
Base	6	3	1.2D+1.6L+.5Lr	Combination				13.031	-3.856	646.983
Base	6	3	1.2D+1.6Lr+L	Combination				9.827	-3.097	517.28
Base	6	3	1.2D+1.6Lr+.8W	Combination	Max			7.226	0.71	358.016
Base	6	3	1.2D+1.6Lr+.8W	Combination	Min			-0.227	-5.078	280.531
Base	6	3	1.2D+1.6Lr-.8W	Combination	Max			9.18	1.464	278.167
Base	6	3	1.2D+1.6Lr-.8W	Combination	Min			1.727	-4.324	200.682
Base	6	3	1.2D+1.6W+L+.5Lr	Combination	Max			15.32	1.953	661.558
Base	6	3	1.2D+1.6W+L+.5Lr	Combination	Min			0.414	-9.623	506.588
Base	6	3	1.2D-1.6W+L+.5Lr	Combination	Max			19.228	3.459	501.86
Base	6	3	1.2D-1.6W+L+.5Lr	Combination	Min			4.322	-8.117	346.89
Base	6	3	1.246D+1E+1L	Combination	Max			12.361	-2.672	597.349
Base	6	3	1.246D+1E+1L	Combination	Min			4.1	-6.647	560.532
Base	6	3	1.246D-1E+1L	Combination	Max			15.878	0.359	456.008
Base	6	3	1.246D-1E+1L	Combination	Min			7.617	-3.615	419.192
Base	6	3	0.9D+1.6W	Combination	Max			8.849	3.695	352.604
Base	6	3	0.9D+1.6W	Combination	Min			-6.057	-7.881	197.633
Base	6	3	0.9D-1.6W	Combination	Max			12.757	5.202	192.905
Base	6	3	0.9D-1.6W	Combination	Min			-2.149	-6.374	37.935
Base	6	3	.854D+E	Combination	Max			5.551	-0.799	274.367
Base	6	3	.854D+E	Combination	Min			-2.71	-4.774	237.551
Base	6	3	.854D-E	Combination	Max			9.068	2.232	133.027

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	6	3	.854D-E	Combination	Min			0.807	-1.742	96.21
Base	6	3	D+L	Combination				9.073	-2.778	454.897
Base	6	3	D+.5L	Combination				6.398	-2.133	335.931
Base	6	3	D+.5L+.7W	Combination	Max			8.804	0.07	404.765
Base	6	3	D+.5L+.7W	Combination	Min			2.282	-4.995	336.966
Base	6	3	D+.5L-.7W	Combination	Max			10.513	0.729	334.897
Base	6	3	D+.5L-.7W	Combination	Min			3.992	-4.335	267.098
Base	6	3	DConS1	Combination				7.158	-2.656	386.905
Base	6	3	DConS2	Combination				14.697	-4.34	712.322
Base	6	3	DConS3	Combination				14.7	-4.347	718.256
Base	6	3	DConS4	Combination				11.496	-3.588	588.553
Base	6	3	DConS5	Combination	Max			16.986	1.468	726.897
Base	6	3	DConS5	Combination	Min			2.079	-10.108	571.927
Base	6	3	DConS6	Combination	Max			20.893	2.975	567.199
Base	6	3	DConS6	Combination	Min			5.987	-8.601	412.229
Base	6	3	DConS7	Combination	Max			16.989	1.461	732.832
Base	6	3	DConS7	Combination	Min			2.082	-10.115	577.862
Base	6	3	DConS8	Combination	Max			20.896	2.968	573.134
Base	6	3	DConS8	Combination	Min			5.99	-8.608	418.163
Base	6	3	DConS9	Combination	Max			8.895	0.219	429.289
Base	6	3	DConS9	Combination	Min			1.441	-5.569	351.804
Base	6	3	DConS10	Combination	Max			10.849	0.972	349.44
Base	6	3	DConS10	Combination	Min			3.395	-4.816	271.955
Base	6	3	DConS11	Combination	Max			8.885	0.24	410.3
Base	6	3	DConS11	Combination	Min			1.432	-5.548	332.814
Base	6	3	DConS12	Combination	Max			10.839	0.994	330.451
Base	6	3	DConS12	Combination	Min			3.386	-4.794	252.965
Base	6	3	DConS13	Combination	Max			10.101	3.327	406.059
Base	6	3	DConS13	Combination	Min			-4.806	-8.249	251.088
Base	6	3	DConS14	Combination	Max			14.009	4.834	246.36
Base	6	3	DConS14	Combination	Min			-0.898	-6.742	91.39
Base	6	3	DConS15	Combination	Max			14.369	-3.285	686.278
Base	6	3	DConS15	Combination	Min			6.109	-7.259	649.461
Base	6	3	DConS16	Combination	Max			17.886	-0.253	544.937
Base	6	3	DConS16	Combination	Min			9.626	-4.228	508.121
Base	6	3	DConS17	Combination	Max			9.019	-1.995	448.347
Base	6	3	DConS17	Combination	Min			0.758	-5.97	411.53
Base	6	3	DConS18	Combination	Max			12.535	1.036	307.007
Base	6	3	DConS18	Combination	Min			4.275	-2.938	270.19
Base	6	3	DConS19	Combination	Max			6.462	-1.047	310.167
Base	6	3	DConS19	Combination	Min			-1.798	-5.021	273.35
Base	6	3	DConS20	Combination	Max			9.979	1.985	168.826
Base	6	3	DConS20	Combination	Min			1.718	-1.989	132.01
Base	7	4	Dead	LinStatic				8.546	-1.005	257.749
Base	7	4	Live	LinStatic				6.374	-1.195	262.816

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	7	4	PW	LinStatic				2.146	-0.197	46.99
Base	7	4	FF	LinStatic				2.145	-0.201	47.062
Base	7	4	ROOF LIVE	LinStatic				-0.009	-0.011	19.762
Base	7	4	EQ	LinStatic	Max			0.87	-0.989	2.326
Base	7	4	EQ	LinStatic	Min			-3.797	-2.609	-20.317
Base	7	4	wind	LinStatic	Max			1.312	1.909	2.753
Base	7	4	wind	LinStatic	Min			-3.211	-3.44	-15.7
Base	7	4	1.4D	Combination				11.964	-1.408	360.849
Base	7	4	1.2D+1.6L+.5Lr	Combination				20.449	-3.125	739.685
Base	7	4	1.2D+1.6Lr+L	Combination				16.615	-2.42	603.734
Base	7	4	1.2D+1.6Lr+.8W	Combination	Max			11.29	0.303	343.121
Base	7	4	1.2D+1.6Lr+.8W	Combination	Min			7.672	-3.976	328.358
Base	7	4	1.2D+1.6Lr-.8W	Combination	Max			12.81	1.528	353.478
Base	7	4	1.2D+1.6Lr-.8W	Combination	Min			9.191	-2.752	338.715
Base	7	4	1.2D+1.6W+L+.5Lr	Combination	Max			18.723	0.648	586.401
Base	7	4	1.2D+1.6W+L+.5Lr	Combination	Min			11.487	-7.912	556.875
Base	7	4	1.2D-1.6W+L+.5Lr	Combination	Max			21.762	3.097	607.116
Base	7	4	1.2D-1.6W+L+.5Lr	Combination	Min			14.526	-5.463	577.59
Base	7	4	1.246D+1E+1L	Combination	Max			17.891	-3.438	586.297
Base	7	4	1.246D+1E+1L	Combination	Min			13.225	-5.057	563.653
Base	7	4	1.246D-1E+1L	Combination	Max			20.819	0.161	604.288
Base	7	4	1.246D-1E+1L	Combination	Min			16.152	-1.459	581.645
Base	7	4	0.9D+1.6W	Combination	Max			9.79	2.15	236.379
Base	7	4	0.9D+1.6W	Combination	Min			2.553	-6.409	206.854
Base	7	4	0.9D-1.6W	Combination	Max			12.829	4.599	257.094
Base	7	4	0.9D-1.6W	Combination	Min			5.592	-3.96	227.569
Base	7	4	.854D+E	Combination	Max			8.168	-1.848	222.443
Base	7	4	.854D+E	Combination	Min			3.501	-3.468	199.8
Base	7	4	.854D-E	Combination	Max			11.095	1.751	240.435
Base	7	4	.854D-E	Combination	Min			6.429	0.131	217.792
Base	7	4	D+L	Combination				14.92	-2.201	520.565
Base	7	4	D+.5L	Combination				11.733	-1.603	389.157
Base	7	4	D+.5L+.7W	Combination	Max			12.651	-0.267	391.084
Base	7	4	D+.5L+.7W	Combination	Min			9.485	-4.011	378.167
Base	7	4	D+.5L-.7W	Combination	Max			13.981	0.805	400.147
Base	7	4	D+.5L-.7W	Combination	Min			10.815	-2.94	387.229
Base	7	4	DConS1	Combination				17.972	-1.965	492.521
Base	7	4	DConS2	Combination				25.602	-3.597	842.666
Base	7	4	DConS3	Combination				25.598	-3.602	852.547
Base	7	4	DConS4	Combination				21.764	-2.897	716.596
Base	7	4	DConS5	Combination	Max			23.877	0.176	689.382
Base	7	4	DConS5	Combination	Min			16.64	-8.384	659.856
Base	7	4	DConS6	Combination	Max			26.916	2.625	710.097
Base	7	4	DConS6	Combination	Min			19.679	-5.934	680.571
Base	7	4	DConS7	Combination	Max			23.872	0.17	699.263

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	7	4	DConS7	Combination	Min			16.636	-8.389	669.737
Base	7	4	DConS8	Combination	Max			26.911	2.619	719.978
Base	7	4	DConS8	Combination	Min			19.675	-5.94	690.452
Base	7	4	DConS9	Combination	Max			16.439	-0.174	455.983
Base	7	4	DConS9	Combination	Min			12.821	-4.454	441.22
Base	7	4	DConS10	Combination	Max			17.959	1.05	466.34
Base	7	4	DConS10	Combination	Min			14.341	-3.229	451.577
Base	7	4	DConS11	Combination	Max			16.454	-0.156	424.363
Base	7	4	DConS11	Combination	Min			12.835	-4.436	409.601
Base	7	4	DConS12	Combination	Max			17.973	1.068	434.721
Base	7	4	DConS12	Combination	Min			14.355	-3.212	419.958
Base	7	4	DConS13	Combination	Max			13.652	1.792	321.026
Base	7	4	DConS13	Combination	Min			6.415	-6.767	291.5
Base	7	4	DConS14	Combination	Max			16.691	4.241	341.741
Base	7	4	DConS14	Combination	Min			9.454	-4.318	312.215
Base	7	4	DConS15	Combination	Max			23.931	-4.009	722.482
Base	7	4	DConS15	Combination	Min			19.265	-5.629	699.839
Base	7	4	DConS16	Combination	Max			26.859	-0.411	740.474
Base	7	4	DConS16	Combination	Min			22.192	-2.03	717.831
Base	7	4	DConS17	Combination	Max			17.558	-2.814	459.666
Base	7	4	DConS17	Combination	Min			12.891	-4.434	437.023
Base	7	4	DConS18	Combination	Max			20.485	0.785	477.658
Base	7	4	DConS18	Combination	Min			15.818	-0.835	455.015
Base	7	4	DConS19	Combination	Max			11.139	-2.112	283.766
Base	7	4	DConS19	Combination	Min			6.472	-3.732	261.123
Base	7	4	DConS20	Combination	Max			14.067	1.487	301.758
Base	7	4	DConS20	Combination	Min			9.4	-0.133	279.115
Base	8	5	Dead	LinStatic				-7.92	-1.1	256.749
Base	8	5	Live	LinStatic				-5.92	-1.39	264.722
Base	8	5	PW	LinStatic				-1.985	-0.204	46.701
Base	8	5	FF	LinStatic				-1.988	-0.212	46.796
Base	8	5	ROOF LIVE	LinStatic				0.005	-0.02	20.105
Base	8	5	EQ	LinStatic	Max			0.846	2.407	22.211
Base	8	5	EQ	LinStatic	Min			-3.921	-6.601	-9.022
Base	8	5	wind	LinStatic	Max			1.312	7.413	18.872
Base	8	5	wind	LinStatic	Min			-3.314	-7.735	-10.439
Base	8	5	1.4D	Combination				-11.088	-1.54	359.448
Base	8	5	1.2D+1.6L+.5Lr	Combination				-18.973	-3.553	741.706
Base	8	5	1.2D+1.6Lr+L	Combination				-15.416	-2.742	604.989
Base	8	5	1.2D+1.6Lr+.8W	Combination	Max			-8.446	4.578	355.365
Base	8	5	1.2D+1.6Lr+.8W	Combination	Min			-12.147	-7.54	331.916
Base	8	5	1.2D+1.6Lr-.8W	Combination	Max			-6.844	4.835	348.618
Base	8	5	1.2D+1.6Lr-.8W	Combination	Min			-10.545	-7.282	325.17
Base	8	5	1.2D+1.6W+L+.5Lr	Combination	Max			-13.322	9.141	613.068
Base	8	5	1.2D+1.6W+L+.5Lr	Combination	Min			-20.724	-15.095	566.171

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	8	5	1.2D-1.6W+L+.5Lr	Combination	Max			-10.118	9.656	599.575
Base	8	5	1.2D-1.6W+L+.5Lr	Combination	Min			-17.521	-14.58	552.678
Base	8	5	1.246D+1E+1L	Combination	Max			-14.942	-0.353	606.842
Base	8	5	1.246D+1E+1L	Combination	Min			-19.709	-9.361	575.609
Base	8	5	1.246D-1E+1L	Combination	Max			-11.867	3.841	593.653
Base	8	5	1.246D-1E+1L	Combination	Min			-16.634	-5.167	562.42
Base	8	5	0.9D+1.6W	Combination	Max			-5.029	10.87	261.269
Base	8	5	0.9D+1.6W	Combination	Min			-12.431	-13.365	214.372
Base	8	5	0.9D-1.6W	Combination	Max			-1.825	11.385	247.776
Base	8	5	0.9D-1.6W	Combination	Min			-9.227	-12.85	200.879
Base	8	5	.854D+E	Combination	Max			-5.918	1.467	241.475
Base	8	5	.854D+E	Combination	Min			-10.684	-7.541	210.241
Base	8	5	.854D-E	Combination	Max			-2.843	5.662	228.286
Base	8	5	.854D-E	Combination	Min			-7.61	-3.346	197.052
Base	8	5	D+L	Combination				-13.84	-2.489	521.471
Base	8	5	D+.5L	Combination				-10.88	-1.795	389.11
Base	8	5	D+.5L+.7W	Combination	Max			-9.962	3.394	402.32
Base	8	5	D+.5L+.7W	Combination	Min			-13.2	-7.209	381.803
Base	8	5	D+.5L-.7W	Combination	Max			-8.56	3.62	396.417
Base	8	5	D+.5L-.7W	Combination	Min			-11.798	-6.984	375.9
Base	8	5	DConS1	Combination				-16.65	-2.123	490.344
Base	8	5	DConS2	Combination				-23.743	-4.043	843.85
Base	8	5	DConS3	Combination				-23.741	-4.054	853.903
Base	8	5	DConS4	Combination				-20.183	-3.242	717.185
Base	8	5	DConS5	Combination	Max			-18.092	8.651	715.212
Base	8	5	DConS5	Combination	Min			-25.494	-15.585	668.315
Base	8	5	DConS6	Combination	Max			-14.888	9.166	701.719
Base	8	5	DConS6	Combination	Min			-22.29	-15.07	654.822
Base	8	5	DConS7	Combination	Max			-18.09	8.64	725.264
Base	8	5	DConS7	Combination	Min			-25.492	-15.595	678.367
Base	8	5	DConS8	Combination	Max			-14.886	9.156	711.771
Base	8	5	DConS8	Combination	Min			-22.288	-15.08	664.875
Base	8	5	DConS9	Combination	Max			-13.213	4.078	467.561
Base	8	5	DConS9	Combination	Min			-16.915	-8.04	444.112
Base	8	5	DConS10	Combination	Max			-11.611	4.335	460.814
Base	8	5	DConS10	Combination	Min			-15.313	-7.783	437.366
Base	8	5	DConS11	Combination	Max			-13.222	4.11	435.392
Base	8	5	DConS11	Combination	Min			-16.923	-8.008	411.944
Base	8	5	DConS12	Combination	Max			-11.62	4.368	428.646
Base	8	5	DConS12	Combination	Min			-15.321	-7.75	405.197
Base	8	5	DConS13	Combination	Max			-8.604	10.495	345.416
Base	8	5	DConS13	Combination	Min			-16.006	-13.74	298.519
Base	8	5	DConS14	Combination	Max			-5.4	11.01	331.923
Base	8	5	DConS14	Combination	Min			-12.803	-13.225	285.026
Base	8	5	DConS15	Combination	Max			-20.535	-0.955	742.253

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	8	5	DConS15	Combination	Min			-25.302	-9.963	711.019
Base	8	5	DConS16	Combination	Max			-17.46	3.24	729.064
Base	8	5	DConS16	Combination	Min			-22.227	-5.768	697.83
Base	8	5	DConS17	Combination	Max			-14.614	0.435	477.531
Base	8	5	DConS17	Combination	Min			-19.381	-8.573	446.297
Base	8	5	DConS18	Combination	Max			-11.539	4.63	464.342
Base	8	5	DConS18	Combination	Min			-16.306	-4.378	433.108
Base	8	5	DConS19	Combination	Max			-8.668	1.193	302.408
Base	8	5	DConS19	Combination	Min			-13.435	-7.815	271.174
Base	8	5	DConS20	Combination	Max			-5.593	5.388	289.219
Base	8	5	DConS20	Combination	Min			-10.36	-3.62	257.985
Base	9	6	Dead	LinStatic				-1.128	1.435	186.279
Base	9	6	Live	LinStatic				2.719	0.863	184.048
Base	9	6	PW	LinStatic				-0.192	0.347	26.675
Base	9	6	FF	LinStatic				-0.194	0.342	26.509
Base	9	6	ROOF LIVE	LinStatic				0.005	-0.015	11.312
Base	9	6	EQ	LinStatic	Max			-0.726	0.353	-5.749
Base	9	6	EQ	LinStatic	Min			-3.718	-3.678	-38.219
Base	9	6	wind	LinStatic	Max			-0.15	3.252	25.334
Base	9	6	wind	LinStatic	Min			-3.384	-4.314	-40.531
Base	9	6	1.4D	Combination				-1.579	2.009	260.79
Base	9	6	1.2D+1.6L+.5Lr	Combination				3	3.095	523.667
Base	9	6	1.2D+1.6Lr+L	Combination				1.374	2.561	425.681
Base	9	6	1.2D+1.6Lr+.8W	Combination	Max			-1.465	4.3	261.9
Base	9	6	1.2D+1.6Lr+.8W	Combination	Min			-4.053	-1.753	209.209
Base	9	6	1.2D+1.6Lr-.8W	Combination	Max			1.363	5.149	274.058
Base	9	6	1.2D+1.6Lr-.8W	Combination	Min			-1.225	-0.903	221.366
Base	9	6	1.2D+1.6W+L+.5Lr	Combination	Max			1.129	7.781	453.773
Base	9	6	1.2D+1.6W+L+.5Lr	Combination	Min			-4.047	-4.325	348.389
Base	9	6	1.2D-1.6W+L+.5Lr	Combination	Max			6.784	9.48	478.088
Base	9	6	1.2D-1.6W+L+.5Lr	Combination	Min			1.608	-2.625	372.704
Base	9	6	1.246D+1E+1L	Combination	Max			0.588	3.004	410.402
Base	9	6	1.246D+1E+1L	Combination	Min			-2.404	-1.027	377.933
Base	9	6	1.246D-1E+1L	Combination	Max			5.032	6.329	454.37
Base	9	6	1.246D-1E+1L	Combination	Min			2.04	2.299	421.9
Base	9	6	0.9D+1.6W	Combination	Max			-1.254	6.495	208.185
Base	9	6	0.9D+1.6W	Combination	Min			-6.43	-5.611	102.802
Base	9	6	0.9D-1.6W	Combination	Max			4.4	8.194	232.5
Base	9	6	0.9D-1.6W	Combination	Min			-0.775	-3.911	127.116
Base	9	6	.854D+E	Combination	Max			-1.689	1.578	153.333
Base	9	6	.854D+E	Combination	Min			-4.681	-2.452	120.863
Base	9	6	.854D-E	Combination	Max			2.755	4.903	197.3
Base	9	6	.854D-E	Combination	Min			-0.237	0.873	164.831
Base	9	6	D+L	Combination				1.592	2.298	370.327
Base	9	6	D+.5L	Combination				0.232	1.867	278.303

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	9	6	D+.5L+.7W	Combination	Max			0.127	4.143	296.037
Base	9	6	D+.5L+.7W	Combination	Min			-2.137	-1.153	249.931
Base	9	6	D+.5L-.7W	Combination	Max			2.601	4.886	306.674
Base	9	6	D+.5L-.7W	Combination	Min			0.337	-0.41	260.569
Base	9	6	DConS1	Combination				-2.119	2.974	335.247
Base	9	6	DConS2	Combination				2.535	3.93	581.832
Base	9	6	DConS3	Combination				2.537	3.922	587.488
Base	9	6	DConS4	Combination				0.911	3.388	489.502
Base	9	6	DConS5	Combination	Max			0.664	8.615	511.938
Base	9	6	DConS5	Combination	Min			-4.512	-3.49	406.554
Base	9	6	DConS6	Combination	Max			6.318	10.315	536.252
Base	9	6	DConS6	Combination	Min			1.142	-1.791	430.868
Base	9	6	DConS7	Combination	Max			0.666	8.608	517.593
Base	9	6	DConS7	Combination	Min			-4.51	-3.498	412.21
Base	9	6	DConS8	Combination	Max			6.321	10.307	541.908
Base	9	6	DConS8	Combination	Min			1.145	-1.798	436.524
Base	9	6	DConS9	Combination	Max			-1.928	5.127	325.721
Base	9	6	DConS9	Combination	Min			-4.516	-0.926	273.029
Base	9	6	DConS10	Combination	Max			0.9	5.976	337.878
Base	9	6	DConS10	Combination	Min			-1.688	-0.076	285.186
Base	9	6	DConS11	Combination	Max			-1.936	5.151	307.622
Base	9	6	DConS11	Combination	Min			-4.524	-0.902	254.93
Base	9	6	DConS12	Combination	Max			0.891	6.001	319.779
Base	9	6	DConS12	Combination	Min			-1.696	-0.052	267.087
Base	9	6	DConS13	Combination	Max			-1.601	7.115	256.051
Base	9	6	DConS13	Combination	Min			-6.777	-4.99	150.667
Base	9	6	DConS14	Combination	Max			4.053	8.814	280.365
Base	9	6	DConS14	Combination	Min			-1.123	-3.291	174.981
Base	9	6	DConS15	Combination	Max			0.026	3.977	489.6
Base	9	6	DConS15	Combination	Min			-2.966	-0.053	457.131
Base	9	6	DConS16	Combination	Max			4.47	7.303	533.568
Base	9	6	DConS16	Combination	Min			1.477	3.272	501.098
Base	9	6	DConS17	Combination	Max			-2.693	3.115	305.552
Base	9	6	DConS17	Combination	Min			-5.685	-0.916	273.082
Base	9	6	DConS18	Combination	Max			1.75	6.44	349.519
Base	9	6	DConS18	Combination	Min			-1.242	2.409	317.05
Base	9	6	DConS19	Combination	Max			-1.937	2.052	185.821
Base	9	6	DConS19	Combination	Min			-4.929	-1.978	153.351
Base	9	6	DConS20	Combination	Max			2.507	5.377	229.788
Base	9	6	DConS20	Combination	Min			-0.485	1.347	197.319
Base	10	7	Dead	LinStatic				-1.06	1.092	156.357
Base	10	7	Live	LinStatic				-1.803	0.698	169.873
Base	10	7	PW	LinStatic				-0.184	0.327	23.638
Base	10	7	FF	LinStatic				-0.186	0.326	23.562
Base	10	7	ROOF LIVE	LinStatic				-0.01	-0.002	10.329

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	10	7	EQ	LinStatic	Max			-0.887	0.909	-11.203
Base	10	7	EQ	LinStatic	Min			-4.132	-2.791	-13.921
Base	10	7	wind	LinStatic	Max			-0.137	2.994	5.819
Base	10	7	wind	LinStatic	Min			-3.804	-3.202	-18.198
Base	10	7	1.4D	Combination				-1.484	1.528	218.9
Base	10	7	1.2D+1.6L+.5Lr	Combination				-4.162	2.426	464.591
Base	10	7	1.2D+1.6Lr+L	Combination				-3.092	2.005	374.029
Base	10	7	1.2D+1.6Lr+.8W	Combination	Max			-1.399	3.702	208.811
Base	10	7	1.2D+1.6Lr+.8W	Combination	Min			-4.331	-1.255	189.597
Base	10	7	1.2D+1.6Lr-.8W	Combination	Max			1.754	3.869	218.714
Base	10	7	1.2D+1.6Lr-.8W	Combination	Min			-1.179	-1.088	199.5
Base	10	7	1.2D+1.6W+L+.5Lr	Combination	Max			-3.3	6.798	371.978
Base	10	7	1.2D+1.6W+L+.5Lr	Combination	Min			-9.166	-3.117	333.551
Base	10	7	1.2D-1.6W+L+.5Lr	Combination	Max			3.005	7.131	391.783
Base	10	7	1.2D-1.6W+L+.5Lr	Combination	Min			-2.86	-2.784	353.356
Base	10	7	1.246D+1E+1L	Combination	Max			-4.011	2.968	353.492
Base	10	7	1.246D+1E+1L	Combination	Min			-7.256	-0.732	350.774
Base	10	7	1.246D-1E+1L	Combination	Max			1.008	4.849	378.616
Base	10	7	1.246D-1E+1L	Combination	Min			-2.237	1.149	375.898
Base	10	7	0.9D+1.6W	Combination	Max			-1.174	5.773	150.033
Base	10	7	0.9D+1.6W	Combination	Min			-7.04	-4.141	111.605
Base	10	7	0.9D-1.6W	Combination	Max			5.132	6.106	169.838
Base	10	7	0.9D-1.6W	Combination	Min			-0.734	-3.808	131.41
Base	10	7	.854D+E	Combination	Max			-1.792	1.842	122.326
Base	10	7	.854D+E	Combination	Min			-5.038	-1.858	119.608
Base	10	7	.854D-E	Combination	Max			3.227	3.723	147.45
Base	10	7	.854D-E	Combination	Min			-0.018	0.023	144.732
Base	10	7	D+L	Combination				-2.863	1.79	326.231
Base	10	7	D+.5L	Combination				-1.962	1.441	241.294
Base	10	7	D+.5L+.7W	Combination	Max			-2.058	3.537	245.368
Base	10	7	D+.5L+.7W	Combination	Min			-4.624	-0.801	228.556
Base	10	7	D+.5L-.7W	Combination	Max			0.701	3.682	254.032
Base	10	7	D+.5L-.7W	Combination	Min			-1.865	-0.655	237.22
Base	10	7	DConS1	Combination				-2.001	2.443	284.98
Base	10	7	DConS2	Combination				-4.601	3.21	516.066
Base	10	7	DConS3	Combination				-4.606	3.209	521.231
Base	10	7	DConS4	Combination				-3.535	2.788	430.669
Base	10	7	DConS5	Combination	Max			-3.739	7.582	423.453
Base	10	7	DConS5	Combination	Min			-9.604	-2.332	385.026
Base	10	7	DConS6	Combination	Max			2.567	7.915	443.258
Base	10	7	DConS6	Combination	Min			-3.299	-1.999	404.831
Base	10	7	DConS7	Combination	Max			-3.744	7.581	428.618
Base	10	7	DConS7	Combination	Min			-9.61	-2.333	390.19
Base	10	7	DConS8	Combination	Max			2.562	7.914	448.423
Base	10	7	DConS8	Combination	Min			-3.304	-2	409.995

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	10	7	DConS9	Combination	Max			-1.842	4.486	265.451
Base	10	7	DConS9	Combination	Min			-4.775	-0.471	246.237
Base	10	7	DConS10	Combination	Max			1.311	4.652	275.354
Base	10	7	DConS10	Combination	Min			-1.622	-0.305	256.14
Base	10	7	DConS11	Combination	Max			-1.826	4.489	248.924
Base	10	7	DConS11	Combination	Min			-4.758	-0.468	229.711
Base	10	7	DConS12	Combination	Max			1.327	4.655	258.827
Base	10	7	DConS12	Combination	Min			-1.606	-0.302	239.613
Base	10	7	DConS13	Combination	Max			-1.507	6.361	192.513
Base	10	7	DConS13	Combination	Min			-7.372	-3.554	154.085
Base	10	7	DConS14	Combination	Max			4.799	6.694	212.318
Base	10	7	DConS14	Combination	Min			-1.067	-3.22	173.89
Base	10	7	DConS15	Combination	Max			-4.549	3.875	423.295
Base	10	7	DConS15	Combination	Min			-7.794	0.175	420.577
Base	10	7	DConS16	Combination	Max			0.471	5.757	448.419
Base	10	7	DConS16	Combination	Min			-2.775	2.057	445.701
Base	10	7	DConS17	Combination	Max			-2.746	3.177	253.422
Base	10	7	DConS17	Combination	Min			-5.991	-0.523	250.704
Base	10	7	DConS18	Combination	Max			2.274	5.059	278.545
Base	10	7	DConS18	Combination	Min			-0.971	1.359	275.827
Base	10	7	DConS19	Combination	Max			-2.031	2.305	151.643
Base	10	7	DConS19	Combination	Min			-5.276	-1.395	148.925
Base	10	7	DConS20	Combination	Max			2.989	4.186	176.767
Base	10	7	DConS20	Combination	Min			-0.257	0.486	174.049
Base	11	8	Dead	LinStatic				4.496	-1.147	152.708
Base	11	8	Live	LinStatic				6.668	-1.608	198.938
Base	11	8	PW	LinStatic				0.766	-0.203	20.855
Base	11	8	FF	LinStatic				0.77	-0.204	21.021
Base	11	8	ROOF LIVE	LinStatic				4.483E-05	-0.024	9.633
Base	11	8	EQ	LinStatic	Max			1.228	-0.603	16.135
Base	11	8	EQ	LinStatic	Min			-3.352	-1.545	-8.569
Base	11	8	wind	LinStatic	Max			1.819	1.143	16.591
Base	11	8	wind	LinStatic	Min			-3.231	-2.078	-16.53
Base	11	8	1.4D	Combination				6.294	-1.606	213.791
Base	11	8	1.2D+1.6L+.5Lr	Combination				16.064	-3.961	506.367
Base	11	8	1.2D+1.6Lr+L	Combination				12.063	-3.023	397.6
Base	11	8	1.2D+1.6Lr+.8W	Combination	Max			6.85	-0.501	211.935
Base	11	8	1.2D+1.6Lr+.8W	Combination	Min			2.81	-3.078	185.438
Base	11	8	1.2D+1.6Lr-.8W	Combination	Max			7.98	0.247	211.886
Base	11	8	1.2D+1.6Lr-.8W	Combination	Min			3.94	-2.33	185.389
Base	11	8	1.2D+1.6W+L+.5Lr	Combination	Max			14.973	-1.167	413.55
Base	11	8	1.2D+1.6W+L+.5Lr	Combination	Min			6.893	-6.321	360.556
Base	11	8	1.2D-1.6W+L+.5Lr	Combination	Max			17.233	0.329	413.452
Base	11	8	1.2D-1.6W+L+.5Lr	Combination	Min			9.153	-4.825	360.458
Base	11	8	1.246D+1E+1L	Combination	Max			13.498	-3.64	405.347

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	11	8	1.246D+1E+1L	Combination	Min			8.917	-4.582	380.643
Base	11	8	1.246D-1E+1L	Combination	Max			15.622	-1.492	397.781
Base	11	8	1.246D-1E+1L	Combination	Min			11.042	-2.434	373.077
Base	11	8	0.9D+1.6W	Combination	Max			6.956	0.797	163.983
Base	11	8	0.9D+1.6W	Combination	Min			-1.124	-4.357	110.989
Base	11	8	0.9D-1.6W	Combination	Max			9.216	2.292	163.885
Base	11	8	0.9D-1.6W	Combination	Min			1.136	-2.861	110.891
Base	11	8	.854D+E	Combination	Max			5.068	-1.583	146.548
Base	11	8	.854D+E	Combination	Min			0.487	-2.524	121.843
Base	11	8	.854D-E	Combination	Max			7.192	0.565	138.982
Base	11	8	.854D-E	Combination	Min			2.611	-0.376	114.277
Base	11	8	D+L	Combination				11.164	-2.755	351.646
Base	11	8	D+.5L	Combination				7.83	-1.951	252.177
Base	11	8	D+.5L+.7W	Combination	Max			9.103	-1.151	263.791
Base	11	8	D+.5L+.7W	Combination	Min			5.568	-3.405	240.606
Base	11	8	D+.5L-.7W	Combination	Max			10.091	-0.496	263.748
Base	11	8	D+.5L-.7W	Combination	Min			6.557	-2.751	240.563
Base	11	8	DConS1	Combination				8.445	-2.176	272.417
Base	11	8	DConS2	Combination				17.908	-4.437	551.801
Base	11	8	DConS3	Combination				17.908	-4.449	556.618
Base	11	8	DConS4	Combination				13.907	-3.512	447.851
Base	11	8	DConS5	Combination	Max			16.816	-1.643	458.984
Base	11	8	DConS5	Combination	Min			8.737	-6.797	405.99
Base	11	8	DConS6	Combination	Max			19.076	-0.148	458.887
Base	11	8	DConS6	Combination	Min			10.997	-5.302	405.892
Base	11	8	DConS7	Combination	Max			16.816	-1.656	463.801
Base	11	8	DConS7	Combination	Min			8.737	-6.81	410.807
Base	11	8	DConS8	Combination	Max			19.076	-0.16	463.703
Base	11	8	DConS8	Combination	Min			10.997	-5.314	410.709
Base	11	8	DConS9	Combination	Max			8.693	-0.99	262.186
Base	11	8	DConS9	Combination	Min			4.654	-3.566	235.689
Base	11	8	DConS10	Combination	Max			9.823	-0.242	262.137
Base	11	8	DConS10	Combination	Min			5.784	-2.819	235.64
Base	11	8	DConS11	Combination	Max			8.693	-0.95	246.773
Base	11	8	DConS11	Combination	Min			4.654	-3.527	220.276
Base	11	8	DConS12	Combination	Max			9.823	-0.203	246.724
Base	11	8	DConS12	Combination	Min			5.784	-2.78	220.227
Base	11	8	DConS13	Combination	Max			8.339	0.43	201.671
Base	11	8	DConS13	Combination	Min			0.259	-4.724	148.677
Base	11	8	DConS14	Combination	Max			10.598	1.926	201.573
Base	11	8	DConS14	Combination	Min			2.519	-3.228	148.579
Base	11	8	DConS15	Combination	Max			15.738	-4.231	468.032
Base	11	8	DConS15	Combination	Min			11.157	-5.173	443.328
Base	11	8	DConS16	Combination	Max			17.862	-2.083	460.466
Base	11	8	DConS16	Combination	Min			13.282	-3.025	435.762

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	11	8	DConS17	Combination	Max			9.07	-2.624	269.094
Base	11	8	DConS17	Combination	Min			4.489	-3.565	244.389
Base	11	8	DConS18	Combination	Max			11.194	-0.476	261.528
Base	11	8	DConS18	Combination	Min			6.613	-1.417	236.823
Base	11	8	DConS19	Combination	Max			6.054	-1.847	171.802
Base	11	8	DConS19	Combination	Min			1.473	-2.788	147.098
Base	11	8	DConS20	Combination	Max			8.178	0.301	164.236
Base	11	8	DConS20	Combination	Min			3.597	-0.64	139.532
Base	12	9	Dead	LinStatic				-4.158	-1.152	148.771
Base	12	9	Live	LinStatic				-6.184	-1.645	194.676
Base	12	9	PW	LinStatic				-0.716	-0.196	19.888
Base	12	9	FF	LinStatic				-0.718	-0.201	20.128
Base	12	9	ROOF LIVE	LinStatic				-0.002	-0.024	9.206
Base	12	9	EQ	LinStatic	Max			1.196	1.539	27.447
Base	12	9	EQ	LinStatic	Min			-3.446	-4.147	9.721
Base	12	9	wind	LinStatic	Max			1.805	4.689	28.366
Base	12	9	wind	LinStatic	Min			-3.271	-4.879	-16.23
Base	12	9	1.4D	Combination				-5.821	-1.612	208.28
Base	12	9	1.2D+1.6L+.5Lr	Combination				-14.885	-4.026	494.61
Base	12	9	1.2D+1.6Lr+L	Combination				-11.177	-3.065	387.932
Base	12	9	1.2D+1.6Lr+.8W	Combination	Max			-3.549	2.332	215.949
Base	12	9	1.2D+1.6Lr+.8W	Combination	Min			-7.61	-5.323	180.272
Base	12	9	1.2D+1.6Lr-.8W	Combination	Max			-2.376	2.483	206.24
Base	12	9	1.2D+1.6Lr-.8W	Combination	Min			-6.437	-5.171	170.563
Base	12	9	1.2D+1.6W+L+.5Lr	Combination	Max			-8.286	4.464	423.19
Base	12	9	1.2D+1.6W+L+.5Lr	Combination	Min			-16.408	-10.844	351.837
Base	12	9	1.2D-1.6W+L+.5Lr	Combination	Max			-5.941	4.767	403.772
Base	12	9	1.2D-1.6W+L+.5Lr	Combination	Min			-14.063	-10.541	332.419
Base	12	9	1.246D+1E+1L	Combination	Max			-10.169	-1.541	407.492
Base	12	9	1.246D+1E+1L	Combination	Min			-14.811	-7.227	389.766
Base	12	9	1.246D-1E+1L	Combination	Max			-7.919	1.067	370.323
Base	12	9	1.246D-1E+1L	Combination	Min			-12.561	-4.619	352.598
Base	12	9	0.9D+1.6W	Combination	Max			-0.854	6.466	179.28
Base	12	9	0.9D+1.6W	Combination	Min			-8.976	-8.842	107.927
Base	12	9	0.9D-1.6W	Combination	Max			1.491	6.769	159.862
Base	12	9	0.9D-1.6W	Combination	Min			-6.631	-8.539	88.509
Base	12	9	.854D+E	Combination	Max			-2.355	0.556	154.498
Base	12	9	.854D+E	Combination	Min			-6.997	-5.131	136.772
Base	12	9	.854D-E	Combination	Max			-0.105	3.164	117.329
Base	12	9	.854D-E	Combination	Min			-4.747	-2.523	99.604
Base	12	9	D+L	Combination				-10.342	-2.797	343.447
Base	12	9	D+.5L	Combination				-7.25	-1.974	246.109
Base	12	9	D+.5L+.7W	Combination	Max			-5.987	1.308	265.965
Base	12	9	D+.5L+.7W	Combination	Min			-9.54	-5.389	234.748
Base	12	9	D+.5L-.7W	Combination	Max			-4.961	1.441	257.47

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	12	9	D+.5L-.7W	Combination	Min			-8.514	-5.257	226.253
Base	12	9	DConS1	Combination				-7.828	-2.167	264.302
Base	12	9	DConS2	Combination				-16.604	-4.489	538.026
Base	12	9	DConS3	Combination				-16.605	-4.501	542.629
Base	12	9	DConS4	Combination				-12.897	-3.54	435.951
Base	12	9	DConS5	Combination	Max			-10.006	4	466.606
Base	12	9	DConS5	Combination	Min			-18.127	-11.308	395.253
Base	12	9	DConS6	Combination	Max			-7.661	4.303	447.188
Base	12	9	DConS6	Combination	Min			-15.783	-11.005	375.835
Base	12	9	DConS7	Combination	Max			-10.007	3.988	471.209
Base	12	9	DConS7	Combination	Min			-18.128	-11.32	399.856
Base	12	9	DConS8	Combination	Max			-7.662	4.291	451.791
Base	12	9	DConS8	Combination	Min			-15.783	-11.017	380.438
Base	12	9	DConS9	Combination	Max			-5.269	1.856	263.967
Base	12	9	DConS9	Combination	Min			-9.33	-5.798	228.291
Base	12	9	DConS10	Combination	Max			-4.097	2.007	254.258
Base	12	9	DConS10	Combination	Min			-8.157	-5.647	218.582
Base	12	9	DConS11	Combination	Max			-5.266	1.894	249.237
Base	12	9	DConS11	Combination	Min			-9.327	-5.761	213.561
Base	12	9	DConS12	Combination	Max			-4.093	2.045	239.528
Base	12	9	DConS12	Combination	Min			-8.154	-5.609	203.852
Base	12	9	DConS13	Combination	Max			-2.144	6.109	215.294
Base	12	9	DConS13	Combination	Min			-10.266	-9.199	143.941
Base	12	9	DConS14	Combination	Max			0.201	6.412	195.876
Base	12	9	DConS14	Combination	Min			-7.921	-8.896	124.523
Base	12	9	DConS15	Combination	Max			-12.257	-2.118	467.546
Base	12	9	DConS15	Combination	Min			-16.899	-7.805	449.82
Base	12	9	DConS16	Combination	Max			-10.008	0.49	430.377
Base	12	9	DConS16	Combination	Min			-14.649	-5.197	412.652
Base	12	9	DConS17	Combination	Max			-6.073	-0.473	272.87
Base	12	9	DConS17	Combination	Min			-10.715	-6.16	255.144
Base	12	9	DConS18	Combination	Max			-3.824	2.135	235.702
Base	12	9	DConS18	Combination	Min			-8.465	-3.552	217.976
Base	12	9	DConS19	Combination	Max			-3.277	0.301	178.476
Base	12	9	DConS19	Combination	Min			-7.919	-5.386	160.751
Base	12	9	DConS20	Combination	Max			-1.028	2.909	141.308
Base	12	9	DConS20	Combination	Min			-5.67	-2.778	123.583
Base	13	10	Dead	LinStatic				8.375	-13.663	324.782
Base	13	10	Live	LinStatic				6.025	-9.473	250.935
Base	13	10	PW	LinStatic				2.12	-1.459	40.615
Base	13	10	FF	LinStatic				2.119	-1.461	41.2
Base	13	10	ROOF LIVE	LinStatic				0.001	-0.763	16.888
Base	13	10	EQ	LinStatic	Max			-0.285	1.987	182.443
Base	13	10	EQ	LinStatic	Min			-4.245	-29.24	-62.176
Base	13	10	wind	LinStatic	Max			-0.233	31.309	202.218

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	13	10	wind	LinStatic	Min			-3.723	-38.006	-190.769
Base	13	10	1.4D	Combination				11.725	-19.128	454.695
Base	13	10	1.2D+1.6L+.5Lr	Combination				19.69	-31.934	799.679
Base	13	10	1.2D+1.6Lr+L	Combination				16.076	-27.09	667.695
Base	13	10	1.2D+1.6Lr+.8W	Combination	Max			9.865	7.431	578.535
Base	13	10	1.2D+1.6Lr+.8W	Combination	Min			7.072	-48.022	264.145
Base	13	10	1.2D+1.6Lr-.8W	Combination	Max			13.03	12.788	569.376
Base	13	10	1.2D+1.6Lr-.8W	Combination	Min			10.237	-42.664	254.985
Base	13	10	1.2D+1.6W+L+.5Lr	Combination	Max			15.702	23.845	972.667
Base	13	10	1.2D+1.6W+L+.5Lr	Combination	Min			10.118	-87.061	343.887
Base	13	10	1.2D-1.6W+L+.5Lr	Combination	Max			22.032	34.56	954.349
Base	13	10	1.2D-1.6W+L+.5Lr	Combination	Min			16.448	-76.345	325.568
Base	13	10	1.246D+1E+1L	Combination	Max			16.175	-24.51	838.057
Base	13	10	1.246D+1E+1L	Combination	Min			12.215	-55.737	593.438
Base	13	10	1.246D-1E+1L	Combination	Max			20.705	2.742	717.789
Base	13	10	1.246D-1E+1L	Combination	Min			16.745	-28.485	473.17
Base	13	10	0.9D+1.6W	Combination	Max			7.165	37.798	615.854
Base	13	10	0.9D+1.6W	Combination	Min			1.58	-73.107	-12.927
Base	13	10	0.9D-1.6W	Combination	Max			13.495	48.513	597.535
Base	13	10	0.9D-1.6W	Combination	Min			7.91	-62.392	-31.245
Base	13	10	.854D+E	Combination	Max			6.867	-9.681	459.807
Base	13	10	.854D+E	Combination	Min			2.907	-40.908	215.189
Base	13	10	.854D-E	Combination	Max			11.398	17.571	339.54
Base	13	10	.854D-E	Combination	Min			7.438	-13.656	94.921
Base	13	10	D+L	Combination				14.4	-23.136	575.717
Base	13	10	D+.5L	Combination				11.387	-18.4	450.25
Base	13	10	D+.5L+.7W	Combination	Max			11.224	3.517	591.803
Base	13	10	D+.5L+.7W	Combination	Min			8.781	-45.004	316.711
Base	13	10	D+.5L-.7W	Combination	Max			13.994	8.205	583.788
Base	13	10	D+.5L-.7W	Combination	Min			11.55	-40.316	308.697
Base	13	10	DConS1	Combination				17.66	-23.217	569.235
Base	13	10	DConS2	Combination				24.776	-35.057	889.412
Base	13	10	DConS3	Combination				24.777	-35.439	897.856
Base	13	10	DConS4	Combination				21.162	-30.595	765.872
Base	13	10	DConS5	Combination	Max			20.789	20.721	1062.4
Base	13	10	DConS5	Combination	Min			15.204	-90.184	433.62
Base	13	10	DConS6	Combination	Max			27.119	31.437	1044.082
Base	13	10	DConS6	Combination	Min			21.534	-79.468	415.301
Base	13	10	DConS7	Combination	Max			20.789	20.34	1070.844
Base	13	10	DConS7	Combination	Min			15.205	-90.565	442.064
Base	13	10	DConS8	Combination	Max			27.119	31.055	1052.526
Base	13	10	DConS8	Combination	Min			21.535	-79.85	423.745
Base	13	10	DConS9	Combination	Max			14.952	3.926	676.712
Base	13	10	DConS9	Combination	Min			12.159	-51.527	362.322
Base	13	10	DConS10	Combination	Max			18.117	9.283	667.553

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	13	10	DConS10	Combination	Min			15.324	-46.169	353.163
Base	13	10	DConS11	Combination	Max			14.951	5.147	649.691
Base	13	10	DConS11	Combination	Min			12.158	-50.306	335.3
Base	13	10	DConS12	Combination	Max			18.116	10.505	640.532
Base	13	10	DConS12	Combination	Min			15.323	-44.948	326.141
Base	13	10	DConS13	Combination	Max			10.98	35.17	689.486
Base	13	10	DConS13	Combination	Min			5.396	-75.736	60.706
Base	13	10	DConS14	Combination	Max			17.31	45.885	671.168
Base	13	10	DConS14	Combination	Min			11.725	-65.02	42.387
Base	13	10	DConS15	Combination	Max			22.138	-29.044	961.954
Base	13	10	DConS15	Combination	Min			18.178	-60.271	717.335
Base	13	10	DConS16	Combination	Max			26.668	-1.792	841.686
Base	13	10	DConS16	Combination	Min			22.708	-33.019	597.067
Base	13	10	DConS17	Combination	Max			16.113	-19.571	711.019
Base	13	10	DConS17	Combination	Min			12.153	-50.798	466.4
Base	13	10	DConS18	Combination	Max			20.644	7.681	590.751
Base	13	10	DConS18	Combination	Min			16.684	-23.546	346.132
Base	13	10	DConS19	Combination	Max			9.806	-11.28	507.721
Base	13	10	DConS19	Combination	Min			5.846	-42.507	263.102
Base	13	10	DConS20	Combination	Max			14.337	15.973	387.453
Base	13	10	DConS20	Combination	Min			10.377	-15.254	142.834
Base	14	11	Dead	LinStatic				-10.424	0.847	184.77
Base	14	11	Live	LinStatic				-8.413	0.478	127.966
Base	14	11	PW	LinStatic				-0.808	0.254	17.76
Base	14	11	FF	LinStatic				-0.772	0.252	17.43
Base	14	11	ROOF LIVE	LinStatic				-0.613	-0.002	8.545
Base	14	11	EQ	LinStatic	Max			8.342	-0.406	185.055
Base	14	11	EQ	LinStatic	Min			-19.818	-2.079	-85.95
Base	14	11	wind	LinStatic	Max			12.803	1.516	182.095
Base	14	11	wind	LinStatic	Min			-21.505	-2.25	-110.111
Base	14	11	1.4D	Combination				-14.593	1.186	258.678
Base	14	11	1.2D+1.6L+.5Lr	Combination				-26.276	1.781	430.743
Base	14	11	1.2D+1.6Lr+L	Combination				-21.903	1.492	363.363
Base	14	11	1.2D+1.6Lr+.8W	Combination	Max			-3.247	2.226	381.072
Base	14	11	1.2D+1.6Lr+.8W	Combination	Min			-30.693	-0.787	147.307
Base	14	11	1.2D+1.6Lr-.8W	Combination	Max			3.714	2.813	323.485
Base	14	11	1.2D+1.6Lr-.8W	Combination	Min			-23.732	-0.2	89.72
Base	14	11	1.2D+1.6W+L+.5Lr	Combination	Max			-0.744	3.92	645.315
Base	14	11	1.2D+1.6W+L+.5Lr	Combination	Min			-55.635	-2.106	177.785
Base	14	11	1.2D-1.6W+L+.5Lr	Combination	Max			13.18	5.094	530.141
Base	14	11	1.2D-1.6W+L+.5Lr	Combination	Min			-41.712	-0.932	62.611
Base	14	11	1.246D+1E+1L	Combination	Max			-13.059	1.128	543.245
Base	14	11	1.246D+1E+1L	Combination	Min			-41.219	-0.545	272.24
Base	14	11	1.246D-1E+1L	Combination	Max			-1.583	3.613	444.14
Base	14	11	1.246D-1E+1L	Combination	Min			-29.742	1.939	173.135

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	14	11	0.9D+1.6W	Combination	Max			11.103	3.188	457.645
Base	14	11	0.9D+1.6W	Combination	Min			-43.789	-2.838	-9.885
Base	14	11	0.9D-1.6W	Combination	Max			25.026	4.362	342.471
Base	14	11	0.9D-1.6W	Combination	Min			-29.865	-1.664	-125.059
Base	14	11	.854D+E	Combination	Max			-0.56	0.318	342.849
Base	14	11	.854D+E	Combination	Min			-28.72	-1.356	71.844
Base	14	11	.854D-E	Combination	Max			10.916	2.802	243.743
Base	14	11	.854D-E	Combination	Min			-17.243	1.129	-27.262
Base	14	11	D+L	Combination				-18.837	1.325	312.736
Base	14	11	D+.5L	Combination				-14.63	1.086	248.753
Base	14	11	D+.5L+.7W	Combination	Max			-5.668	2.148	376.22
Base	14	11	D+.5L+.7W	Combination	Min			-29.683	-0.489	171.675
Base	14	11	D+.5L-.7W	Combination	Max			0.423	2.661	325.831
Base	14	11	D+.5L-.7W	Combination	Min			-23.592	0.025	121.287
Base	14	11	DConS1	Combination				-16.806	1.894	307.943
Base	14	11	DConS2	Combination				-27.866	2.389	468.698
Base	14	11	DConS3	Combination				-28.172	2.388	472.97
Base	14	11	DConS4	Combination				-23.799	2.098	405.59
Base	14	11	DConS5	Combination	Max			-2.334	4.528	683.27
Base	14	11	DConS5	Combination	Min			-57.225	-1.498	215.74
Base	14	11	DConS6	Combination	Max			11.59	5.702	568.096
Base	14	11	DConS6	Combination	Min			-43.302	-0.324	100.565
Base	14	11	DConS7	Combination	Max			-2.64	4.527	687.543
Base	14	11	DConS7	Combination	Min			-57.532	-1.499	220.012
Base	14	11	DConS8	Combination	Max			11.283	5.701	572.368
Base	14	11	DConS8	Combination	Min			-43.609	-0.325	104.838
Base	14	11	DConS9	Combination	Max			-5.144	2.833	423.3
Base	14	11	DConS9	Combination	Min			-32.59	-0.18	189.534
Base	14	11	DConS10	Combination	Max			1.817	3.42	365.713
Base	14	11	DConS10	Combination	Min			-25.628	0.407	131.947
Base	14	11	DConS11	Combination	Max			-4.163	2.836	409.628
Base	14	11	DConS11	Combination	Min			-31.609	-0.177	175.862
Base	14	11	DConS12	Combination	Max			2.799	3.423	352.04
Base	14	11	DConS12	Combination	Min			-24.647	0.41	118.275
Base	14	11	DConS13	Combination	Max			9.681	3.644	489.316
Base	14	11	DConS13	Combination	Min			-45.211	-2.382	21.785
Base	14	11	DConS14	Combination	Max			23.604	4.817	374.142
Base	14	11	DConS14	Combination	Min			-31.288	-1.209	-93.389
Base	14	11	DConS15	Combination	Max			-15.677	1.831	598.969
Base	14	11	DConS15	Combination	Min			-43.837	0.158	327.964
Base	14	11	DConS16	Combination	Max			-4.2	4.316	499.863
Base	14	11	DConS16	Combination	Min			-32.36	2.643	228.858
Base	14	11	DConS17	Combination	Max			-7.264	1.353	471.003
Base	14	11	DConS17	Combination	Min			-35.424	-0.32	199.998
Base	14	11	DConS18	Combination	Max			4.213	3.837	371.897

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	14	11	DConS18	Combination	Min			-23.947	2.164	100.892
Base	14	11	DConS19	Combination	Max			-1.262	0.677	361.023
Base	14	11	DConS19	Combination	Min			-29.421	-0.997	90.018
Base	14	11	DConS20	Combination	Max			10.215	3.161	261.917
Base	14	11	DConS20	Combination	Min			-17.945	1.488	-9.088
Base	15	12	Dead	LinStatic				-7.372	0.998	258.118
Base	15	12	Live	LinStatic				-5.377	1.294	258.751
Base	15	12	PW	LinStatic				-1.859	0.212	45.025
Base	15	12	FF	LinStatic				-1.859	0.203	45.104
Base	15	12	ROOF LIVE	LinStatic				0.007	0.019	19.362
Base	15	12	EQ	LinStatic	Max			-0.144	2.867	21.719
Base	15	12	EQ	LinStatic	Min			-3.867	-7.95	10.155
Base	15	12	wind	LinStatic	Max			-0.107	8.94	22.166
Base	15	12	wind	LinStatic	Min			-3.373	-9.341	-1.373
Base	15	12	1.4D	Combination				-10.32	1.397	361.365
Base	15	12	1.2D+1.6L+.5Lr	Combination				-17.445	3.277	733.424
Base	15	12	1.2D+1.6Lr+L	Combination				-14.212	2.522	599.472
Base	15	12	1.2D+1.6Lr+.8W	Combination	Max			-8.921	8.38	358.454
Base	15	12	1.2D+1.6Lr+.8W	Combination	Min			-11.533	-6.245	339.623
Base	15	12	1.2D+1.6Lr-.8W	Combination	Max			-6.137	8.701	341.819
Base	15	12	1.2D+1.6Lr-.8W	Combination	Min			-8.75	-5.924	322.988
Base	15	12	1.2D+1.6W+L+.5Lr	Combination	Max			-14.39	16.805	613.639
Base	15	12	1.2D+1.6W+L+.5Lr	Combination	Min			-19.615	-12.445	575.977
Base	15	12	1.2D-1.6W+L+.5Lr	Combination	Max			-8.823	17.447	580.37
Base	15	12	1.2D-1.6W+L+.5Lr	Combination	Min			-14.048	-11.803	542.708
Base	15	12	1.246D+1E+1L	Combination	Max			-14.706	5.404	602.085
Base	15	12	1.246D+1E+1L	Combination	Min			-18.429	-5.413	590.521
Base	15	12	1.246D-1E+1L	Combination	Max			-10.694	10.487	570.211
Base	15	12	1.246D-1E+1L	Combination	Min			-14.417	-0.33	558.646
Base	15	12	0.9D+1.6W	Combination	Max			-6.806	15.202	267.772
Base	15	12	0.9D+1.6W	Combination	Min			-12.03	-14.048	230.11
Base	15	12	0.9D-1.6W	Combination	Max			-1.238	15.844	234.502
Base	15	12	0.9D-1.6W	Combination	Min			-6.463	-13.406	196.841
Base	15	12	.854D+E	Combination	Max			-6.44	3.719	242.152
Base	15	12	.854D+E	Combination	Min			-10.163	-7.098	230.587
Base	15	12	.854D-E	Combination	Max			-2.428	8.802	210.278
Base	15	12	.854D-E	Combination	Min			-6.151	-2.015	198.713
Base	15	12	D+L	Combination				-12.748	2.292	516.869
Base	15	12	D+.5L	Combination				-10.06	1.645	387.493
Base	15	12	D+.5L+.7W	Combination	Max			-10.135	7.903	403.009
Base	15	12	D+.5L+.7W	Combination	Min			-12.421	-4.894	386.532
Base	15	12	D+.5L-.7W	Combination	Max			-7.699	8.183	388.454
Base	15	12	D+.5L-.7W	Combination	Min			-9.985	-4.613	371.977
Base	15	12	DConS1	Combination				-15.525	1.977	487.545
Base	15	12	DConS2	Combination				-21.91	3.765	831.897

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	15	12	DConS3	Combination				-21.907	3.775	841.579
Base	15	12	DConS4	Combination				-18.673	3.019	707.627
Base	15	12	DConS5	Combination	Max			-18.855	17.293	712.112
Base	15	12	DConS5	Combination	Min			-24.08	-11.957	674.451
Base	15	12	DConS6	Combination	Max			-13.288	17.934	678.843
Base	15	12	DConS6	Combination	Min			-18.513	-11.316	641.181
Base	15	12	DConS7	Combination	Max			-18.852	17.302	721.793
Base	15	12	DConS7	Combination	Min			-24.077	-11.947	684.132
Base	15	12	DConS8	Combination	Max			-13.285	17.944	688.524
Base	15	12	DConS8	Combination	Min			-18.509	-11.306	650.863
Base	15	12	DConS9	Combination	Max			-13.382	8.877	466.608
Base	15	12	DConS9	Combination	Min			-15.995	-5.748	447.777
Base	15	12	DConS10	Combination	Max			-10.599	9.198	449.974
Base	15	12	DConS10	Combination	Min			-13.211	-5.427	431.143
Base	15	12	DConS11	Combination	Max			-13.393	8.847	435.629
Base	15	12	DConS11	Combination	Min			-16.005	-5.778	416.798
Base	15	12	DConS12	Combination	Max			-10.609	9.167	418.994
Base	15	12	DConS12	Combination	Min			-13.222	-5.458	400.163
Base	15	12	DConS13	Combination	Max			-10.152	15.575	348.887
Base	15	12	DConS13	Combination	Min			-15.377	-13.675	311.226
Base	15	12	DConS14	Combination	Max			-4.584	16.216	315.618
Base	15	12	DConS14	Combination	Min			-9.809	-13.033	277.956
Base	15	12	DConS15	Combination	Max			-19.937	5.997	733.191
Base	15	12	DConS15	Combination	Min			-23.66	-4.82	721.626
Base	15	12	DConS16	Combination	Max			-15.926	11.08	701.317
Base	15	12	DConS16	Combination	Min			-19.648	0.263	689.752
Base	15	12	DConS17	Combination	Max			-14.561	4.703	474.44
Base	15	12	DConS17	Combination	Min			-18.284	-6.115	462.875
Base	15	12	DConS18	Combination	Max			-10.549	9.786	442.566
Base	15	12	DConS18	Combination	Min			-14.272	-1.032	431.001
Base	15	12	DConS19	Combination	Max			-9.016	3.997	300.317
Base	15	12	DConS19	Combination	Min			-12.739	-6.821	288.752
Base	15	12	DConS20	Combination	Max			-5.004	9.08	268.442
Base	15	12	DConS20	Combination	Min			-8.727	-1.738	256.878
Base	16	13	Dead	LinStatic				-6.496	1.259	242.968
Base	16	13	Live	LinStatic				-4.78	1.426	195.507
Base	16	13	PW	LinStatic				-1.739	0.179	37.955
Base	16	13	FF	LinStatic				-1.683	0.241	42.777
Base	16	13	ROOF LIVE	LinStatic				0.008	0.013	12.841
Base	16	13	EQ	LinStatic	Max			1.206	0.525	23.604
Base	16	13	EQ	LinStatic	Min			-5.68	-4.936	-90.105
Base	16	13	wind	LinStatic	Max			1.883	4.463	27.628
Base	16	13	wind	LinStatic	Min			-4.831	-5.841	-70.093
Base	16	13	1.4D	Combination				-9.095	1.762	340.156
Base	16	13	1.2D+1.6L+.5Lr	Combination				-15.44	3.799	610.794

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	16	13	1.2D+1.6Lr+L	Combination				-12.562	2.958	507.616
Base	16	13	1.2D+1.6Lr+.8W	Combination	Max			-6.276	5.102	334.211
Base	16	13	1.2D+1.6Lr+.8W	Combination	Min			-11.647	-3.141	256.034
Base	16	13	1.2D+1.6Lr-.8W	Combination	Max			-3.918	6.204	368.183
Base	16	13	1.2D+1.6Lr-.8W	Combination	Min			-9.289	-2.038	290.006
Base	16	13	1.2D+1.6W+L+.5Lr	Combination	Max			-9.559	10.083	537.695
Base	16	13	1.2D+1.6W+L+.5Lr	Combination	Min			-20.301	-6.402	381.341
Base	16	13	1.2D-1.6W+L+.5Lr	Combination	Max			-4.842	12.289	605.639
Base	16	13	1.2D-1.6W+L+.5Lr	Combination	Min			-15.584	-4.197	449.285
Base	16	13	1.246D+1E+1L	Combination	Max			-11.668	3.519	521.849
Base	16	13	1.246D+1E+1L	Combination	Min			-18.555	-1.942	408.141
Base	16	13	1.246D-1E+1L	Combination	Max			-7.194	7.93	588.35
Base	16	13	1.246D-1E+1L	Combination	Min			-14.08	2.469	474.642
Base	16	13	0.9D+1.6W	Combination	Max			-2.834	8.273	262.876
Base	16	13	0.9D+1.6W	Combination	Min			-13.576	-8.213	106.522
Base	16	13	0.9D-1.6W	Combination	Max			1.883	10.478	330.821
Base	16	13	0.9D-1.6W	Combination	Min			-8.859	-6.007	174.467
Base	16	13	.854D+E	Combination	Max			-4.342	1.6	231.099
Base	16	13	.854D+E	Combination	Min			-11.228	-3.861	117.39
Base	16	13	.854D-E	Combination	Max			0.133	6.011	297.6
Base	16	13	.854D-E	Combination	Min			-6.754	0.55	183.891
Base	16	13	D+L	Combination				-11.276	2.685	438.476
Base	16	13	D+.5L	Combination				-8.886	1.972	340.722
Base	16	13	D+.5L+.7W	Combination	Max			-7.568	5.095	360.062
Base	16	13	D+.5L+.7W	Combination	Min			-12.268	-2.117	291.657
Base	16	13	D+.5L-.7W	Combination	Max			-5.505	6.06	389.787
Base	16	13	D+.5L-.7W	Combination	Min			-10.204	-1.152	321.382
Base	16	13	DConS1	Combination				-13.886	2.35	453.181
Base	16	13	DConS2	Combination				-19.551	4.296	701.252
Base	16	13	DConS3	Combination				-19.547	4.303	707.673
Base	16	13	DConS4	Combination				-16.669	3.462	604.494
Base	16	13	DConS5	Combination	Max			-13.67	10.581	628.153
Base	16	13	DConS5	Combination	Min			-24.412	-5.905	471.799
Base	16	13	DConS6	Combination	Max			-8.953	12.786	696.097
Base	16	13	DConS6	Combination	Min			-19.695	-3.699	539.743
Base	16	13	DConS7	Combination	Max			-13.666	10.588	634.574
Base	16	13	DConS7	Combination	Min			-24.408	-5.898	478.219
Base	16	13	DConS8	Combination	Max			-8.949	12.793	702.518
Base	16	13	DConS8	Combination	Min			-19.691	-3.693	546.164
Base	16	13	DConS9	Combination	Max			-10.383	5.606	431.089
Base	16	13	DConS9	Combination	Min			-15.754	-2.637	352.912
Base	16	13	DConS10	Combination	Max			-8.025	6.709	465.062
Base	16	13	DConS10	Combination	Min			-13.396	-1.534	386.885
Base	16	13	DConS11	Combination	Max			-10.396	5.585	410.543
Base	16	13	DConS11	Combination	Min			-15.767	-2.658	332.366

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	16	13	DConS12	Combination	Max			-8.038	6.687	444.515
Base	16	13	DConS12	Combination	Min			-13.409	-1.555	366.338
Base	16	13	DConS13	Combination	Max			-5.914	8.651	335.535
Base	16	13	DConS13	Combination	Min			-16.656	-7.834	179.181
Base	16	13	DConS14	Combination	Max			-1.197	10.856	403.48
Base	16	13	DConS14	Combination	Min			-11.939	-5.629	247.126
Base	16	13	DConS15	Combination	Max			-16.468	4.134	639.922
Base	16	13	DConS15	Combination	Min			-23.355	-1.327	526.214
Base	16	13	DConS16	Combination	Max			-11.994	8.545	706.423
Base	16	13	DConS16	Combination	Min			-18.88	3.084	592.715
Base	16	13	DConS17	Combination	Max			-11.688	2.708	444.414
Base	16	13	DConS17	Combination	Min			-18.574	-2.753	330.706
Base	16	13	DConS18	Combination	Max			-7.214	7.119	510.915
Base	16	13	DConS18	Combination	Min			-14.1	1.658	397.207
Base	16	13	DConS19	Combination	Max			-6.729	1.868	282.564
Base	16	13	DConS19	Combination	Min			-13.615	-3.593	168.856
Base	16	13	DConS20	Combination	Max			-2.255	6.279	349.065
Base	16	13	DConS20	Combination	Min			-9.141	0.818	235.357
Base	17	14	Dead	LinStatic				6.054	2.09	251.123
Base	17	14	Live	LinStatic				4.439	2.314	206.227
Base	17	14	PW	LinStatic				1.584	0.195	38.912
Base	17	14	FF	LinStatic				1.546	0.368	44.477
Base	17	14	ROOF LIVE	LinStatic				0.007	0.062	14.332
Base	17	14	EQ	LinStatic	Max			1.188	1.616	92.99
Base	17	14	EQ	LinStatic	Min			-5.226	-6.663	4.256
Base	17	14	wind	LinStatic	Max			1.806	6.381	72.689
Base	17	14	wind	LinStatic	Min			-4.449	-7.684	-4.173
Base	17	14	1.4D	Combination				8.476	2.926	351.572
Base	17	14	1.2D+1.6L+.5Lr	Combination				14.371	6.241	638.477
Base	17	14	1.2D+1.6Lr+L	Combination				11.715	4.921	530.505
Base	17	14	1.2D+1.6Lr+.8W	Combination	Max			8.721	7.712	382.429
Base	17	14	1.2D+1.6Lr+.8W	Combination	Min			3.717	-3.54	320.939
Base	17	14	1.2D+1.6Lr-.8W	Combination	Max			10.836	8.755	327.616
Base	17	14	1.2D+1.6Lr-.8W	Combination	Min			5.831	-2.497	266.126
Base	17	14	1.2D+1.6W+L+.5Lr	Combination	Max			14.597	15.062	631.043
Base	17	14	1.2D+1.6W+L+.5Lr	Combination	Min			4.589	-7.441	508.063
Base	17	14	1.2D-1.6W+L+.5Lr	Combination	Max			18.826	17.147	521.417
Base	17	14	1.2D-1.6W+L+.5Lr	Combination	Min			8.818	-5.356	398.438
Base	17	14	1.246D+1E+1L	Combination	Max			13.171	6.534	612.116
Base	17	14	1.246D+1E+1L	Combination	Min			6.756	-1.745	523.382
Base	17	14	1.246D-1E+1L	Combination	Max			17.209	11.581	514.87
Base	17	14	1.246D-1E+1L	Combination	Min			10.794	3.302	426.136
Base	17	14	0.9D+1.6W	Combination	Max			8.339	12.09	342.313
Base	17	14	0.9D+1.6W	Combination	Min			-1.67	-10.413	219.333
Base	17	14	0.9D-1.6W	Combination	Max			12.568	14.176	232.688

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	17	14	0.9D-1.6W	Combination	Min			2.559	-8.328	109.708
Base	17	14	.854D+E	Combination	Max			6.359	3.401	307.448
Base	17	14	.854D+E	Combination	Min			-0.056	-4.878	218.714
Base	17	14	.854D-E	Combination	Max			10.397	8.448	210.203
Base	17	14	.854D-E	Combination	Min			3.982	0.169	121.469
Base	17	14	D+L	Combination				10.493	4.404	457.35
Base	17	14	D+.5L	Combination				8.274	3.247	354.236
Base	17	14	D+.5L+.7W	Combination	Max			9.538	7.714	405.119
Base	17	14	D+.5L+.7W	Combination	Min			5.159	-2.132	351.315
Base	17	14	D+.5L-.7W	Combination	Max			11.388	8.626	357.158
Base	17	14	D+.5L-.7W	Combination	Min			7.009	-1.219	303.354
Base	17	14	DConS1	Combination				12.858	3.714	468.316
Base	17	14	DConS2	Combination				18.123	6.886	731.378
Base	17	14	DConS3	Combination				18.127	6.917	738.544
Base	17	14	DConS4	Combination				15.471	5.597	630.572
Base	17	14	DConS5	Combination	Max			18.35	15.707	723.944
Base	17	14	DConS5	Combination	Min			8.341	-6.797	600.964
Base	17	14	DConS6	Combination	Max			22.579	17.792	614.319
Base	17	14	DConS6	Combination	Min			12.57	-4.712	491.339
Base	17	14	DConS7	Combination	Max			18.353	15.738	731.11
Base	17	14	DConS7	Combination	Min			8.345	-6.766	608.13
Base	17	14	DConS8	Combination	Max			22.582	17.823	621.484
Base	17	14	DConS8	Combination	Min			12.574	-4.681	498.505
Base	17	14	DConS9	Combination	Max			12.477	8.388	482.496
Base	17	14	DConS9	Combination	Min			7.473	-2.864	421.006
Base	17	14	DConS10	Combination	Max			14.592	9.43	427.683
Base	17	14	DConS10	Combination	Min			9.587	-1.822	366.193
Base	17	14	DConS11	Combination	Max			12.466	8.288	459.565
Base	17	14	DConS11	Combination	Min			7.462	-2.963	398.075
Base	17	14	DConS12	Combination	Max			14.581	9.331	404.753
Base	17	14	DConS12	Combination	Min			9.577	-1.921	343.263
Base	17	14	DConS13	Combination	Max			11.156	12.597	417.363
Base	17	14	DConS13	Combination	Min			1.147	-9.906	294.383
Base	17	14	DConS14	Combination	Max			15.385	14.682	307.738
Base	17	14	DConS14	Combination	Min			5.376	-7.821	184.758
Base	17	14	DConS15	Combination	Max			17.567	7.379	734.082
Base	17	14	DConS15	Combination	Min			11.152	-0.9	645.348
Base	17	14	DConS16	Combination	Max			21.605	12.426	636.837
Base	17	14	DConS16	Combination	Min			15.19	4.147	548.103
Base	17	14	DConS17	Combination	Max			13.128	5.065	527.855
Base	17	14	DConS17	Combination	Min			6.713	-3.214	439.121
Base	17	14	DConS18	Combination	Max			17.166	10.112	430.61
Base	17	14	DConS18	Combination	Min			10.751	1.833	341.876
Base	17	14	DConS19	Combination	Max			8.536	3.738	360.599
Base	17	14	DConS19	Combination	Min			2.121	-4.54	271.865

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	17	14	DConS20	Combination	Max			12.574	8.785	263.354
Base	17	14	DConS20	Combination	Min			6.159	0.507	174.62
Base	18	15	Dead	LinStatic				12.984	15.945	359.876
Base	18	15	Live	LinStatic				5.51	7.583	170.117
Base	18	15	PW	LinStatic				1.308	1.942	48.332
Base	18	15	FF	LinStatic				1.306	1.953	48.123
Base	18	15	ROOF LIVE	LinStatic				1.01	1.017	21.194
Base	18	15	EQ	LinStatic	Max			-16.387	-23.791	-247.293
Base	18	15	EQ	LinStatic	Min			-34.744	-28.466	-376.6
Base	18	15	wind	LinStatic	Max			-1.362	10.175	9.278
Base	18	15	wind	LinStatic	Min			-39.591	-42.092	-464.07
Base	18	15	1.4D	Combination				18.177	22.323	503.826
Base	18	15	1.2D+1.6L+.5Lr	Combination				24.9	31.776	714.634
Base	18	15	1.2D+1.6Lr+L	Combination				22.705	28.345	635.877
Base	18	15	1.2D+1.6Lr+.8W	Combination	Max			16.106	28.902	473.183
Base	18	15	1.2D+1.6Lr+.8W	Combination	Min			-14.477	-12.911	94.505
Base	18	15	1.2D+1.6Lr-.8W	Combination	Max			48.868	54.436	837.016
Base	18	15	1.2D+1.6Lr-.8W	Combination	Min			18.285	12.623	458.338
Base	18	15	1.2D+1.6W+L+.5Lr	Combination	Max			19.416	43.505	627.409
Base	18	15	1.2D+1.6W+L+.5Lr	Combination	Min			-41.751	-40.122	-129.947
Base	18	15	1.2D-1.6W+L+.5Lr	Combination	Max			84.94	94.573	1355.076
Base	18	15	1.2D-1.6W+L+.5Lr	Combination	Min			23.773	10.947	597.719
Base	18	15	1.246D+1E+1L	Combination	Max			5.3	3.66	371.229
Base	18	15	1.246D+1E+1L	Combination	Min			-13.057	-1.015	241.922
Base	18	15	1.246D-1E+1L	Combination	Max			56.431	55.916	995.122
Base	18	15	1.246D-1E+1L	Combination	Min			38.074	51.241	865.815
Base	18	15	0.9D+1.6W	Combination	Max			9.506	30.63	338.733
Base	18	15	0.9D+1.6W	Combination	Min			-51.66	-52.997	-418.623
Base	18	15	0.9D-1.6W	Combination	Max			75.03	81.698	1066.399
Base	18	15	0.9D-1.6W	Combination	Min			13.864	-1.928	309.043
Base	18	15	.854D+E	Combination	Max			-5.299	-10.173	60.041
Base	18	15	.854D+E	Combination	Min			-23.656	-14.848	-69.266
Base	18	15	.854D-E	Combination	Max			45.832	42.083	683.934
Base	18	15	.854D-E	Combination	Min			27.475	37.408	554.627
Base	18	15	D+L	Combination				18.493	23.528	529.992
Base	18	15	D+.5L	Combination				15.738	19.737	444.934
Base	18	15	D+.5L+.7W	Combination	Max			14.785	26.859	451.429
Base	18	15	D+.5L+.7W	Combination	Min			-11.975	-9.728	120.085
Base	18	15	D+.5L-.7W	Combination	Max			43.452	49.201	769.783
Base	18	15	D+.5L-.7W	Combination	Min			16.692	12.615	438.439
Base	18	15	DConS1	Combination				21.836	27.777	638.864
Base	18	15	DConS2	Combination				27.532	35.942	819.784
Base	18	15	DConS3	Combination				28.037	36.45	830.381
Base	18	15	DConS4	Combination				25.842	33.02	751.624
Base	18	15	DConS5	Combination	Max			22.048	47.671	732.559

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	18	15	DConS5	Combination	Min			-39.119	-35.956	-24.797
Base	18	15	DConS6	Combination	Max			87.572	98.74	1460.226
Base	18	15	DConS6	Combination	Min			26.405	15.113	702.869
Base	18	15	DConS7	Combination	Max			22.552	48.18	743.156
Base	18	15	DConS7	Combination	Min			-38.614	-35.447	-14.201
Base	18	15	DConS8	Combination	Max			88.076	99.248	1470.822
Base	18	15	DConS8	Combination	Min			26.91	15.621	713.466
Base	18	15	DConS9	Combination	Max			19.243	33.577	588.93
Base	18	15	DConS9	Combination	Min			-11.34	-8.237	210.252
Base	18	15	DConS10	Combination	Max			52.005	59.111	952.763
Base	18	15	DConS10	Combination	Min			21.422	17.298	574.085
Base	18	15	DConS11	Combination	Max			17.627	31.949	555.02
Base	18	15	DConS11	Combination	Min			-12.956	-9.865	176.342
Base	18	15	DConS12	Combination	Max			50.389	57.483	918.853
Base	18	15	DConS12	Combination	Min			19.806	15.67	540.175
Base	18	15	DConS13	Combination	Max			11.859	34.136	425.543
Base	18	15	DConS13	Combination	Min			-49.308	-49.491	-331.813
Base	18	15	DConS14	Combination	Max			77.383	85.205	1153.21
Base	18	15	DConS14	Combination	Min			16.216	1.578	395.853
Base	18	15	DConS15	Combination	Max			9.399	9.585	516.054
Base	18	15	DConS15	Combination	Min			-8.958	4.91	386.747
Base	18	15	DConS16	Combination	Max			60.53	61.842	1139.947
Base	18	15	DConS16	Combination	Min			42.173	57.167	1010.64
Base	18	15	DConS17	Combination	Max			3.889	2.003	345.938
Base	18	15	DConS17	Combination	Min			-14.467	-2.672	216.631
Base	18	15	DConS18	Combination	Max			55.02	54.259	969.831
Base	18	15	DConS18	Combination	Min			36.664	49.584	840.524
Base	18	15	DConS19	Combination	Max			-3.909	-7.918	117.772
Base	18	15	DConS19	Combination	Min			-22.266	-12.593	-11.535
Base	18	15	DConS20	Combination	Max			47.222	44.338	741.665
Base	18	15	DConS20	Combination	Min			28.865	39.663	612.358
Base	19	16	Dead	LinStatic				-13.64	16.446	363.651
Base	19	16	Live	LinStatic				-6.116	8.478	184.545
Base	19	16	PW	LinStatic				-1.51	2.146	49.716
Base	19	16	FF	LinStatic				-1.498	2.169	50.066
Base	19	16	ROOF LIVE	LinStatic				-0.973	1.037	21.293
Base	19	16	EQ	LinStatic	Max			9.839	33.24	384.489
Base	19	16	EQ	LinStatic	Min			-33.66	-39.43	-237.067
Base	19	16	wind	LinStatic	Max			11.067	52.71	424.239
Base	19	16	wind	LinStatic	Min			-30.615	-45.947	-263.828
Base	19	16	1.4D	Combination				-19.096	23.024	509.112
Base	19	16	1.2D+1.6L+.5Lr	Combination				-26.64	33.817	742.3
Base	19	16	1.2D+1.6Lr+L	Combination				-24.041	29.872	654.995
Base	19	16	1.2D+1.6Lr+.8W	Combination	Max			-9.072	63.562	809.841
Base	19	16	1.2D+1.6Lr+.8W	Combination	Min			-42.417	-15.363	259.388

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	19	16	1.2D+1.6Lr-.8W	Combination	Max			6.567	58.152	681.513
Base	19	16	1.2D+1.6Lr-.8W	Combination	Min			-26.778	-20.774	131.059
Base	19	16	1.2D+1.6W+L+.5Lr	Combination	Max			-5.264	113.067	1310.355
Base	19	16	1.2D+1.6W+L+.5Lr	Combination	Min			-71.955	-44.784	209.448
Base	19	16	1.2D-1.6W+L+.5Lr	Combination	Max			26.014	102.246	1053.698
Base	19	16	1.2D-1.6W+L+.5Lr	Combination	Min			-40.677	-55.606	-47.209
Base	19	16	1.246D+1E+1L	Combination	Max			-13.272	62.208	1022.143
Base	19	16	1.246D+1E+1L	Combination	Min			-56.772	-10.461	400.588
Base	19	16	1.246D-1E+1L	Combination	Max			10.549	68.398	874.721
Base	19	16	1.246D-1E+1L	Combination	Min			-32.951	-4.271	253.166
Base	19	16	0.9D+1.6W	Combination	Max			5.43	99.137	1006.068
Base	19	16	0.9D+1.6W	Combination	Min			-61.26	-58.714	-94.839
Base	19	16	0.9D-1.6W	Combination	Max			36.709	88.316	749.411
Base	19	16	0.9D-1.6W	Combination	Min			-29.982	-69.535	-351.496
Base	19	16	.854D+E	Combination	Max			-1.809	47.284	695.047
Base	19	16	.854D+E	Combination	Min			-45.309	-25.385	73.491
Base	19	16	.854D-E	Combination	Max			22.012	53.474	547.625
Base	19	16	.854D-E	Combination	Min			-21.488	-19.195	-73.93
Base	19	16	D+L	Combination				-19.756	24.923	548.196
Base	19	16	D+.5L	Combination				-16.698	20.684	455.924
Base	19	16	D+.5L+.7W	Combination	Max			-8.951	57.581	752.891
Base	19	16	D+.5L+.7W	Combination	Min			-38.129	-11.479	271.244
Base	19	16	D+.5L-.7W	Combination	Max			4.733	52.847	640.603
Base	19	16	D+.5L-.7W	Combination	Min			-24.445	-16.213	158.957
Base	19	16	DConS1	Combination				-23.308	29.064	648.806
Base	19	16	DConS2	Combination				-29.764	38.476	851.392
Base	19	16	DConS3	Combination				-30.25	38.995	862.038
Base	19	16	DConS4	Combination				-27.651	35.049	774.734
Base	19	16	DConS5	Combination	Max			-8.388	117.726	1419.446
Base	19	16	DConS5	Combination	Min			-75.079	-40.126	318.54
Base	19	16	DConS6	Combination	Max			22.89	106.905	1162.79
Base	19	16	DConS6	Combination	Min			-43.801	-50.947	61.883
Base	19	16	DConS7	Combination	Max			-8.874	118.244	1430.093
Base	19	16	DConS7	Combination	Min			-75.565	-39.607	329.186
Base	19	16	DConS8	Combination	Max			22.404	107.423	1173.436
Base	19	16	DConS8	Combination	Min			-44.287	-50.428	72.53
Base	19	16	DConS9	Combination	Max			-12.682	68.74	929.579
Base	19	16	DConS9	Combination	Min			-46.027	-10.186	379.126
Base	19	16	DConS10	Combination	Max			2.957	63.329	801.251
Base	19	16	DConS10	Combination	Min			-30.388	-15.597	250.798
Base	19	16	DConS11	Combination	Max			-11.125	67.08	895.51
Base	19	16	DConS11	Combination	Min			-44.47	-11.846	345.057
Base	19	16	DConS12	Combination	Max			4.514	61.669	767.182
Base	19	16	DConS12	Combination	Min			-28.831	-17.256	216.729
Base	19	16	DConS13	Combination	Max			2.723	103.02	1095.871

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	19	16	DConS13	Combination	Min			-63.968	-54.831	-5.036
Base	19	16	DConS14	Combination	Max			34.001	92.199	839.215
Base	19	16	DConS14	Combination	Min			-32.69	-65.652	-261.692
Base	19	16	DConS15	Combination	Max			-17.92	68.705	1171.496
Base	19	16	DConS15	Combination	Min			-61.419	-3.964	549.941
Base	19	16	DConS16	Combination	Max			5.901	74.895	1024.075
Base	19	16	DConS16	Combination	Min			-37.598	2.226	402.519
Base	19	16	DConS17	Combination	Max			-11.804	60.227	986.951
Base	19	16	DConS17	Combination	Min			-55.303	-12.442	365.396
Base	19	16	DConS18	Combination	Max			12.017	66.418	839.53
Base	19	16	DConS18	Combination	Min			-31.482	-6.252	217.974
Base	19	16	DConS19	Combination	Max			-3.479	49.848	755.235
Base	19	16	DConS19	Combination	Min			-46.979	-22.822	133.679
Base	19	16	DConS20	Combination	Max			20.342	56.038	607.813
Base	19	16	DConS20	Combination	Min			-23.158	-16.632	-13.742
Base	29	383	Dead	LinStatic				13.37	15.749	204.068
Base	29	383	Live	LinStatic				8.963	12.472	143.226
Base	29	383	PW	LinStatic				1.433	1.96	21.025
Base	29	383	FF	LinStatic				1.395	1.958	20.591
Base	29	383	ROOF LIVE	LinStatic				0.595	0.793	10.278
Base	29	383	EQ	LinStatic	Max			-10.483	-13.32	-109.934
Base	29	383	EQ	LinStatic	Min			-15.491	-23.565	-171.352
Base	29	383	wind	LinStatic	Max			1.294	16.944	6.26
Base	29	383	wind	LinStatic	Min			-20.313	-35.557	-211.082
Base	29	383	1.4D	Combination				18.718	22.049	285.696
Base	29	383	1.2D+1.6L+.5Lr	Combination				30.682	39.251	479.183
Base	29	383	1.2D+1.6Lr+L	Combination				25.959	32.64	404.553
Base	29	383	1.2D+1.6Lr+.8W	Combination	Max			18.032	33.722	266.334
Base	29	383	1.2D+1.6Lr+.8W	Combination	Min			0.746	-8.278	92.461
Base	29	383	1.2D+1.6Lr-.8W	Combination	Max			33.246	48.613	430.192
Base	29	383	1.2D+1.6Lr-.8W	Combination	Min			15.961	6.613	256.319
Base	29	383	1.2D+1.6W+L+.5Lr	Combination	Max			27.375	58.878	403.263
Base	29	383	1.2D+1.6W+L+.5Lr	Combination	Min			-7.196	-25.124	55.516
Base	29	383	1.2D-1.6W+L+.5Lr	Combination	Max			57.805	88.659	730.979
Base	29	383	1.2D-1.6W+L+.5Lr	Combination	Min			23.234	4.658	383.232
Base	29	383	1.246D+1E+1L	Combination	Max			15.139	18.776	287.562
Base	29	383	1.246D+1E+1L	Combination	Min			10.131	8.531	226.144
Base	29	383	1.246D-1E+1L	Combination	Max			41.112	55.661	568.847
Base	29	383	1.246D-1E+1L	Combination	Min			36.104	45.416	507.43
Base	29	383	0.9D+1.6W	Combination	Max			14.103	41.284	193.677
Base	29	383	0.9D+1.6W	Combination	Min			-20.467	-42.717	-154.07
Base	29	383	0.9D-1.6W	Combination	Max			44.533	71.066	521.393
Base	29	383	0.9D-1.6W	Combination	Min			9.962	-12.935	173.646
Base	29	383	.854D+E	Combination	Max			0.935	0.13	64.34
Base	29	383	.854D+E	Combination	Min			-4.073	-10.115	2.923

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	29	383	.854D-E	Combination	Max			26.908	37.015	345.626
Base	29	383	.854D-E	Combination	Min			21.9	26.77	284.209
Base	29	383	D+L	Combination				22.333	28.222	347.295
Base	29	383	D+.5L	Combination				17.851	21.986	275.682
Base	29	383	D+.5L+.7W	Combination	Max			18.757	33.846	280.063
Base	29	383	D+.5L+.7W	Combination	Min			3.632	-2.905	127.924
Base	29	383	D+.5L-.7W	Combination	Max			32.07	46.876	423.439
Base	29	383	D+.5L-.7W	Combination	Min			16.945	10.125	271.3
Base	29	383	DConS1	Combination				22.677	27.534	343.958
Base	29	383	DConS2	Combination				33.778	43.556	523.983
Base	29	383	DConS3	Combination				34.076	43.953	529.122
Base	29	383	DConS4	Combination				29.353	37.341	454.492
Base	29	383	DConS5	Combination	Max			30.471	63.183	448.063
Base	29	383	DConS5	Combination	Min			-4.1	-20.818	100.316
Base	29	383	DConS6	Combination	Max			60.9	92.965	775.779
Base	29	383	DConS6	Combination	Min			26.33	8.963	428.032
Base	29	383	DConS7	Combination	Max			30.769	63.579	453.202
Base	29	383	DConS7	Combination	Min			-3.802	-20.422	105.455
Base	29	383	DConS8	Combination	Max			61.198	93.361	780.918
Base	29	383	DConS8	Combination	Min			26.627	9.36	433.171
Base	29	383	DConS9	Combination	Max			21.425	38.424	316.273
Base	29	383	DConS9	Combination	Min			4.14	-3.577	142.4
Base	29	383	DConS10	Combination	Max			36.64	53.315	480.131
Base	29	383	DConS10	Combination	Min			19.355	11.314	306.258
Base	29	383	DConS11	Combination	Max			20.473	37.156	299.829
Base	29	383	DConS11	Combination	Min			3.187	-4.845	125.955
Base	29	383	DConS12	Combination	Max			35.687	52.047	463.687
Base	29	383	DConS12	Combination	Min			18.402	10.046	289.813
Base	29	383	DConS13	Combination	Max			16.649	44.81	231.131
Base	29	383	DConS13	Combination	Min			-17.922	-39.191	-116.616
Base	29	383	DConS14	Combination	Max			47.078	74.592	558.847
Base	29	383	DConS14	Combination	Min			12.507	-9.409	211.1
Base	29	383	DConS15	Combination	Max			19.537	24.72	352.682
Base	29	383	DConS15	Combination	Min			14.529	14.475	291.264
Base	29	383	DConS16	Combination	Max			45.511	61.605	633.967
Base	29	383	DConS16	Combination	Min			40.503	51.359	572.55
Base	29	383	DConS17	Combination	Max			10.574	12.248	209.455
Base	29	383	DConS17	Combination	Min			5.566	2.003	148.038
Base	29	383	DConS18	Combination	Max			36.548	49.132	490.741
Base	29	383	DConS18	Combination	Min			31.54	38.887	429.323
Base	29	383	DConS19	Combination	Max			2.475	2.414	86.613
Base	29	383	DConS19	Combination	Min			-2.533	-7.831	25.196
Base	29	383	DConS20	Combination	Max			28.449	39.299	367.899
Base	29	383	DConS20	Combination	Min			23.441	29.053	306.481
Base	45	365	Dead	LinStatic				18.54	-18.449	247.037

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	45	365	Live	LinStatic				10.542	-9.737	132.563
Base	45	365	PW	LinStatic				2.437	-2.623	32.94
Base	45	365	FF	LinStatic				2.546	-2.656	33.83
Base	45	365	ROOF LIVE	LinStatic				1.122	-1.074	14.528
Base	45	365	EQ	LinStatic	Max			25.151	20.187	186.608
Base	45	365	EQ	LinStatic	Min			-32.107	-24.639	-227.703
Base	45	365	wind	LinStatic	Max			27.933	33.929	212.102
Base	45	365	wind	LinStatic	Min			-40.453	-30.354	-291.184
Base	45	365	1.4D	Combination				25.956	-25.828	345.851
Base	45	365	1.2D+1.6L+.5Lr	Combination				39.675	-38.254	515.809
Base	45	365	1.2D+1.6Lr+L	Combination				34.584	-33.593	452.251
Base	45	365	1.2D+1.6Lr+.8W	Combination	Max			46.389	3.287	489.37
Base	45	365	1.2D+1.6Lr+.8W	Combination	Min			-8.32	-48.14	86.741
Base	45	365	1.2D+1.6Lr-.8W	Combination	Max			56.405	0.427	552.635
Base	45	365	1.2D+1.6Lr-.8W	Combination	Min			1.696	-51	150.006
Base	45	365	1.2D+1.6W+L+.5Lr	Combination	Max			78.043	21.874	775.634
Base	45	365	1.2D+1.6W+L+.5Lr	Combination	Min			-31.375	-80.979	-29.624
Base	45	365	1.2D-1.6W+L+.5Lr	Combination	Max			98.075	16.155	902.166
Base	45	365	1.2D-1.6W+L+.5Lr	Combination	Min			-11.342	-86.699	96.908
Base	45	365	1.246D+1E+1L	Combination	Max			58.794	-12.537	626.979
Base	45	365	1.246D+1E+1L	Combination	Min			1.535	-57.363	212.668
Base	45	365	1.246D-1E+1L	Combination	Max			65.75	-8.085	668.073
Base	45	365	1.246D-1E+1L	Combination	Min			8.491	-52.911	253.763
Base	45	365	0.9D+1.6W	Combination	Max			61.378	37.683	561.696
Base	45	365	0.9D+1.6W	Combination	Min			-48.039	-65.171	-243.562
Base	45	365	0.9D-1.6W	Combination	Max			81.411	31.963	688.228
Base	45	365	0.9D-1.6W	Combination	Min			-28.006	-70.89	-117.03
Base	45	365	.854D+E	Combination	Max			40.984	4.432	397.577
Base	45	365	.854D+E	Combination	Min			-16.274	-40.394	-16.733
Base	45	365	.854D-E	Combination	Max			47.94	8.884	438.672
Base	45	365	.854D-E	Combination	Min			-9.318	-35.942	24.362
Base	45	365	D+L	Combination				29.082	-28.186	379.6
Base	45	365	D+.5L	Combination				23.811	-23.317	313.318
Base	45	365	D+.5L+.7W	Combination	Max			43.364	0.433	461.79
Base	45	365	D+.5L+.7W	Combination	Min			-4.506	-44.565	109.489
Base	45	365	D+.5L-.7W	Combination	Max			52.128	-2.069	517.147
Base	45	365	D+.5L-.7W	Combination	Min			4.258	-47.067	164.847
Base	45	365	DConS1	Combination				32.932	-33.219	439.33
Base	45	365	DConS2	Combination				45.094	-44.053	588.669
Base	45	365	DConS3	Combination				45.654	-44.59	595.933
Base	45	365	DConS4	Combination				40.563	-39.928	532.376
Base	45	365	DConS5	Combination	Max			83.461	16.076	848.495
Base	45	365	DConS5	Combination	Min			-25.956	-86.777	43.237
Base	45	365	DConS6	Combination	Max			103.494	10.357	975.026
Base	45	365	DConS6	Combination	Min			-5.924	-92.497	169.768

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	45	365	DConS7	Combination	Max			84.022	15.539	855.759
Base	45	365	DConS7	Combination	Min			-25.396	-87.314	50.501
Base	45	365	DConS8	Combination	Max			104.055	9.82	982.29
Base	45	365	DConS8	Combination	Min			-5.363	-93.034	177.032
Base	45	365	DConS9	Combination	Max			52.368	-3.048	569.494
Base	45	365	DConS9	Combination	Min			-2.341	-54.475	166.865
Base	45	365	DConS10	Combination	Max			62.384	-5.908	632.76
Base	45	365	DConS10	Combination	Min			7.675	-57.335	230.131
Base	45	365	DConS11	Combination	Max			50.573	-1.33	546.25
Base	45	365	DConS11	Combination	Min			-4.135	-52.757	143.621
Base	45	365	DConS12	Combination	Max			60.59	-4.19	609.516
Base	45	365	DConS12	Combination	Min			5.881	-55.617	206.887
Base	45	365	DConS13	Combination	Max			65.863	32.932	621.79
Base	45	365	DConS13	Combination	Min			-43.555	-69.922	-183.468
Base	45	365	DConS14	Combination	Max			85.895	27.212	748.321
Base	45	365	DConS14	Combination	Min			-23.522	-75.642	-56.937
Base	45	365	DConS15	Combination	Max			66.272	-20.396	727.12
Base	45	365	DConS15	Combination	Min			9.014	-65.222	312.81
Base	45	365	DConS16	Combination	Max			73.228	-15.944	768.215
Base	45	365	DConS16	Combination	Min			15.97	-60.77	353.904
Base	45	365	DConS17	Combination	Max			55.73	-10.659	594.557
Base	45	365	DConS17	Combination	Min			-1.528	-55.485	180.247
Base	45	365	DConS18	Combination	Max			62.686	-6.207	635.652
Base	45	365	DConS18	Combination	Min			5.428	-51.033	221.341
Base	45	365	DConS19	Combination	Max			43.969	1.205	437.653
Base	45	365	DConS19	Combination	Min			-13.289	-43.621	23.343
Base	45	365	DConS20	Combination	Max			50.925	5.657	478.748
Base	45	365	DConS20	Combination	Min			-6.333	-39.169	64.438
Base	46	374	Dead	LinStatic				-18.949	-18.539	249.493
Base	46	374	Live	LinStatic				-10.837	-10.616	140.468
Base	46	374	PW	LinStatic				-2.645	-2.616	33.839
Base	46	374	FF	LinStatic				-2.725	-2.702	35.003
Base	46	374	ROOF LIVE	LinStatic				-1.124	-1.067	14.569
Base	46	374	EQ	LinStatic	Max			-12.282	-11.779	215.554
Base	46	374	EQ	LinStatic	Min			-30.396	-36.979	184.025
Base	46	374	wind	LinStatic	Max			-4.567	25.866	307.913
Base	46	374	wind	LinStatic	Min			-32.275	-43.441	-45.067
Base	46	374	1.4D	Combination				-26.528	-25.955	349.291
Base	46	374	1.2D+1.6L+.5Lr	Combination				-40.64	-39.766	531.425
Base	46	374	1.2D+1.6Lr+L	Combination				-35.374	-34.57	463.17
Base	46	374	1.2D+1.6Lr+.8W	Combination	Max			-28.191	-3.262	569.033
Base	46	374	1.2D+1.6Lr+.8W	Combination	Min			-50.356	-58.707	286.648
Base	46	374	1.2D+1.6Lr-.8W	Combination	Max			1.283	10.798	358.755
Base	46	374	1.2D+1.6Lr-.8W	Combination	Min			-20.883	-44.647	76.371
Base	46	374	1.2D+1.6W+L+.5Lr	Combination	Max			-41.445	7.989	939.806

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	46	374	1.2D+1.6W+L+.5Lr	Combination	Min			-85.777	-102.902	375.037
Base	46	374	1.2D-1.6W+L+.5Lr	Combination	Max			17.502	36.109	519.251
Base	46	374	1.2D-1.6W+L+.5Lr	Combination	Min			-26.83	-74.782	-45.517
Base	46	374	1.246D+1E+1L	Combination	Max			-46.73	-45.495	666.891
Base	46	374	1.246D+1E+1L	Combination	Min			-64.843	-70.695	635.362
Base	46	374	1.246D-1E+1L	Combination	Max			-4.051	3.263	267.312
Base	46	374	1.246D-1E+1L	Combination	Min			-22.165	-21.937	235.782
Base	46	374	0.9D+1.6W	Combination	Max			-24.361	24.7	717.205
Base	46	374	0.9D+1.6W	Combination	Min			-68.693	-86.191	152.437
Base	46	374	0.9D-1.6W	Combination	Max			34.585	52.82	296.651
Base	46	374	0.9D-1.6W	Combination	Min			-9.746	-58.071	-268.117
Base	46	374	.854D+E	Combination	Max			-28.464	-27.612	428.622
Base	46	374	.854D+E	Combination	Min			-46.578	-52.812	397.092
Base	46	374	.854D-E	Combination	Max			14.214	21.146	29.042
Base	46	374	.854D-E	Combination	Min			-3.9	-4.054	-2.487
Base	46	374	D+L	Combination				-29.786	-29.155	389.961
Base	46	374	D+.5L	Combination				-24.367	-23.847	319.727
Base	46	374	D+.5L+.7W	Combination	Max			-27.564	-5.741	535.267
Base	46	374	D+.5L+.7W	Combination	Min			-46.96	-54.256	288.18
Base	46	374	D+.5L-.7W	Combination	Max			-1.775	6.562	351.274
Base	46	374	D+.5L-.7W	Combination	Min			-21.17	-41.954	104.188
Base	46	374	DConS1	Combination				-34.046	-33.399	445.67
Base	46	374	DConS2	Combination				-46.522	-45.613	606.751
Base	46	374	DConS3	Combination				-47.084	-46.147	614.036
Base	46	374	DConS4	Combination				-41.818	-40.951	545.78
Base	46	374	DConS5	Combination	Max			-47.327	2.142	1015.132
Base	46	374	DConS5	Combination	Min			-91.659	-108.75	450.363
Base	46	374	DConS6	Combination	Max			11.62	30.262	594.578
Base	46	374	DConS6	Combination	Min			-32.712	-80.63	29.809
Base	46	374	DConS7	Combination	Max			-47.889	1.608	1022.416
Base	46	374	DConS7	Combination	Min			-92.221	-109.283	457.648
Base	46	374	DConS8	Combination	Max			11.058	29.728	601.862
Base	46	374	DConS8	Combination	Min			-33.274	-81.163	37.094
Base	46	374	DConS9	Combination	Max			-34.634	-9.642	651.643
Base	46	374	DConS9	Combination	Min			-56.8	-65.088	369.259
Base	46	374	DConS10	Combination	Max			-5.161	4.418	441.366
Base	46	374	DConS10	Combination	Min			-27.327	-51.028	158.982
Base	46	374	DConS11	Combination	Max			-32.836	-7.935	628.333
Base	46	374	DConS11	Combination	Min			-55.002	-63.381	345.949
Base	46	374	DConS12	Combination	Max			-3.363	6.125	418.056
Base	46	374	DConS12	Combination	Min			-25.529	-49.321	135.672
Base	46	374	DConS13	Combination	Max			-29.194	19.915	779.163
Base	46	374	DConS13	Combination	Min			-73.526	-90.977	214.395
Base	46	374	DConS14	Combination	Max			29.753	48.035	358.609
Base	46	374	DConS14	Combination	Min			-14.579	-62.857	-206.159

Table 5.8 - Joint Reactions (Part 1 of 2, continued)

Story	Label	Unique Name	Output Case	Case Type	Step Type	Step Number	Step Label	FX kip	FY kip	FZ kip
Base	46	374	DConS15	Combination	Max			-54.734	-53.408	769.859
Base	46	374	DConS15	Combination	Min			-72.847	-78.609	738.329
Base	46	374	DConS16	Combination	Max			-12.055	-4.65	370.279
Base	46	374	DConS16	Combination	Min			-30.169	-29.851	338.75
Base	46	374	DConS17	Combination	Max			-43.896	-42.793	629.391
Base	46	374	DConS17	Combination	Min			-62.01	-67.993	597.861
Base	46	374	DConS18	Combination	Max			-1.218	5.965	229.811
Base	46	374	DConS18	Combination	Min			-19.332	-19.235	198.282
Base	46	374	DConS19	Combination	Max			-31.737	-30.864	470.223
Base	46	374	DConS19	Combination	Min			-49.851	-56.065	438.693
Base	46	374	DConS20	Combination	Max			10.941	17.894	70.643
Base	46	374	DConS20	Combination	Min			-7.173	-7.307	39.114

Table 5.8 - Joint Reactions (Part 2 of 2)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	4	1	-1.6099	-1.5046	3.412E-06
Base	4	1	-2.6301	-2.4995	-1.415E-06
Base	4	1	-0.3072	-0.2468	2.874E-06
Base	4	1	-0.27	-0.2584	2.268E-06
Base	4	1	-0.0217	-0.017	6.421E-07
Base	4	1	24.436	-3.576	0.0004
Base	4	1	-8.3272	-15.7846	-0.0005
Base	4	1	28.3358	-0.7794	0.0007
Base	4	1	-26.8684	-14.4558	-0.0006
Base	4	1	-2.2539	-2.1064	4.777E-06
Base	4	1	-6.1509	-5.8132	2.152E-06
Base	4	1	-4.5968	-4.3323	3.707E-06
Base	4	1	20.702	-2.4562	0.0006
Base	4	1	-23.4614	-13.3974	-0.0005
Base	4	1	19.528	9.7319	0.0005
Base	4	1	-24.6353	-1.2093	-0.0006
Base	4	1	40.7644	-5.5605	0.0012
Base	4	1	-47.5624	-27.4429	-0.001
Base	4	1	38.4166	18.8158	0.001
Base	4	1	-49.9102	-3.0665	-0.0012
Base	4	1	19.8	-7.9502	0.0004
Base	4	1	-12.9633	-20.1588	-0.0005
Base	4	1	3.6911	11.4103	0.0005
Base	4	1	-29.0721	-0.7983	-0.0004
Base	4	1	43.8884	-2.6011	0.0012
Base	4	1	-44.4384	-24.4835	-0.001
Base	4	1	41.5405	21.7752	0.001
Base	4	1	-46.7863	-0.1071	-0.0012
Base	4	1	23.0612	-4.8609	0.0004

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	4	1	-9.7021	-17.0695	-0.0005
Base	4	1	6.9523	14.4996	0.0005
Base	4	1	-25.8109	2.2911	-0.0004
Base	4	1	-4.24	-4.0041	1.997E-06
Base	4	1	-2.925	-2.7543	2.705E-06
Base	4	1	16.9101	-3.2999	0.0005
Base	4	1	-21.7329	-12.8734	-0.0004
Base	4	1	15.8829	7.3648	0.0005
Base	4	1	-22.7601	-2.2088	-0.0005
Base	4	1	-3.062	-2.8137	1.198E-05
Base	4	1	-6.8327	-6.4109	8.002E-06
Base	4	1	-6.8435	-6.4194	8.323E-06
Base	4	1	-5.2894	-4.9385	9.878E-06
Base	4	1	40.0827	-6.1582	0.0012
Base	4	1	-48.2441	-28.0406	-0.001
Base	4	1	37.7348	18.2181	0.001
Base	4	1	-50.5919	-3.6642	-0.0011
Base	4	1	40.0718	-6.1667	0.0012
Base	4	1	-48.255	-28.0491	-0.001
Base	4	1	37.724	18.2096	0.001
Base	4	1	-50.6028	-3.6728	-0.0011
Base	4	1	20.0093	-3.0625	0.0006
Base	4	1	-24.154	-14.0036	-0.0005
Base	4	1	18.8354	9.1257	0.0005
Base	4	1	-25.328	-1.8155	-0.0006
Base	4	1	20.0441	-3.0352	0.0006
Base	4	1	-24.1193	-13.9764	-0.0005
Base	4	1	18.8702	9.153	0.0005
Base	4	1	-25.2932	-1.7882	-0.0006
Base	4	1	43.3689	-3.0558	0.0012
Base	4	1	-44.9579	-24.9381	-0.001
Base	4	1	41.0211	21.3206	0.001
Base	4	1	-47.3057	-0.5618	-0.0012
Base	4	1	18.9627	-8.6882	0.0004
Base	4	1	-13.8006	-20.8967	-0.0005
Base	4	1	2.8539	10.6724	0.0005
Base	4	1	-29.9094	-1.5362	-0.0003
Base	4	1	21.5928	-6.1886	0.0004
Base	4	1	-11.1705	-18.3972	-0.0004
Base	4	1	5.484	13.1719	0.0005
Base	4	1	-27.2793	0.9633	-0.0003
Base	4	1	22.6863	-5.1838	0.0004
Base	4	1	-10.0769	-17.3924	-0.0005
Base	4	1	6.5775	14.1768	0.0005
Base	4	1	-26.1857	1.9682	-0.0003

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	5	2	1.2923	-9.1404	4.996E-06
Base	5	2	1.0988	-13.0408	-2.072E-06
Base	5	2	0.2901	-1.6667	4.208E-06
Base	5	2	0.2853	-1.7176	3.321E-06
Base	5	2	-0.0828	-0.0598	9.4E-07
Base	5	2	17.7687	12.4838	0.0005
Base	5	2	-0.9647	-36.8601	-0.0007
Base	5	2	21.0197	18.4742	0.0011
Base	5	2	-15.4552	-34.0491	-0.0009
Base	5	2	1.8092	-12.7966	6.995E-06
Base	5	2	3.2674	-31.8636	3.15E-06
Base	5	2	2.5171	-24.1049	5.427E-06
Base	5	2	18.234	3.7152	0.0009
Base	5	2	-10.9459	-38.3034	-0.0007
Base	5	2	13.7825	16.1751	0.0008
Base	5	2	-15.3975	-25.8435	-0.0008
Base	5	2	36.2397	5.5196	0.0017
Base	5	2	-22.1202	-78.5176	-0.0015
Base	5	2	27.3365	30.4393	0.0015
Base	5	2	-31.0234	-53.5979	-0.0017
Base	5	2	20.4777	-11.9459	0.0005
Base	5	2	1.7443	-61.2898	-0.0007
Base	5	2	3.6737	12.4303	0.0007
Base	5	2	-15.0597	-36.9135	-0.0005
Base	5	2	34.7946	21.3324	0.0017
Base	5	2	-23.5653	-62.7049	-0.0015
Base	5	2	25.8914	46.2521	0.0015
Base	5	2	-32.4685	-37.7851	-0.0017
Base	5	2	18.8723	4.6779	0.0005
Base	5	2	0.1389	-44.666	-0.0007
Base	5	2	2.0683	29.0541	0.0007
Base	5	2	-16.6651	-20.2897	-0.0005
Base	5	2	2.3911	-22.1812	2.924E-06
Base	5	2	1.8417	-15.6608	3.96E-06
Base	5	2	16.5555	-2.7289	0.0007
Base	5	2	-8.977	-39.4951	-0.0007
Base	5	2	12.6604	8.1735	0.0007
Base	5	2	-12.8721	-28.5927	-0.0007
Base	5	2	2.6148	-17.5347	1.754E-05
Base	5	2	3.9993	-35.8949	1.172E-05
Base	5	2	3.9579	-35.9248	1.219E-05
Base	5	2	3.2075	-28.1661	1.446E-05
Base	5	2	36.9716	1.4883	0.0017
Base	5	2	-21.3883	-82.549	-0.0015
Base	5	2	28.0684	26.408	0.0015

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	5	2	-30.2915	-57.6292	-0.0017
Base	5	2	36.9302	1.4584	0.0017
Base	5	2	-21.4297	-82.5789	-0.0015
Base	5	2	28.027	26.3781	0.0015
Base	5	2	-30.3329	-57.6591	-0.0017
Base	5	2	18.9245	-0.346	0.0009
Base	5	2	-10.2555	-42.3646	-0.0007
Base	5	2	14.4729	12.1139	0.0008
Base	5	2	-14.707	-29.9047	-0.0008
Base	5	2	19.057	-0.2504	0.0009
Base	5	2	-10.123	-42.269	-0.0007
Base	5	2	14.6054	12.2095	0.0008
Base	5	2	-14.5745	-29.8091	-0.0008
Base	5	2	35.3125	18.2864	0.0017
Base	5	2	-23.0475	-65.7508	-0.0015
Base	5	2	26.4093	43.2062	0.0015
Base	5	2	-31.9506	-40.831	-0.0017
Base	5	2	21.2955	-16.8391	0.0005
Base	5	2	2.5621	-66.183	-0.0007
Base	5	2	4.4915	7.5371	0.0007
Base	5	2	-14.2419	-41.8068	-0.0005
Base	5	2	20.1967	-3.7984	0.0005
Base	5	2	1.4633	-53.1423	-0.0007
Base	5	2	3.3927	20.5779	0.0007
Base	5	2	-15.3407	-28.766	-0.0005
Base	5	2	19.2629	2.464	0.0005
Base	5	2	0.5295	-46.8799	-0.0007
Base	5	2	2.4589	26.8402	0.0007
Base	5	2	-16.2745	-22.5036	-0.0005
Base	6	3	3.834	7.685	4.996E-06
Base	6	3	3.5256	11.0485	-2.072E-06
Base	6	3	0.4058	1.4001	4.208E-06
Base	6	3	0.6933	1.3595	3.321E-06
Base	6	3	0.0611	0.0024	9.4E-07
Base	6	3	22.9592	12.4714	0.0005
Base	6	3	-3.1451	-35.7599	-0.0007
Base	6	3	26.5351	18.2929	0.0011
Base	6	3	-20.5159	-33.3165	-0.0009
Base	6	3	5.3677	10.759	6.995E-06
Base	6	3	10.2723	26.9007	3.15E-06
Base	6	3	8.2242	20.2742	5.427E-06
Base	6	3	25.9267	23.8601	0.0009
Base	6	3	-11.7141	-17.4274	-0.0007
Base	6	3	21.1114	35.8789	0.0008
Base	6	3	-16.5295	-5.4086	-0.0008

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	6	3	50.6132	49.5403	0.0017
Base	6	3	-24.6685	-33.0348	-0.0015
Base	6	3	40.9824	73.578	0.0015
Base	6	3	-34.2992	-8.9971	-0.0017
Base	6	3	31.262	33.0954	0.0005
Base	6	3	5.1577	-15.136	-0.0007
Base	6	3	11.4479	56.3838	0.0007
Base	6	3	-14.6564	8.1525	-0.0005
Base	6	3	45.9068	36.1851	0.0017
Base	6	3	-29.3748	-46.3899	-0.0015
Base	6	3	36.2761	60.2229	0.0015
Base	6	3	-39.0056	-22.3522	-0.0017
Base	6	3	26.2335	19.0344	0.0005
Base	6	3	0.1292	-29.1969	-0.0007
Base	6	3	6.4193	42.3229	0.0007
Base	6	3	-19.685	-5.9085	-0.0005
Base	6	3	7.3596	18.7334	2.924E-06
Base	6	3	5.5968	13.2092	3.96E-06
Base	6	3	24.1714	26.0142	0.0007
Base	6	3	-8.7643	-10.1123	-0.0007
Base	6	3	19.958	36.5307	0.0007
Base	6	3	-12.9778	0.4042	-0.0007
Base	6	3	6.9063	14.6223	1.754E-05
Base	6	3	11.5606	30.211	1.172E-05
Base	6	3	11.5912	30.2121	1.219E-05
Base	6	3	9.5431	23.5857	1.446E-05
Base	6	3	51.9015	52.8505	0.0017
Base	6	3	-23.3802	-29.7245	-0.0015
Base	6	3	42.2707	76.8883	0.0015
Base	6	3	-33.0109	-5.6868	-0.0017
Base	6	3	51.932	52.8517	0.0017
Base	6	3	-23.3496	-29.7233	-0.0015
Base	6	3	42.3013	76.8894	0.0015
Base	6	3	-32.9804	-5.6856	-0.0017
Base	6	3	27.2456	27.1715	0.0009
Base	6	3	-10.3952	-14.116	-0.0007
Base	6	3	22.4302	39.1904	0.0008
Base	6	3	-15.2106	-2.0971	-0.0008
Base	6	3	27.1478	27.1677	0.0009
Base	6	3	-10.493	-14.1198	-0.0007
Base	6	3	22.3324	39.1866	0.0008
Base	6	3	-15.3084	-2.1009	-0.0008
Base	6	3	46.896	38.6687	0.0017
Base	6	3	-28.3857	-43.9063	-0.0015
Base	6	3	37.2652	62.7064	0.0015

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	6	3	-38.0164	-19.8686	-0.0017
Base	6	3	32.8978	37.0978	0.0005
Base	6	3	6.7935	-11.1336	-0.0007
Base	6	3	13.0836	60.3862	0.0007
Base	6	3	-13.0207	12.1549	-0.0005
Base	6	3	29.3722	26.0493	0.0005
Base	6	3	3.2679	-22.1821	-0.0007
Base	6	3	9.5581	49.3378	0.0007
Base	6	3	-16.5462	1.1064	-0.0005
Base	6	3	26.9057	20.827	0.0005
Base	6	3	0.8014	-27.4043	-0.0007
Base	6	3	7.0915	44.1155	0.0007
Base	6	3	-19.0128	-4.1158	-0.0005
Base	7	4	2.8888	17.8779	4.996E-06
Base	7	4	3.297	13.1927	-2.072E-06
Base	7	4	0.5787	4.4579	4.208E-06
Base	7	4	0.6038	4.4565	3.321E-06
Base	7	4	0.0697	-0.0239	9.4E-07
Base	7	4	13.8097	5.5536	0.0005
Base	7	4	5.5543	-28.4638	-0.0007
Base	7	4	18.0067	8.5767	0.0011
Base	7	4	-9.7344	-23.8446	-0.0009
Base	7	4	4.0443	25.0291	6.995E-06
Base	7	4	8.7766	42.55	3.15E-06
Base	7	4	6.875	34.6081	5.427E-06
Base	7	4	17.9833	28.2767	0.0009
Base	7	4	-4.2096	2.3397	-0.0007
Base	7	4	11.3655	40.491	0.0008
Base	7	4	-10.8274	14.554	-0.0008
Base	7	4	35.6091	48.357	0.0017
Base	7	4	-8.7767	-3.517	-0.0015
Base	7	4	22.3735	72.7856	0.0015
Base	7	4	-22.0123	20.9116	-0.0017
Base	7	4	20.7061	41.0222	0.0005
Base	7	4	12.4507	7.0048	-0.0007
Base	7	4	1.3421	63.9324	0.0007
Base	7	4	-6.9133	29.9151	-0.0005
Base	7	4	31.4106	29.8128	0.0017
Base	7	4	-12.9752	-22.0612	-0.0015
Base	7	4	18.175	54.2414	0.0015
Base	7	4	-26.2108	2.3675	-0.0017
Base	7	4	16.2767	20.8213	0.0005
Base	7	4	8.0213	-13.196	-0.0007
Base	7	4	-3.0873	43.7315	0.0007
Base	7	4	-11.3427	9.7142	-0.0005

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	7	4	6.1858	31.0707	2.924E-06
Base	7	4	4.5373	24.4743	3.96E-06
Base	7	4	17.142	30.478	0.0007
Base	7	4	-2.2768	7.7831	-0.0007
Base	7	4	11.3514	41.1655	0.0007
Base	7	4	-8.0674	18.4706	-0.0007
Base	7	4	5.6997	37.5092	1.754E-05
Base	7	4	10.1607	53.2591	1.172E-05
Base	7	4	10.1956	53.2472	1.219E-05
Base	7	4	8.294	45.3053	1.446E-05
Base	7	4	36.9932	59.0662	0.0017
Base	7	4	-7.3926	7.1922	-0.0015
Base	7	4	23.7576	83.4948	0.0015
Base	7	4	-20.6282	31.6208	-0.0017
Base	7	4	37.0281	59.0543	0.0017
Base	7	4	-7.3577	7.1803	-0.0015
Base	7	4	23.7925	83.4829	0.0015
Base	7	4	-20.5934	31.6089	-0.0017
Base	7	4	19.4023	38.974	0.0009
Base	7	4	-2.7906	13.037	-0.0007
Base	7	4	12.7845	51.1883	0.0008
Base	7	4	-9.4084	25.2513	-0.0008
Base	7	4	19.2909	39.0121	0.0009
Base	7	4	-2.9021	13.0751	-0.0007
Base	7	4	12.673	51.2264	0.0008
Base	7	4	-9.5199	25.2894	-0.0008
Base	7	4	32.4748	37.8358	0.0017
Base	7	4	-11.911	-14.0382	-0.0015
Base	7	4	19.2392	62.2644	0.0015
Base	7	4	-25.1466	10.3904	-0.0017
Base	7	4	22.3994	53.5763	0.0005
Base	7	4	14.1439	19.5589	-0.0007
Base	7	4	3.0354	76.4865	0.0007
Base	7	4	-5.2201	42.4692	-0.0005
Base	7	4	19.1024	40.3836	0.0005
Base	7	4	10.8469	6.3662	-0.0007
Base	7	4	-0.2617	63.2938	0.0007
Base	7	4	-8.5171	29.2764	-0.0005
Base	7	4	17.0667	26.9874	0.0005
Base	7	4	8.8113	-7.0299	-0.0007
Base	7	4	-2.2973	49.8976	0.0007
Base	7	4	-10.5527	15.8803	-0.0005
Base	8	5	2.9645	-16.8229	4.996E-06
Base	8	5	3.7575	-12.7163	-2.072E-06
Base	8	5	0.4905	-4.2472	4.208E-06

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	8	5	0.5461	-4.2542	3.321E-06
Base	8	5	0.066	0.0057	9.4E-07
Base	8	5	36.457	5.5039	0.0005
Base	8	5	-12.5877	-28.7247	-0.0007
Base	8	5	42.2354	8.5772	0.0011
Base	8	5	-40.1202	-24.0623	-0.0009
Base	8	5	4.1503	-23.5521	6.995E-06
Base	8	5	9.6025	-40.5308	3.15E-06
Base	8	5	7.4206	-32.8947	5.427E-06
Base	8	5	37.4513	-13.3165	0.0009
Base	8	5	-28.4331	-39.4281	-0.0007
Base	8	5	35.7592	-0.9285	0.0008
Base	8	5	-30.1252	-27.0401	-0.0008
Base	8	5	74.9246	-19.1774	0.0017
Base	8	5	-56.8444	-71.4006	-0.0015
Base	8	5	71.5403	5.5987	0.0015
Base	8	5	-60.2286	-46.6245	-0.0017
Base	8	5	43.9083	-28.1738	0.0005
Base	8	5	-5.1363	-62.4023	-0.0007
Base	8	5	20.039	-4.953	0.0007
Base	8	5	-29.0056	-39.1816	-0.0005
Base	8	5	70.2447	-1.4171	0.0017
Base	8	5	-61.5243	-53.6402	-0.0015
Base	8	5	66.8604	23.359	0.0015
Base	8	5	-64.9085	-28.8642	-0.0017
Base	8	5	38.9887	-8.8629	0.0005
Base	8	5	-10.056	-43.0914	-0.0007
Base	8	5	15.1194	14.3579	0.0007
Base	8	5	-33.9253	-19.8707	-0.0005
Base	8	5	6.7221	-29.5393	2.924E-06
Base	8	5	4.8433	-23.1811	3.96E-06
Base	8	5	34.4081	-17.177	0.0007
Base	8	5	-23.2408	-40.0247	-0.0007
Base	8	5	32.9274	-6.3375	0.0007
Base	8	5	-24.7215	-29.1851	-0.0007
Base	8	5	5.6016	-35.454	1.754E-05
Base	8	5	10.8134	-50.7353	1.172E-05
Base	8	5	10.8464	-50.7324	1.219E-05
Base	8	5	8.6645	-43.0963	1.446E-05
Base	8	5	76.1355	-29.3819	0.0017
Base	8	5	-55.6334	-81.6051	-0.0015
Base	8	5	72.7512	-4.6059	0.0015
Base	8	5	-59.0177	-56.8291	-0.0017
Base	8	5	76.1685	-29.3791	0.0017
Base	8	5	-55.6004	-81.6023	-0.0015

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	8	5	72.7842	-4.603	0.0015
Base	8	5	-58.9847	-56.8262	-0.0017
Base	8	5	38.6953	-23.5182	0.0009
Base	8	5	-27.1892	-49.6298	-0.0007
Base	8	5	37.0032	-11.1302	0.0008
Base	8	5	-28.8813	-37.2418	-0.0008
Base	8	5	38.5897	-23.5274	0.0009
Base	8	5	-27.2948	-49.639	-0.0007
Base	8	5	36.8975	-11.1393	0.0008
Base	8	5	-28.9869	-37.2509	-0.0008
Base	8	5	71.1776	-9.0683	0.0017
Base	8	5	-60.5913	-61.2915	-0.0015
Base	8	5	67.7934	15.7078	0.0015
Base	8	5	-63.9756	-36.5154	-0.0017
Base	8	5	45.416	-40.134	0.0005
Base	8	5	-3.6286	-74.3626	-0.0007
Base	8	5	21.5467	-16.9133	0.0007
Base	8	5	-27.498	-51.1418	-0.0005
Base	8	5	41.6585	-27.4177	0.0005
Base	8	5	-7.3862	-61.6462	-0.0007
Base	8	5	17.7892	-4.1969	0.0007
Base	8	5	-31.2555	-38.4255	-0.0005
Base	8	5	39.6579	-14.7555	0.0005
Base	8	5	-9.3868	-48.9841	-0.0007
Base	8	5	15.7886	8.4652	0.0007
Base	8	5	-33.2561	-25.7633	-0.0005
Base	9	6	-2.3165	-2.4429	4.996E-06
Base	9	6	-1.0151	5.4636	-2.072E-06
Base	9	6	-0.6193	-0.4136	4.208E-06
Base	9	6	-0.5822	-0.4297	3.321E-06
Base	9	6	0.0666	0.0181	9.4E-07
Base	9	6	21.9875	-4.8605	0.0005
Base	9	6	-1.8637	-22.8474	-0.0007
Base	9	6	25.635	-1.4234	0.0011
Base	9	6	-19.1854	-20.6032	-0.0009
Base	9	6	-3.2431	-3.4201	6.995E-06
Base	9	6	-4.3707	5.8193	3.15E-06
Base	9	6	-3.6884	2.561	5.427E-06
Base	9	6	17.8348	-4.0413	0.0009
Base	9	6	-18.0216	-19.3851	-0.0007
Base	9	6	12.6751	13.58	0.0008
Base	9	6	-23.1813	-1.7638	-0.0008
Base	9	6	37.2544	0.2637	0.0017
Base	9	6	-34.4583	-30.424	-0.0015
Base	9	6	26.935	35.5062	0.0015

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	9	6	-44.7777	4.8186	-0.0017
Base	9	6	18.086	-2.4408	0.0005
Base	9	6	-5.7651	-20.4277	-0.0007
Base	9	6	-2.0378	25.2671	0.0007
Base	9	6	-25.889	7.2802	-0.0005
Base	9	6	38.9312	-4.4761	0.0017
Base	9	6	-32.7815	-35.1637	-0.0015
Base	9	6	28.6118	30.7664	0.0015
Base	9	6	-43.1009	0.0788	-0.0017
Base	9	6	20.0092	-6.9468	0.0005
Base	9	6	-3.842	-24.9337	-0.0007
Base	9	6	-0.1146	20.7612	0.0007
Base	9	6	-23.9658	2.7742	-0.0005
Base	9	6	-3.3316	3.0207	2.924E-06
Base	9	6	-2.8241	0.2889	3.96E-06
Base	9	6	15.1205	-0.7075	0.0007
Base	9	6	-16.2539	-14.1334	-0.0007
Base	9	6	10.6057	14.7111	0.0007
Base	9	6	-20.7686	1.2852	-0.0007
Base	9	6	-4.9252	-4.6007	1.754E-05
Base	9	6	-5.8458	4.7983	1.172E-05
Base	9	6	-5.8125	4.8074	1.219E-05
Base	9	6	-5.1302	1.5491	1.446E-05
Base	9	6	35.7793	-0.7573	0.0017
Base	9	6	-35.9334	-31.4449	-0.0015
Base	9	6	25.4599	34.4852	0.0015
Base	9	6	-46.2528	3.7976	-0.0017
Base	9	6	35.8126	-0.7482	0.0017
Base	9	6	-35.9001	-31.4359	-0.0015
Base	9	6	25.4932	34.4943	0.0015
Base	9	6	-46.2195	3.8066	-0.0017
Base	9	6	16.393	-5.0532	0.0009
Base	9	6	-19.4634	-20.397	-0.0007
Base	9	6	11.2333	12.5681	0.0008
Base	9	6	-24.6231	-2.7758	-0.0008
Base	9	6	16.2864	-5.0822	0.0009
Base	9	6	-19.57	-20.426	-0.0007
Base	9	6	11.1267	12.5391	0.0008
Base	9	6	-24.7297	-2.8047	-0.0008
Base	9	6	37.8498	-5.235	0.0017
Base	9	6	-33.8629	-35.9227	-0.0015
Base	9	6	27.5304	30.0075	0.0015
Base	9	6	-44.1823	-0.6801	-0.0017
Base	9	6	16.399	-3.669	0.0005
Base	9	6	-7.4522	-21.6559	-0.0007

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	9	6	-3.7249	24.0389	0.0007
Base	9	6	-27.5761	6.052	-0.0005
Base	9	6	17.4141	-9.1326	0.0005
Base	9	6	-6.4371	-27.1195	-0.0007
Base	9	6	-2.7098	18.5753	0.0007
Base	9	6	-26.561	0.5884	-0.0005
Base	9	6	19.1731	-7.4895	0.0005
Base	9	6	-4.6781	-25.4764	-0.0007
Base	9	6	-0.9508	20.2185	0.0007
Base	9	6	-24.8019	2.2315	-0.0005
Base	10	7	-1.6302	-2.3004	4.996E-06
Base	10	7	-0.6519	-4.0673	-2.072E-06
Base	10	7	-0.6099	-0.396	4.208E-06
Base	10	7	-0.5719	-0.4132	3.321E-06
Base	10	7	0.0317	-0.0146	9.4E-07
Base	10	7	25.21	-5.2006	0.0005
Base	10	7	-6.9565	-23.7209	-0.0007
Base	10	7	28.4652	-1.3978	0.0011
Base	10	7	-25.7485	-21.5403	-0.0009
Base	10	7	-2.2823	-3.2205	6.995E-06
Base	10	7	-2.9835	-9.2754	3.15E-06
Base	10	7	-2.5575	-6.8511	5.427E-06
Base	10	7	20.8665	-3.902	0.0009
Base	10	7	-22.5045	-20.016	-0.0007
Base	10	7	18.6932	14.4485	0.0008
Base	10	7	-24.6778	-1.6655	-0.0008
Base	10	7	42.952	-9.0715	0.0017
Base	10	7	-43.79	-41.2996	-0.0015
Base	10	7	38.6053	27.6295	0.0015
Base	10	7	-48.1366	-4.5985	-0.0017
Base	10	7	22.5269	-12.1341	0.0005
Base	10	7	-9.6397	-30.6544	-0.0007
Base	10	7	4.2734	16.7873	0.0007
Base	10	7	-27.8932	-1.733	-0.0005
Base	10	7	44.0771	-4.3068	0.0017
Base	10	7	-42.6649	-36.5349	-0.0015
Base	10	7	39.7305	32.3942	0.0015
Base	10	7	-47.0115	0.1662	-0.0017
Base	10	7	23.8178	-7.1651	0.0005
Base	10	7	-8.3488	-25.6854	-0.0007
Base	10	7	5.5643	21.7564	0.0007
Base	10	7	-26.6022	3.2361	-0.0005
Base	10	7	-2.2821	-6.3677	2.924E-06
Base	10	7	-1.9562	-4.334	3.96E-06
Base	10	7	17.9695	-5.3125	0.0007

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	10	7	-19.9802	-19.4122	-0.0007
Base	10	7	16.0678	10.7442	0.0007
Base	10	7	-21.8818	-3.3555	-0.0007
Base	10	7	-3.9369	-4.3534	1.754E-05
Base	10	7	-4.4175	-10.2392	1.172E-05
Base	10	7	-4.4017	-10.2464	1.219E-05
Base	10	7	-3.9757	-7.8221	1.446E-05
Base	10	7	41.5179	-10.0353	0.0017
Base	10	7	-45.224	-42.2633	-0.0015
Base	10	7	37.1713	26.6658	0.0015
Base	10	7	-49.5707	-5.5623	-0.0017
Base	10	7	41.5338	-10.0426	0.0017
Base	10	7	-45.2082	-42.2706	-0.0015
Base	10	7	37.1871	26.6585	0.0015
Base	10	7	-49.5548	-5.5695	-0.0017
Base	10	7	19.4483	-4.873	0.0009
Base	10	7	-23.9227	-20.987	-0.0007
Base	10	7	17.275	13.4775	0.0008
Base	10	7	-26.096	-2.6365	-0.0008
Base	10	7	19.3977	-4.8497	0.0009
Base	10	7	-23.9733	-20.9637	-0.0007
Base	10	7	17.2244	13.5008	0.0008
Base	10	7	-26.1466	-2.6132	-0.0008
Base	10	7	43.0134	-5.0351	0.0017
Base	10	7	-43.7285	-37.2631	-0.0015
Base	10	7	38.6668	31.666	0.0015
Base	10	7	-48.0752	-0.5621	-0.0017
Base	10	7	20.9025	-13.3103	0.0005
Base	10	7	-11.2641	-31.8306	-0.0007
Base	10	7	2.649	15.6111	0.0007
Base	10	7	-29.5176	-2.9092	-0.0005
Base	10	7	21.5543	-9.243	0.0005
Base	10	7	-10.6122	-27.7633	-0.0007
Base	10	7	3.3008	19.6785	0.0007
Base	10	7	-28.8657	1.1581	-0.0005
Base	10	7	22.9604	-7.6882	0.0005
Base	10	7	-9.2062	-26.2085	-0.0007
Base	10	7	4.7069	21.2332	0.0007
Base	10	7	-27.4597	2.7129	-0.0005
Base	11	8	2.9882	9.5415	3.412E-06
Base	11	8	3.9821	14.1585	-1.415E-06
Base	11	8	0.5467	1.5849	2.874E-06
Base	11	8	0.5621	1.5965	2.268E-06
Base	11	8	0.0841	-0.0069	6.421E-07
Base	11	8	8.9925	7.7408	0.0004

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	11	8	3.6644	-23.1446	-0.0005
Base	11	8	11.8078	11.451	0.0007
Base	11	8	-6.3544	-21.2285	-0.0006
Base	11	8	4.1835	13.358	4.777E-06
Base	11	8	9.9992	34.1	2.152E-06
Base	11	8	7.7024	25.5972	3.707E-06
Base	11	8	13.1665	20.5994	0.0006
Base	11	8	-1.3632	-5.5441	-0.0005
Base	11	8	8.8038	28.4214	0.0005
Base	11	8	-5.7259	2.2779	-0.0006
Base	11	8	26.5024	43.9264	0.0012
Base	11	8	-2.557	-8.3607	-0.001
Base	11	8	17.7769	59.5704	0.001
Base	11	8	-11.2826	7.2833	-0.0012
Base	11	8	16.6979	33.788	0.0004
Base	11	8	11.3697	2.9026	-0.0005
Base	11	8	4.041	49.1918	0.0005
Base	11	8	-1.2872	18.3064	-0.0004
Base	11	8	21.5818	26.9088	0.0012
Base	11	8	-7.4776	-25.3782	-0.001
Base	11	8	12.8563	42.5528	0.001
Base	11	8	-16.2031	-9.7342	-0.0012
Base	11	8	11.5444	15.8892	0.0004
Base	11	8	6.2163	-14.9962	-0.0005
Base	11	8	-1.1125	31.293	0.0005
Base	11	8	-6.4406	0.4076	-0.0004
Base	11	8	6.9703	23.7	1.997E-06
Base	11	8	4.9792	16.6207	2.705E-06
Base	11	8	13.2447	24.6364	0.0005
Base	11	8	0.5312	1.7608	-0.0004
Base	11	8	9.4273	31.4806	0.0005
Base	11	8	-3.2862	8.6051	-0.0005
Base	11	8	5.7358	17.812	1.198E-05
Base	11	8	11.2878	37.9211	8.002E-06
Base	11	8	11.3298	37.9176	8.323E-06
Base	11	8	9.033	29.4149	9.878E-06
Base	11	8	27.791	47.7475	0.0012
Base	11	8	-1.2685	-4.5396	-0.001
Base	11	8	19.0655	63.3915	0.001
Base	11	8	-9.994	11.1044	-0.0011
Base	11	8	27.833	47.744	0.0012
Base	11	8	-1.2264	-4.543	-0.001
Base	11	8	19.1075	63.388	0.001
Base	11	8	-9.9519	11.101	-0.0011
Base	11	8	14.4972	24.4171	0.0006

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	11	8	-0.0326	-1.7264	-0.0005
Base	11	8	10.1344	32.2391	0.0005
Base	11	8	-4.3953	6.0956	-0.0006
Base	11	8	14.3627	24.4282	0.0006
Base	11	8	-0.167	-1.7153	-0.0005
Base	11	8	9.9999	32.2502	0.0005
Base	11	8	-4.5298	6.1067	-0.0006
Base	11	8	22.5798	29.7721	0.0012
Base	11	8	-6.4796	-22.515	-0.001
Base	11	8	13.8543	45.4161	0.001
Base	11	8	-15.2051	-6.871	-0.0012
Base	11	8	18.3007	38.4391	0.0004
Base	11	8	12.9726	7.5536	-0.0005
Base	11	8	5.6438	53.8429	0.0005
Base	11	8	0.3157	22.9574	-0.0003
Base	11	8	14.3187	24.2805	0.0004
Base	11	8	8.9905	-6.6049	-0.0004
Base	11	8	1.6618	39.6843	0.0005
Base	11	8	-3.6664	8.7989	-0.0003
Base	11	8	12.2701	17.9191	0.0004
Base	11	8	6.942	-12.9663	-0.0005
Base	11	8	-0.3868	33.3229	0.0005
Base	11	8	-5.7149	2.4375	-0.0003
Base	12	9	2.9139	-9.0355	3.412E-06
Base	12	9	4.0971	-13.4309	-1.415E-06
Base	12	9	0.4612	-1.5963	2.874E-06
Base	12	9	0.4979	-1.5977	2.268E-06
Base	12	9	0.0666	-0.0112	6.421E-07
Base	12	9	24.3012	7.6719	0.0004
Base	12	9	-8.4377	-23.3448	-0.0005
Base	12	9	28.1866	11.4223	0.0007
Base	12	9	-26.7987	-21.3141	-0.0006
Base	12	9	4.0795	-12.6497	4.777E-06
Base	12	9	10.0854	-32.3376	2.152E-06
Base	12	9	7.7003	-24.2914	3.707E-06
Base	12	9	26.1525	-1.7227	0.0006
Base	12	9	-17.8358	-27.9118	-0.0005
Base	12	9	25.0421	6.1907	0.0005
Base	12	9	-18.9461	-19.9984	-0.0006
Base	12	9	52.7257	-6.0034	0.0012
Base	12	9	-35.2509	-58.3816	-0.001
Base	12	9	50.5051	9.8234	0.001
Base	12	9	-37.4715	-42.5548	-0.0012
Base	12	9	32.029	-17.0172	0.0004
Base	12	9	-0.7098	-48.0339	-0.0005

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	12	9	16.1655	-1.3443	0.0005
Base	12	9	-16.5733	-32.361	-0.0004
Base	12	9	47.7211	10.1437	0.0012
Base	12	9	-40.2555	-42.2345	-0.001
Base	12	9	45.5005	25.9706	0.001
Base	12	9	-42.4761	-26.4076	-0.0012
Base	12	9	26.7896	-0.0444	0.0004
Base	12	9	-5.9492	-31.0611	-0.0005
Base	12	9	10.9261	15.6285	0.0005
Base	12	9	-21.8127	-15.3882	-0.0004
Base	12	9	7.011	-22.4664	1.997E-06
Base	12	9	4.9625	-15.7509	2.705E-06
Base	12	9	24.6931	-7.7553	0.0005
Base	12	9	-13.7966	-30.6708	-0.0004
Base	12	9	23.7216	-0.8311	0.0005
Base	12	9	-14.7682	-23.7465	-0.0005
Base	12	9	5.4222	-17.1213	1.198E-05
Base	12	9	11.203	-36.1648	8.002E-06
Base	12	9	11.2363	-36.1704	8.323E-06
Base	12	9	8.8512	-28.1242	9.878E-06
Base	12	9	53.8433	-9.8306	0.0012
Base	12	9	-34.1332	-62.2088	-0.001
Base	12	9	51.6227	5.9963	0.001
Base	12	9	-36.3539	-46.3819	-0.0011
Base	12	9	53.8766	-9.8362	0.0012
Base	12	9	-34.1	-62.2144	-0.001
Base	12	9	51.656	5.9907	0.001
Base	12	9	-36.3206	-46.3876	-0.0011
Base	12	9	27.3034	-5.5555	0.0006
Base	12	9	-16.6849	-31.7446	-0.0005
Base	12	9	26.193	2.3579	0.0005
Base	12	9	-17.7952	-23.8312	-0.0006
Base	12	9	27.1969	-5.5375	0.0006
Base	12	9	-16.7914	-31.7266	-0.0005
Base	12	9	26.0865	2.3759	0.0005
Base	12	9	-17.9017	-23.8132	-0.0006
Base	12	9	48.5843	7.2691	0.0012
Base	12	9	-39.3923	-45.1091	-0.001
Base	12	9	46.3636	23.096	0.001
Base	12	9	-41.6129	-29.2822	-0.0012
Base	12	9	33.4332	-21.6573	0.0004
Base	12	9	0.6943	-52.674	-0.0005
Base	12	9	17.5697	-5.9844	0.0005
Base	12	9	-15.1691	-37.0011	-0.0003
Base	12	9	29.336	-8.2264	0.0004

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	12	9	-3.4028	-39.2431	-0.0004
Base	12	9	13.4725	7.4465	0.0005
Base	12	9	-19.2663	-23.5702	-0.0003
Base	12	9	27.3995	-2.1117	0.0004
Base	12	9	-5.3393	-33.1284	-0.0005
Base	12	9	11.5361	13.5612	0.0005
Base	12	9	-21.2028	-17.4555	-0.0003
Base	13	10	1.549	17.3638	-0.0017
Base	13	10	1.0625	12.1661	-0.0056
Base	13	10	0.339	4.3818	-0.0008
Base	13	10	0.3932	4.3674	-0.001
Base	13	10	0.1096	0.0053	0.0001
Base	13	10	31.1051	-2.9309	-0.0336
Base	13	10	12.365	-35.9397	-0.4629
Base	13	10	40.6555	-2.4234	-0.0246
Base	13	10	-22.1174	-30.8589	-0.3928
Base	13	10	2.1686	24.3093	-0.0024
Base	13	10	3.6136	40.3048	-0.011
Base	13	10	3.0968	33.011	-0.0074
Base	13	10	34.5587	18.9062	-0.0215
Base	13	10	-15.6597	-3.8422	-0.3161
Base	13	10	19.7282	45.5321	0.3124
Base	13	10	-30.4902	22.7837	0.0179
Base	13	10	68.025	29.1278	-0.047
Base	13	10	-32.4117	-16.3691	-0.6361
Base	13	10	38.364	82.3795	0.6209
Base	13	10	-62.0727	36.8826	0.0318
Base	13	10	34.0977	30.8704	-0.0413
Base	13	10	15.3576	-2.1384	-0.4706
Base	13	10	-9.3724	69.741	0.4551
Base	13	10	-28.1125	36.7322	0.0258
Base	13	10	66.443	11.7499	-0.041
Base	13	10	-33.9937	-33.7469	-0.63
Base	13	10	36.782	65.0016	0.6269
Base	13	10	-63.6547	19.5048	0.0379
Base	13	10	32.428	11.8977	-0.035
Base	13	10	13.6879	-21.111	-0.4643
Base	13	10	-11.0421	50.7683	0.4614
Base	13	10	-29.7822	17.7596	0.0321
Base	13	10	2.6115	29.5298	-0.0073
Base	13	10	2.0803	23.4468	-0.0045
Base	13	10	30.5391	21.7504	-0.0218
Base	13	10	-13.4019	1.8455	-0.2795
Base	13	10	17.5625	45.048	0.2704
Base	13	10	-26.3786	25.1432	0.0127

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	13	10	3.1938	36.5581	-0.005
Base	13	10	4.4375	50.8012	-0.0133
Base	13	10	4.4923	50.8039	-0.0132
Base	13	10	3.9754	43.51	-0.0097
Base	13	10	68.8489	39.6242	-0.0493
Base	13	10	-31.5879	-5.8727	-0.6384
Base	13	10	39.1879	92.8759	0.6186
Base	13	10	-61.2488	47.379	0.0295
Base	13	10	68.9037	39.6268	-0.0493
Base	13	10	-31.533	-5.87	-0.6383
Base	13	10	39.2427	92.8785	0.6186
Base	13	10	-61.194	47.3817	0.0296
Base	13	10	35.4374	29.4053	-0.0238
Base	13	10	-14.781	6.6569	-0.3183
Base	13	10	20.6069	56.0311	0.3102
Base	13	10	-29.6115	33.2827	0.0156
Base	13	10	35.2619	29.3968	-0.024
Base	13	10	-14.9564	6.6484	-0.3186
Base	13	10	20.4315	56.0227	0.3099
Base	13	10	-29.7869	33.2743	0.0154
Base	13	10	67.102	19.6242	-0.0427
Base	13	10	-33.3347	-25.8726	-0.6317
Base	13	10	37.441	72.8759	0.6253
Base	13	10	-62.9957	27.3791	0.0362
Base	13	10	35.1332	43.182	-0.0439
Base	13	10	16.3931	10.1732	-0.4732
Base	13	10	-8.3369	82.0526	0.4526
Base	13	10	-27.077	49.0438	0.0233
Base	13	10	34.0707	31.0159	-0.0382
Base	13	10	15.3306	-1.9929	-0.4675
Base	13	10	-9.3993	69.8865	0.4582
Base	13	10	-28.1394	36.8777	0.0289
Base	13	10	32.9301	17.9595	-0.0364
Base	13	10	14.19	-15.0493	-0.4658
Base	13	10	-10.54	56.8301	0.46
Base	13	10	-29.2801	23.8213	0.0307
Base	14	11	-0.5948	2.7586	0.0221
Base	14	11	0.2186	-0.8636	0.0238
Base	14	11	-0.2924	0.4493	0.0041
Base	14	11	-0.2602	0.4274	0.0046
Base	14	11	0.0706	0.0137	0.0014
Base	14	11	18.4323	-6.6678	0.2512
Base	14	11	5.0058	-35.6107	0.0239
Base	14	11	19.6418	-0.9205	0.264
Base	14	11	-12.2556	-32.7143	-0.1926

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	14	11	-0.8327	3.862	0.0309
Base	14	11	-0.3287	1.9353	0.0652
Base	14	11	-0.3822	2.4685	0.0525
Base	14	11	15.1126	2.5957	0.2399
Base	14	11	-10.4054	-22.8393	-0.1254
Base	14	11	9.2036	29.5036	0.1827
Base	14	11	-16.3143	4.0686	-0.1825
Base	14	11	30.9671	0.9806	0.4734
Base	14	11	-20.0689	-49.8895	-0.2572
Base	14	11	19.1492	54.7964	0.359
Base	14	11	-31.8868	3.9263	-0.3715
Base	14	11	17.9098	-4.0943	0.3025
Base	14	11	4.4833	-33.0372	0.0751
Base	14	11	-5.5283	38.1843	0.0274
Base	14	11	-18.9548	9.2414	-0.1999
Base	14	11	30.8916	1.0098	0.4423
Base	14	11	-20.1443	-49.8602	-0.2882
Base	14	11	19.0737	54.8257	0.328
Base	14	11	-31.9622	3.9556	-0.4026
Base	14	11	17.9244	-4.312	0.27
Base	14	11	4.4978	-33.2549	0.0427
Base	14	11	-5.5138	37.9666	-0.005
Base	14	11	-18.9403	9.0237	-0.2324
Base	14	11	-0.3762	1.8949	0.0458
Base	14	11	-0.4855	2.3268	0.034
Base	14	11	13.2638	1.6824	0.2188
Base	14	11	-9.0644	-20.5733	-0.1008
Base	14	11	8.0935	25.2268	0.1687
Base	14	11	-14.2348	2.9711	-0.1509
Base	14	11	-1.6064	5.0894	0.0431
Base	14	11	-1.0271	2.9805	0.075
Base	14	11	-0.9918	2.9873	0.0756
Base	14	11	-1.0454	3.5206	0.0629
Base	14	11	30.2686	2.0258	0.4831
Base	14	11	-20.7673	-48.8442	-0.2474
Base	14	11	18.4507	55.8416	0.3688
Base	14	11	-32.5852	4.9716	-0.3617
Base	14	11	30.3039	2.0327	0.4838
Base	14	11	-20.732	-48.8374	-0.2467
Base	14	11	18.486	55.8485	0.3695
Base	14	11	-32.5499	4.9784	-0.361
Base	14	11	14.4494	3.6478	0.2503
Base	14	11	-11.0686	-21.7873	-0.1149
Base	14	11	8.5405	30.5557	0.1932
Base	14	11	-16.9775	5.1206	-0.1721

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	14	11	14.3365	3.6259	0.2481
Base	14	11	-11.1815	-21.8091	-0.1171
Base	14	11	8.4276	30.5338	0.191
Base	14	11	-17.0904	5.0988	-0.1743
Base	14	11	30.3942	1.7989	0.4501
Base	14	11	-20.6417	-49.0712	-0.2804
Base	14	11	18.5763	55.6147	0.3358
Base	14	11	-32.4596	4.7446	-0.3947
Base	14	11	17.1593	-2.8056	0.315
Base	14	11	3.7328	-31.7485	0.0876
Base	14	11	-6.2789	39.473	0.0399
Base	14	11	-19.7054	10.5301	-0.1874
Base	14	11	16.9406	-1.942	0.2912
Base	14	11	3.5141	-30.8849	0.0639
Base	14	11	-6.4975	40.3366	0.0161
Base	14	11	-19.924	11.3937	-0.2112
Base	14	11	17.5144	-3.7596	0.2758
Base	14	11	4.0878	-32.7025	0.0485
Base	14	11	-5.9238	38.519	0.0008
Base	14	11	-19.3503	9.5761	-0.2266
Base	15	12	-1.1438	-15.3525	7.076E-06
Base	15	12	-1.4979	-11.4621	-2.935E-06
Base	15	12	-0.3527	-3.8831	5.96E-06
Base	15	12	-0.2786	-3.8945	4.704E-06
Base	15	12	-0.0071	0.0167	1.331E-06
Base	15	12	48.3433	-2.1117	0.0007
Base	15	12	-16.5639	-31.5096	-0.001
Base	15	12	56.0166	-1.7301	0.0015
Base	15	12	-53.1541	-27.0494	-0.0013
Base	15	12	-1.6013	-21.4935	9.906E-06
Base	15	12	-3.7727	-36.7541	4.462E-06
Base	15	12	-2.8818	-29.8585	7.687E-06
Base	15	12	43.4294	-19.7804	0.0012
Base	15	12	-43.9071	-40.0358	-0.0011
Base	15	12	41.1394	3.2432	0.0011
Base	15	12	-46.1971	-17.0123	-0.0012
Base	15	12	86.7525	-32.6449	0.0024
Base	15	12	-87.9205	-73.1559	-0.0021
Base	15	12	82.1725	13.4022	0.0021
Base	15	12	-92.5005	-27.1087	-0.0024
Base	15	12	45.4203	-32.7031	0.0007
Base	15	12	-19.487	-62.1009	-0.0009
Base	15	12	13.6409	0.9182	0.001
Base	15	12	-51.2664	-28.4797	-0.0007
Base	15	12	88.5971	-16.5854	0.0024

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	15	12	-86.0759	-57.0963	-0.0021
Base	15	12	84.0171	29.4618	0.0021
Base	15	12	-90.6559	-11.0492	-0.0024
Base	15	12	47.3665	-15.2228	0.0007
Base	15	12	-17.5407	-44.6206	-0.0009
Base	15	12	15.5871	18.3985	0.001
Base	15	12	-49.3201	-10.9993	-0.0007
Base	15	12	-2.6417	-26.8147	4.141E-06
Base	15	12	-1.8927	-21.0836	5.609E-06
Base	15	12	37.3188	-22.2946	0.0011
Base	15	12	-39.1006	-40.0182	-0.0009
Base	15	12	35.3151	-2.149	0.0009
Base	15	12	-41.1043	-19.8725	-0.001
Base	15	12	-2.4851	-32.3821	2.484E-05
Base	15	12	-4.5267	-46.0955	1.659E-05
Base	15	12	-4.5303	-46.0872	1.726E-05
Base	15	12	-3.6393	-39.1915	2.048E-05
Base	15	12	85.9985	-41.9863	0.0024
Base	15	12	-88.6745	-82.4973	-0.0021
Base	15	12	81.4185	4.0608	0.0022
Base	15	12	-93.2545	-36.4501	-0.0024
Base	15	12	85.995	-41.978	0.0024
Base	15	12	-88.678	-82.489	-0.0021
Base	15	12	81.415	4.0692	0.0022
Base	15	12	-93.258	-36.4418	-0.0024
Base	15	12	42.6718	-29.1134	0.0012
Base	15	12	-44.6647	-49.3689	-0.001
Base	15	12	40.3818	-6.0899	0.0011
Base	15	12	-46.9547	-26.3453	-0.0012
Base	15	12	42.6832	-29.1401	0.0012
Base	15	12	-44.6533	-49.3956	-0.001
Base	15	12	40.3932	-6.1166	0.0011
Base	15	12	-46.9433	-26.372	-0.0012
Base	15	12	88.0289	-23.5852	0.0024
Base	15	12	-86.6441	-64.0961	-0.0021
Base	15	12	83.4489	22.462	0.0021
Base	15	12	-91.2241	-18.049	-0.0024
Base	15	12	44.5378	-43.643	0.0008
Base	15	12	-20.3694	-73.0408	-0.0009
Base	15	12	12.7584	-10.0217	0.001
Base	15	12	-52.1488	-39.4195	-0.0007
Base	15	12	46.0357	-32.1808	0.0008
Base	15	12	-18.8715	-61.5787	-0.0009
Base	15	12	14.2563	1.4404	0.001
Base	15	12	-50.6509	-27.9574	-0.0007

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	15	12	46.9233	-20.6158	0.0007
Base	15	12	-17.984	-50.0136	-0.0009
Base	15	12	15.1439	13.0055	0.001
Base	15	12	-49.7634	-16.3923	-0.0007
Base	16	13	-1.9362	-13.8224	4.996E-06
Base	16	13	-2.2054	-10.3139	-2.072E-06
Base	16	13	-0.259	-3.7296	4.208E-06
Base	16	13	-0.3638	-3.612	3.321E-06
Base	16	13	0.0079	0.0121	9.4E-07
Base	16	13	23.5671	6.2624	0.0005
Base	16	13	-1.4016	-32.4324	-0.0007
Base	16	13	27.7525	9.7802	0.0011
Base	16	13	-20.4952	-27.2581	-0.0009
Base	16	13	-2.7107	-19.3513	6.995E-06
Base	16	13	-5.8481	-33.0831	3.15E-06
Base	16	13	-4.5162	-26.8814	5.427E-06
Base	16	13	19.8912	-8.7433	0.0009
Base	16	13	-18.707	-38.3739	-0.0007
Base	16	13	14.0854	5.239	0.0008
Base	16	13	-24.5128	-24.3916	-0.0008
Base	16	13	39.8791	-11.2464	0.0017
Base	16	13	-37.3172	-70.5076	-0.0015
Base	16	13	28.2674	16.7182	0.0015
Base	16	13	-48.9289	-42.543	-0.0017
Base	16	13	18.9491	-21.2742	0.0005
Base	16	13	-6.0195	-59.969	-0.0007
Base	16	13	-3.2163	4.8958	0.0007
Base	16	13	-28.185	-33.799	-0.0005
Base	16	13	42.6614	3.2082	0.0017
Base	16	13	-34.535	-56.053	-0.0015
Base	16	13	31.0497	31.1727	0.0015
Base	16	13	-46.1466	-28.0884	-0.0017
Base	16	13	21.9135	-5.5419	0.0005
Base	16	13	-3.0552	-44.2367	-0.0007
Base	16	13	-0.252	20.6281	0.0007
Base	16	13	-25.2206	-18.0667	-0.0005
Base	16	13	-4.1416	-24.1363	2.924E-06
Base	16	13	-3.0389	-18.9793	3.96E-06
Base	16	13	16.3878	-12.1332	0.0007
Base	16	13	-17.3856	-38.06	-0.0007
Base	16	13	11.3077	0.1013	0.0007
Base	16	13	-22.4657	-25.8255	-0.0007
Base	16	13	-3.5826	-29.6297	1.754E-05
Base	16	13	-6.5994	-41.8991	1.172E-05
Base	16	13	-6.5954	-41.8931	1.219E-05

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	16	13	-5.2634	-35.6914	1.446E-05
Base	16	13	39.1278	-20.0625	0.0017
Base	16	13	-38.0685	-79.3237	-0.0015
Base	16	13	27.5162	7.9021	0.0015
Base	16	13	-49.6801	-51.3591	-0.0017
Base	16	13	39.1318	-20.0564	0.0017
Base	16	13	-38.0645	-79.3176	-0.0015
Base	16	13	27.5202	7.9082	0.0015
Base	16	13	-49.6762	-51.353	-0.0017
Base	16	13	19.1439	-17.5533	0.0009
Base	16	13	-19.4542	-47.1839	-0.0007
Base	16	13	13.3381	-3.571	0.0008
Base	16	13	-25.2601	-33.2016	-0.0008
Base	16	13	19.1312	-17.5727	0.0009
Base	16	13	-19.4669	-47.2033	-0.0007
Base	16	13	13.3254	-3.5904	0.0008
Base	16	13	-25.2728	-33.221	-0.0008
Base	16	13	42.1009	-3.3993	0.0017
Base	16	13	-35.0954	-62.6605	-0.0015
Base	16	13	30.4892	24.5653	0.0015
Base	16	13	-46.7071	-34.6959	-0.0017
Base	16	13	18.035	-31.5648	0.0005
Base	16	13	-6.9337	-70.2596	-0.0007
Base	16	13	-4.1304	-5.3948	0.0007
Base	16	13	-29.0991	-44.0896	-0.0005
Base	16	13	20.2404	-21.2509	0.0005
Base	16	13	-4.7283	-59.9456	-0.0007
Base	16	13	-1.9251	4.9191	0.0007
Base	16	13	-26.8937	-33.7757	-0.0005
Base	16	13	21.5199	-10.6688	0.0005
Base	16	13	-3.4488	-49.3636	-0.0007
Base	16	13	-0.6456	15.5012	0.0007
Base	16	13	-25.6143	-23.1936	-0.0005
Base	17	14	-3.7068	12.6271	4.996E-06
Base	17	14	-4.0688	9.1148	-2.072E-06
Base	17	14	-0.3071	3.275	4.208E-06
Base	17	14	-0.6432	3.1929	3.321E-06
Base	17	14	-0.0978	0.0094	9.4E-07
Base	17	14	29.6187	6.2256	0.0005
Base	17	14	-5.5572	-31.4757	-0.0007
Base	17	14	34.1127	9.6185	0.0011
Base	17	14	-27.3317	-26.4538	-0.0009
Base	17	14	-5.1895	17.678	6.995E-06
Base	17	14	-11.0071	29.7409	3.15E-06
Base	17	14	-8.6734	24.2824	5.427E-06

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	17	14	22.6855	22.8624	0.0009
Base	17	14	-26.47	-5.9954	-0.0007
Base	17	14	17.2608	36.3307	0.0008
Base	17	14	-31.8947	7.4728	-0.0008
Base	17	14	46.0144	39.6616	0.0017
Base	17	14	-52.2966	-18.0541	-0.0015
Base	17	14	35.1649	66.5982	0.0015
Base	17	14	-63.1461	8.8825	-0.0017
Base	17	14	20.9312	31.0738	0.0005
Base	17	14	-14.2447	-6.6276	-0.0007
Base	17	14	-3.1303	56.3239	0.0007
Base	17	14	-38.3061	18.6225	-0.0005
Base	17	14	51.2441	26.754	0.0017
Base	17	14	-47.0669	-30.9617	-0.0015
Base	17	14	40.3946	53.6905	0.0015
Base	17	14	-57.9164	-4.0252	-0.0017
Base	17	14	26.4531	17.0092	0.0005
Base	17	14	-8.7228	-20.6922	-0.0007
Base	17	14	2.3916	42.2593	0.0007
Base	17	14	-32.7843	4.5579	-0.0005
Base	17	14	-7.7756	21.7419	2.924E-06
Base	17	14	-5.7412	17.1845	3.96E-06
Base	17	14	18.1377	23.9175	0.0007
Base	17	14	-24.8734	-1.3332	-0.0007
Base	17	14	13.391	35.7022	0.0007
Base	17	14	-29.6201	10.4516	-0.0007
Base	17	14	-6.5199	26.733	1.754E-05
Base	17	14	-12.0986	37.4976	1.172E-05
Base	17	14	-12.1475	37.5023	1.219E-05
Base	17	14	-9.8138	32.0438	1.446E-05
Base	17	14	44.9229	47.4183	0.0017
Base	17	14	-53.3881	-10.2974	-0.0015
Base	17	14	34.0734	74.3549	0.0015
Base	17	14	-64.2376	16.6392	-0.0017
Base	17	14	44.874	47.4231	0.0017
Base	17	14	-53.437	-10.2927	-0.0015
Base	17	14	34.0245	74.3596	0.0015
Base	17	14	-64.2865	16.6439	-0.0017
Base	17	14	21.5452	30.6238	0.0009
Base	17	14	-27.6103	1.766	-0.0007
Base	17	14	16.1204	44.0921	0.0008
Base	17	14	-33.0351	15.2343	-0.0008
Base	17	14	21.7016	30.6088	0.0009
Base	17	14	-27.4539	1.7509	-0.0007
Base	17	14	16.2769	44.0771	0.0008

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	17	14	-32.8786	15.2192	-0.0008
Base	17	14	50.3889	32.5751	0.0017
Base	17	14	-47.9222	-25.1406	-0.0015
Base	17	14	39.5394	59.5116	0.0015
Base	17	14	-58.7716	1.7959	-0.0017
Base	17	14	19.4956	40.1639	0.0005
Base	17	14	-15.6802	2.4625	-0.0007
Base	17	14	-4.5659	65.414	0.0007
Base	17	14	-39.7417	27.7126	-0.0005
Base	17	14	23.5644	31.0491	0.0005
Base	17	14	-11.6114	-6.6522	-0.0007
Base	17	14	-0.4971	56.2992	0.0007
Base	17	14	-35.6729	18.5979	-0.0005
Base	17	14	25.893	21.5016	0.0005
Base	17	14	-9.2829	-16.1997	-0.0007
Base	17	14	1.8315	46.7517	0.0007
Base	17	14	-33.3443	9.0504	-0.0005
Base	18	15	3.3798	-10.9549	-0.0201
Base	18	15	3.0842	-8.0405	-0.0152
Base	18	15	0.7806	-2.9454	-0.0039
Base	18	15	0.8446	-2.9583	-0.0043
Base	18	15	0.0971	0.0096	-0.0008
Base	18	15	34.2794	-4.0137	0.4991
Base	18	15	-0.2608	-54.4187	-0.2825
Base	18	15	40.7013	-3.0878	0.5546
Base	18	15	-28.8824	-47.0199	-0.3326
Base	18	15	4.7317	-15.3368	-0.0281
Base	18	15	9.039	-26.0058	-0.0488
Base	18	15	7.2953	-21.1709	-0.0406
Base	18	15	36.7721	-15.6007	0.4182
Base	18	15	-18.8948	-50.7464	-0.2915
Base	18	15	27.3169	24.4854	0.2406
Base	18	15	-28.35	-10.6602	-0.4691
Base	18	15	72.3105	-26.122	0.8477
Base	18	15	-39.0233	-96.4133	-0.5718
Base	18	15	53.4003	54.0503	0.4924
Base	18	15	-57.9336	-16.241	-0.9271
Base	18	15	41.5748	-25.7039	0.4589
Base	18	15	7.0346	-76.109	-0.3227
Base	18	15	7.5562	32.7285	0.2423
Base	18	15	-26.984	-17.6765	-0.5393
Base	18	15	68.1639	-14.7999	0.8693
Base	18	15	-43.17	-85.0912	-0.5502
Base	18	15	49.2536	65.3724	0.514
Base	18	15	-62.0802	-4.9189	-0.9055

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	18	15	37.1657	-13.3692	0.4819
Base	18	15	2.6255	-63.7742	-0.2997
Base	18	15	3.1472	45.0633	0.2654
Base	18	15	-31.393	-5.3418	-0.5163
Base	18	15	6.464	-18.9953	-0.0353
Base	18	15	4.9219	-14.9751	-0.0277
Base	18	15	33.4128	-17.1366	0.3606
Base	18	15	-15.2958	-47.889	-0.2605
Base	18	15	25.1395	17.9388	0.2051
Base	18	15	-23.569	-12.8136	-0.4159
Base	18	15	7.007	-23.6021	-0.0395
Base	18	15	10.9407	-33.0951	-0.0581
Base	18	15	10.9892	-33.0903	-0.0586
Base	18	15	9.2455	-28.2555	-0.0504
Base	18	15	74.2122	-33.2113	0.8383
Base	18	15	-37.1216	-103.5027	-0.5811
Base	18	15	55.302	46.961	0.483
Base	18	15	-56.0319	-23.3304	-0.9364
Base	18	15	74.2608	-33.2065	0.8379
Base	18	15	-37.0731	-103.4979	-0.5816
Base	18	15	55.3505	46.9658	0.4826
Base	18	15	-55.9833	-23.3256	-0.9369
Base	18	15	38.7223	-22.6852	0.4085
Base	18	15	-16.9446	-57.8309	-0.3013
Base	18	15	29.2672	17.4009	0.2308
Base	18	15	-26.3997	-17.7448	-0.4789
Base	18	15	38.567	-22.7006	0.4098
Base	18	15	-17.0999	-57.8463	-0.2999
Base	18	15	29.1119	17.3855	0.2322
Base	18	15	-26.555	-17.7602	-0.4776
Base	18	15	69.6265	-20.1133	0.862
Base	18	15	-41.7073	-90.4046	-0.5575
Base	18	15	50.7163	60.059	0.5067
Base	18	15	-60.6175	-10.2323	-0.9128
Base	18	15	43.8701	-33.9704	0.4472
Base	18	15	9.3299	-84.3755	-0.3344
Base	18	15	9.8515	24.462	0.2307
Base	18	15	-24.6887	-25.943	-0.551
Base	18	15	40.7859	-25.93	0.4624
Base	18	15	6.2457	-76.335	-0.3193
Base	18	15	6.7673	32.5025	0.2458
Base	18	15	-27.7729	-17.9026	-0.5358
Base	18	15	38.2834	-17.5006	0.4765
Base	18	15	3.7432	-67.9057	-0.3051
Base	18	15	4.2648	40.9318	0.2599

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	18	15	-30.2754	-9.4732	-0.5217
Base	19	16	2.9833	9.8042	0.0254
Base	19	16	2.9068	6.4435	0.0306
Base	19	16	0.6855	2.5908	0.0055
Base	19	16	0.7522	2.5771	0.0064
Base	19	16	0.0911	0.0154	0.0006
Base	19	16	41.2585	-4.0615	0.4744
Base	19	16	-7.7309	-54.4223	0.364
Base	19	16	47.8132	-3.1127	0.6591
Base	19	16	-38.2902	-47.0042	-0.1154
Base	19	16	4.1766	13.7259	0.0355
Base	19	16	8.2764	22.0824	0.0797
Base	19	16	6.6325	18.2333	0.0621
Base	19	16	41.9762	9.2996	0.5587
Base	19	16	-26.9065	-25.8136	-0.0608
Base	19	16	34.3579	49.3932	0.1238
Base	19	16	-34.5248	14.28	-0.4958
Base	19	16	83.0334	13.2359	1.1159
Base	19	16	-54.732	-56.9905	-0.1233
Base	19	16	67.7966	93.4231	0.246
Base	19	16	-69.9687	23.1967	-0.9932
Base	19	16	47.8825	14.598	0.5366
Base	19	16	-1.1069	-35.7628	0.4262
Base	19	16	14.3549	73.0819	-0.3018
Base	19	16	-34.6345	22.7211	-0.4122
Base	19	16	79.1861	3.8434	1.0774
Base	19	16	-58.5793	-66.383	-0.1618
Base	19	16	63.9493	84.0306	0.2075
Base	19	16	-73.8161	13.8042	-1.0317
Base	19	16	43.8062	4.3113	0.4961
Base	19	16	-5.1831	-46.0495	0.3856
Base	19	16	10.2786	62.7952	-0.3423
Base	19	16	-38.7107	12.4344	-0.4528
Base	19	16	5.8901	16.2477	0.056
Base	19	16	4.4367	13.026	0.0407
Base	19	16	37.9059	10.8471	0.502
Base	19	16	-22.3664	-19.877	-0.0401
Base	19	16	31.2399	45.929	0.1215
Base	19	16	-29.0325	15.2049	-0.4207
Base	19	16	6.1894	20.9611	0.0521
Base	19	16	9.9561	28.2762	0.0936
Base	19	16	10.0017	28.2839	0.094
Base	19	16	8.3577	24.4348	0.0763
Base	19	16	84.7131	19.4297	1.1298
Base	19	16	-53.0523	-50.7967	-0.1094

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	19	16	69.4764	99.6169	0.2599
Base	19	16	-68.289	29.3905	-0.9793
Base	19	16	84.7586	19.4374	1.1301
Base	19	16	-53.0067	-50.789	-0.1091
Base	19	16	69.5219	99.6246	0.2603
Base	19	16	-68.2435	29.3982	-0.9789
Base	19	16	43.7015	15.5012	0.573
Base	19	16	-25.1812	-19.6121	-0.0466
Base	19	16	36.0831	55.5947	0.138
Base	19	16	-32.7996	20.4815	-0.4815
Base	19	16	43.5558	15.4765	0.5719
Base	19	16	-25.3269	-19.6367	-0.0477
Base	19	16	35.9374	55.57	0.137
Base	19	16	-32.9453	20.4568	-0.4826
Base	19	16	80.48	8.4946	1.088
Base	19	16	-57.2854	-61.7318	-0.1511
Base	19	16	65.2432	88.6818	0.2182
Base	19	16	-72.5222	18.4554	-1.021
Base	19	16	49.9126	21.8458	0.5534
Base	19	16	0.9233	-28.515	0.443
Base	19	16	16.385	80.3297	-0.285
Base	19	16	-32.6043	29.9689	-0.3954
Base	19	16	47.0058	15.4023	0.5228
Base	19	16	-1.9836	-34.9585	0.4124
Base	19	16	13.4782	73.8862	-0.3156
Base	19	16	-35.5112	23.5254	-0.426
Base	19	16	44.7953	7.9162	0.5042
Base	19	16	-4.1941	-42.4446	0.3938
Base	19	16	11.2677	66.4001	-0.3342
Base	19	16	-37.7217	16.0393	-0.4447
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	29	383	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	45	365	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0

Table 5.8 - Joint Reactions (Part 2 of 2, continued)

Story	Label	Unique Name	MX kip-ft	MY kip-ft	MZ kip-ft
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0
Base	46	374	0	0	0

5.4 Modal Results

Table 5.9 - Modal Periods And Frequencies

Case	Mode	Period sec	Frequency cyc/sec	CircFreq rad/sec	Eigenvalue rad2/sec2
Modal	1	0.883	1.133	7.1178	50.6632
Modal	2	0.737	1.357	8.5281	72.7277
Modal	3	0.488	2.048	12.8679	165.5827
Modal	4	0.227	4.399	27.641	764.0255
Modal	5	0.197	5.071	31.8626	1015.2249
Modal	6	0.143	6.969	43.7861	1917.2263
Modal	7	0.138	7.221	45.3709	2058.5205
Modal	8	0.136	7.357	46.2229	2136.5542
Modal	9	0.134	7.442	46.7598	2186.4747
Modal	10	0.134	7.478	46.9828	2207.3826
Modal	11	0.133	7.516	47.2222	2229.9406
Modal	12	0.133	7.526	47.2843	2235.8069

Table 5.10 - Modal Participating Mass Ratios (Part 1 of 2)

Case	Mode	Period sec	UX	UY	UZ	SumUX	SumUY	SumUZ	RX	RY	RZ
Modal	1	0.883	0.641	0.0006	1.336E-06	0.641	0.0006	1.336E-06	0.0001	0.2072	0.0381
Modal	2	0.737	0.0106	0.5215	1.296E-05	0.6516	0.5221	1.43E-05	0.1774	0.0052	0.1774
Modal	3	0.488	0.0189	0.1653	0.0001	0.6705	0.6874	0.0001	0.0769	0.0116	0.4909
Modal	4	0.227	0.1044	0.0228	0	0.7748	0.7102	0.0001	0.0456	0.1256	0.0282
Modal	5	0.197	0.0631	0.0832	0.0002	0.838	0.7934	0.0003	0.1452	0.0731	0.0159
Modal	6	0.143	0.0001	0.0015	0.2467	0.8381	0.7949	0.2469	0.0097	0.0114	0.0038
Modal	7	0.138	0.0001	0.0007	0.0783	0.8382	0.7956	0.3252	7.428E-06	0.058	0.001
Modal	8	0.136	2.306E-05	0.0001	0.0076	0.8382	0.7957	0.3328	0.0003	0.0054	0.0001
Modal	9	0.134	1.571E-06	9.124E-07	0.0001	0.8382	0.7957	0.3329	3.288E-06	0.0001	6.248E-07
Modal	10	0.134	1.036E-06	2.6E-05	0.0018	0.8382	0.7957	0.3347	1.523E-05	0.0007	0.0001
Modal	11	0.133	5.587E-06	0.0001	0.0013	0.8382	0.7958	0.336	0.0001	0.0007	0.0002
Modal	12	0.133	0	0.0005	0.0074	0.8382	0.7962	0.3434	0.0005	0.0025	0.0013

Table 5.10 - Modal Participating Mass Ratios (Part 2 of 2)

Case	Mode	SumRX	SumRY	SumRZ
Modal	1	0.0001	0.2072	0.0381
Modal	2	0.1774	0.2123	0.2156
Modal	3	0.2543	0.2239	0.7064
Modal	4	0.3	0.3496	0.7346
Modal	5	0.4452	0.4227	0.7506
Modal	6	0.4549	0.4341	0.7544
Modal	7	0.4549	0.4921	0.7553
Modal	8	0.4552	0.4975	0.7555
Modal	9	0.4552	0.4976	0.7555
Modal	10	0.4552	0.4983	0.7555
Modal	11	0.4553	0.499	0.7558
Modal	12	0.4558	0.5015	0.757

Table 5.11 - Modal Load Participation Ratios

Case	ItemType	Item	Static %	Dynamic %
Modal	Acceleration	UX	99.82	83.82
Modal	Acceleration	UY	99.55	79.62
Modal	Acceleration	UZ	64.33	34.34

Table 5.12 - Modal Direction Factors

Case	Mode	Period sec	UX	UY	UZ	RZ
Modal	1	0.883	0.948	0.001	0	0.052
Modal	2	0.737	0.019	0.74	0	0.242
Modal	3	0.488	0.035	0.26	0	0.706
Modal	4	0.227	0.574	0.15	0	0.275
Modal	5	0.197	0.359	0.522	0	0.119
Modal	6	0.143	0.002	0.013	0.952	0.033
Modal	7	0.138	0.044	0.035	0.888	0.033

Table 5.12 - Modal Direction Factors (continued)

Case	Mode	Period sec	UX	UY	UZ	RZ
Modal	8	0.136	0	0.001	0.997	0.002
Modal	9	0.134	0	0	1	0
Modal	10	0.134	0.001	0.002	0.993	0.004
Modal	11	0.133	0.002	0.006	0.982	0.01
Modal	12	0.133	0.004	0.03	0.911	0.055