


PRAKTIKUM 7


Meningkatkan Keamanan, Logging, dan Monitoring pada RESTful API Express.js

Nama : Febi Novia Putri
Kelas : TI23B
NIM : 230104040055

1. Get all

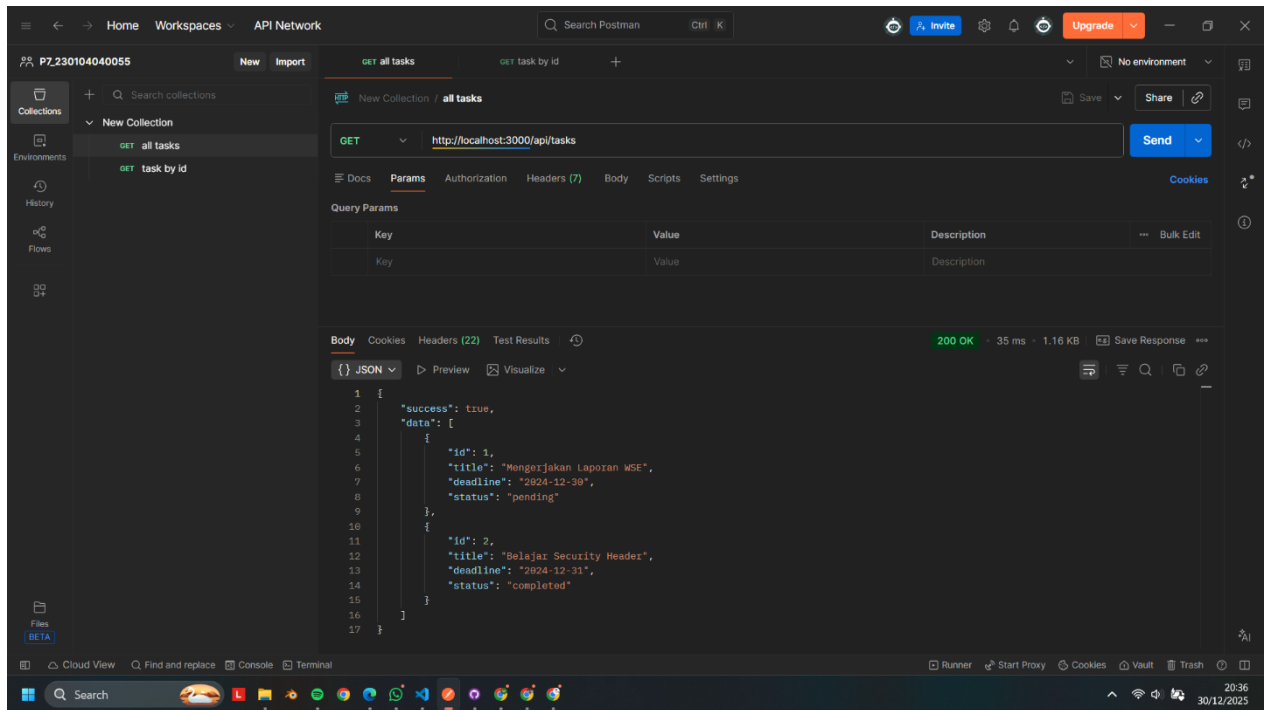

2. Get by id

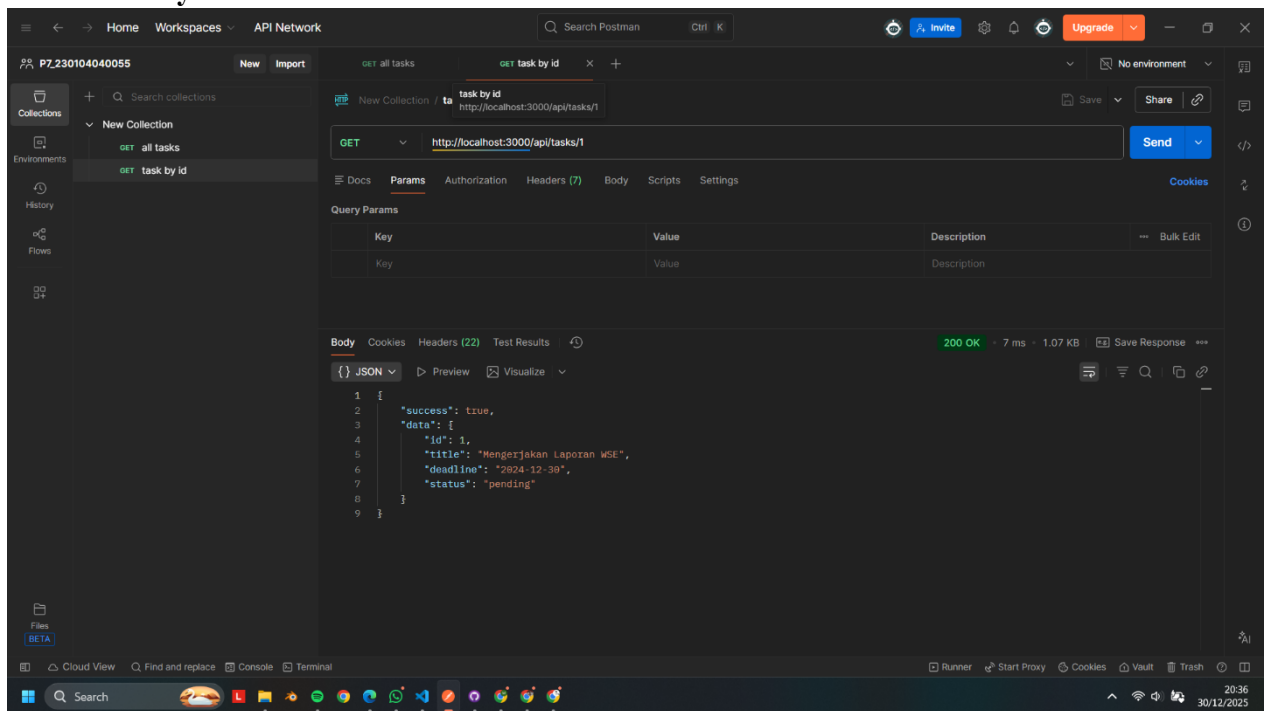

3. Get by id (not found)

The screenshot shows the Postman interface with a new collection named "task by id (false)". A GET request is configured to the URL `http://localhost:3000/api/tasks/999`. The response is a 404 Not Found status, indicating the task with ID 999 does not exist. The response body is JSON:

```
{
  "success": false,
  "message": "Task not found"
}
```

The interface also shows the "Query Params" section with a table:

Key	Value	Description
Key	Value	Description

4. Post new task

The screenshot shows the Postman interface with a new collection named "new task". A POST request is configured to the URL `http://localhost:3000/api/tasks`. The request body is raw JSON:

```
{
  "title": "Tugas P7",
  "deadline": "2025-01-01",
  "status": "pending"
}
```

The response is a 201 Created status, indicating the task was successfully created. The response body is JSON:

```
{
  "success": true,
  "message": "Task created",
  "data": {
    "id": "1767998350148",
    "title": "Tugas P7",
    "deadline": "2025-01-01",
    "status": "pending"
  }
}
```

5. Post Failed

The screenshot shows the Postman interface with a new collection named "new task (fail)". A POST request is configured to `http://localhost:3000/api/tasks`. The response is a 500 Internal Server Error (6 ms, 1.1 KB). The JSON body of the response is:

```
1 {
2   "success": false,
3   "status": "error",
4   "message": "Cannot destructure property 'title' of 'req.body' as it is undefined."
5 }
```

6. Put update task

The screenshot shows the Postman interface with a new collection named "update task". A PUT request is configured to `http://localhost:3000/api/tasks/1`. The response is a 200 OK (6 ms, 1.1 KB). The JSON body of the response is:

```
1 {
2   "success": true,
3   "message": "Task updated",
4   "data": {
5     "id": 1,
6     "title": "Mengerjakan Laporan WSE",
7     "deadline": "2024-12-30",
8     "status": "completed"
9   }
10 }
```

7. Delete task

The screenshot shows the Postman interface with a DELETE request to `http://localhost:3000/api/tasks/2`. The response is a 200 OK status with a JSON body: `{\"success\": true, \"message\": \"Task deleted\"}`.

Query Params

Key	Value	Description
Key	Value	Description

Body

```
1 {
2   \"success\": true,
3   \"message\": \"Task deleted\"
4 }
```

8. GET Info

The screenshot shows the Postman interface with a GET request to `http://localhost:3000/api/info`. The response is a 200 OK status with a JSON body: `{\"serviceName\": \"Task Management API\", \"version\": \"1.0.0\", \"maintainedBy\": \"Mahasirwa WSE\"}`.

Query Params

Key	Value	Description
Key	Value	Description

Body

```
1 {
2   \"serviceName\": \"Task Management API\",
3   \"version\": \"1.0.0\",
4   \"maintainedBy\": \"Mahasirwa WSE\"
5 }
```

9. Health Check

The screenshot displays the Postman interface with a new collection named "health". A GET request is configured to the URL `http://localhost:3000/api/health`. The response is a 200 OK status with a 5 ms response time and 1.05 KB of data. The response body is shown in JSON format:

```
1 {
2   "status": "ok",
3   "timestamp": "2025-12-30T12:42:58.413Z",
4   "server": "Task Service Hardened"
5 }
```

The interface includes a sidebar with a list of collections, a top bar with navigation and search options, and a bottom status bar showing the time and date.