

```

import pandas as pd

import matplotlib.pyplot as plt

import seaborn as sns

# Load and clean

df = pd.read_csv('books_dataset.csv')

df['Price'] = df['Price'].str.replace('Â£', '').astype(float)

df['Price Range'] = pd.cut(df['Price'], bins=[0, 20, 40, 60, 100],
                           labels=['Cheap 0-20', 'Medium 20-40', 'Expensive 40-60', 'Very Expensive 60+'])

# Dashboard with 3 charts

fig, axes = plt.subplots(1, 3, figsize=(15,4))

sns.histplot(df['Price'], bins=20, ax=axes[0], color='skyblue', kde=True)
axes[0].set_title('Price Distribution')

sns.countplot(data=df, x='Price Range', ax=axes[1], palette='pastel')
axes[1].set_title('Books by Price Range')
axes[1].tick_params(axis='x', rotation=20)

sns.boxplot(y=df['Price'], ax=axes[2], color='lightgreen')
axes[2].set_title('Price Outliers')

plt.tight_layout()

plt.savefig('books_dashboard.png') # saves image for your portfolio

plt.show()


print("Dashboard saved as books_dashboard.png")

```

Output :

Passing `palette` without assigning `hue` is deprecated and will be removed in v0.14.0. Assign the `x` variable to `hue` and set `legend=False` for the same effect.

```
sns.countplot(data=df, x='Price Range', ax=axes[1], palette='pastel')
```

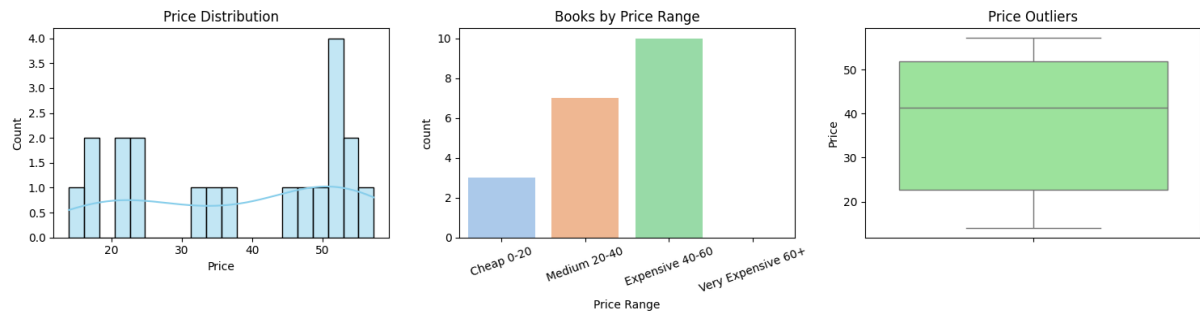

Dashboard saved as books_dashboard.png