

## Run a basic Word Count Map Reduce program to understand Map Reduce Paradigm.

### Aim:

To run a basic Word Count MapReduce program.

### Procedure:

#### Step 1: Create Data File:

Create a file named "word\_count\_data.txt" and populate it with text data that you wish to analyse.  
Login with your hadoop user.

```
nano word_count.txt
```

Output: Type the below content in word\_count.txt

#### Step 2: Mapper Logic - mapper.py:

Create a file named "mapper.py" to implement the logic for the mapper. The mapper will read input data from STDIN, split lines into words, and output each word with its count.

```
nano mapper.py
```

```
# Copy and paste the mapper.py code
```

```
#!/usr/bin/env python3
# import sys because we need to read and write data to STDIN and STDOUT
#!/usr/bin/python3
import sys
for line in sys.stdin:
    line = line.strip() # remove leading and trailing
    whitespace words = line.split() # split the line into words
    for word in words:
```

```
print( '%s\t%s' % (word, 1))
```

### Step 3: Reducer Logic - reducer.py:

Create a file named "reducer.py" to implement the logic for the reducer. The reducer will aggregate the occurrences of each word and generate the final output.

```
nano reducer.py
```

```
# Copy and paste the reducer.py code
```

#### reducer.py

```
#!/usr/bin/python3
from operator import itemgetter
import sys
current_word = None
current_count = 0
word = None
for line in sys.stdin:
    line = line.strip()
    word, count = line.split('\t', 1)
    try:
        count = int(count)
    except ValueError:
        continue
    if current_word == word:
        current_count += count
    else:
        if current_word:
            print( '%s\t%s' % (current_word, current_count))
            current_count = count
            current_word = word
        if current_word == word:
            print( '%s\t%s' % (current_word, current_count))
```

### Step 4: Prepare Hadoop Environment:

Start the Hadoop daemons and create a directory in HDFS to store your data.

```
start-all.sh
```

```
hdfsdfs -mkdir /word_count_in_python
```

```
hdfsdfs -copyFromLocal /path/to/word_count.txt/word_count_in_python
```

### Step 6: Make Python Files Executable:

Give executable permissions to your mapper.py and reducer.py files.

```
chmod 777 mapper.py reducer.py
```

### Step 7: Run Word Count using Hadoop Streaming:

Download the latest hadoop-streaming jar file and place it in a location you can easily access.

Then run the Word Count program using Hadoop Streaming.

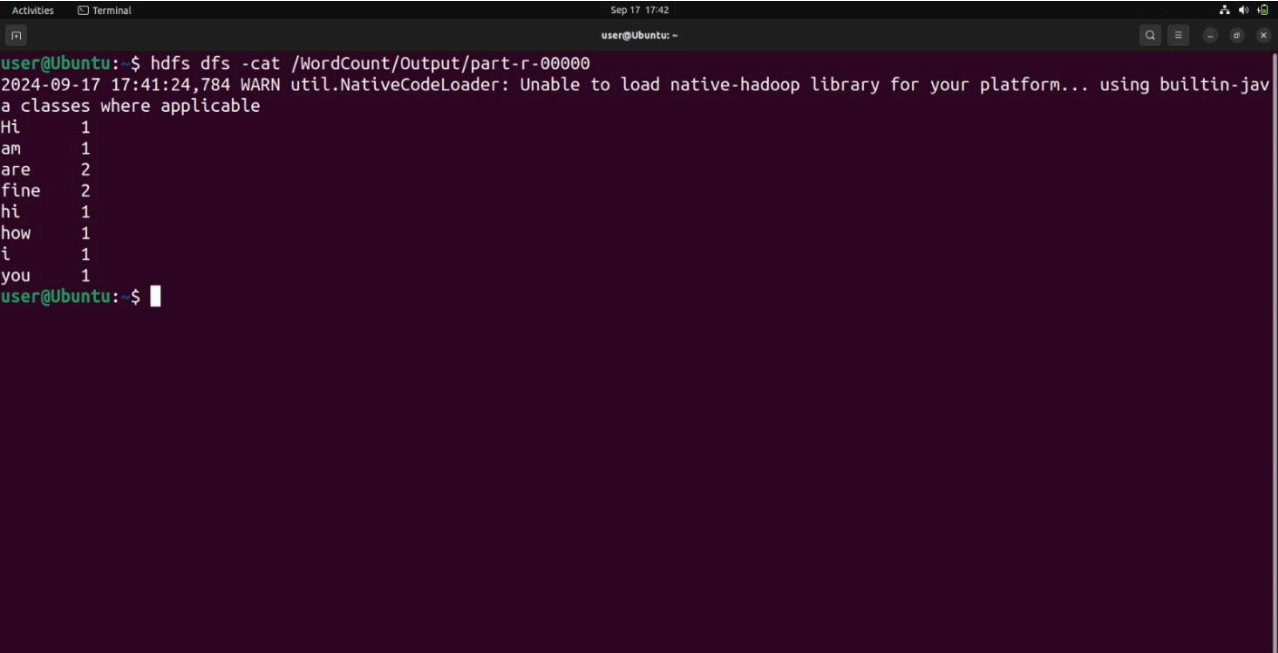
```
hadoop jar /path/to/hadoop-streaming-3.3.6.jar \  
-input /word_count_in_python/word_count_data.txt \  
-output /word_count_in_python/new_output \  
-mapper /path/to/mapper.py \  
-reducer /path/to/reducer.py
```

### Step 8: Check Output:

Check the output of the Word Count program in the specified HDFS output directory

```
. hdfs dfs -cat /word_count_in_python/new_output/part-00000
```

### OUTPUT:

A terminal window screenshot showing the execution of the command `hdfs dfs -cat /WordCount/Output/part-r-00000`. The output displays word counts for various words: 'Hi' (1), 'am' (1), 'are' (2), 'fine' (2), 'hi' (1), 'how' (1), 'i' (1), and 'you' (1). A warning message from Hadoop is also visible at the top of the output.

```
user@Ubuntu: ~$ hdfs dfs -cat /WordCount/Output/part-r-00000  
2024-09-17 17:41:24,784 WARN util.NativeCodeLoader: Unable to load native-hadoop library for your platform... using builtin-jav  
a classes where applicable  
Hi      1  
am      1  
are     2  
fine    2  
hi      1  
how     1  
i       1  
you     1  
user@Ubuntu: ~$
```

### Result:

Thus, the program for basic Word Count Map Reduce has been executed successfully.