SCRIPT-CONTROLLED ACL – RESTRICT RECORD ACCESS BASED ON FIELD VALUE

PHASE 5: PROJECT DEVELOPMENT PHASE


The Project Development Phase focused on the actual implementation of the ACL in ServiceNow. The required ACL was created and configured with the appropriate table, conditions, access rules, and script logic. The configured ACL was then saved and prepared for testing to ensure secure and controlled record access.

In the development phase the plan was carried out in the instance. The ACL was created, its parameters and conditions were filled in, the script was added and the record was saved, so that the rule became active in the platform.

5.1 Creating the ACL

The required ACL was created in ServiceNow based on the identified security requirements. The appropriate table and access operation were selected.

The Access Control form was opened with **New**, the type was set to record, the table Institution Details was selected and the operation was chosen. The screenshot shows the Conditions section of the form, where the **Requires role** table lists the custom role that must be held by the user, and where the Security Attribute Condition can be used as an additional filter.

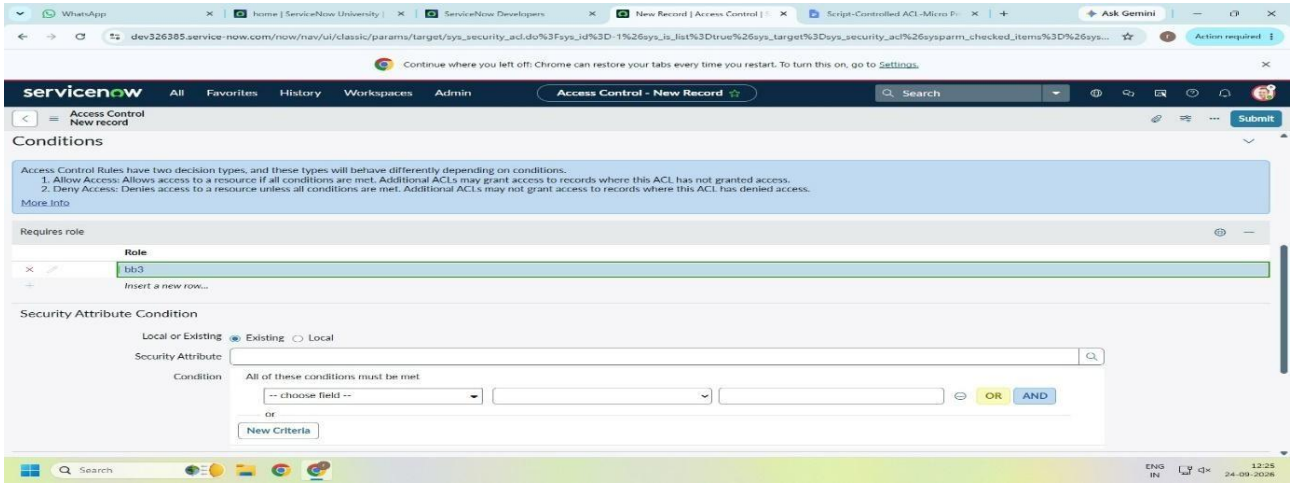

5.2 Configuring ACL Parameters

The necessary ACL settings were configured according to the planned design. The required parameters were entered to control record access.

The decision type was set to Allow If, the Active option was kept checked so the rule is enforced immediately, and the Admin overrides option was left enabled so that administrators are not locked out of the table. The description was used to record the purpose of the rule.

5.3 Adding Access Conditions

Specific conditions were added to determine whether users should be allowed or restricted from accessing records. These conditions support the required access rules.

The custom role was added to the Requires role list and the data condition *Branch is EEE* was added in the Data Condition section. The role answers the question “who is the user?”, and the data condition answers “which record is it?”. Both must be satisfied for access to be granted.

5.4 Implementing the ACL Script

The script was added to control record access dynamically based on the defined conditions. The script logic was configured according to the project requirements.

The Advanced checkbox was selected to reveal the Script field and the script from the design phase was entered. The script returns true for administrators and for users who hold the branch role and returns false in every other case. After typing the code, the syntax was checked using the editor so that no error would stop the rule from running.

5.5 Saving and Applying the Configuration

The completed ACL configuration was saved and applied in ServiceNow. The configuration was then prepared for testing and validation.

The Submit button saves the record. From that moment ServiceNow evaluates the rule for every access to the Institution Details table. Because ACL results can be cached per session, the test user should log in again, or be impersonated, before testing so that the new rule is taken into account.