ASSIGNMENT – 1


DDL COMMANDS (Create, Alter, Drop,)

1) **Create Command -** CREATE command is to **define the structure of an object before storing data in it.**

```
CREATE TABLE Restuarant(
    Order_ID INT,
    Customer_Name VARCHAR(50),
    Customer_Phone_Number VARCHAR(100),
    Cuisine_Name VARCHAR(100)
);

INSERT INTO Restuarant VALUES
(112456,'Raghu',1234567890,'NorthIndian'),
(123456,'Mohith',4455667890,'SouthIndian'),
(133256,'Gagan',7745362846,'Chats'),
(143214,'madan',9905468462,'Chinese'),
(158432,'Shrihan',6635284642,'Japanese'),
(162542,'Babu',7130184627,'Continental');

SELECT * FROM Restuarant;
```

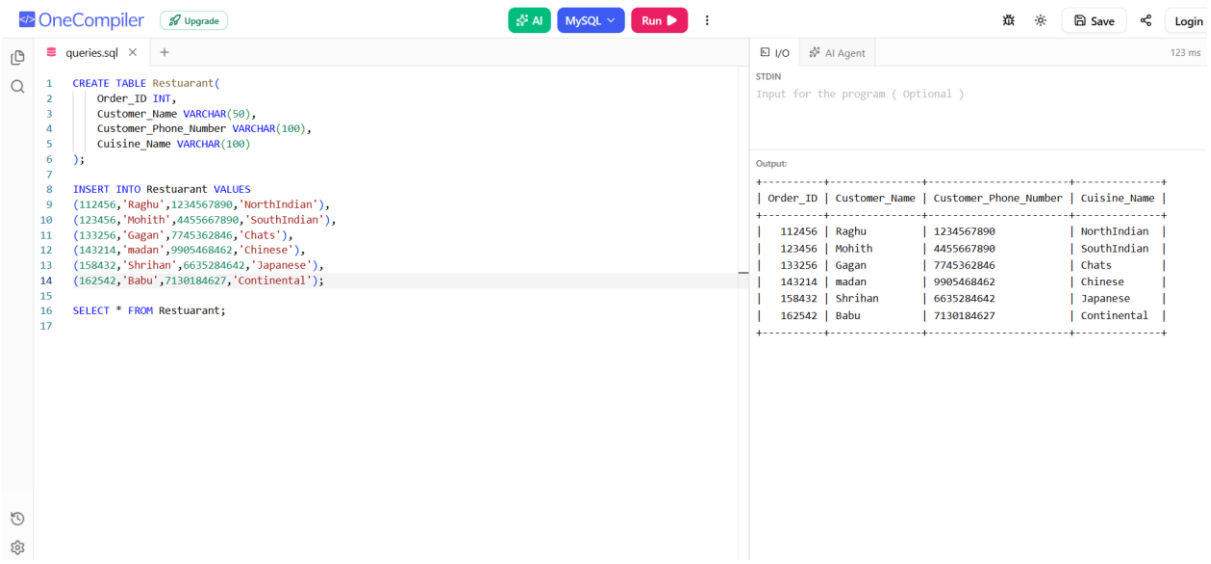


2) Alter Command - Used to **modify the structure of an existing table** without deleting it.

ALTER TABLE Restuarant

ADD Order_Price INT;

SELECT * FROM Restuarant;

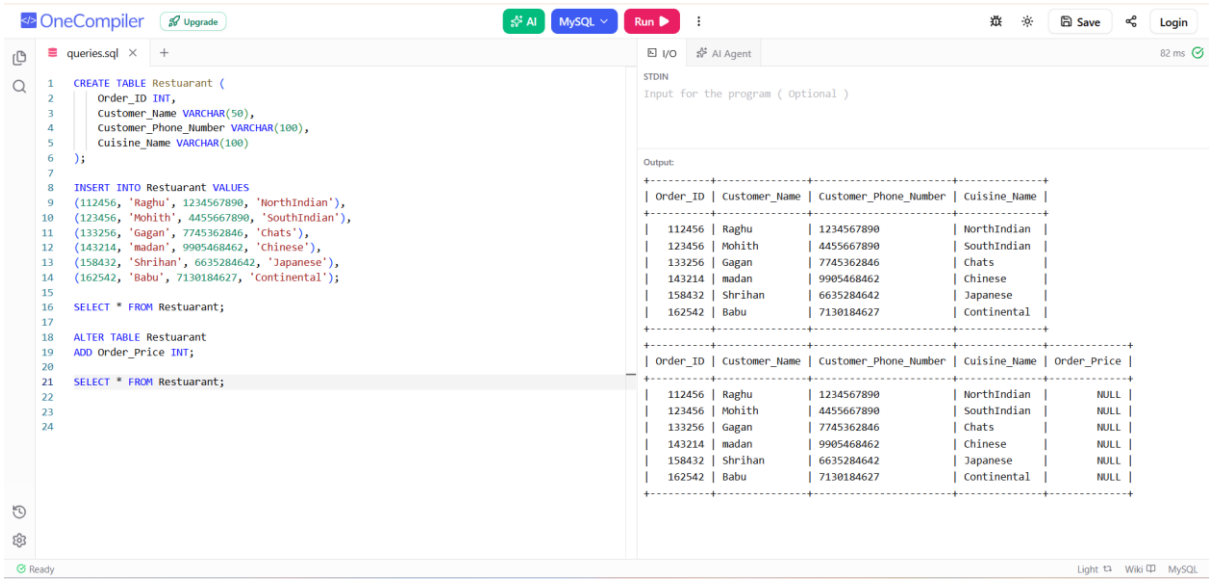

GITHUB : https://github.com/raghugadimane/DBMS-LAB-1.git

3) **Drop Command -** Command used to permanently delete a database object such as a table, database, or column.

4)

