

The screenshot displays the Zapier interface for configuring a Zap. The main workspace shows a sequence of 7 steps:


- Trigger: File
- Action: Download file contents from FTP/FTPS server
- Action: Parse JSON document
- Loop: **FOR EACH** item in **Input list** (Step 3) **REPEAT** the following steps
- Action: Send request via HTTP (highlighted)
- Action: Add a new row in a sheet in Google Sheets
- End: **STOP** job

The configuration panel for the 'Send request via HTTP' step is open on the right, showing the following parameters:

Parameter name	Value
codes	Zipcode   Step 3
country	Country   Step 3
city	Cityname   Step 3

Below the parameters, the 'Request headers' section is visible.

> zipcodes\_details + :

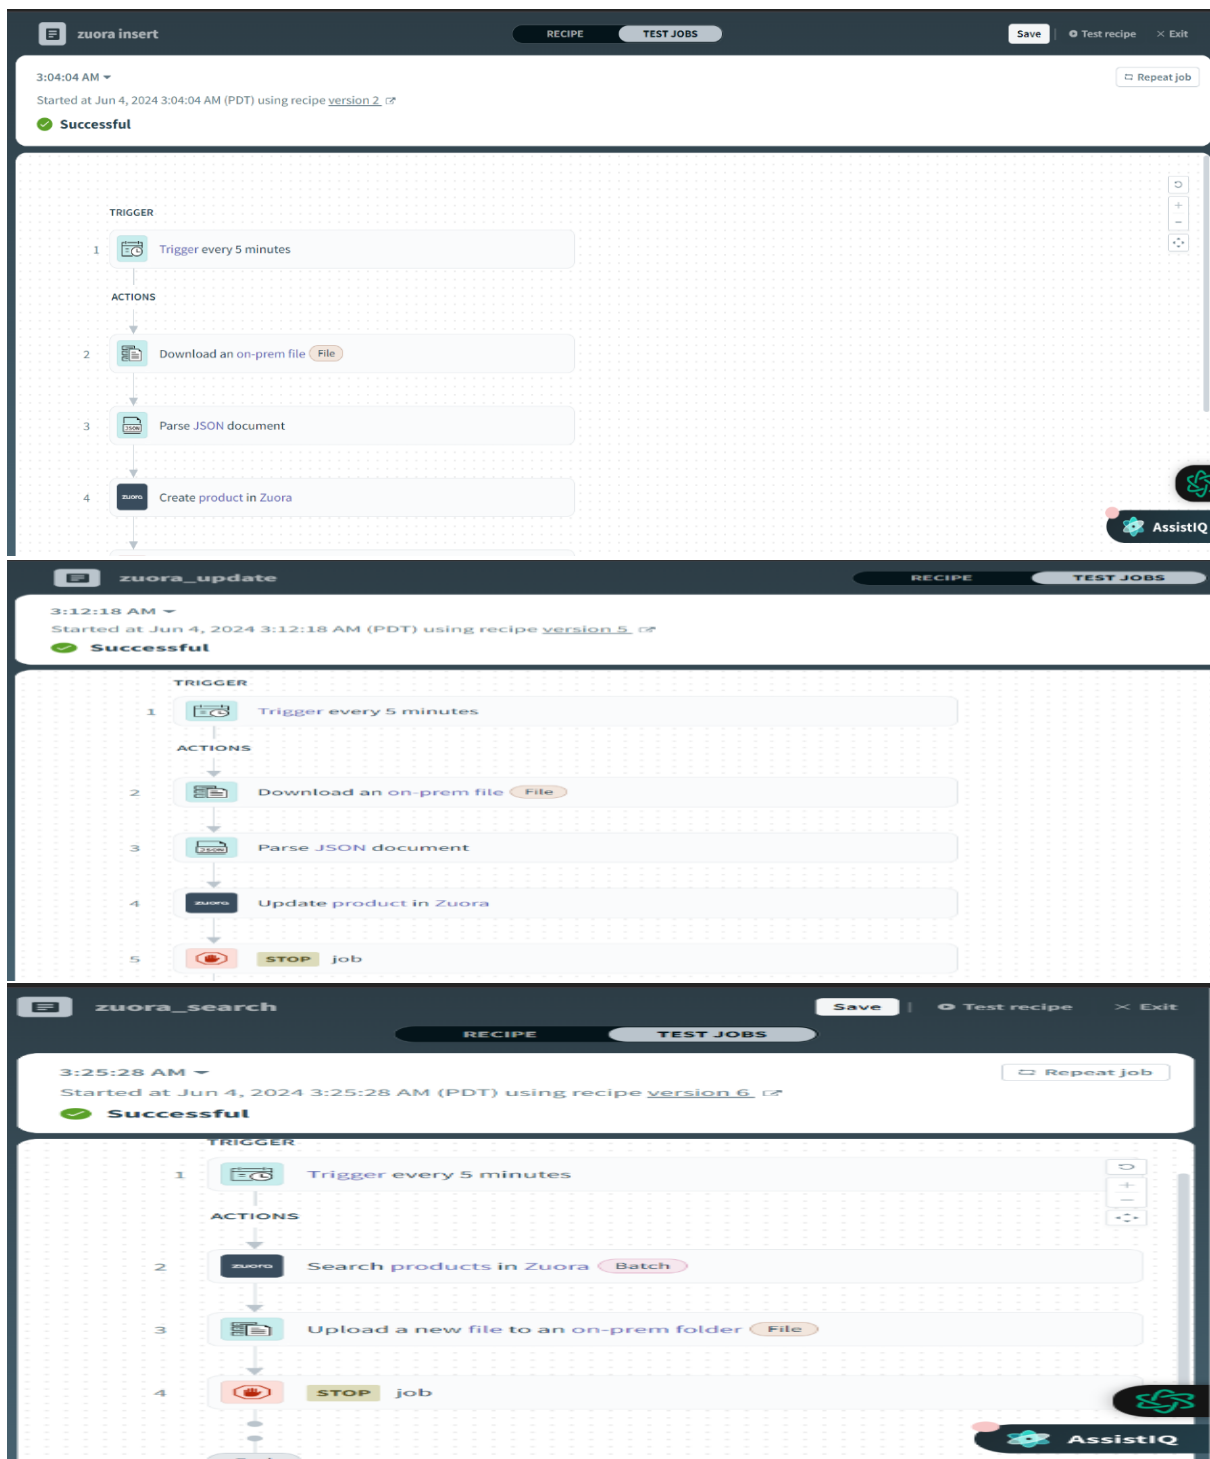

### Data.json

```
{  
  "Name": "Ragini",  
  "Email": "raginisathu@gmail.com",  
  "branch": "CSE"  
}
```

Output.json

[raginisathu@gmail.com](mailto:raginisathu@gmail.com)

CSE

9a9aa1469fc38abe018fe2b4bc2c6f2r

Ragini