



برای استفاده از این ابزار ابتدا ان را در گیتهاب خود فورک کنید

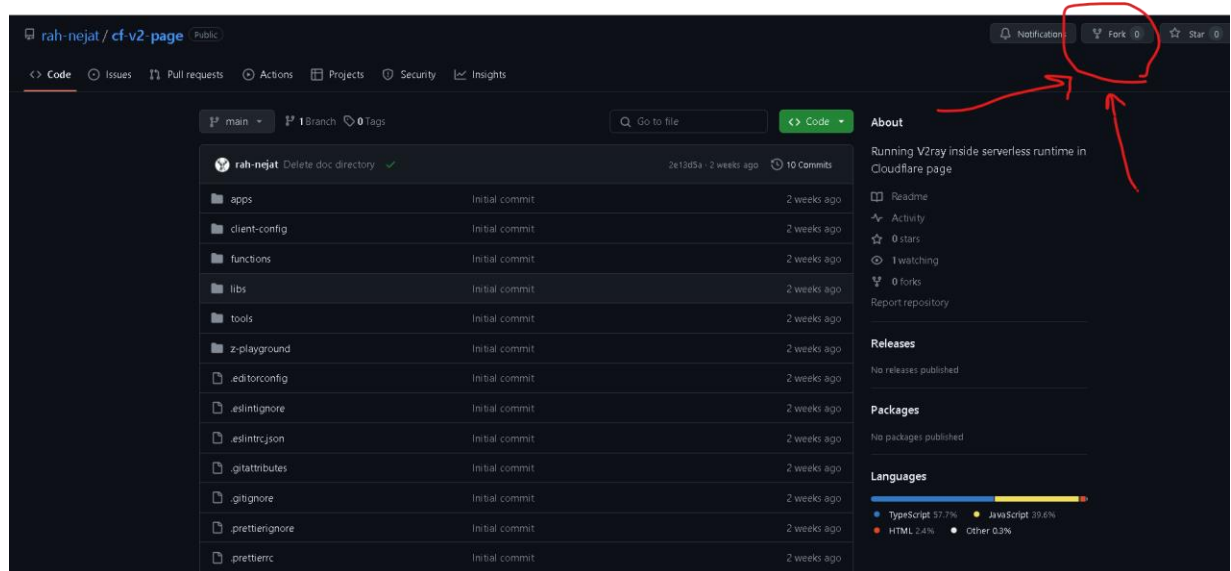

سپس به یک اکانت [cloudflare](https://cloudflare.com) نیاز دارید

پس از ثبت نام در ان به قسمت woker & page بروید

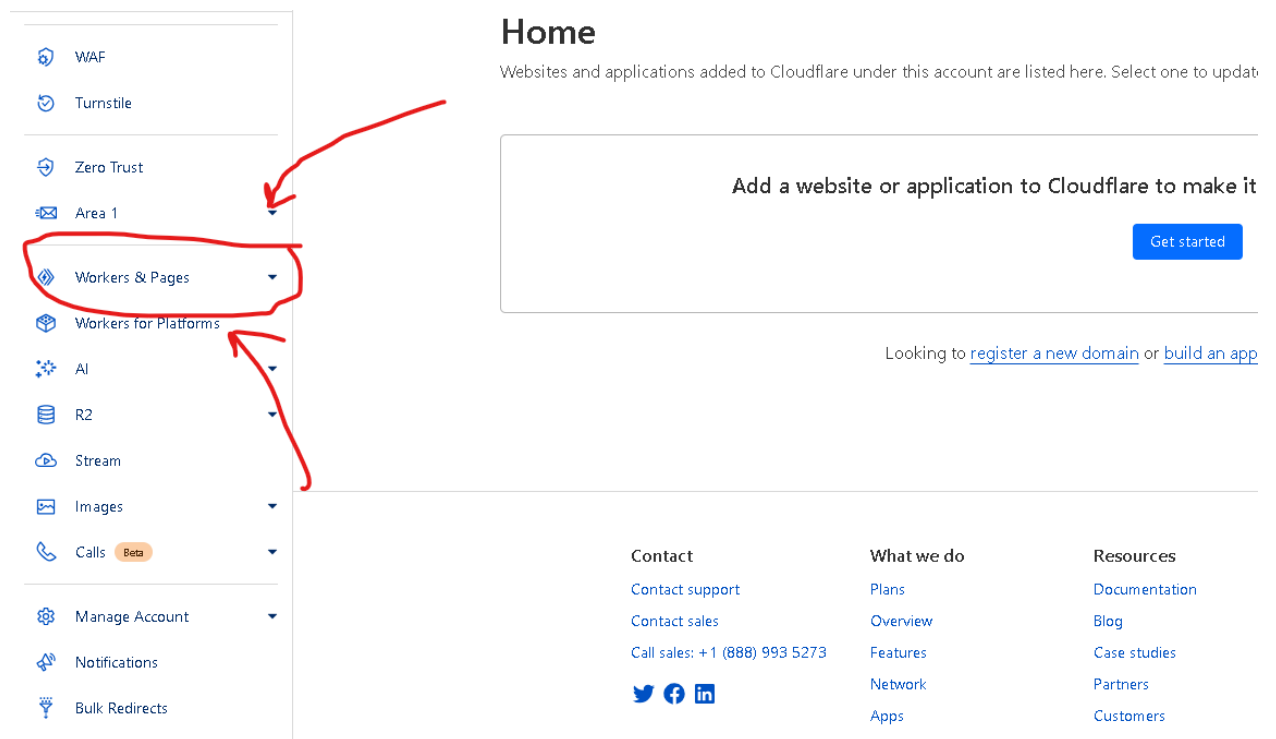

و سپس روی Create application کلیک کنید

وارد تب pages شوید و روی connect to git کلیک کنید

[← Overview](#)

Create an application

Build serverless functions with Workers. Deploy websites and full-stack applications with Pages. Read the [Workers documentation](#) and [Pages documentation](#) to learn more.

Workers

Pages

[Create with CLI](#)

Create by importing an existing Git repository

Connect to Git

Create using direct upload

Upload your site's assets including HTML, CSS, and JS files directly from your computer.

Upload assets

بعد از اضافه کردن اکانت گیت‌هاب خود روی پروژه ای که فورکش کردید کلیک کنید

Deploy a site from your account

Select a repository to connect as your project's source code. New commits will trigger Cloudflare to automatically build and deploy your changes.

GitHub

GitLab

GitHub account

rah-nejat

[Add account](#)

Select a repository

cf-v2-page

uuid-generator-page

If your repository is not shown, configure repository access for the [Cloudflare Pages](#) app on GitHub.

[Cancel](#)

Begin setup

در این قسمت موارد خواسته شده را وارد کنید

Project name

نام انتخابی

Project name can only contain lowercase letters (a-z), numbers (0-9), dashes

Production branch

main

Pushes to this branch automatically trigger deployments to the Production environment. Pushes to all other branches will trigger deployments within the Preview environment.

Build settings [Configuring builds](#)

If your project uses a static site generator or build tool, set the build instructions for Cloudflare.

Framework preset

None

Select a framework to prefill recommended settings.

Build command ⓘ

npm run cf-v2

eg. npm run build

Build output directory ⓘ

/ dist/apps/cf-page-vless

eg. dist

> [Root directory \(advanced\)](#)

Environment variables (advanced)

Add variables to be used during build time for Production and Preview environments. Variables for each environment can be changed separately later.

Variable name

UUID

Value

= bc64bf0b-2a80-4c18-937e-01ba6bc43b12



NODE_VERSION

= 18



+ [Add variable](#)

npm run cf-v2	Build command
dist/apps/cf-page-vless	Build output directory

سپس دو متغیر اضافه کنید با مقادیر زیر:


UUID	bc64bf0b-2a80-4c18-937e-01ba6bc43b12
NODE_VERSION	18


برای گرفتن UUID خود به سایت زیر مراجعه کنید


<https://uuid-generator-page.pages.dev>

```
12:17:45.086
12:17:45.115 Finished
12:17:45.115 Found Functions directory at /functions. Uploading.
12:17:46.175 ✨ Compiled Worker successfully
12:17:46.211 Validating asset output directory
12:17:46.890 Deploying your site to Cloudflare's global network...
12:17:49.957 Uploading... (0/5)
12:17:50.543 Uploading... (1/5)
12:17:50.690 Uploading... (3/5)
12:17:50.790 Uploading... (5/5)
12:17:50.790 ✨ Success! Uploaded 5 files (1.31 sec)
12:17:50.791
12:17:51.118 ✨ Upload complete!
12:17:53.185 Success: Assets published!
12:17:54.931 Success: Your site was deployed!
```

Build and deployment settings

Repository:  rah-nejat/cf-v2-page

Branch:  main [7de3a6a](#) Update package.json

Status:  Success 12:17PM April 27, 2024

Duration: 1m 9s

> Build settings

[← Change settings](#)

Continue to project

پس از نصب روی لینک خود کلیک کنید

Workers & Pages / aredaee

Deployments Functions metrics Custom domains Integrations Beta Settings Manage

Production

 Automatic deployments enabled

Domains: [aredaee.pages.dev](#)

Production  main [2e13d5a](#) abf025cd.aredaee.pages.dev 

✓ 12 hours ago

All deployments

Environment	Source	Deployment	Status
-------------	--------	------------	--------

دقت کنید که یوزر پس همان UUID شماسست

امکان اضافه کردن دامنه از قسمت Costom domians امکان پذیره

این آموزشو برای هر کی که میدونی لازمش داره ارسال کن 😊