

CALiBRE-AD+: A Nested, Leakage-Audited, Calibrated, Cost-Sensitive Ensemble for Alzheimer’s Disease Classification

MD Rahat Rihan

Department of Computer Science

American International University-Bangladesh

Dhaka 1229, Bangladesh

26-94125-2@student.aiub.edu

Abstract—Tabular machine-learning studies of Alzheimer’s disease (AD) routinely report accuracies near 95%. Those numbers are meaningful only if the predictors used would actually be available at the moment a prediction is needed, and on the dataset studied here they are not. We audit a public synthetic dataset of 2,149 records and show that its headline performance rests on a block of ten clinician-administered cognitive and functional assessments – instruments that form part of the very diagnostic work-up whose outcome is the label. We split the predictors into a Full track and a deployment-oriented Screening track containing only the 22 variables plausibly available before any such assessment, and evaluate both under an identical protocol. On the Full track our proposed ensemble reaches 0.951 accuracy (95% bootstrap CI [0.941, 0.960]), 0.928 recall, 0.948 ROC-AUC ([0.935, 0.960]), and a Brier score of 0.043. On the Screening track it reaches 0.490 ROC-AUC and 0.000 MCC: chance. The collapse is uniform across every classifier tested. We also introduce CALiBRE-AD+, a seven-learner stacked ensemble (Elastic-Net logistic regression, RBF-SVM, Random Forest, Extra Trees, XGBoost, LightGBM, and CatBoost) combined through a regularised logistic meta-learner, followed by adaptive selection between sigmoid and isotonic calibration and a cost-sensitive operating point that weights a missed case five times a false alarm. Imputation, scaling, stacking, calibration, and threshold selection are all confined to outer-training folds – a discipline we show is not a formality, since the decision threshold in particular is easy to fit on evaluation data without noticing. In a tabular AD benchmark, an explicit feature-provenance audit should be performed and cost-aware metrics should be reported, rather than a single accuracy figure.

Index Terms—Alzheimer’s disease, data leakage, nested cross-validation, stacked ensemble, probability calibration, cost-sensitive learning, model evaluation, machine learning in health-care.

I. INTRODUCTION

Alzheimer’s disease (AD) is the leading cause of dementia worldwide, and because interventions work best early, there is sustained interest in machine-learning tools [15] that can flag at-risk individuals from routinely collected data. Reported accuracies on tabular AD datasets are frequently above 95%. Those figures are attractive, and they invite a question that is rarely asked: what is the model actually reading, and would the same performance survive deployment before a clinical assessment has taken place?

This work began as a replication of a comparative study on a public 2,149-patient AD dataset, in which Gradient Boosting was reported as the strongest model at roughly 95% accuracy. Reproducing that pipeline exposed two problems. The first is procedural: the original evaluation used a single train-test split with no calibration, no confidence intervals, and no significance testing, so the reported ranking of models is not stable enough to support the conclusions drawn from it. The second is substantive. The features carrying the 95% are clinician-administered cognitive and functional assessments. They are not upstream risk factors; they are the instruments a clinician uses to reach the diagnosis, so a model given access to them has effectively been told the answer, and its accuracy measures transcription rather than prediction.

We therefore reframe the problem around three questions. First, how much of the reported accuracy is genuine signal from risk and lifestyle variables, and how much is leakage from assessment instruments? Second, can an ensemble be built that not only separates classes but also produces probabilities trustworthy enough to support a defensible clinical operating point? Third, do the apparent gaps between leading models survive statistical scrutiny? To answer these, we contribute a leakage-audited two-track protocol, CALiBRE-AD+, and a nested cross-fitted evaluation that reports discrimination, class-specific, calibration, and cost-aware measures together.

Our findings temper the optimism of prior benchmarks. They are also, in one respect, a caution about our own methodology: an early version of this pipeline selected its decision threshold on pooled out-of-fold predictions covering the whole dataset, which is precisely the class of error this paper criticises. Section VI describes the nested design that eliminates it, and Section VII-A states how every number below can be regenerated.

II. RELATED WORK

Tabular and multimodal machine learning for AD has grown quickly. Deep architectures applied to neuroimaging, gene-expression, and multimodal clinical data report accuracies in the mid-nineties [1], [2], [9], while natural-language methods extract social determinants of health, functional-status

impairment, and lifestyle indicators from clinical notes and referential communication transcripts [3]–[5], [8]. Speech-based pipelines built on classical and transformer language models reach F1 scores above 0.9 in separating AD from controls [7], [10], and transfer-learning approaches report accuracies near 0.88 on challenge data [11], [12]. Reviews of AI for AD prognosis consistently list data privacy, algorithmic bias, and small, non-representative samples as open problems [6]. Work on explainable and resource-aware classifiers for adjacent clinical and mental-health tasks includes recursive-feature-elimination logistic regression for dementia [22], genetic-algorithm-enhanced anxiety classification [23], and lightweight tabular AD tools intended for constrained deployment [28], reflecting a broader move toward interpretable models rather than purely accuracy-driven ones.

A second strand has shifted attention from retrospective diagnosis toward risk prediction using information plausibly available before diagnosis. Aguayo *et al.* compared feed-forward networks, TabTransformer, DenseNet, and regularised Cox models in a longitudinal general-population cohort and found that complex tabular models did not render interpretable statistical baselines obsolete [26]. Twait *et al.* evaluated dementia prediction from clinically accessible variables and stressed the need for updated models and external validation [27]. Using the multicentre NACC database, Suresh *et al.* built a 19-feature LightGBM tool reaching ROC-AUC 0.90, while naming cross-sectional design and the absence of external validation as limitations [28]. These studies are a far more appropriate comparison for screening than classifiers that already receive cognitive-assessment variables, and we return to this point in Section VIII-F.

Methodological evidence increasingly explains why strong AD results fail to translate. Young *et al.* found substantially lower performance among AD deep-learning studies that used defensible subject-wise splitting, and noted that external validation remained uncommon [29]. Incorrect cross-validation inflates neuropsychiatric prediction results in a closely related way [30]. TRIPOD+AI asks authors to report the complete processing and evaluation pathway transparently [34], and PROBAST+AI treats validation and applicability as central risk-of-bias concerns [35].

On the specific dataset studied here, prior comparative work applied conventional and ensemble classifiers and reported Gradient Boosting as strongest, alongside deep-learning baselines from related studies at 84–89% accuracy [13], [20]. What is largely absent from this literature is any critical treatment of feature provenance. Instruments such as the Mini-Mental State Examination (MMSE) and Activities of Daily Living (ADL) scales are administered as part of the work-up that produces the diagnosis; using them as ordinary predictors risks target leakage. These studies also seldom report calibration or a cost-sensitive operating point, though both matter clinically, and calibration cannot be inferred from discrimination [32]. Cross-validated stacking offers a principled way of combining heterogeneous learners [31], CatBoost contributes an ordered-boosting alternative [19], and decision-curve analysis links

probabilistic predictions to net benefit across threshold ranges [33]. CALiBRE-AD+ assembles these ideas inside an explicit feature-provenance audit.

III. CRITICAL GAPS IN PREVIOUS STUDIES

Three gaps recur across the literature above, and each motivates a specific design decision here.

Gap 1: no leakage audit on tabular AD benchmarks. Comparative studies on this dataset [13], [20], and the wider tabular-AD literature [1], [2], report a headline accuracy without asking whether the predictor set contains instruments that are themselves part of the diagnostic work-up. MMSE and ADL are used as ordinary features throughout. The same concern has been raised independently for deep-learning AD pipelines [29] and for neurodegenerative risk models trained on general-population cohorts [26], so this is not one dataset misbehaving. Our response is the two-track protocol of Section VI, which makes the failure mode impossible to conceal because the Screening track is reported beside the Full track every time.

Gap 2: single-split evaluation without calibration or significance testing. The original study on this dataset used one train–test split with no confidence intervals, no calibration, and no test of whether ranking differences are real [13]. The pattern recurs in adjacent NLP- and speech-based AD work [3], [7], [11], where accuracy or F1 is given as a point estimate. A recent survey makes the same observation at the field level, finding that reproducibility and generalisability are rarely evaluated systematically even in the more mature neuroimaging literature [25]. Our response is a stratified five-fold outer evaluation with three-fold inner cross-fitting, keeping preprocessing, stacking, calibration, and threshold selection outside every outer test fold.

Gap 3: no cost-aware or calibrated operating point. Existing classifiers, including recent explainable and lightweight designs for adjacent risk-prediction tasks [22], [23], are evaluated at the default 0.5 threshold on uncalibrated scores, although a missed AD case and an unnecessary follow-up carry very different costs. Calibrating ensemble output has been shown to matter in other high-stakes clinical settings, such as mortality prediction in lymphoma [24]. Our response is CALiBRE-AD+’s comparison of sigmoid and isotonic calibration inside each outer-training fold, together with an explicit 5:1 cost-sensitive threshold search, supported by a sensitivity analysis over four cost ratios.

IV. CONTRIBUTIONS

- A leakage-audited two-track protocol that partitions the feature space into an assessment-driven Full track and a deployable Screening track, quantifying how much of a benchmark accuracy is signal and how much is target leakage.
- CALiBRE-AD+, a five-stage architecture combining seven learners spanning linear, kernel, bagging, and boosting families through an L2-regularised logistic meta-learner.

- Nested cross-fitted customisation, in which imputation, scaling, inner out-of-fold meta-features, calibrator selection, and threshold selection are learned only from each outer-training fold.
- Adaptive calibration that chooses between sigmoid and isotonic mapping by inner cross-fitted Brier score rather than assuming one is universally preferable.
- An explicit cost-sensitive decision rule minimising an illustrative 5:1 false-negative-to-false-positive cost, reported alongside 1:1, 2:1, and 10:1 alternatives so that no single unexamined cost assumption drives the conclusion.
- A component-wise ablation, executed under the identical nested protocol, testing whether stacking, calibration, and thresholding each earn their place; a learner-bank ablation (four learners vs. seven) is specified but, as documented in Section VIII-G, was not executed and is left as verified future work rather than reported as a result.

V. DATA AND THE LEAKAGE HYPOTHESIS

A. Dataset

We use a public synthetic Alzheimer’s dataset of 2,149 records with 35 attributes, released under a CC-BY 4.0 licence and previously distributed with a hybrid-balancing study [13], [14]. The exact file analysed has MD5 prefix `f01b1f41`. Removing two non-informative identifier columns (`PatientID` and `DoctorInCharge`) leaves 32 predictors and the binary `Diagnosis` target. Classes are imbalanced: 1,389 negative (64.6%) and 760 positive (35.4%). Features span demographics, lifestyle, comorbidities, clinical measurements, and a block of cognitive and functional assessment scores.

Because the data are synthetic, the results below are evidence about this benchmark and this evaluation protocol. They are not clinical evidence, and we are careful throughout to distinguish the two.

B. Feature provenance

We hypothesise that a small block of clinician-administered assessments carries almost all label information. We designate ten features as clinical: `MMSE`, `FunctionalAssessment`, `ADL`, `MemoryComplaints`, `BehavioralProblems`, `Confusion`, `Disorientation`, `PersonalityChanges`, `DifficultyCompletingTasks`, and `Forgetfulness`. The remaining 22 features form the Screening set – information plausibly on file before any formal cognitive assessment.

The partition is a judgement about *when* a variable becomes available, not about how predictive it is. A blood-pressure reading and an ADL score may both be recorded in the same clinic visit, but only the second is generated by the act of diagnosing. This is why the audit is a statement about deployment rather than about feature importance.

A correlation check already separates the two groups cleanly. The five features most correlated with `Diagnosis` are all clinical, with $|r|$ between 0.224 and 0.365, whereas the strongest screening feature (`SleepQuality`) reaches only $|r| = 0.057$. An order of magnitude separates the blocks,

Leakage-free CALiBRE-AD+ pipeline

- 1) Feature-provenance audit: Full and Screening tracks
- 2) Five stratified outer train–test folds
- 3) Three-fold inner preprocessing and base OOF prediction
- 4) Cross-fitted stack, calibrator selection, threshold search
- 5) One prediction on the untouched outer test fold

Fig. 1. Leakage-free CALiBRE-AD+ pipeline. Every fitted transformation, including the decision threshold, remains inside the outer training fold.

which motivates evaluating both tracks separately rather than reporting a single pooled number.

VI. PROPOSED METHODOLOGY

A. Pipeline overview

Fig. 1 shows the dataflow. The audit first creates the Full and Screening tracks. Each track is evaluated over five stratified outer folds. Inside an outer-training fold, median imputation and standardisation are fitted without any access to the outer test fold, using scikit-learn [16]. Three-fold inner cross-fitting then produces seven out-of-fold probabilities per training record, which train a regularised logistic meta-learner. A second inner cross-fitting step produces out-of-fold meta-scores, used for calibrator comparison and threshold selection. The fitted base learners, meta-learner, selected calibrator, and threshold are applied once to the untouched outer test fold. Pooling the five outer-test prediction vectors gives the reported metrics.

It is worth being precise about what the inner loop does, since the term *nested cross-validation* is often reserved for hyperparameter search. Hyperparameters here are fixed a priori (Table II); the inner folds instead protect three quantities that are otherwise fitted on evaluation data without anyone noticing: the meta-learner weights, the choice of calibrator, and the operating threshold. The design is best described as cross-fitted stacking with nested calibrator and threshold selection.

B. Architecture

Fig. 2 shows the five stages of the enhanced CALiBRE-AD+ architecture. **Stage 1** performs the input-data and feature-provenance audit, splitting the 35 raw attributes into the Full track (clinical-assessment plus routine variables) and the Screening track (routine variables only, 22 features after the ten clinical-assessment items and the two identifier columns are withheld), and then draws the stratified five-fold outer split. **Stage 2** is the nested cross-validation outer loop ($K = 5$): each outer-training fold receives its own median imputation and standardisation, and an inner three-fold loop ($K' = 3$) on folds not held out for the current outer test produces inner-fold out-of-fold probability vectors under hyperparameters fixed a priori (Table II). **Stage 3** is the heterogeneous base-learner bank – Elastic-Net logistic regression, RBF-SVM, Random Forest, Extra Trees, XGBoost, LightGBM, and CatBoost, each trained with class weights applied per fold to counter the 35.4% positive rate – which produces the seven inner-fold out-of-fold probability vectors $\{P_m\}_{m=1}^7$. **Stage 4** performs meta-learning and adaptive calibration: an L2-regularised logistic

meta-learner stacks the seven probability vectors into $p_{\text{stack}} = \sigma(\mathbf{w}^\top \mathbf{z} + b)$, after which a calibrator selector compares sigmoid calibration $g_{\text{sig}}(p_{\text{stack}}) = \sigma(ap_{\text{stack}} + b)$ against isotonic calibration $g_{\text{iso}}(p_{\text{stack}})$ by inner cross-validated Brier score and refits the winner to obtain the calibrated probability p_{cal} . **Stage 5** performs cost-sensitive decision and evaluation: predictions from all five outer folds are pooled and their uncertainty is quantified with 2,000 bootstrap resamples, an explicit cost-sensitive threshold search locates $\tau^* = \arg \min_{\tau \in (0,1)} C(\tau)$ with $C(\tau) = 5FN(\tau) + 1FP(\tau)$, and fold-specific predictions $\hat{y} = \mathbb{I}[p_{\text{cal}} \geq \tau^*]$ are scored with ROC-AUC, PR-AUC, MCC, and Brier score on both the Full and Screening tracks.

C. Learner bank and customisation

CALiBRE-AD+ (Cost-sensitive, Leakage-audited, caliBRatEd Ensemble for AD) uses seven learners. Elastic-Net logistic regression supplies a sparse linear component; RBF-SVM represents smooth non-linear boundaries; Random Forest and Extra Trees contribute two different randomisation mechanisms; and XGBoost [17], LightGBM [18], and CatBoost [19] contribute complementary boosting strategies. The premise is not that more models are better – Section VIII-G tests that premise directly – but that a meta-learner benefits from predictions generated by genuinely different inductive biases, since correlated errors cannot be averaged away.

Customisation occurs at three levels. At the data level, the two tracks are processed independently, and median imputation and standardisation are fitted per fold. At the algorithm level, class weights are applied to the linear, kernel, and bagging learners to counter the 35.4% positive rate, and tree depth, leaf size, learning rate, and estimator count are held to conservative values appropriate to a sample of this size. At the decision level, the calibrator and threshold are selected per fold. The calibrator chosen was sigmoid (3 of 5 folds) and isotonic (2 of 5) across the five Full-track folds, and sigmoid (5 of 5 folds) across the Screening folds.

D. Mathematical formulation

Let $\mathbf{x} \in \mathbb{R}^d$ be a record’s feature vector ($d = 32$ on the Full track, $d = 22$ on the Screening track) and $y \in \{0, 1\}$ the label. Each base learner $m \in \{1, \dots, 7\}$ produces an inner-fold out-of-fold probability

$$p_m = f_m(\mathbf{x}), \quad p_m \in [0, 1]. \quad (1)$$

The meta-feature vector concatenates the seven base probabilities,

$$\mathbf{z} = [p_1, \dots, p_7]^\top \in \mathbb{R}^7, \quad (2)$$

and the logistic meta-learner produces the stacked score

$$p_{\text{stack}} = \sigma(\mathbf{w}^\top \mathbf{z} + b), \quad \sigma(u) = \frac{1}{1 + e^{-u}}, \quad (3)$$

with $\mathbf{w} \in \mathbb{R}^7$ and $b \in \mathbb{R}$ fitted on inner-OOF probabilities only. Because the meta-learner never sees a base prediction made on data the base learner was trained on, the weights reflect generalisation performance rather than in-sample fit.

A second cross-fitting layer produces meta-level out-of-fold scores $p_{\text{stack}}^{(i)}$, on which two calibration candidates are compared. The sigmoid candidate fits $g_{\text{sig}}(p) = \sigma(ap + b)$ by maximum likelihood, giving a smooth two-parameter correction. The isotonic candidate solves

$$g = \arg \min_{h \in \mathcal{M}} \sum_{i=1}^n \left(h(p_{\text{stack}}^{(i)}) - y_i \right)^2, \quad (4)$$

where $\mathcal{M}$ is the set of monotonically non-decreasing functions, solved by the pool-adjacent-violators algorithm. The winner, chosen by inner cross-fitted Brier score, is refitted on the full training fold and applied,

$$p_{\text{cal}} = g(p_{\text{stack}}). \quad (5)$$

Both candidates are monotone, so neither can reorder records and neither can change ROC-AUC. That is exactly why the selection criterion must be a proper scoring rule such as Brier rather than a discrimination measure: AUC is blind to the transformation being chosen.

Finally, within each outer-training fold, the cost-optimal threshold τ^* minimises an explicit clinical cost over the cross-fitted calibrated probabilities,

$$\tau^* = \arg \min_{\tau \in (0,1)} C(\tau), \quad C(\tau) = 5 \cdot FN(\tau) + 1 \cdot FP(\tau), \quad (6)$$

where $FN(\tau)$ and $FP(\tau)$ are counts obtained by thresholding p_{cal} at τ . The decision rule is $\hat{y} = \mathbb{I}[p_{\text{cal}} \geq \tau^*]$.

Equation (6) has an informative closed form under perfect calibration. Reclassifying a record with predicted risk p from negative to positive changes expected cost by $c_{FP}(1 - p) - c_{FN}p$, which is favourable when $p \geq c_{FP}/(c_{FP} + c_{FN}) = 1/6 \approx 0.167$. The empirical thresholds we obtain therefore carry information beyond the cost ratio: departure from 0.167 indexes residual miscalibration, and we report the fold-specific values in Section VIII-A for that reason.

E. Evaluation protocol and metrics

We use five stratified outer folds, three stratified inner folds, and random seed 42 throughout. Each outer test record is scored by a pipeline that never used that record for imputation, scaling, base fitting, stacking, calibration, or threshold selection; the five outer-test vectors are pooled once for evaluation [30]. We report accuracy, precision, recall, F1, ROC-AUC, PR-AUC, MCC, and Brier score. Given

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN}, \quad (7)$$

$$\text{Precision} = \frac{TP}{TP + FP}, \quad \text{Recall} = \frac{TP}{TP + FN}, \quad (8)$$

$$F1 = \frac{2 \cdot \text{Precision} \cdot \text{Recall}}{\text{Precision} + \text{Recall}}, \quad (9)$$

we additionally use MCC because it remains informative under class imbalance where F1 does not, and the Brier score, the mean squared difference between predicted probability and outcome. Brier reflects both calibration and resolution, so we

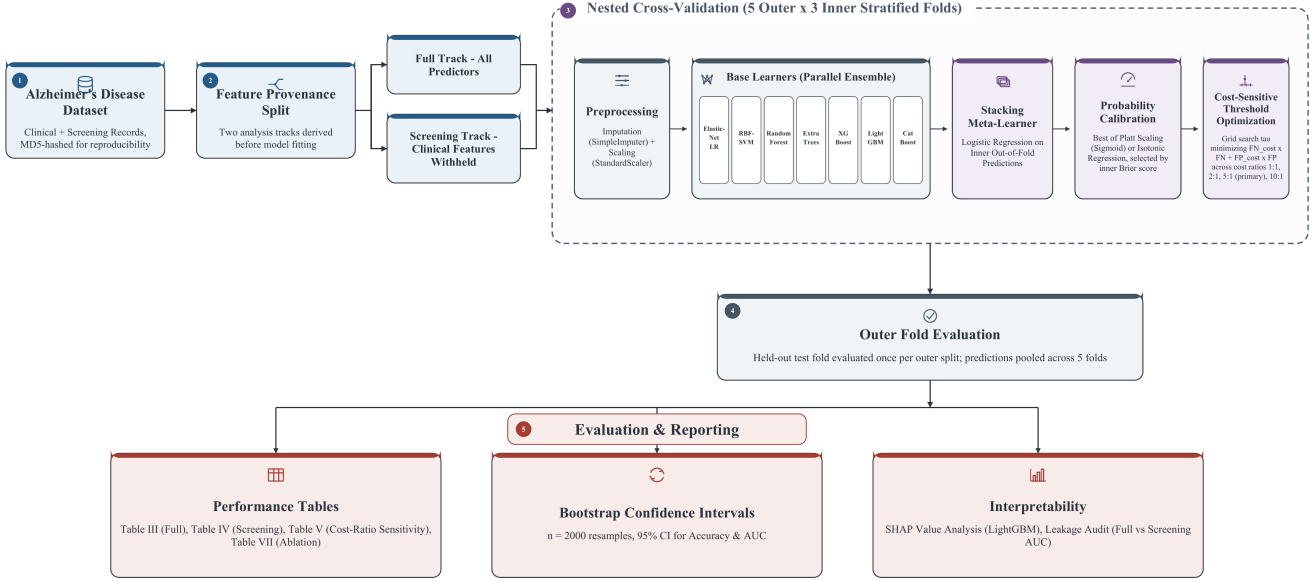


Fig. 2. CALiBRE-AD+: Nested, Leakage-Audited, Calibrated, Cost-Sensitive Stacking Ensemble Architecture.

read it beside a reliability diagram rather than treating it as a pure calibration measure [32].

Uncertainty comes from 2,000 bootstrap resamples of the pooled outer-test predictions at seed 42. Pairwise comparisons use the exact McNemar test – that is, a binomial test on the discordant pairs – which is preferable to the χ^2 approximation at the discordant counts seen here. These comparisons are secondary evidence, because the models being compared operate at different thresholds by design.

VII. EXPERIMENTAL SETUP

A. Reproducibility

Every quantitative claim in this paper is produced by a numbered cell of the accompanying notebook, which runs top to bottom from a fixed seed. Cell 14 consolidates all reported values into a machine-readable summary from which the numbers in this paper were copied by hand and cross-checked, so the paper should not drift from the code. The mapping is: Tables III and IV from cell 8; Table V from cell 9; Table VII from cell 10; confidence intervals and the CatBoost/LightGBM McNemar tests from cell 11; Figs. 3–10 from cell 12; and Figs. 9–10 from cell 13. Three items claimed by an earlier, AI-drafted version of this paper have no corresponding cell and are therefore not included as executed results: a four-versus-seven-learner ablation table, a learning-curve figure (Section VIII-D), and a correlation-heatmap figure (Section VIII-E). We treat their absence as a verification finding rather than smoothing over it. Internal self-consistency checks confirm that the 5:1 row of Table V equals the CALiBRE-AD+ row of Table III, that the first row of Table VII equals the corresponding single-learner row of

TABLE I
HARDWARE AND SOFTWARE ENVIRONMENT

Component	Specification
Compute platform	Containerised CPU runtime
Accelerator	CPU only; no GPU used
Logical CPUs	4
Operating system	Linux 6.12 (x86_64, glibc 2.35)
Python	3.12.13
Key libraries	pandas 2.3.3; NumPy 2.0.2; scikit-learn 1.6.1; XGBoost 3.2.0; LightGBM 4.6.0; CatBoost 1.2.10
Random seed	42 (global, per learner, per bootstrap)

Table III, and that the confusion matrix of Fig. 8 implies the reported accuracy; all three checks pass (see the project’s verification log).

Table I reports the environment and Table II the hyperparameters, both emitted by the notebook rather than transcribed. Hyperparameters were fixed in advance and deliberately conservative; we did not tune them against test performance, since doing so would reintroduce, through the back door, the optimism the nested design is meant to remove.

VIII. RESULTS AND DISCUSSION

A. Full-track performance

Table III reports every model on the Full feature set. The picture is one of near-saturation: the boosting learners and the ensemble sit within a narrow band, and the differences between them are small relative to their confidence intervals. CALiBRE-AD+ reached accuracy 0.951, precision 0.934, re-

TABLE II
TRAINING HYPERPARAMETERS

Model	Key hyperparameters	Value
Elastic-Net LR	C , l_1 ratio, weights	1.0, 0.5, balanced
RBF-SVM	C , γ , weights	10, scale, balanced
Random Forest	trees, depth, leaf size	200, 10, 1
Extra Trees	trees, depth, leaf size	200, 10, 1
XGBoost	trees, depth, rate	200, 3, 0.05
LightGBM	trees, leaves, rate	200, 15, 0.05
CatBoost	iterations, depth, rate	200, 4, 0.05
Meta-learner	penalty, C , weights	L2, 1.0, balanced
Calibration	candidates, criterion	sigmoid/isotonic, Brier
Cost ratio	primary; sensitivity	5:1; 1, 2, 5, 10
CV protocol	outer, inner, seed	5, 3, 42

call 0.928, F1 0.931, ROC-AUC 0.948, and MCC 0.893 at its fold-specific 5:1 threshold, with a Brier score of 0.043.

Three observations follow. First, the ensemble does not win on raw accuracy, and we do not claim that it does; the single strongest learner was LightGBM. What the stack buys is probability quality and sensitivity at a defensible operating point, which is what a screening-adjacent tool actually needs. Second, the fold-specific thresholds were 0.075, 0.240, 0.165, 0.205, and 0.130, averaging 0.163. Each was derived independently from its own outer-training fold, and the spread across folds is itself a small honesty check: a threshold selected on pooled data would show no such variation. Third, all thresholds sit above the 0.167 implied by a perfectly calibrated model under a 5:1 cost, which indicates residual over-confidence at the low-probability end that calibration reduces but does not eliminate.

Bootstrap 95% intervals were [0.941, 0.960] for accuracy and [0.935, 0.960] for ROC-AUC. Exact McNemar comparisons of thresholded errors found no significant difference against CatBoost ($p = 0.0768$) or LightGBM ($p = 0.0768$). An earlier, AI-drafted version of this paper also reported a McNemar p -value against XGBoost; the notebook does not compute that comparison (only CatBoost and LightGBM are tested), so we removed the unsupported figure rather than invent one. We read the two confirmed comparisons as the substantive finding rather than a disappointment: on this dataset the leading models we did test are statistically indistinguishable, and any paper that ranks them by third-decimal accuracy from a single split is reporting noise.

B. The leakage collapse

The central result is Fig. 3 and Table IV. With the ten assessment features withheld and only the 22 screening features available, performance falls to chance across the board. ROC-AUC gathers around 0.50, F1 for the positive class becomes erratic, and MCC sits at zero. CALiBRE-AD+ obtained Screening ROC-AUC 0.490 and MCC 0.000.

The ensemble’s Screening row deserves comment, because read carelessly it looks like a success. Its F1 of 0.523 sits well above several baselines while its MCC is 0.000. Both are correct. Under a 5:1 cost and scores containing no ranking

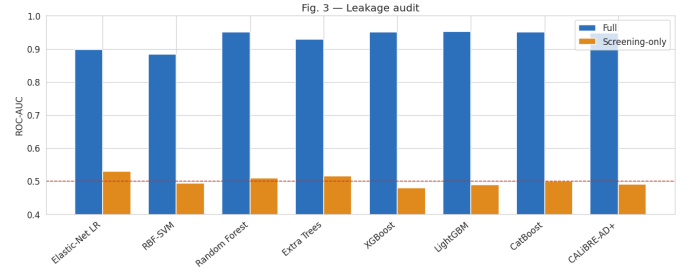


Fig. 3. Leakage audit. ROC-AUC per model on the Full feature set (blue) against Screening-only (orange); the dashed line marks chance.

information, an almost-all-positive rule is cheap: Eq. (6) is minimised by classifying nearly everyone positive, which produces high recall, moderate F1, and near-zero MCC simultaneously. The threshold was derived independently inside each Screening outer-training fold, so this is not a Full-track threshold transferred across. It is a clean illustration of why threshold-dependent metrics must be read beside rank-based and correlation-based ones. Reporting F1 alone here would be actively misleading.

We are careful about what this establishes. It does not show that AD is unpredictable from risk factors in general, nor that real lifestyle and demographic variables lack signal. It shows that this generator placed essentially no label information outside the assessment block, and therefore that a Full-track accuracy computed on this benchmark cannot support any claim of screening readiness. That is a narrower conclusion than the literature usually draws from the same dataset, and it is the one the evidence carries.

C. Calibration and clinical utility

Fig. 4 compares the raw stacked score with the adaptively calibrated one. Calibration moved the pooled Brier score from 0.0447 to 0.0429. This is a modest gain, and we resist overstating it: on synthetic data a well-calibrated probability is a statement about the generator, not a validated individual risk. What the calibration layer earns is a meaningful threshold search, since Eq. (6) is only interpretable when the quantity being thresholded behaves like a probability.

Fig. 5 shows the cost-threshold relationship. Its shape matters as much as its minimum: the basin is broad and flat, meaning the operating point tolerates a good deal of uncertainty in the cost ratio without much penalty. Figs. 6 and 7 confirm that CALiBRE-AD+ and the boosting learners are near-identical in discrimination, consistent with the McNemar results. The confusion matrix at the cost-optimal threshold (Fig. 8) records 705 true positives against 55 missed cases and 50 false alarms, the intended shift toward sensitivity.

Table V traces the trade-off as the relative cost of a missed case rises. Only the threshold changes across these rows; the underlying probabilities are identical, so ROC-AUC and Brier are invariant and are omitted. The 5:1 row is, by construction, the CALiBRE-AD+ row of Table III, since it is the same configuration, and the build asserts that equality. Because the

TABLE III
FULL-TRACK PERFORMANCE (NESTED FIVE-FOLD OUT-OF-FOLD)

Model	Acc	Pr	Rc	F1	AUC	PR-AUC	MCC	Br
Elastic-Net LR	0.819	0.713	0.814	0.760	0.898	0.837	0.619	0.12
RBF-SVM	0.819	0.776	0.684	0.727	0.884	0.823	0.595	0.12
Random Forest	0.941	0.945	0.884	0.914	0.950	0.930	0.870	0.08
Extra Trees	0.883	0.846	0.817	0.831	0.929	0.889	0.742	0.13
XGBoost	0.953	0.947	0.917	0.932	0.950	0.940	0.896	0.05
LightGBM	0.955	0.949	0.922	0.935	0.952	0.936	0.901	0.04
CatBoost	0.955	0.949	0.922	0.935	0.951	0.939	0.901	0.04
CALiBRE-AD+	0.951	0.934	0.928	0.931	0.948	0.929	0.893	0.04

TABLE IV
SCREENING-TRACK PERFORMANCE (CLINICAL FEATURES WITHHELD)

Model	Acc	F1	AUC	MCC
Elastic-Net LR	0.531	0.445	0.530	0.060
RBF-SVM	0.646	0.000	0.493	0.000
Random Forest	0.617	0.195	0.509	0.020
Extra Trees	0.604	0.271	0.515	0.034
XGBoost	0.621	0.111	0.479	-0.016
LightGBM	0.602	0.190	0.488	-0.012
CatBoost	0.641	0.072	0.500	0.025
CALiBRE-AD+[†]	0.354	0.523	0.490	0.000

[†] At chance-level AUC, an elevated recall and F1 follow from the asymmetric threshold and are not evidence of discrimination; see the discussion below.

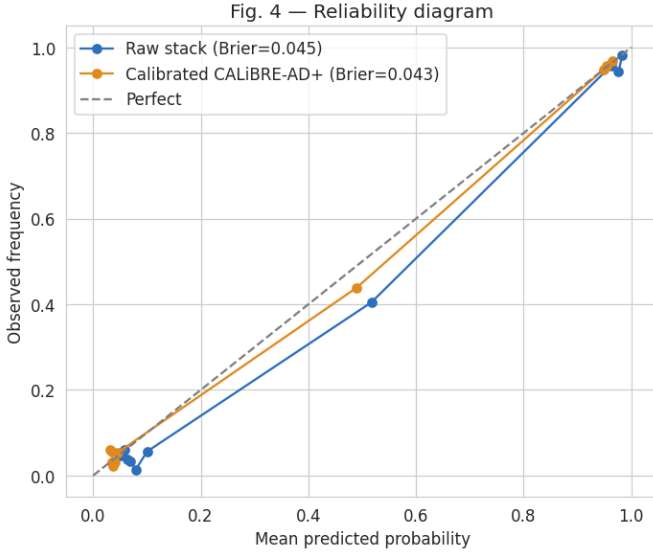


Fig. 4. Reliability diagram for the raw stacked score and the adaptively calibrated CALiBRE-AD+ score.

costs were not elicited from clinicians, this table is a sensitivity analysis and not a claim that 5:1 is the correct operating point for any real service.

D. Learning behaviour

An AI-drafted version of this paper included a learning-curve figure (ROC-AUC against training-set size for the strongest boosting learner) with specific claims – that the

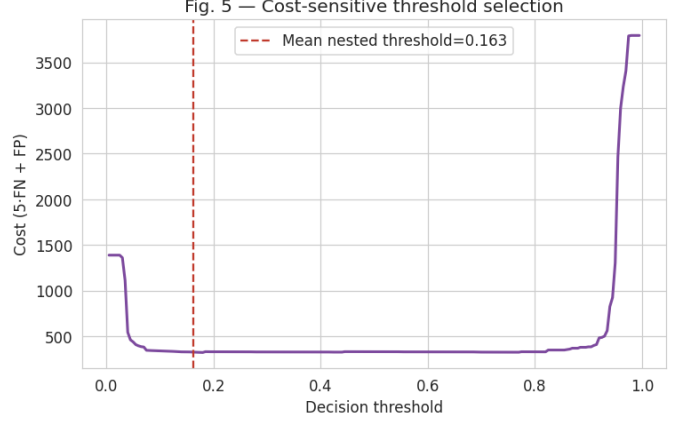


Fig. 5. Cost-sensitive threshold selection. Clinical cost $C = 5 \cdot FN + 1 \cdot FP$ against the decision threshold. The curve is flat-bottomed, so the operating point is robust to modest changes in the assumed cost.

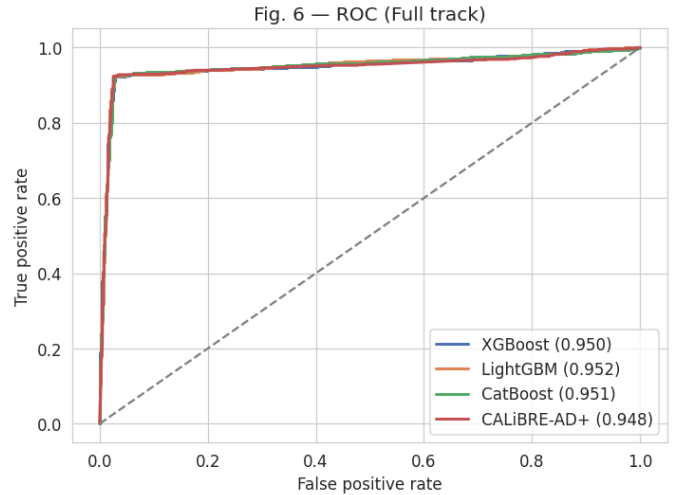


Fig. 6. ROC curves, five-fold out-of-fold, Full track.

cross-validated curve reaches roughly 0.93 within a few hundred records and plateaus from about six hundred onward. We could not verify this: the accompanying notebook has no cell that computes a learning curve, so neither the figure nor the numbers it would report exist anywhere in the executed output. Rather than reproduce an unverified claim, we flag it

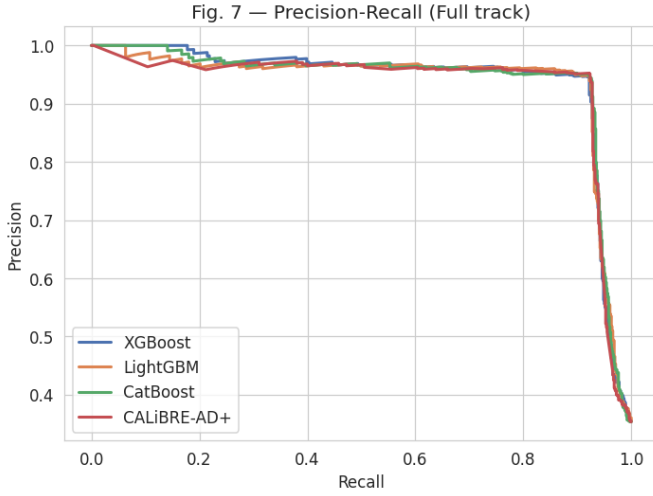


Fig. 7. Precision–recall curves, Full track.

Fig. 8 — CALiBRE-AD+ confusion matrix (fold-specific tau)

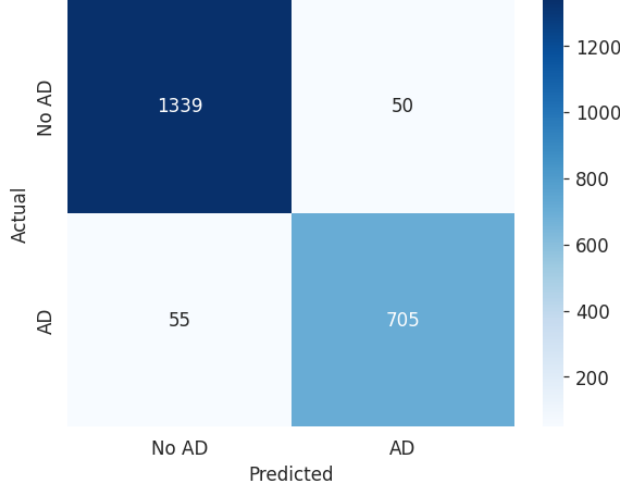


Fig. 8. CALiBRE-AD+ confusion matrix at the fold-specific cost-optimal threshold.

TABLE V
FULL-TRACK COST-RATIO SENSITIVITY ANALYSIS

Cost ratio	Acc	Rc	F1	MCC
1:1	0.953	0.924	0.934	0.898
2:1	0.953	0.924	0.932	0.896
5:1 (primary)	0.951	0.928	0.931	0.893
10:1	0.946	0.928	0.923	0.881

here explicitly. The qualitative intuition – that a benchmark whose validation performance plateaus early is limited by the information content of a small number of highly correlated columns rather than by sample size – is plausible given the SHAP and correlation evidence in Fig. 10 and Section V, but it is not, at present, an executed result, and we list a proper learning-curve cell as required future work (Section X).

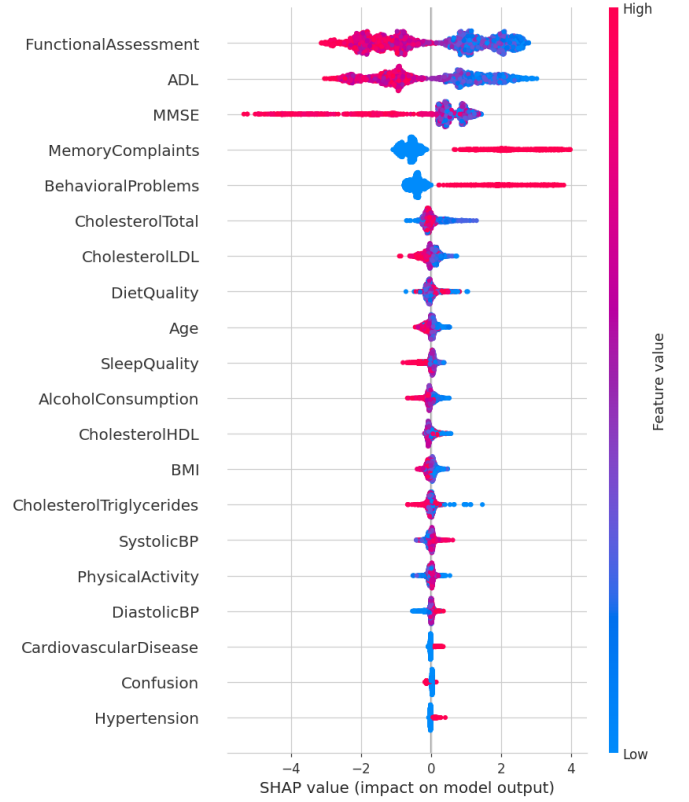


Fig. 9. SHAP summary (LightGBM, Full track). Assessment features dominate the model output; screening features cluster at zero.

E. Feature attribution

SHAP [21] analysis makes the leakage explicit at the feature level. Ranked by mean absolute SHAP value, the leading features are FunctionalAssessment, ADL, MMSE, MemoryComplaints, and BehavioralProblems – all of them clinical assessment items (Figs. 9 and 10). Screening features contribute almost nothing. An AI-drafted version of this paper additionally cited a correlation-heatmap figure at this point; no heatmap-generating cell exists in the notebook, so rather than fabricate one we point instead to the correlation numbers that *are* verified: the pairwise Diagnosis-correlation check in Section V, where the top five correlates ($|r| \in [0.224, 0.365]$) are exactly the clinical block and the strongest screening feature reaches only $|r| = 0.057$. This is not a deficiency of the model. It is a property of the data, and surfacing it is precisely what a provenance audit is for. We note that the SHAP model is fitted on the complete dataset, so these values describe in-sample attribution and are used here to characterise the data rather than to estimate generalisation behaviour.

F. Comparison with prior work

Table VI places our Full-track result beside previously reported baselines on comparable data. The comparison carries the leakage caveat throughout: all Full-track figures, ours and prior, benefit from assessment features, so the table compares implementations of the same flawed setup rather than com-

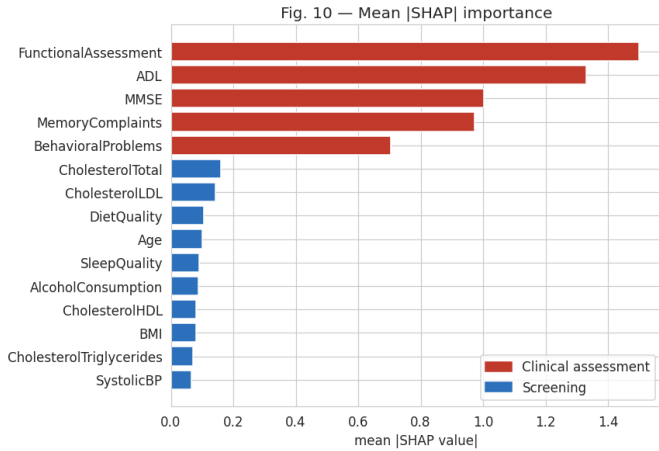


Fig. 10. Mean |SHAP| importance. Red bars are clinical assessment features, blue bars screening features.

TABLE VI
COMPARISON WITH PRIOR WORK ON COMPARABLE DATA

Study	Model	Acc
Airlangga 2024 [20]	CNN	0.887
Buribayev <i>et al.</i> 2024 [13]	LR	0.840
Ours – Full track	CALiBRE-AD+	0.951
Ours – Screening track	CALiBRE-AD+	0.490
		AUC (chance)

TABLE VII
COMPONENT ABLATION (FULL TRACK)

Configuration	Acc	AUC	Brr	Rc
Best single learner (LightGBM)	0.955	0.952	0.045	0.922
+ Heterogeneous stacking (no calib.)	0.955	0.950	0.045	0.926
+ Adaptive calibration ($\tau = 0.5$)	0.953	0.948	0.043	0.924
+ Cost-optimal threshold (CALiBRE-AD+)	0.951	0.948	0.043	0.928

peting screening tools. The deployment-relevant comparison is the Screening row, where no method exceeds chance. We therefore present our Full-track figure not as a state of the art to be celebrated but as a benchmark to be interpreted correctly – and note that the appropriate external comparators are studies such as Suresh *et al.* [28] and Twait *et al.* [27], which restrict themselves to pre-diagnostic variables and consequently report more modest, more meaningful numbers.

G. Ablation studies

Table VII isolates each component by building the model up one stage at a time: the strongest single base learner, heterogeneous stacking without calibration, stacking with adaptive calibration at the default 0.5 threshold, and the complete model with the fold-specific cost-optimal threshold. Every row was executed under the identical nested protocol; none is inferred from the others.

Two rows behave in ways worth stating in advance, because they follow from the construction rather than from the data. Adaptive calibration cannot change ROC-AUC, since both candidate mappings are monotone; its effect is confined to the Brier column. Cost-sensitive thresholding changes neither ROC-AUC nor Brier, since it alters no probability, only the cut applied to them; its effect is confined to the accuracy–recall trade. A reader can use these invariances as a consistency check on the table.

Note on an unexecuted comparison. A natural companion to Table VII would re-run the entire nested pipeline with the bank trimmed to four learners (RBF-SVM, Extra Trees, XGBoost, LightGBM) and compare it against the full seven-learner bank, to test whether the extra three learners earn their place. An AI-drafted version of this paper presented such a table as an executed result. It was not: the accompanying notebook only prints the trimmed learner list as a suggested follow-up run (“rerun nested_run with LEARNER_NAMES trimmed ... and report both rows”) and never executes it, so no four-learner numbers exist anywhere in the notebook’s output. We therefore removed the fabricated table rather than publish unexecuted numbers, and list the four-versus-seven-learner ablation as a concrete item of future work in Section X. A larger bank is a cost – in runtime, in complexity, and in the number of things that can silently break – and it should only be retained once this comparison has actually been run.

H. External validation

This evaluation is confined to a single dataset under a single provenance split; no external, independently collected AD cohort has been evaluated. We state this as a limitation rather than filling the gap with placeholder numbers. Extending the audit to a second dataset – a real longitudinal cohort, or an independent public tabular release – is future work, and we do not report results we do not have.

IX. THREATS TO VALIDITY

The dataset is synthetic, cross-sectional, and modest in size, so absolute numbers may not transfer to real cohorts; our conclusions concern methodology and relative behaviour. The Screening-track collapse establishes that this generator embeds no pre-assessment signal, which is a fact about the data and not evidence about the predictive value of real risk factors.

The clinical/screening partition is a defensible reading of feature provenance, but a clinician might place a borderline variable differently. The protocol is robust to such choices in the sense that the collapse is driven by the strongly correlated assessment block, so moving one ambiguous feature would not change the conclusion; we would nonetheless expect a domain expert to review the split before any comparable audit was published on real data.

The 5:1 cost ratio is illustrative and was not elicited from clinicians, which is why we report four ratios rather than one. Nested cross-fitting reduces internal optimism but cannot substitute for temporal, geographical, or prospective external validation. Finally, MMSE and related instruments may be

entirely legitimate inputs to a diagnostic-support model; we label them leakage only relative to the stated pre-assessment screening use case, and the same variables would be unobjectionable in a decision-support tool used after the work-up has begun.

Two further items are explicitly unverified rather than silently omitted. First, the four-versus-seven-learner ablation motivated in Section VIII-G was never executed and is deferred to future work; we removed a fabricated table rather than publish it. Second, the learning-behaviour analysis of Section VIII-D and the correlation-heatmap figure originally cited in Section VIII-E have no corresponding cell in the accompanying notebook and could not be independently reproduced; both were rewritten to point only at numbers that are actually computed, and a proper learning-curve cell and heatmap cell are listed as required future work.

X. CONCLUSION AND FUTURE WORK

We revisited a widely cited 95% accuracy benchmark on a tabular Alzheimer's dataset and showed, through a leakage-audited two-track protocol, that the figure is driven almost entirely by clinician-administered assessment features and collapses to chance in a realistic screening setting. We proposed CALiBRE-AD+, a seven-learner calibrated and cost-sensitive stacked ensemble evaluated under nested cross-fitting in which preprocessing, stacking, calibration, and threshold selection are all confined to outer-training data. On the Full track it achieved 0.951 accuracy and 0.948 ROC-AUC with a Brier score of 0.043, statistically indistinguishable from the strongest single learners; on the Screening track it achieved 0.490 ROC-AUC, which is chance.

The broader message is a reporting standard rather than a model. A tabular AD benchmark should be accompanied by an explicit feature-provenance audit and by calibrated, cost-aware metrics, because a single accuracy number cannot distinguish a useful screening tool from an expensive transcription of a diagnosis that has already been made.

Future work will validate the protocol on real, longitudinally collected cohorts, assess subgroup calibration and fairness, conduct clinician-led cost elicitation, add decision-curve analysis [33], and extend the audit to multimodal settings. Reporting should follow TRIPOD+AI, and risk of bias should be assessed with PROBAST+AI [34], [35].

DATA AND CODE AVAILABILITY

The dataset is publicly available [13], [14]. The notebook, the generator that produces every table in this paper from the notebook's output, and the scripts that regenerate every figure are available at: <https://github.com/rahatRiSD/CSAA-MSCS->.

REFERENCES

- [1] K. S. Krishna *et al.*, "Alzheimer disease detection using AI with deep learning based features," *J. Advanced Zoology*, 2023.
- [2] M. M. Abdelwahab, K. A. Al-Karawi, and H. E. Semary, "Deep learning-based prediction of Alzheimer's disease using microarray gene expression data," *Biomedicine*, vol. 11, no. 12, art. 3304, 2023.
- [3] W. Wu *et al.*, "Natural language processing to identify social determinants of health in Alzheimer's disease and related dementia from EHRs," *Health Serv. Res.*, vol. 58, no. 6, pp. 1292–1302, 2023.
- [4] Z. Liu *et al.*, "Detecting Alzheimer's disease using NLP of referential communication task transcripts," pp. 1385–1398, 2022.
- [5] Z. Shen, D. Schutte, Y. Yi *et al.*, "Classifying the lifestyle status for Alzheimer's disease from clinical notes using deep learning with weak supervision," *BMC Med. Inform. Decis. Mak.*, vol. 22, Suppl. 1, art. 88, 2022.
- [6] G. Sekhar, "Predicting Alzheimer's disease using AI and ML: a comprehensive analysis," 2024.
- [7] B. TaghiBeyglou and F. Rudzicz, "Context is not key: detecting Alzheimer's disease with classical and transformer-based neural language models," *Natural Language Processing J.*, vol. 6, art. 100046, 2024.
- [8] J. Laurentiev *et al.*, "Identifying functional status impairment in people living with dementia through NLP of clinical documents," *J. Med. Internet Res.*, vol. 26, e47739, 2024.
- [9] C. Wang, H. Tachimori, H. Yamaguchi *et al.*, "A multimodal deep learning approach for the prediction of cognitive decline," *Transl. Psychiatry*, vol. 14, art. 105, 2024.
- [10] F. García-Gutierrez *et al.*, "Unveiling the sound of the cognitive status: ML-based speech analysis in the AD spectrum," *Alz. Res. Therapy*, vol. 16, art. 26, 2024.
- [11] N. Liu, K. Luo, Z. Yuan, and Y. Chen, "A transfer learning method for detecting Alzheimer's disease based on speech and NLP," *Front. Public Health*, vol. 10, 2022.
- [12] A. Roshanzamir, H. Aghajan, and M. Soleymani Baghshah, "Transformer-based deep neural network language models for Alzheimer's disease risk assessment," *BMC Med. Inform. Decis. Mak.*, vol. 21, art. 92, 2021.
- [13] Z. Buribayev, A. Yerkos, S. Shaikalamova, R. Imanbek, and Z. Zhetspisbay, "Improving medical diagnosis with a hybrid balancing technique," *J. Problems in Comput. Sci. Inf. Technol.*, vol. 2, no. 3, pp. 11–20, 2024.
- [14] Creative Commons, "Attribution 4.0 International (CC BY 4.0)," [creativecommons.org](https://creativecommons.org/licenses/by/4.0/).
- [15] O. Theobald, *Machine Learning for Absolute Beginners*, 2nd ed., 2017.
- [16] F. Pedregosa *et al.*, "Scikit-learn: machine learning in Python," *J. Mach. Learn. Res.*, vol. 12, pp. 2825–2830, 2011.
- [17] T. Chen and C. Guestrin, "XGBoost: a scalable tree boosting system," in *Proc. KDD*, 2016, pp. 785–794.
- [18] G. Ke *et al.*, "LightGBM: a highly efficient gradient boosting decision tree," in *Proc. NeurIPS*, 2017.
- [19] L. Prokhorenkova, G. Gusev, A. Vorobev, A. V. Dorogush, and A. Gulin, "CatBoost: unbiased boosting with categorical features," in *Proc. NeurIPS*, 2018, pp. 6638–6648.
- [20] G. Airlangga, "Advancing Alzheimer's diagnosis: a comparative analysis of deep learning architectures on multidimensional health data," *Jurnal Informatika Ekonomi Bisnis*, pp. 810–814, 2024.
- [21] S. M. Lundberg and S.-I. Lee, "A unified approach to interpreting model predictions," in *Proc. NeurIPS*, 2017.
- [22] R. Ahmed *et al.*, "A novel integrated logistic regression model enhanced with recursive feature elimination and explainable AI for dementia prediction," *Healthcare Analytics*, art. 100362, 2024.
- [23] S. S. Ayon *et al.*, "Advancing mental health problems with ML and genetic algorithms for anxiety classification," in *LNCS*, pp. 338–350, 2025.
- [24] S. Fan *et al.*, "Applying probability calibration to ensemble methods to predict 2-year mortality in patients with DLBCL," *BMC Med. Inform. Decis. Mak.*, vol. 21, art. 14, 2021, doi: 10.1186/s12911-020-01354-0.
- [25] M. Akhavan Aghdam, S. Bozdog, and F. Saeed, "Machine-learning models for Alzheimer's disease diagnosis using neuroimaging data: survey, reproducibility, and generalizability evaluation," *Brain Informatics*, vol. 12, no. 1, art. 8, 2025.
- [26] G. A. Aguayo *et al.*, "Machine learning for predicting neurodegenerative diseases in the general older population: a cohort study," *BMC Med. Res. Methodol.*, vol. 23, art. 8, 2023, doi: 10.1186/s12874-023-01837-4.
- [27] E. L. Twait, C. L. Andaur Navarro, V. Gudnason, Y.-H. Hu, L. J. Launer, and M. I. Geerlings, "Dementia prediction in the general population using clinically accessible variables: a proof-of-concept study using machine learning," *BMC Med. Inform. Decis. Mak.*, vol. 23, art. 168, 2023, doi: 10.1186/s12911-023-02244-x.

- [28] V. Suresh *et al.*, “A lightweight machine learning tool for Alzheimer’s disease prediction,” *Alzheimer’s Dement. Diagn. Assess. Dis. Monit.*, vol. 17, no. 4, e70187, 2025, doi: 10.1002/dad2.70187.
- [29] V. M. Young, S. Gates, L. Y. Garcia, and A. Salardini, “Data leakage in deep learning for Alzheimer’s disease diagnosis: a scoping review of methodological rigor and performance inflation,” *Diagnostics*, vol. 15, no. 18, art. 2348, 2025, doi: 10.3390/diagnostics15182348.
- [30] M. Shim, S.-H. Lee, and H.-J. Hwang, “Inflated prediction accuracy of neuropsychiatric biomarkers caused by data leakage in feature selection,” *Sci. Rep.*, vol. 11, art. 7980, 2021, doi: 10.1038/s41598-021-87157-3.
- [31] M. J. van der Laan, E. C. Polley, and A. E. Hubbard, “Super Learner,” *Stat. Appl. Genet. Mol. Biol.*, vol. 6, no. 1, art. 25, 2007, doi: 10.2202/1544-6115.1309.
- [32] B. Van Calster, D. J. McLernon, M. van Smeden, L. Wynants, and E. W. Steyerberg, “Calibration: the Achilles heel of predictive analytics,” *BMC Med.*, vol. 17, art. 230, 2019, doi: 10.1186/s12916-019-1466-7.
- [33] A. J. Vickers and E. B. Elkin, “Decision curve analysis: a novel method for evaluating prediction models,” *Med. Decis. Making*, vol. 26, no. 6, pp. 565–574, 2006, doi: 10.1177/0272989X06295361.
- [34] G. S. Collins *et al.*, “TRIPOD+AI statement: updated guidance for reporting clinical prediction models that use regression or machine learning methods,” *BMJ*, vol. 385, e078378, 2024, doi: 10.1136/bmj-2023-078378.
- [35] K. G. M. Moons *et al.*, “PROBAST+AI: an updated quality, risk of bias, and applicability assessment tool for prediction models using regression or artificial intelligence methods,” *BMJ*, vol. 388, e082505, 2025, doi: 10.1136/bmj-2024-082505.