
TDN Advance | promising corrections, no confirmed solver-cost advantage

Fresh confirmation: 64 independent fields • 3 paired training seeds • 32² and 64² grids • RTX 4090

A Same-schedule RMS accuracy

Control error / Ours two-basis error: higher favors Ours; 1 = equal. Color shows ratio, text shows the frozen claim verdict.

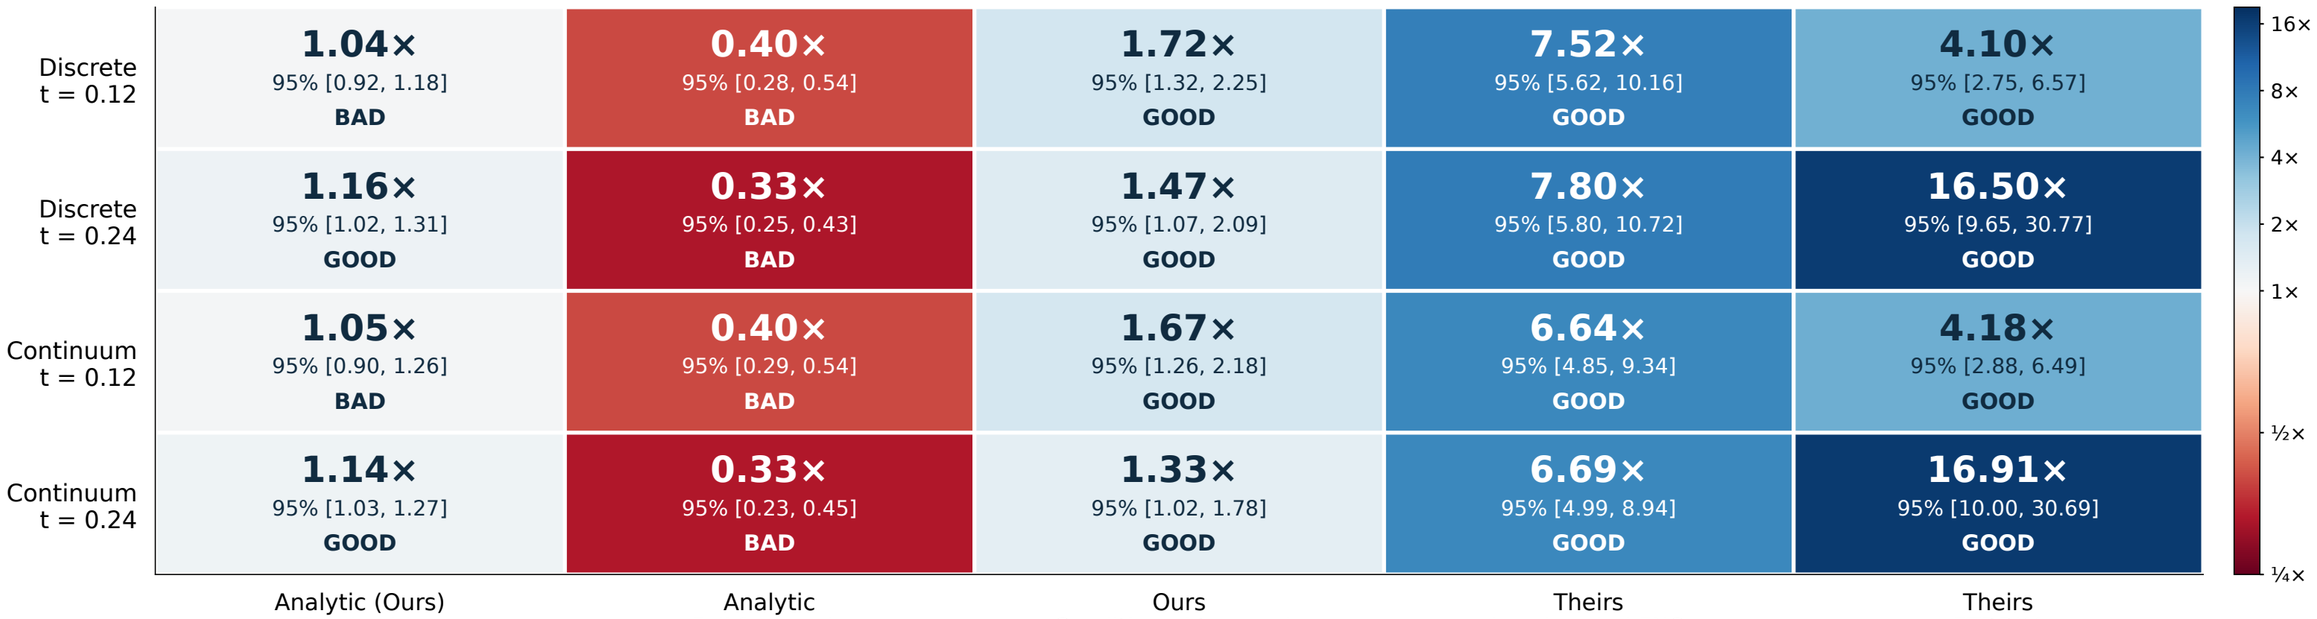


GOOD: ratio ≥1.10, interval lower bound >1, ≤5 percentage-point pass-coverage loss. BAD: criterion unmet, not necessarily worse.

Intervals: descriptive paired field/seed bootstrap, 1,000 replicates, unadjusted for multiple comparisons; repeated grids are not independent samples.

B Accuracy coverage under validation-locked schedules

Higher coverage is better. A field must pass joint RMS/max ≤2×10⁻⁵ across its paired grids and training seeds; dashed line = 95% requirement.

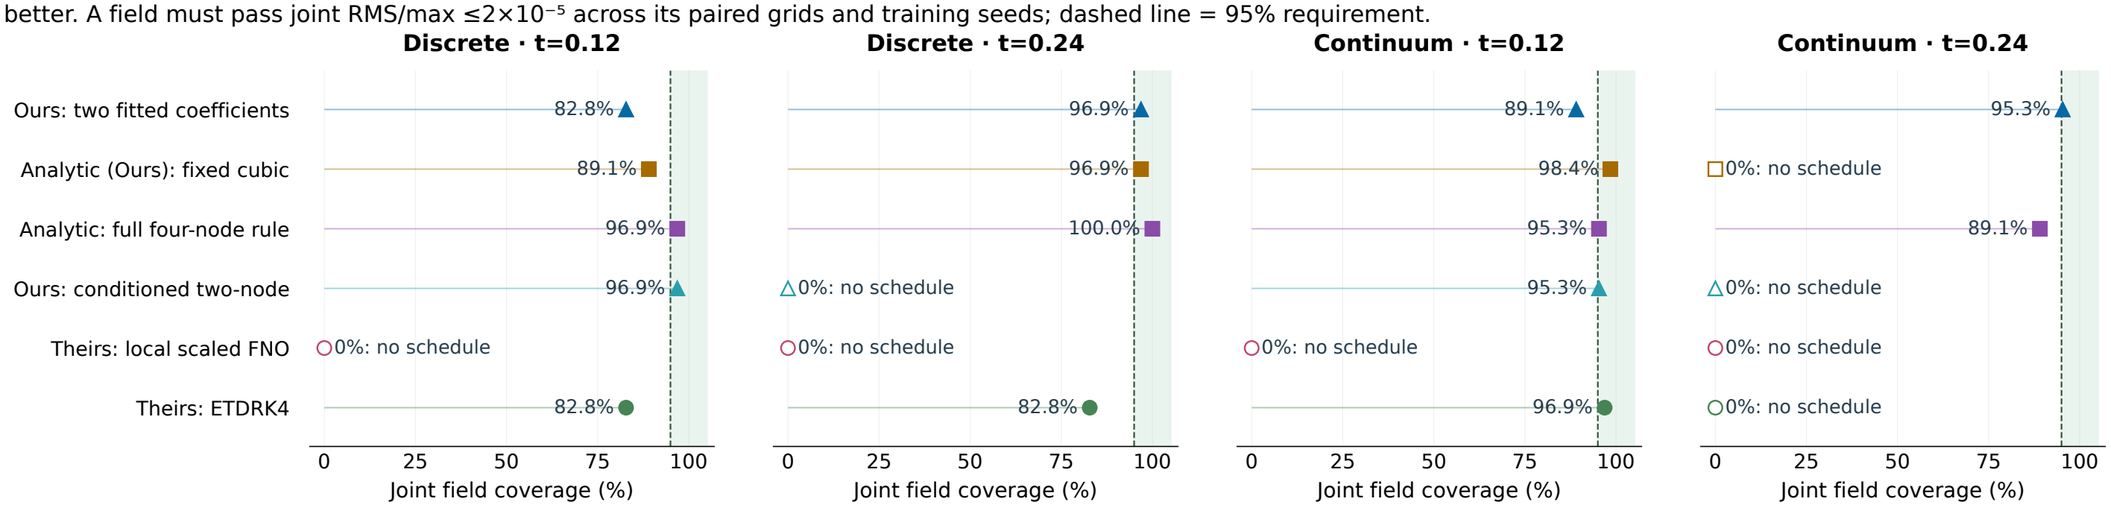

Cost claims: 0 GOOD · 14 BAD · 6 NA. Conditional timing ratios cannot rescue insufficient coverage; no deployed-policy advantage is established.

Open markers denote no feasible schedule selected on validation (operational coverage 0%), not a measurement of all possible solver configurations.

Triangles: Ours learned models. Squares: analytic controls (including our fixed cubic). Circles: Theirs. Local FNO control is not a published-paper reproduction.

Source a764670 · fedora-advance-full-20261011T001715 · exact primary claims retained in primary-results-data.json · 128² belongs to separate scaling only