

Name: Rahul Gupta

Reg No: 2547242


Class: 4 MCA B

Lab 4


Aim: Launch EC2 Instance with User Data

Steps:


1. Start the Lab and click when AWS turns green

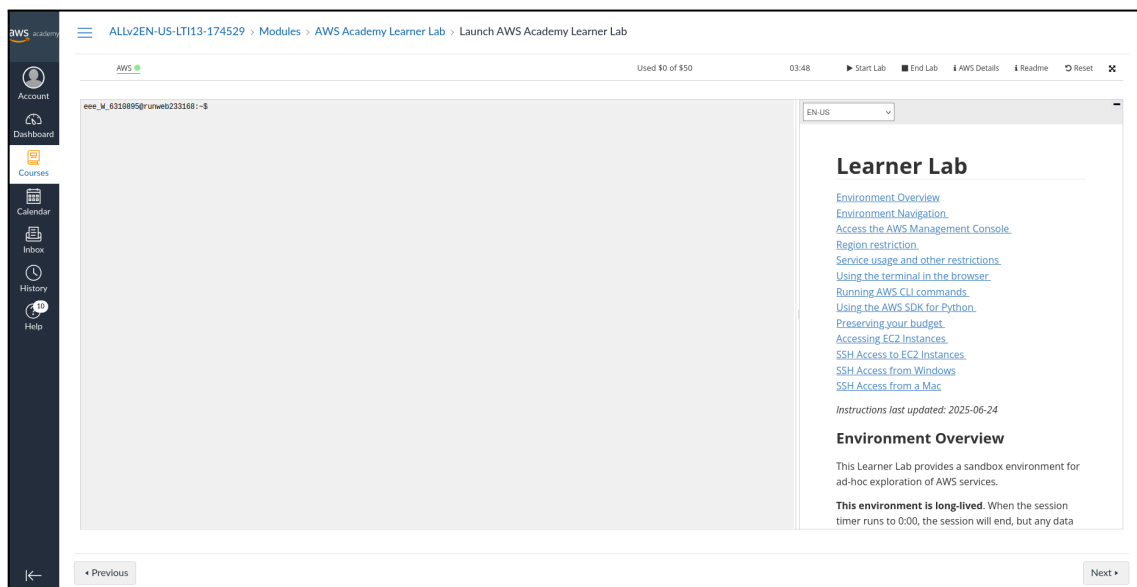


2. Search EC2 in the search bar and select it

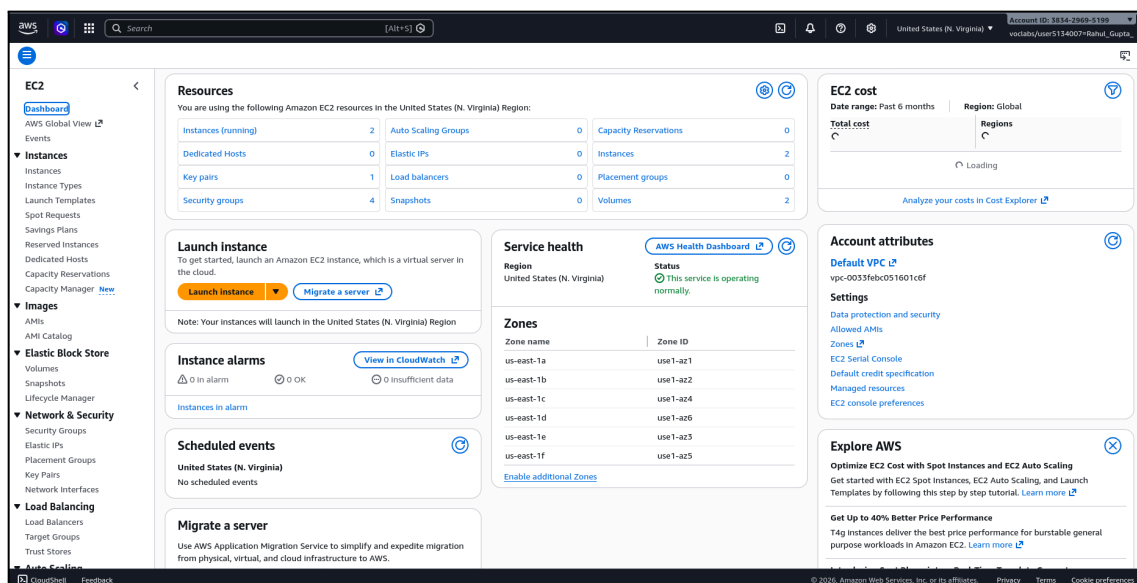


3. Select Launch Instance and give any name to the instance

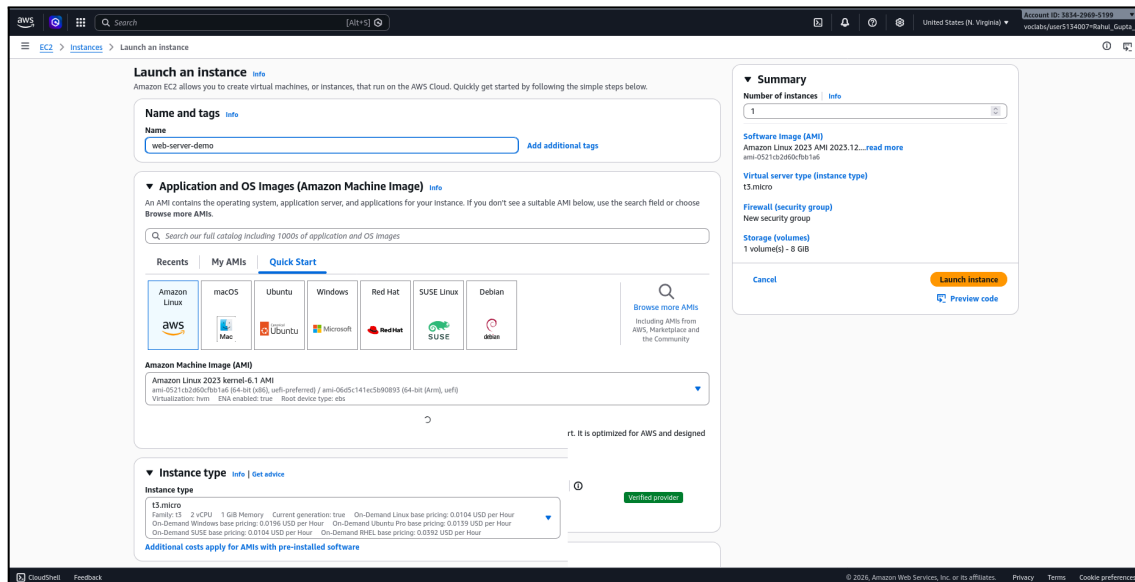


4. Select AMI-Amaon Linux 2023

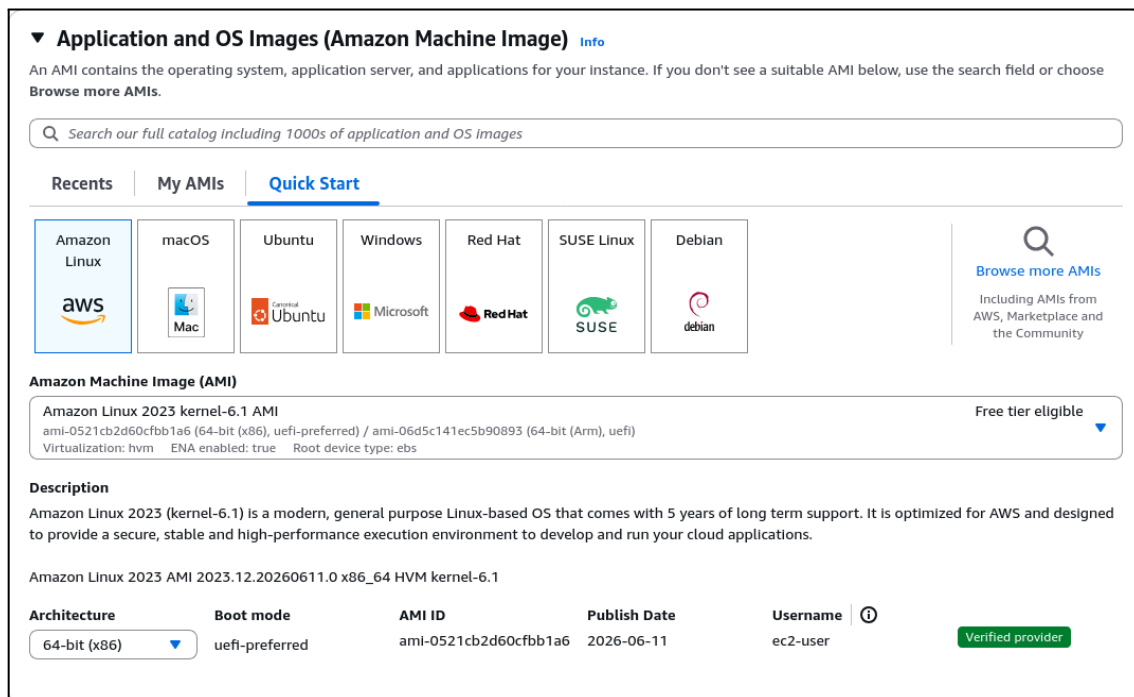


5. Select Instance type - t3.micro

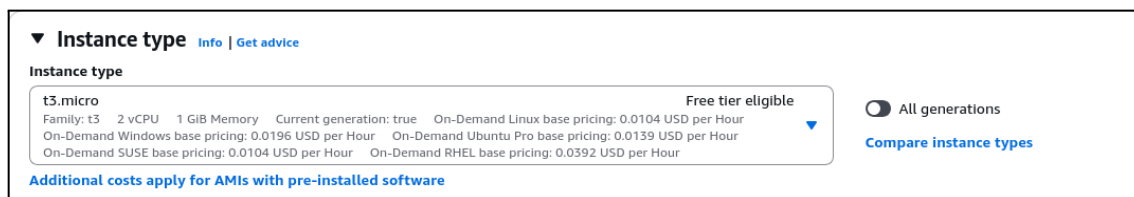

6. Select - create a new key pair and then select .pem for Windows, and it will be downloaded into the system

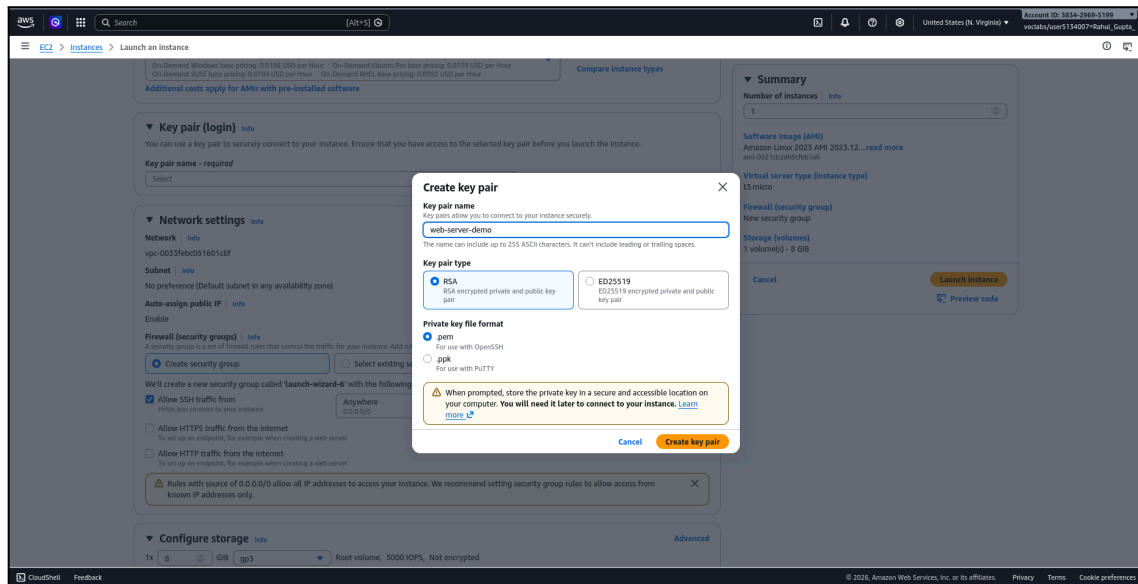

7. Security group → click allow HTTP traffic
Under network settings → Edit → Add inbound rule:
Type: HTTP; Port: 80; Source: 0.0.0.0/0

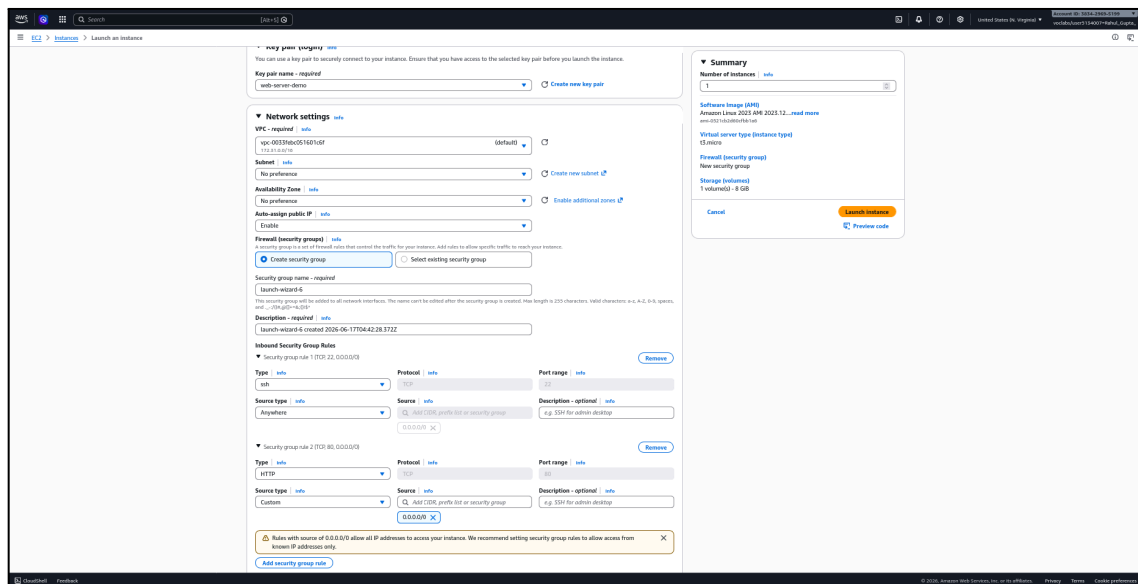

8. Select Advanced Details and Enter User Data

```
#!/bin/bash
yum update -y
yum install httpd -y
systemctl start httpd
systemctl enable httpd
echo "<html>
<h1>Welcome to My EC2 Server</h1>
<p>Web page deployed using User Data Script</p>
<p>Deployment Date: $(date)</p>
</html>" > /var/www/html/index.html
```

The screenshot shows the AWS Management Console interface for launching an EC2 instance. The 'Launch an instance' page is active, with the 'User data' field containing a bash script. The 'Summary' panel on the right provides a quick overview of the configuration: 1 instance, Amazon Linux 2023 AMI, t3.micro instance type, New security group, and 1 volume (8 GiB). The 'Launch instance' button is highlighted in orange.

Metadata IPv6 endpoint | Info
Select
Metadata version | Info
V2 only (token required)
⚠ For V2 requests, you must include a session token in all instance metadata requests. Applications or agents that use V1 for instance metadata access will break.
Metadata response hop limit | Info
2
Allow tags in metadata | Info
Select

User data - optional | Info
Upload a file with your user data or enter it in the field.
[Choose file](#)

```
#!/bin/bash
yum update -y
yum install httpd -y
systemctl start httpd
systemctl enable httpd
echo "<html>
<h1>Welcome to My EC2 Server</h1>
<p>Web page deployed using User Data Script</p>
<p>Deployment Date: $(date)</p>
</html>" > /var/www/html/index.html
```


☐ User data has already been base64 encoded

Summary
Number of instances | Info
1
Software image (AMI)
Amazon Linux 2023 AMI 2023.12....[read more](#)
ami-0521cb2d60cfbb1a6
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
[Cancel](#) [Launch instance](#) [Preview code](#)


9. Click Run Instance

The screenshot is a close-up of the 'Summary' panel from the previous image. It clearly displays the configuration details: 1 instance, Amazon Linux 2023 AMI, t3.micro instance type, New security group, and 1 volume (8 GiB). The 'Launch instance' button is highlighted in orange, and the 'Preview code' link is visible below it.

Summary
Number of instances | Info
1
Software image (AMI)
Amazon Linux 2023 AMI 2023.12....[read more](#)
ami-0521cb2d60cfbb1a6
Virtual server type (instance type)
t3.micro
Firewall (security group)
New security group
Storage (volumes)
1 volume(s) - 8 GiB
[Cancel](#) [Launch instance](#) [Preview code](#)

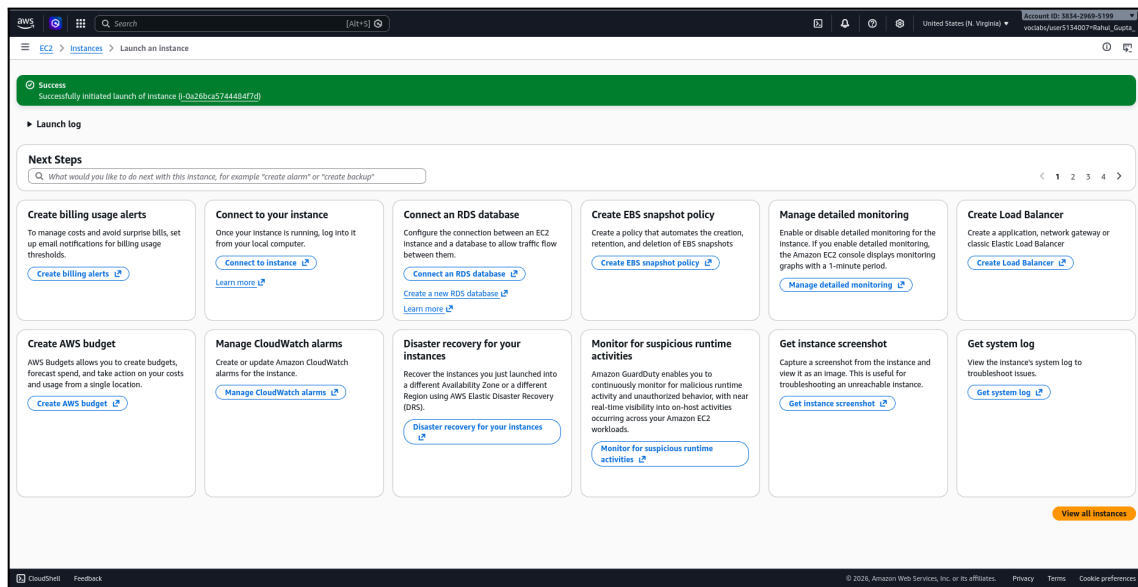

10. We can now access the page by copying the IP address from the running instances page

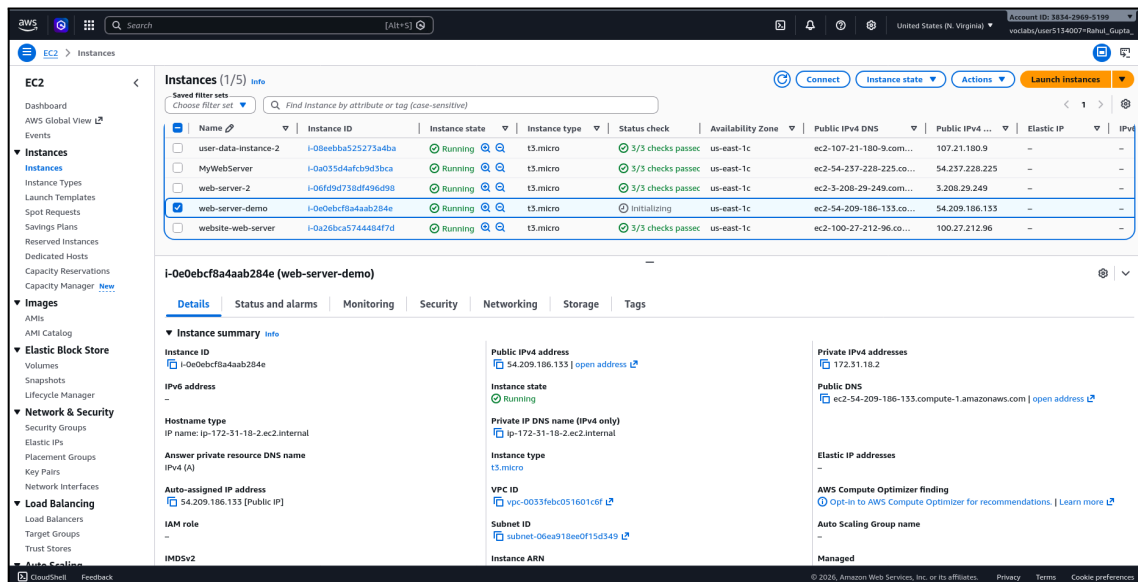

11. Now search `http://<ip-address>`, and we can see the page in a new tab in the browser

