


The route is readable in the recurrent state before the agent moves

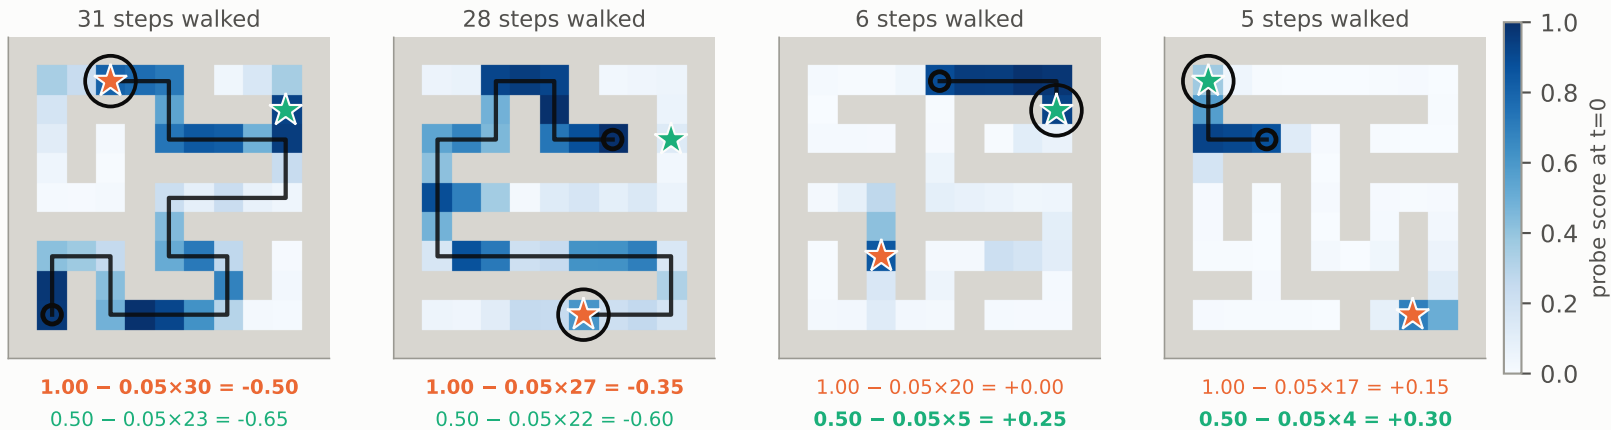

shading = linear probe on the recurrent state before the first move · line = route actually walked · ○ start ★ objectives
 under each panel: value - 0.05 × distance = what that objective is worth. The better one is ringed and in bold — often the nearer one, not the more valuable one.