


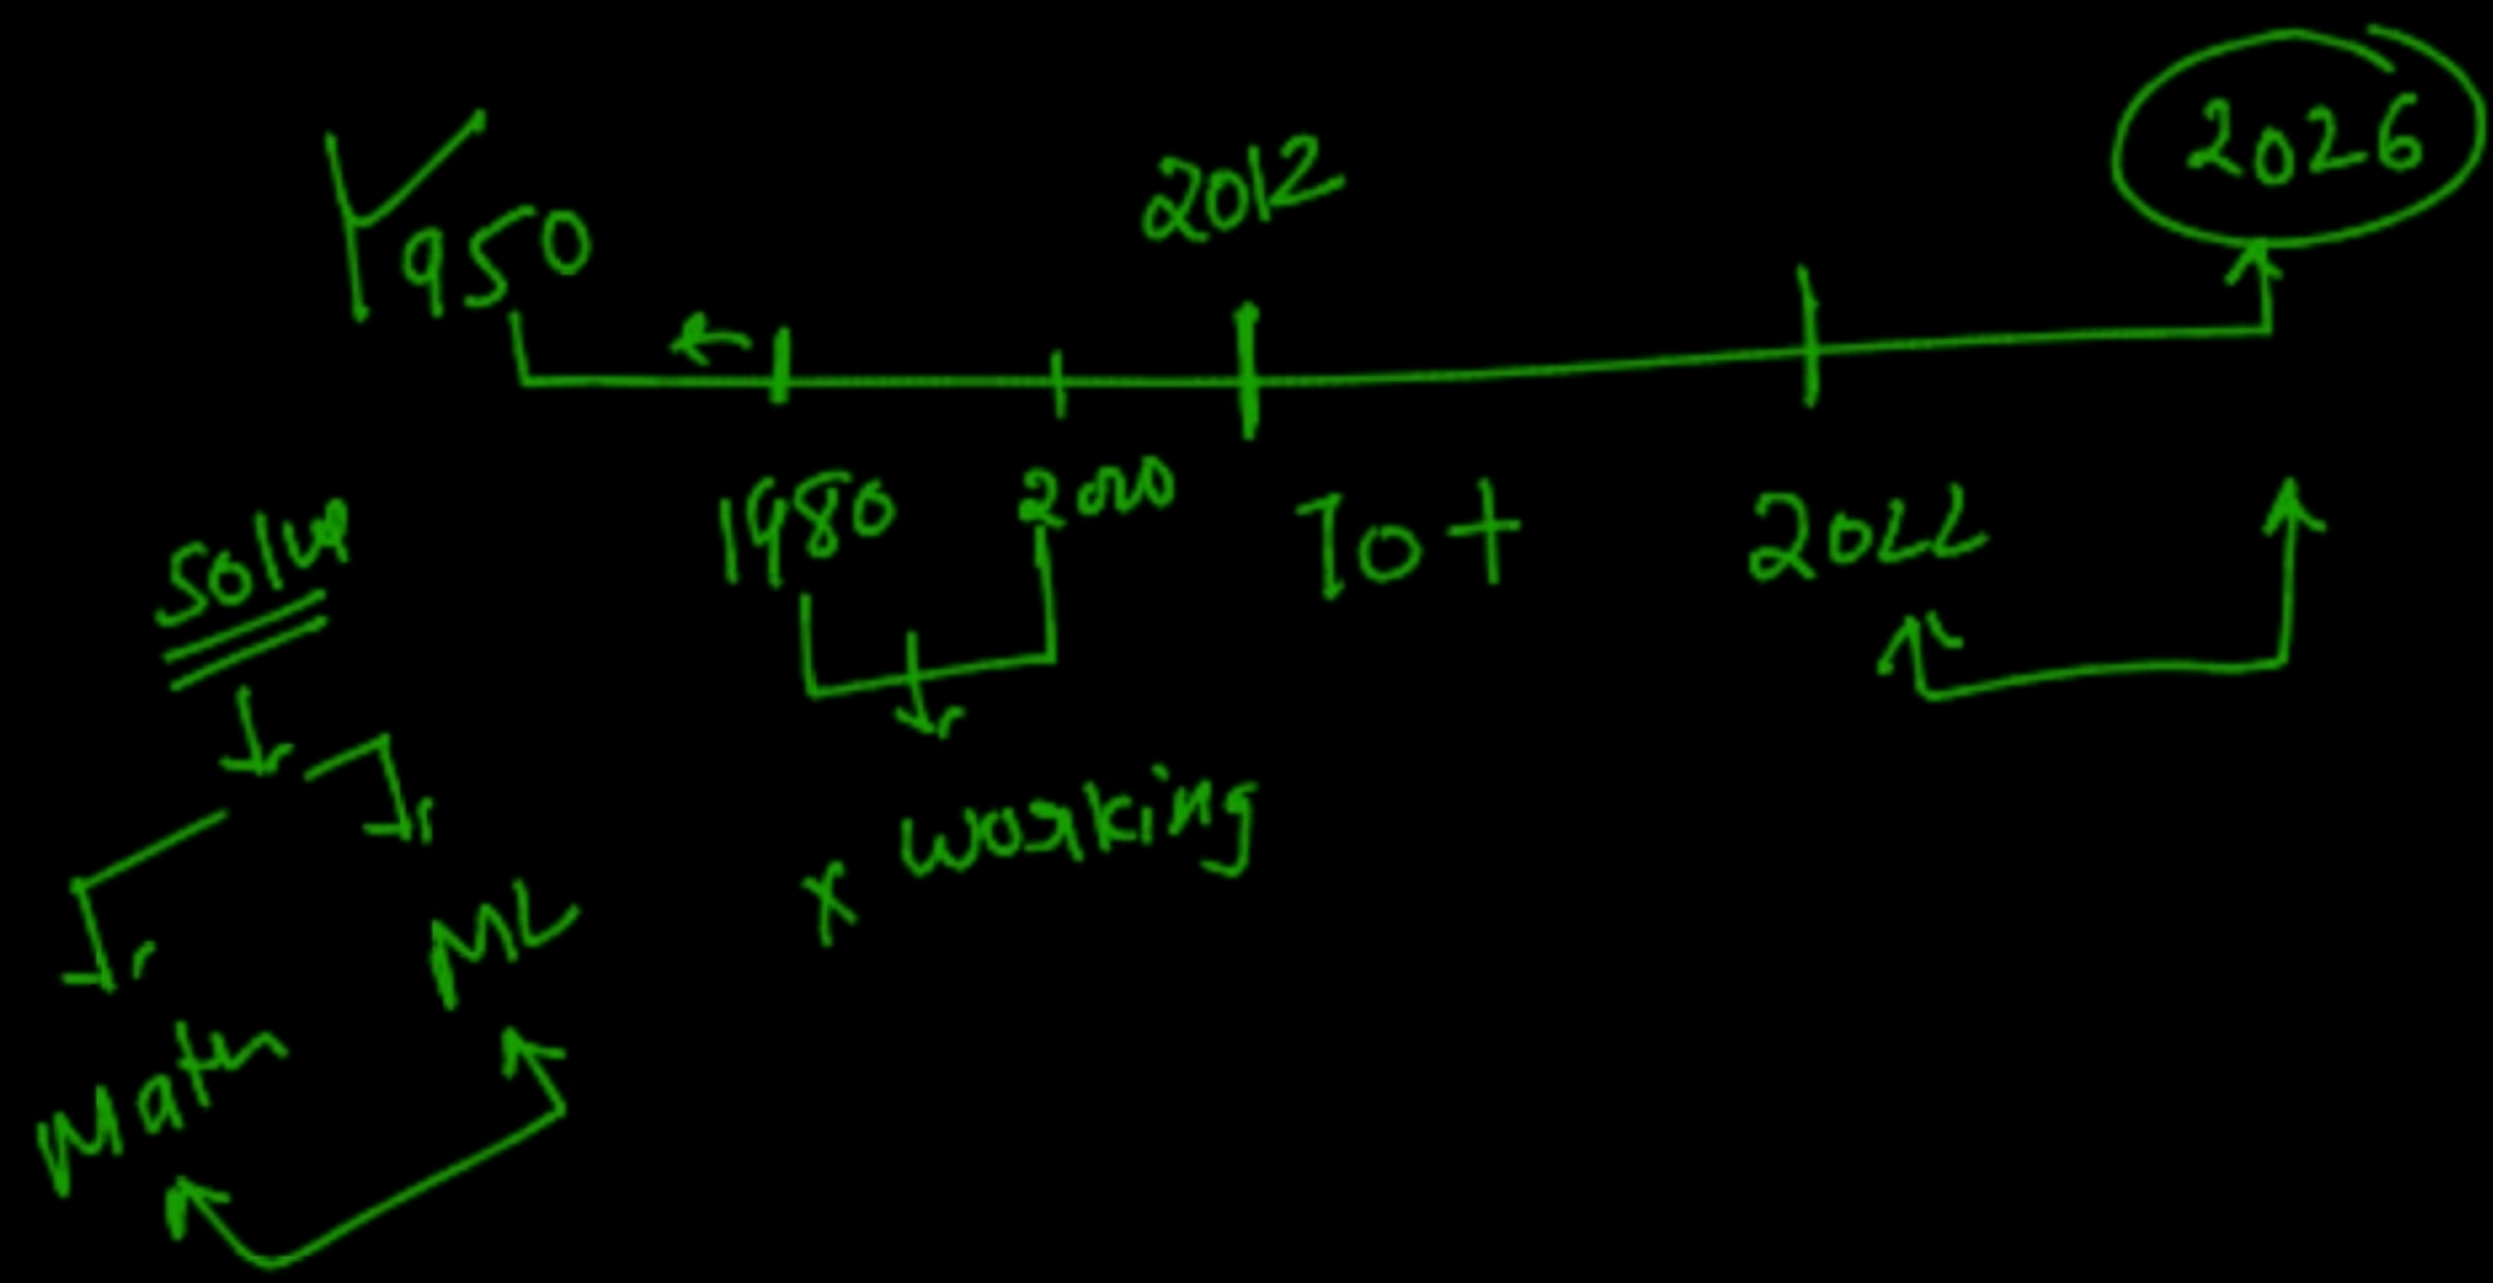

Problem statement

⇓

'1990'

↑ Data Sci → Bank ↑

⇓

python

⊖
↑
=

Information

C1 → [20, 750, Mumbai, 28]

⇓

Approve ☒

Reject ☐

→ C2 → [9, 550, Pune, 34]

⇓

Approve ☒

Reject ☐

in a day

5 Request

↓

5 customer's data

↓

manually → you can check

↓

x

But → in a day

[1000 Request
1000 custom]

Single { 10 days }



CS → [9, 550, M, 34]

→ 8 day

1000



10,000/m4



Fullfilling



HDFC|



Starter



Submit

they though $\rightarrow$ let Build Rule

	Income	c-s	city	Age	States
C1	—	—	—	—	Yes
C2	—	—	—	—	No
C3	—	—	—	—	Yes
C4	—	—	—	—	No
C5	—	—	—	—	—
...	—	—	—	—	—
Goal	—	—	—	—	—



Rule
 $\downarrow$

if cibil-score > 750
and income > 30
 $\rightarrow$ Yes

else
 $\rightarrow$ Reject

python
fn




```

def status(cibil-score, income):
    if (cibil-score > 750) and income > 30:
        if city Approved
    else:
        status Reject

```

T-F ✓
 T-II
 T-III

limited

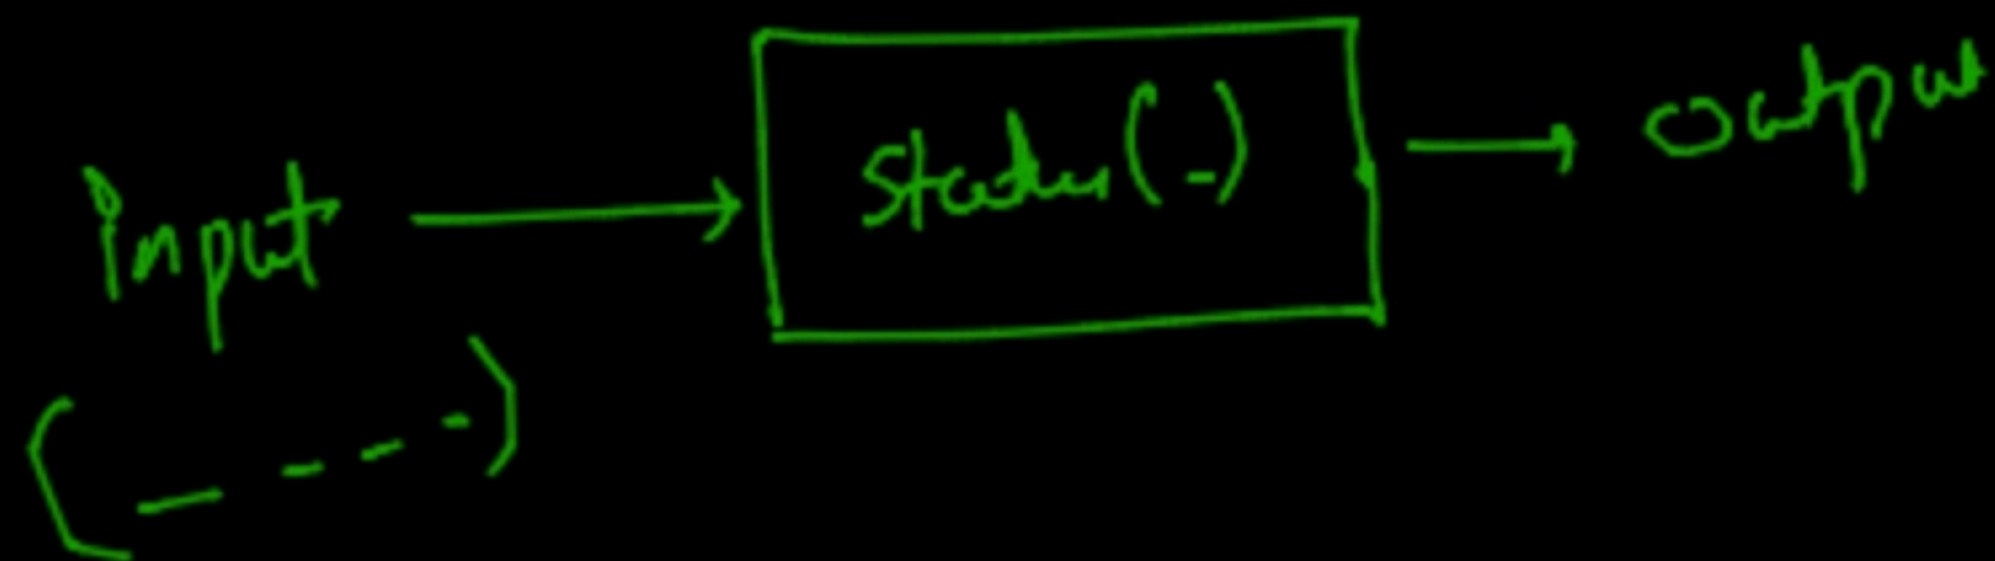

eg.

CI

↓

civil-sion = 749 (-1)] x x

income = 70
v.v. good

→ can som idea

↓

Biggie

Quarins

MATH

Red

x

x

feature →


	cid	in	cin
P1	C1	(17, 750)	
P2	C2	16, 650	
P3	C3	(14, 350)	

Ind →
Kernak ←
Tejas ←



$$P_1 \Rightarrow (17, 750) \text{ (vector)}$$


$$P_2 \Rightarrow (16, 650)$$

$$P_3 \Rightarrow (14, 350)$$

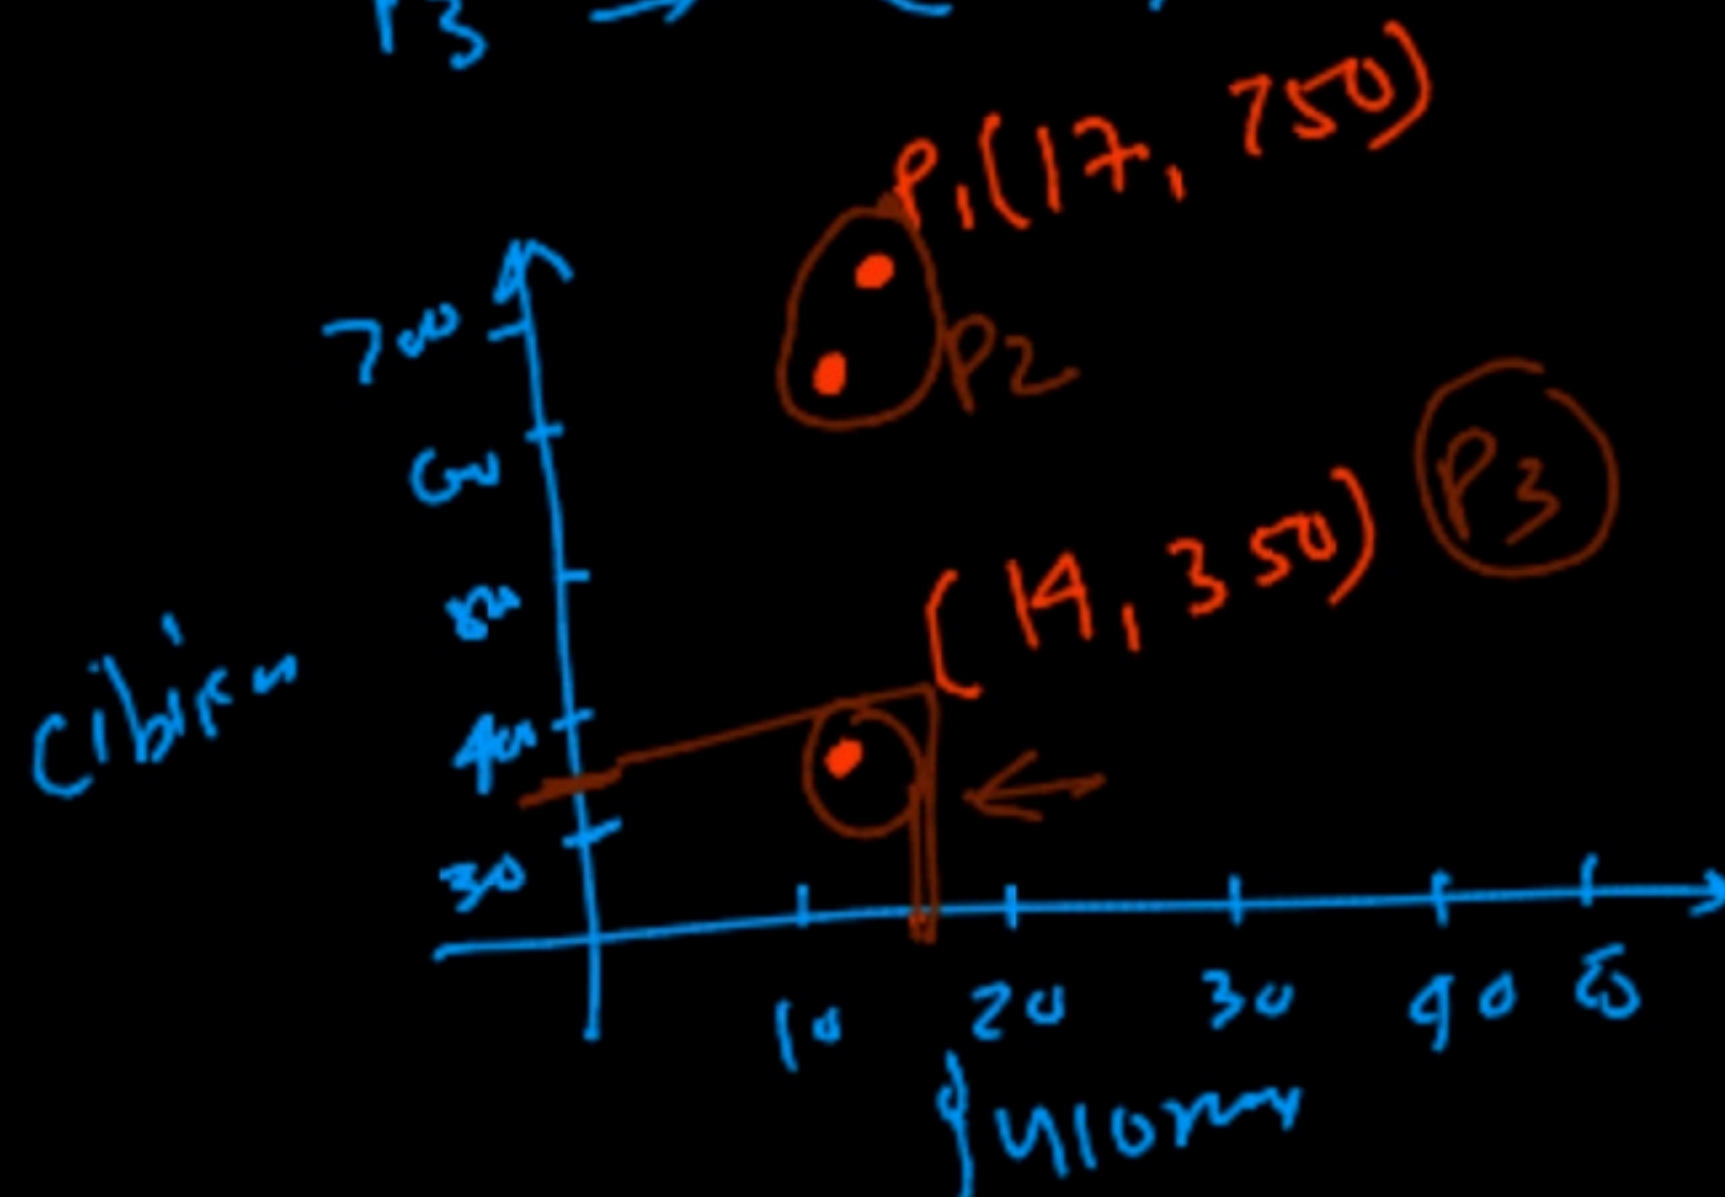

12M/10M

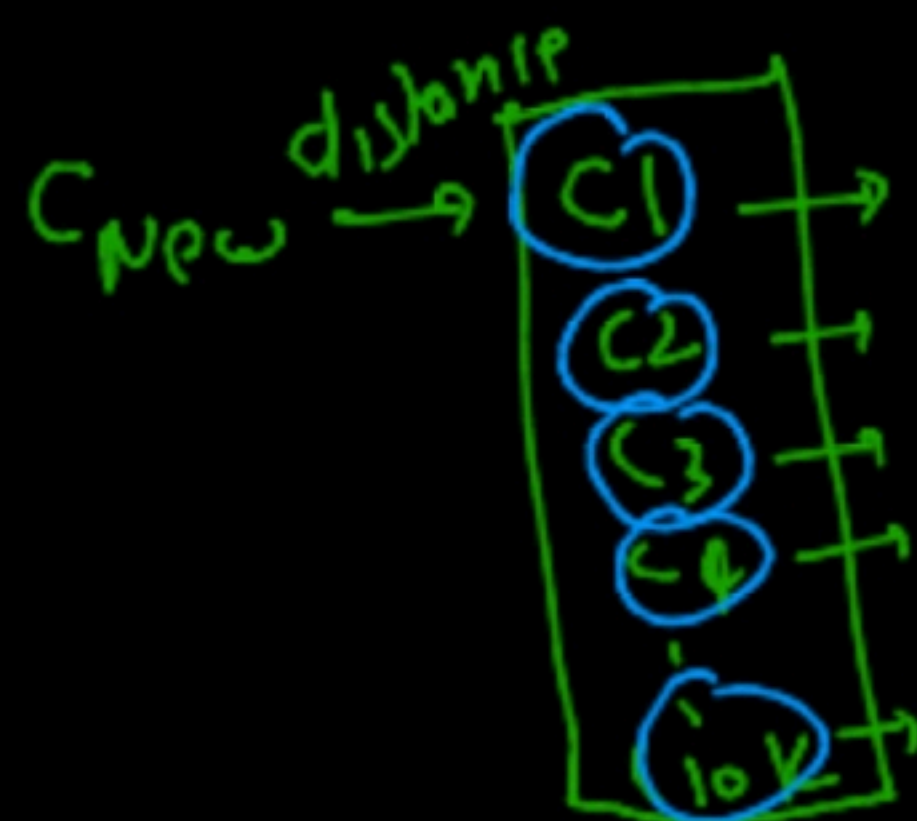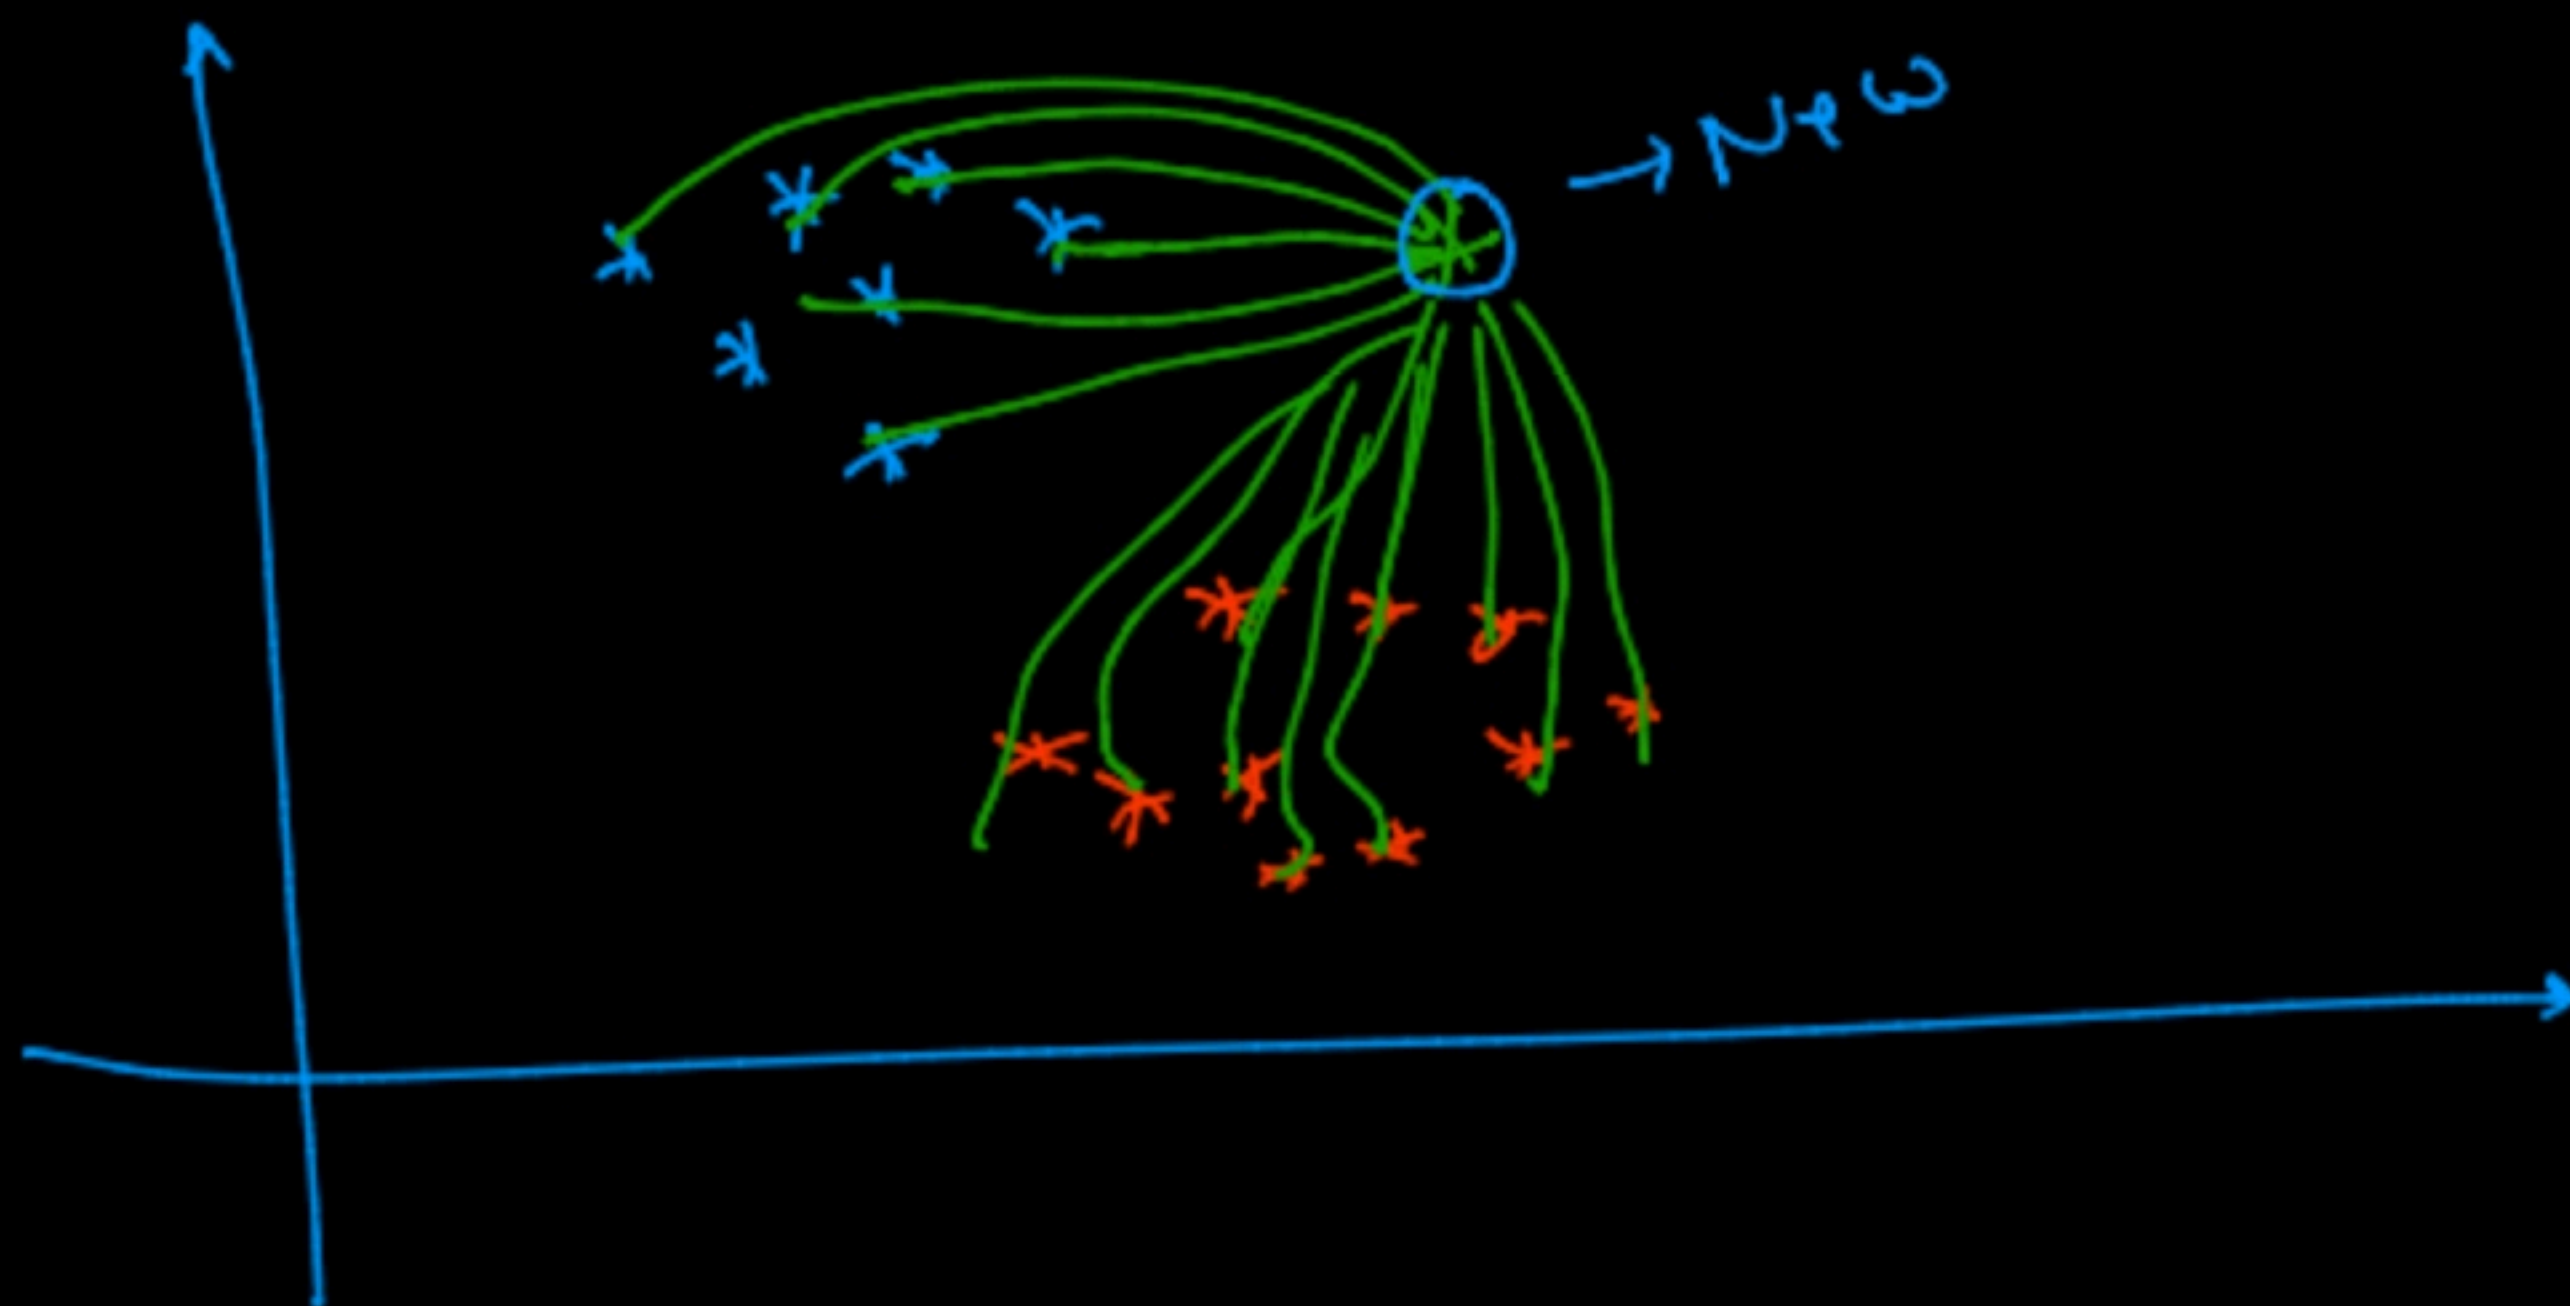


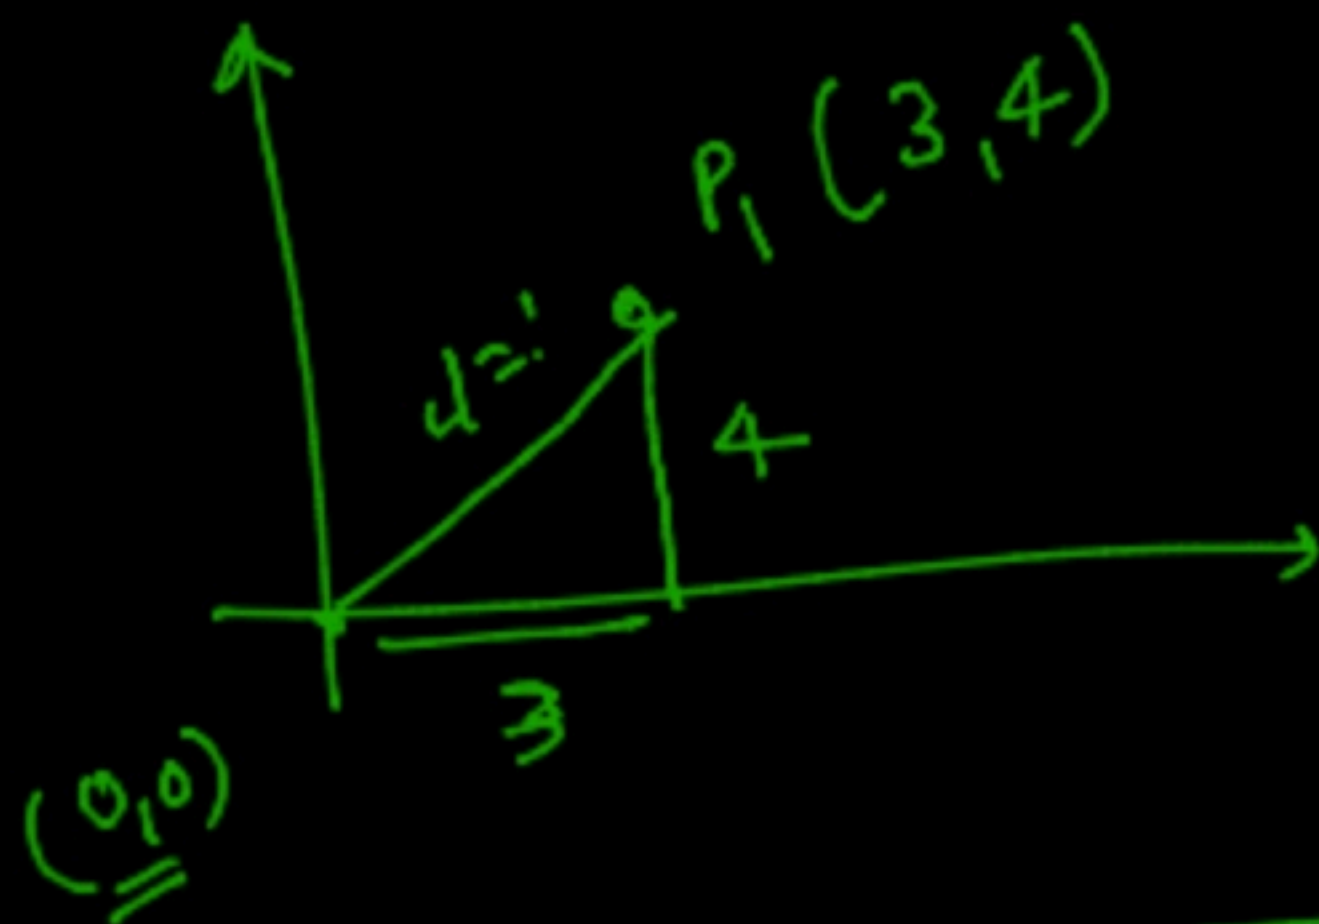

$$d = \sqrt{9 + 16}$$



$$d = \sqrt{25}$$

$$\boxed{d = 5}$$

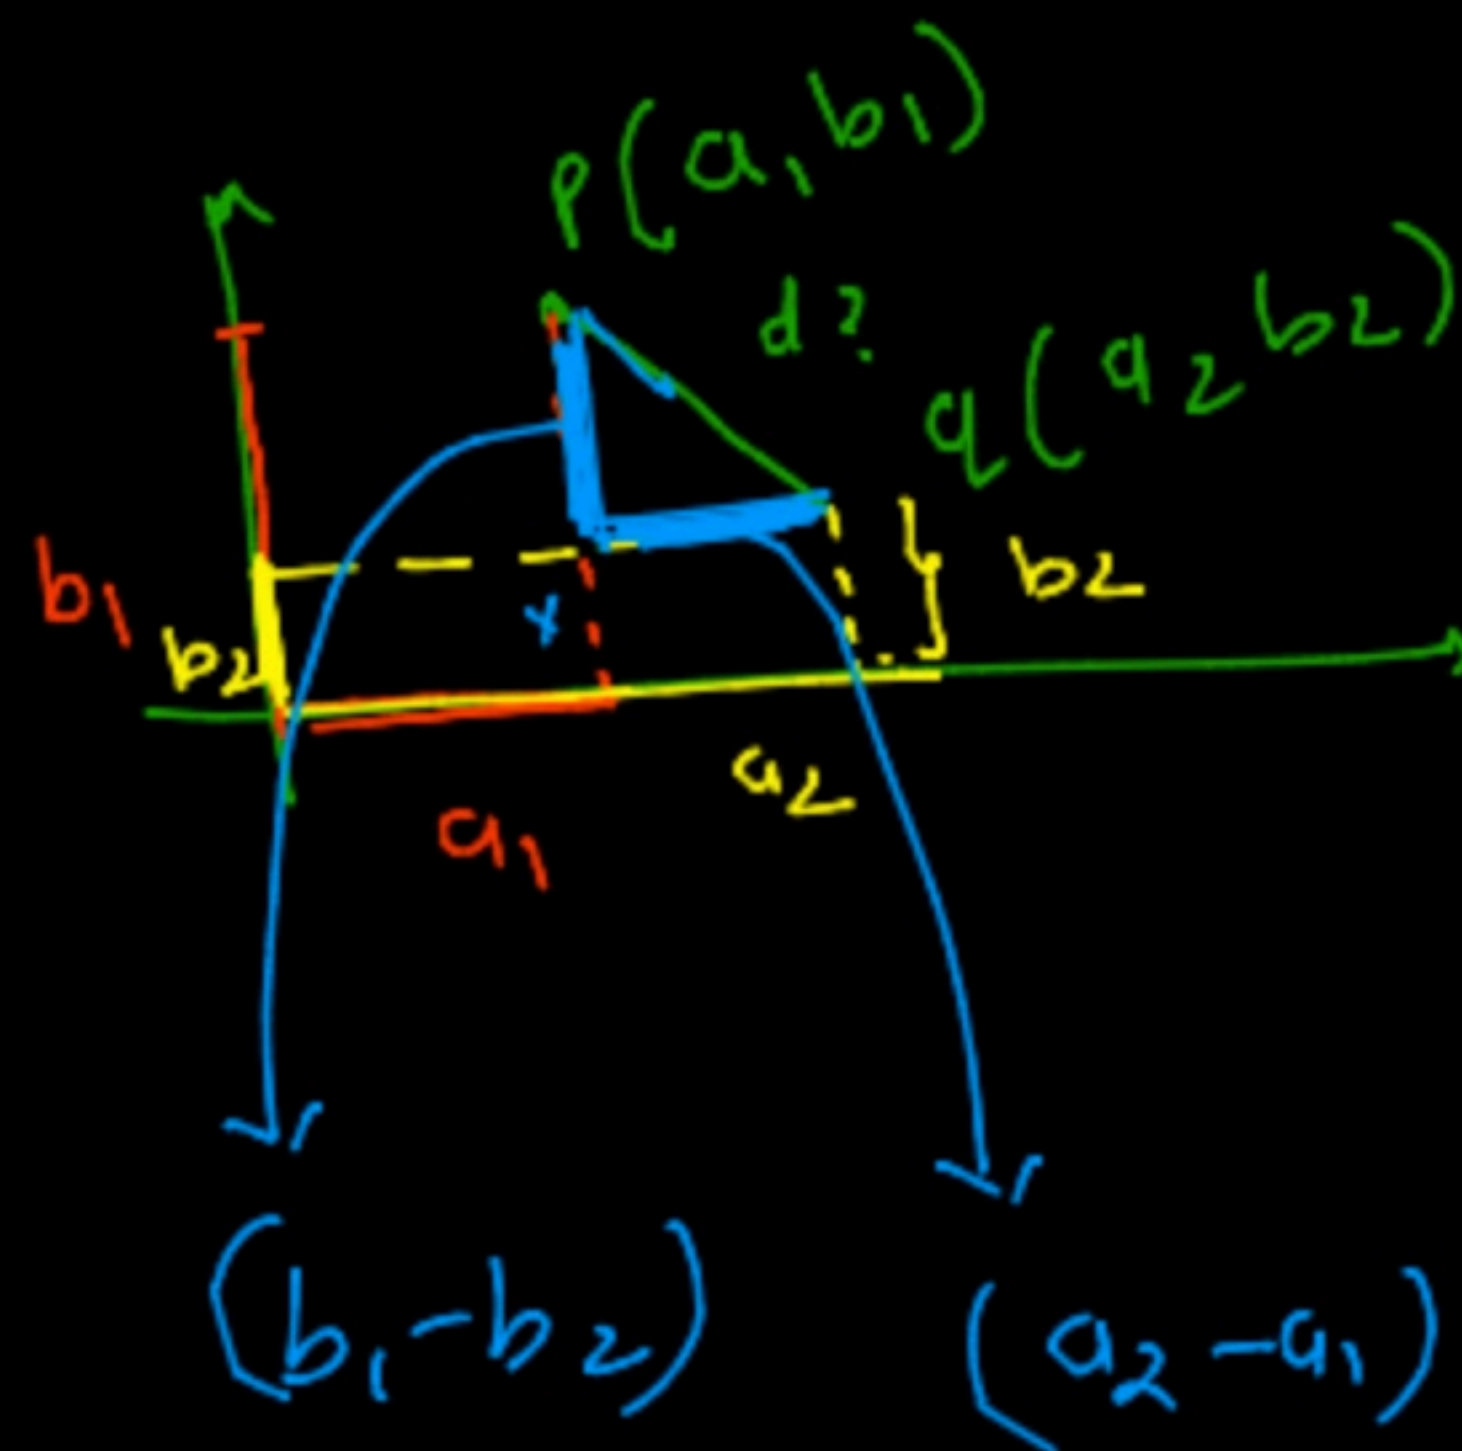

$$d = \sqrt{(a_2 - a_1)^2 + (b_1 - b_2)^2}$$

$$\rightarrow d = \sqrt{(a_1 - a_2)^2 + (b_1 - b_2)^2}$$

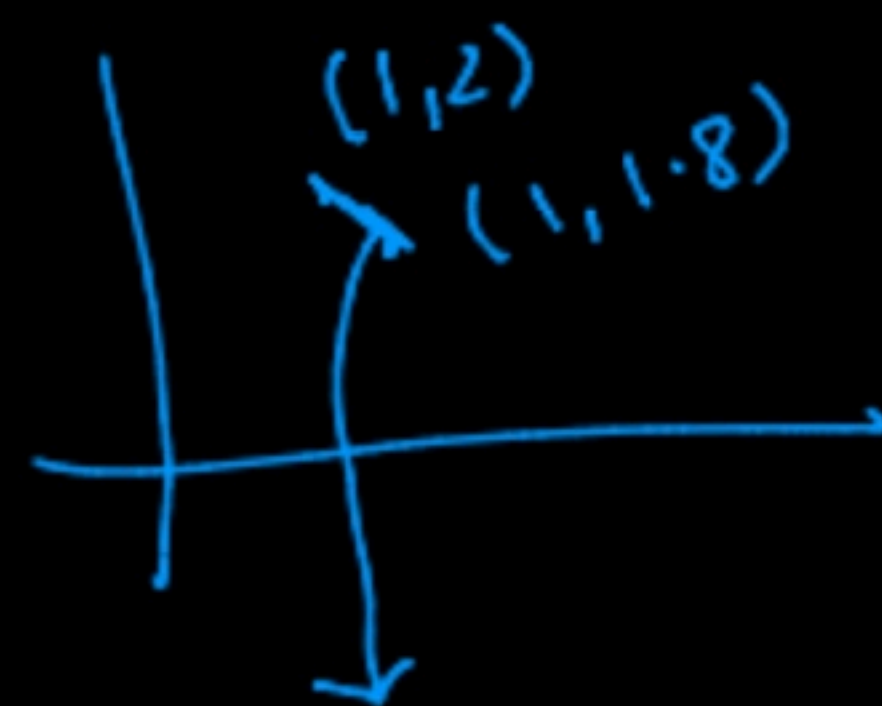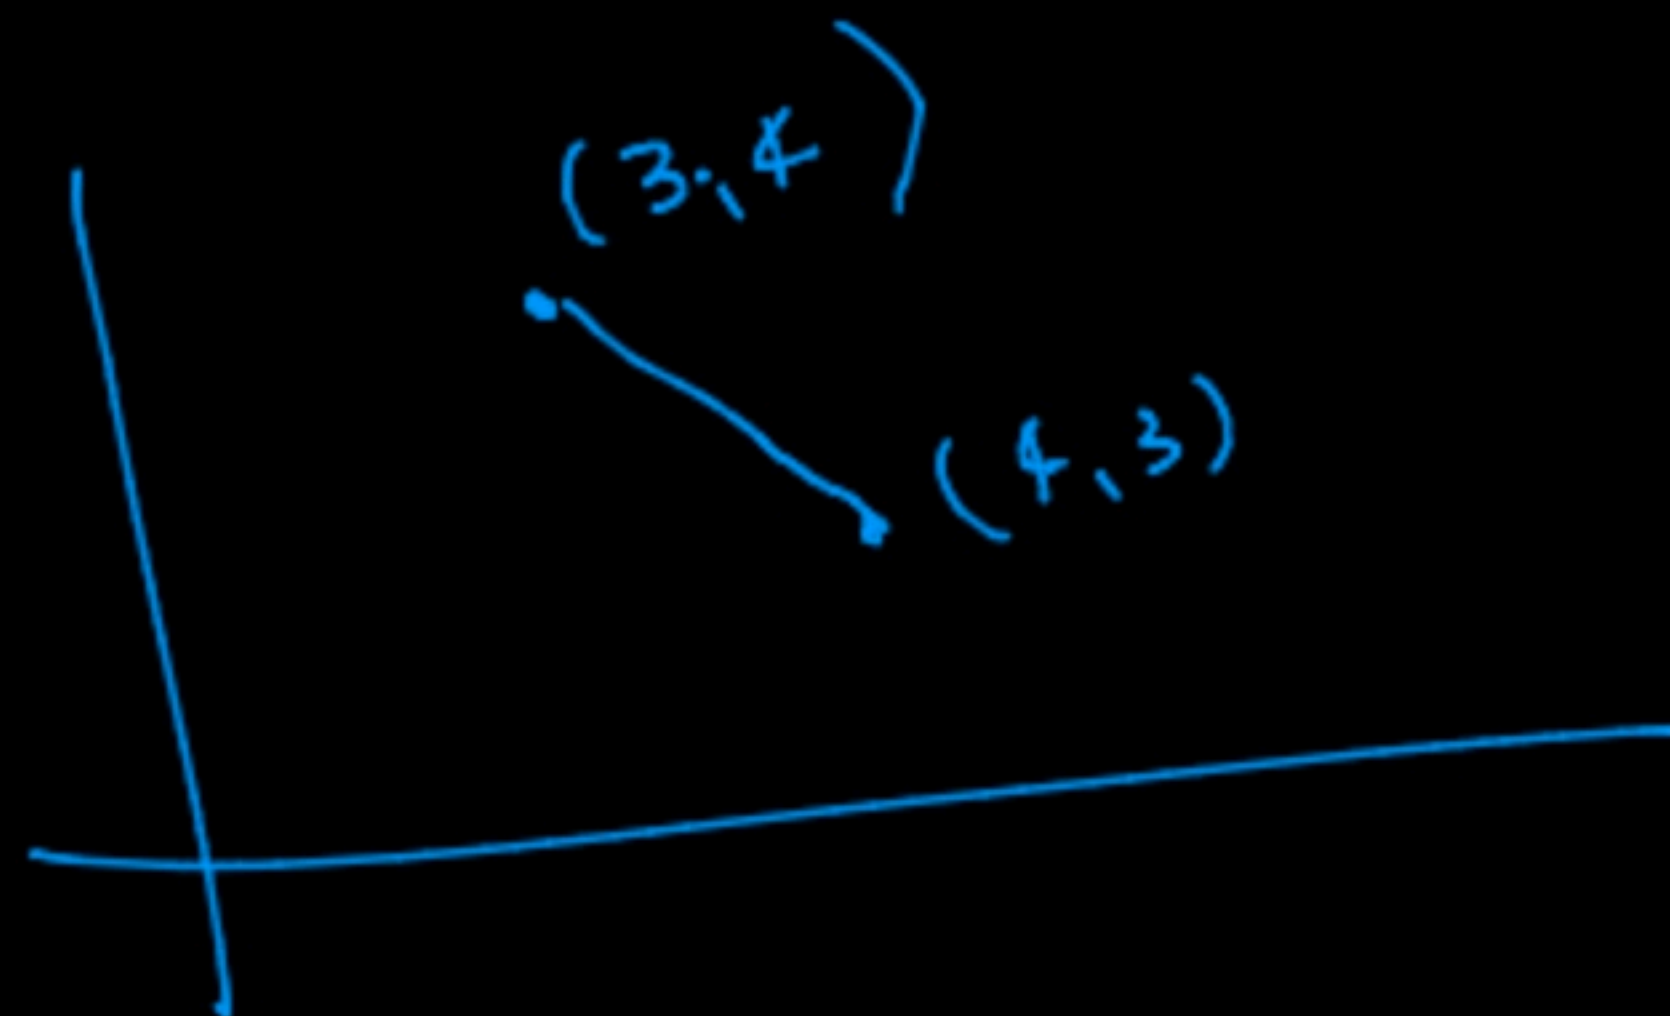

distance ↓

$$d = \sqrt{(-1)^2 + (-1)^2}$$

$$d = \sqrt{2}$$

$$d = 1.41$$

24m

$$d = \sqrt{(a_2 - a_1)^2 + (b_2 - b_1)^2}$$

↓
 $p(a_1, a_2, a_3)$

$q(b_1, b_2, b_3)$

$p(3, 4, 5)$
 $q(4, 5, 6)$ } distance
 ↓

$$d = \sqrt{(-1)^2 + (-1)^2 + (-1)^2}$$

$$d = \sqrt{3}$$

Linear Alge

	c1	c2	c3	c4
r1	3	4	5	4
r2	4	5	6	

$$p = (a_1 a_2 a_3 a_4 \dots a_n)$$

$$q = (b_1 b_2 b_3 b_4 \dots b_n)$$

$$d = \sqrt{(a_1 - b_1)^2 + (a_2 - b_2)^2 + \dots + (a_n - b_n)^2}$$

$$d = \sqrt{\sum_{i=1}^n (a_i - b_i)^2}$$

python

