

Literal or Constant:


Any constant value which can be assigned to the variable.

DATA TYPES

Data types are used to classify and define the type of data that a variable can hold.

There are 2 types of Data Types:

- 1.Primitive Data types: pre-defined, fixed size.
- 2.Non-Primitive Data types: Customize and no fixed size.

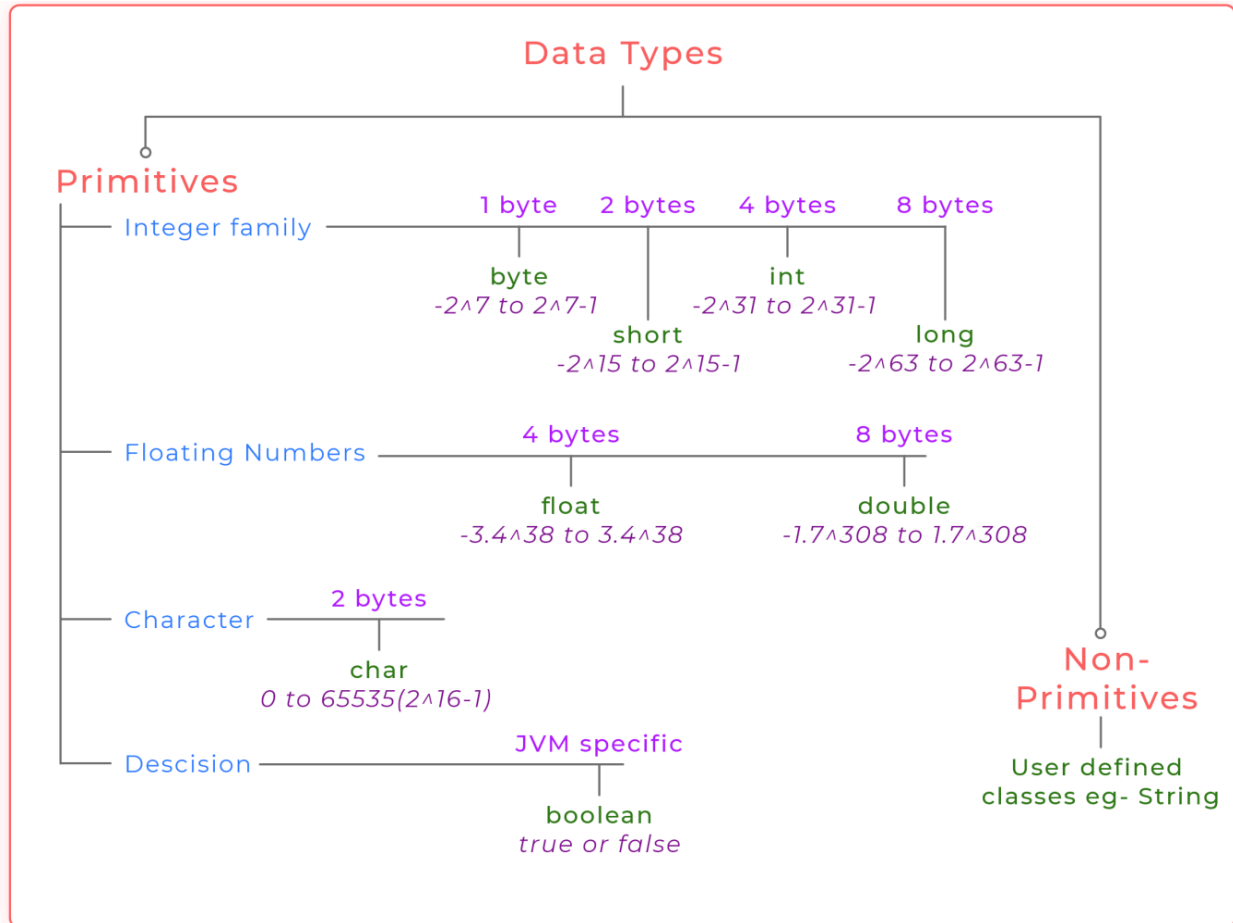

Default Values

Data Type	Default Value (for fields)
byte	0
short	0
int	0
long	0L
float	0.0f
double	0.0d
char	'\u0000'
boolean	false

the compiler never assigns a default value to an uninitialized **local variable**(DTL).

+ operator between two char values

- It performs addition between their Unicode code points.
- For example :

```
char a = 'a';  
char b = 'b';  
System.out.println(a+b) ; //97+98=195
```

Output : 195