

Operators Integration

Table of Contents

Overview

This document is about the integration of Operator to Sevens system.


Some glossary:

Sevens - (us) provider of an exchange iFrame

Operator - (you) provider of users

Sevens can be used as a provider for exchange markets which will be open in iFrame on the web site of the operator

Data Model

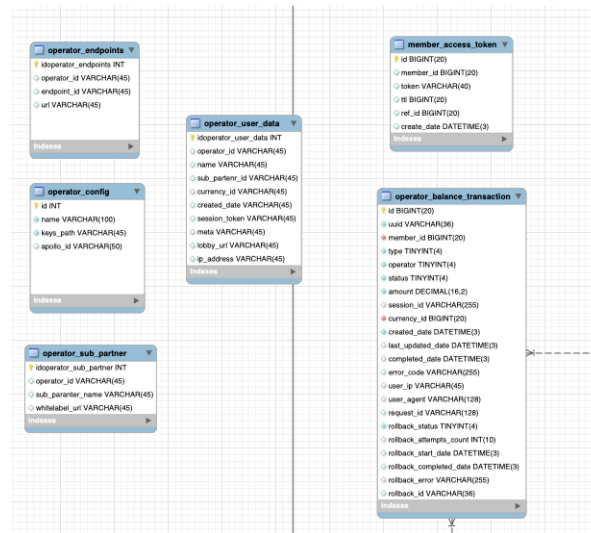

Types of integrations

We support two types of integrations: **direct** and **seamless wallet**.

There is also the approach to use **pseudo-seamless** integration via direct wallet.

Security / Signature

Please review the example of how to use public and private keys for requests signature

Java Example of e-signature: [GitHub - BeatenOffRick/rsa-signature-example: RSA Signature Example](#) Please, refer to the following Demo application how to sign the body of your request:

<https://github.com/BeatenOffRick/rsa-signature-example/blob/main/src/main/java/Demo.java>

Onboarding new operator

Each **operator** has to be registered in our system and will have to provide us with


- public RSA key
- \$baseUrl (for callbacks)

Sevens will provider operator with

- operator id
- sub_operator ids (if requested, at least one)
- Sevens public key


Direct wallet flow

- Call /frame/url endpoint
- Open Sevens in an iframe
 - Expect to handle desposit/withdraw callbacks

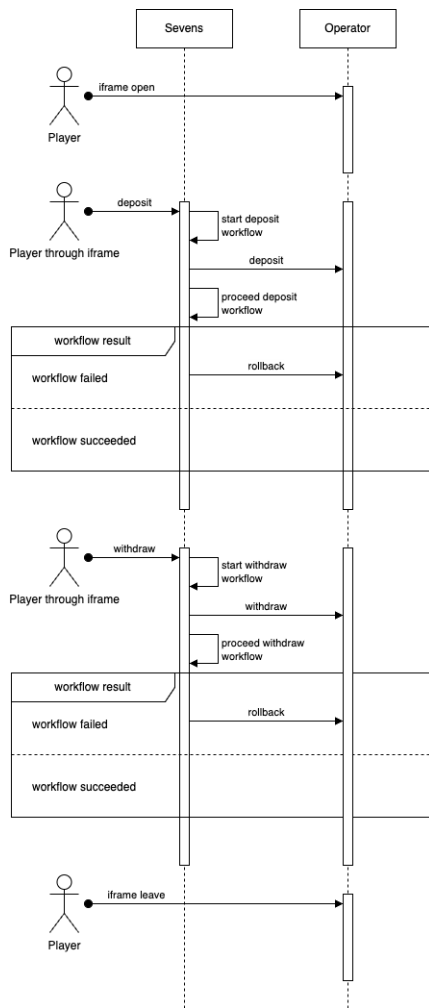


Pseudo Seamless flow

- Call /frame/url endpoint
- Call sevens deposit endpoint for all given user **balance**, mark the user as the one with the balance on Sevens
- Track the user's activity on your platform
- Whenever a user leaves the iframe (like closing it or navigating) - poll the balance of a user on Sevens and poll for open bets.
 - If the user has balance - withdraw the balance using Sevens **withdraw** endpoint
 - If the user has unsettled bets, using Sevens **open bets** endpoint schedule the procedure from the start with a scaling interval
- If the user doesn't have unsettled bets - unmark the user as the one with the balance on Sevens and stop polling

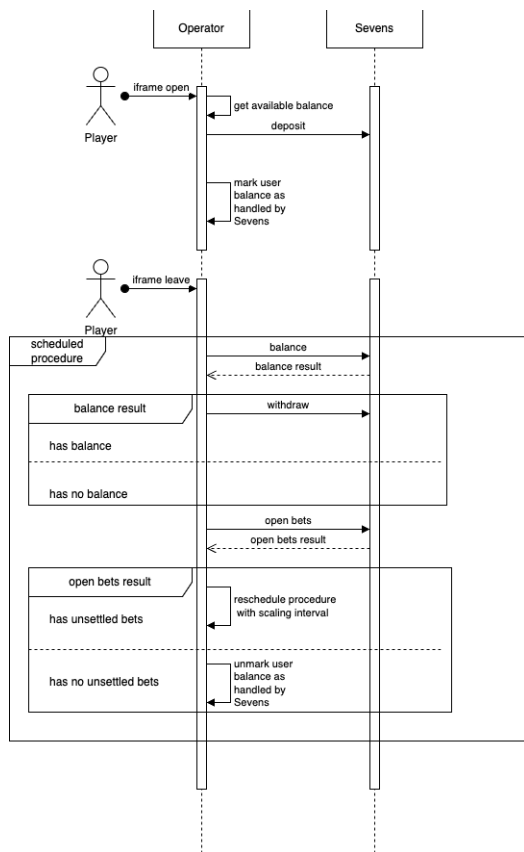

Seamless flow

- Call /frame/url endpoint
- Open Sevens in an iframe
 - Expect to handle balance and transaction callbacks

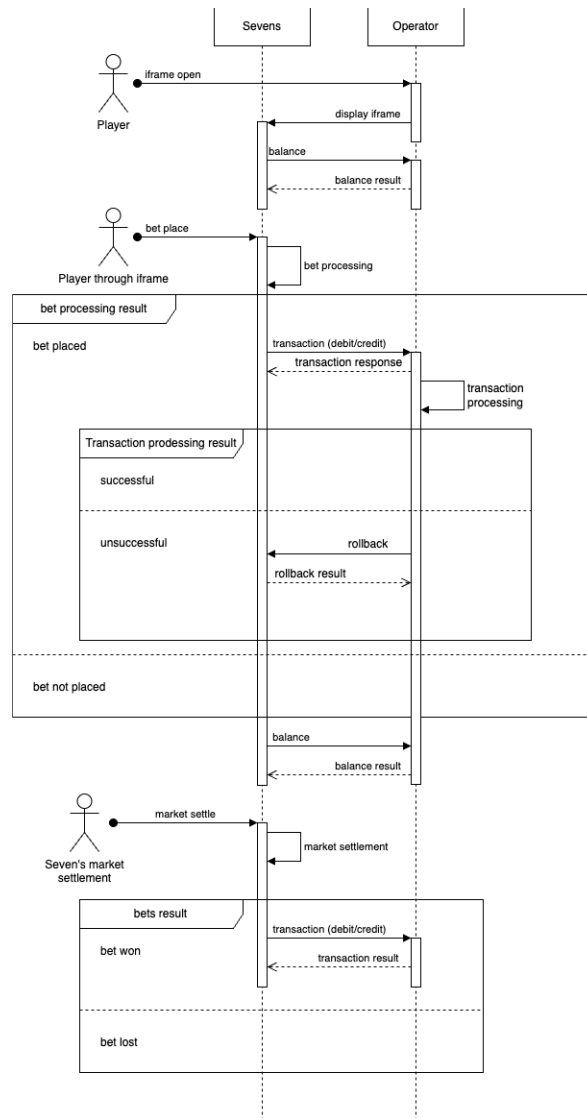

Endpoints overview

There are two ways to implement wallet integration:

- Endpoints (deposit/withdraw initiated from the operator side)
- Callbacks (deposit/withdraw is initiated from within sevens)

List of endpoints

1. Frame-url - how to open application and identify user from 3-party system. Login by token via from operator
2. User balance
3. Deposit
4. Withdraw
5. Transaction status
6. User bets
7. Operator bets

List of callbacks

(if the deposit/withdraw will be implemented within Sevens)

1. Deposit
2. Withdraw
3. Rollback

Common endpoints

Sevens endpoints

Frame-URL Endpoint

Endpoint for creating user in Sevens from operator and/or getting iFrame URL, by which Sevens identifies users and log them into UI. Endpoint can be used for new and existing users. The endpoint can provide the anonymous access URL when including the `mode=ANONYMOUS` parameter.

URL: `https://{$SevensHost}/api/integration/operator/user/frame-url`

Http Method: POST

Required Headers:

- Signature (signature of body by operator's (yours) secret key),
- RequestId (Unique request ID for debugging and linking requests and responses),
- OperatorId (uuid, Unique identifier of operator in Sevens)

Example request:

```
curl --location --request POST 'https://$ourplatformurl/api/integration/operator/user/frame-url' \
--header 'X-Signature: gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMoXu7sc0Nb//mkFyBt0BaImULZqHKeegs114hjrLb8d+Df818MSdhMZmlyiTdovQ+urLJV08mN+PNDSucUrCF2JA6A55/jLx75m7jeyjv/fXtKLvyGxkASyugwbUX2n0z/kB96zyMgI2nPXESMuYNS1At98n+qXPRSxNGhXpdz7CBX3Fyp847rEd19WZ/nnj1iK4eqp7e0Fz0Jj0XsZidY9iKyUmVXsP0e9yxHJ+mx5SYBb2rbsk8LQsTV1GjNIwVLSkeazzEp4Xfv0G5Hrn/tpmfRJ25FbXCHtUVEcLQ= ' \
--header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
--header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
--header 'Content-Type: application/json' \
--data-raw '{
  "operatorId": $YOUR_OPERATOR_ID,
  "userName": "aaa112",
  "currency": "INR",
  "sessionToken": "YOUR_SESSION_TOKEN",
  "mode": "DEFAULT|ANONYMOUS", //could be null or omitted, in this case the DEFAULT is used
  "meta": {},
  "subPartner": "$YOUR_SUBPARTNER_ID",
  "lobbyUrl": "$YOUR_LOBBY_URL",
  "settings": {} // not a must
}'
```

Request Body:

```
{
  "operatorId": 123, // Unique identifier of operator in our system
  "userName": "aaa111", // unique identifier of user of operator system
  "currency": "INR", // we only support 'INR' for now by default. For other currencies we need some explicit work
  "sessionToken": "beraere dcdcdcfvf", // any token for identifying from which session user do Deposit/Withdraw for operator
  "meta": {}, // some meta not used for now
  "subPartner": "your_subpartner_id", // Some identifier of a different platform within on operator (different whitelabels are supported for one operator from our system). We provide you with 1 default. If you require more than 1 different platforms/uis integrated with us - you need multiple subpartner ids
  "lobbyUrl": "http://super-operator.com", // Lobby of operator (YOUR lobby)
  "settings": {
    "autoWithdrawOnLogout": true, // Make auto withdraw on user logout or long non active. Not supported yet!
  }
}
```

Response Body:

```
{
  "url" : "http://whitelable.com/login/token?token=abc" // Login URL with token for user login. Should be opened in iframe
}
```

Anonymous Request Body:

```
{
  "operatorId": 123, // Unique identifier of operator in our system
  "currency": "INR", // we only support 'INR' for now by default. For other currencies we need some explicit work
  "subPartner": "your_subpartner_id", // Some identifier of a different platform within on operator (different whitelabels are supported for one operator from our system). We provide you with 1 default. If you require more than 1 different platforms/uis integrated with us - you need multiple subpartner ids
  "mode": "ANONYMOUS" //Indicates the request doesn't require user authentication and the response will provide anonymous activation URL
}
```

Anonymous Response Body:

```
{
  "url" : "http://whitelable.com/login/token?token=abc" // Login URL with token for user login. Should be opened in iframe
}
```

```
1 {
2   "url" : "http://whitelable.com/" // URL to open application in the anonymous mode
3 }
```

Error Response:

▼ Error Responses

```
1 {
2   "errorCode": "G001",
3   "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
4 }
5
6 {
7   "errorCode": "G003",
8   "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
9 }
10
11 {
12   "errorCode": "G005",
13   "description": "Security signature is not valid"
14 }
15
16 {
17   "errorCode": "G006",
18   "description": "Required header {0} is not found"
19 }
20
21 {
22   "errorCode": "G007",
23   "description": "Required header with signature is not found"
24 }
25
26 {
27   "errorCode": "G008",
28   "description": "Required header {0} must be number"
29 }
30
31 {
32   "errorCode": "G009",
33   "description": "Operator id from header is not equal to operator id from request body"
34 }
35
36 {
37   "errorCode": "G010",
38   "description": "Required header {0} must be {1}"
39 }
40
41 {
42   "errorCode": "OP0005",
43   "description": "Used wrong currency. Please use currency with which you come first"
44 }
45
46 {
47   "errorCode": "OP0001",
48   "description": "Cannot create user"
49 }
```

User Bets Endpoint

Endpoint for getting user bets for specific period

URL: <https://{SevensHost}/api/integration/operator/user/bets>

Http Method: POST

Required Headers:

- Signature (signature of body by operator's (yours) secret key),
- RequestId (Unique request ID for debugging and linking requests and responses),
- OperatorId (uuid, Unique identifier of operator in Sevens)

Example request

▼ curl

```
1 curl --location --request POST 'https://{Sourplatformurl}/api/integration/operator/user/bets' \
2   --header 'X-Signature:
3     gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMoXu7sc0Nb//mkFyBt0BaImULZqHKeegs114hjrLb8d+Df818MSdhMZmlyiTdovQ+urLJVo8mN+PNDSucURCF2JA6A55/jLx75m7jeyjv/fXtKLvyG
4     xkASyugwbUX2n0z/kB96zyMgI2nPXESMuyNS1At98n+qXPRSxNgHxpDz7CBX3Fyp847rEd19WZ/nnj1iK4eqp7e0Fz0Jj0XsZidY9iKyUmVxsP0e9yxHJ+mx5SYBb2rbsk8LQsTV1GjNIWvLSKeazzEp4Xfv065
5     Hrn/tpmfRJ25FbXCHtUVEcLQ= ' \
6   --header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
7   --header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
8   --header 'Content-Type: application/json' \
```

```
6  --data-raw '{
7      "operatorId": $YOUR_OPERATOR_ID,
8      "userName": "$YOUR_USER_NAME",
9      "startRecord": 1,
10     "recordCount": 100,
11     "dateStart": "2022-02-15T15:00:00.000+02:00",
12     "dateEnd": "2022-08-10T23:00:00.000+02:00",
13     "status": "OPENED" //Possible values: OPENED/SETTLED,
14     "sport": "HORSE_RACING" //Possible values: CRICKET/FOOTBALL/TENNIS/HORSE_RACING/GREYHOUND_RACING - Optional parameter
15 }'
```

Request body

▼ Body

```
1  {
2      "operator_id": 123,
3      "userName": "AAA",
4      "startRecord": 1,
5      "recordCount": 100,
6      "dateStart": "2022-02-15T15:00:00.000+02:00",
7      "dateEnd": "2022-08-10T23:00:00.000+02:00",
8      "status": "OPENED",
9      "sport": "HORSE_RACING"
10 }
```

Response body

▼ Body

```
1  [
2      {
3          "stake": 500.00,
4          "bettingType": "Odds",
5          "oddsType": "Decimal",
6          "betId": "2208050250201678",
7          "sport": "Horse Racing",
8          "side": "Lay",
9          "odds": 1.870,
10         "competitionName": "",
11         "eventName": "${HH:mm} Ipswich (AUS)",
12         "marketName": "win",
13         "selectionName": "Aqua Alta",
14         "outcome": null,
15         "invalid": false,
16         "marketTime": 1659669000000,
17         "line": 0,
18         "betPlacedDate": 1659667821000,
19         "settledDate": null,
20         "profitLoss": 0.00,
21         "betPlacedIp": "157.37.187.177",
22         "userName": "scj96lpnzoibz6yg4"
23     }
24 ]
```

Error Response:

▼ Error Responses

```
1  {
2      "errorCode": "G001",
3      "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
4  }
5
6  {
7      "errorCode": "G002",
8      "description": "Can not convert value {0}. Please, check type of value according provided documentation."
9  }
10
11 {
12     "errorCode": "G003",
13     "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
14 }
15
16 {
17     "errorCode": "G004",
18     "description": "Input argument is invalid"
19 }
20
21 {
22     "errorCode": "G005",
23     "description": "Security signature is not valid"
24 }
```

```

25
26 {
27     "errorCode": "G006",
28     "description": "Required header {0} is not found"
29 }
30
31 {
32     "errorCode": "G007",
33     "description": "Required header with signature is not found"
34 }
35
36 {
37     "errorCode": "G008",
38     "description": "Required header {0} must be number"
39 }
40
41 {
42     "errorCode": "G009",
43     "description": "Operator id from header is not equal to operator id from request body"
44 }
45
46 {
47     "errorCode": "G010",
48     "description": "Required header {0} must be {1}"
49 }
50
51 {
52     "errorCode": "OP0009",
53     "description": "User does not exist or account details is unavailable"
54 }

```

Operator Bets Endpoint

Endpoint for getting bets for all users of operator for specific period

URL: <https://{SevensHost}/api/integration/operator/bets>

Http Method: POST

Required Headers:

Signature (signature of body by operator's (yours) secret key),

RequestId (Unique request ID for debugging and linking requests and responses),

OperatorId (uuid, Unique identifier of operator in Sevens)

Example request

▼ curl

```

1 curl --location --request POST 'https://{Sourplatformurl}/api/integration/operator/bets' \
2 --header 'X-Signature:
gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMoXu7sc0Nb//mkFyBt0BaImULZqHkeegs114hjrLb8d+Df818MSdhMZm1yiTv dovQ+urLJV08mN+PNDSucUrfCF2JA6A55/jLx75m7jeYjv/fXtKLvyG
xkASyugwbUX2n0z/kB96zyMgI2nPXESMuYnS1At98n+qXPRsXNgHxpDz7CBX3Fyp847rEd19WZ/nnj1iK4eqp7eOfZ0j0XsZidY9iKyUmVXsP0e9yxHJ+mx5SYBb2rbsk8LQsTV16jNIWvLSKeazZEp4Xfv0G5
Hrn/tpmFRJ25FbXCHtUVEcLQ==' \
3 --header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
4 --header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
5 --header 'Content-Type: application/json' \
6 --data-raw '{
7     "operatorId": $YOUR_OPERATOR_ID,
8     "startRecord": 1,
9     "recordCount": 100,
10    "dateStart": "2022-02-15T15:00:00.000+02:00",
11    "dateEnd": "2022-08-10T23:00:00.000+02:00",
12    "status": "OPENED" //Possible values: OPENED/SETTLED,
13    "sport": "HORSE_RACING" //Possible values: CRICKET/FOOTBALL/TENNIS/HORSE_RACING/GREYHOUND_RACING - Optional parameter
14 }'

```

Request body

▼ Body

```

1 {
2     "operator_id": 123,
3     "startRecord": 1,
4     "recordCount": 100,
5     "dateStart": "2022-02-15T15:00:00.000+02:00",
6     "dateEnd": "2022-08-10T23:00:00.000+02:00",
7     "status": "OPENED",
8     "sport": "HORSE_RACING"
9 }

```

Response body:

▼ Body

```

1  [
2    {
3      "stake": 10.00,
4      "bettingType": "Odds",
5      "oddsType": "Decimal",
6      "betId": "2308071253513031",
7      "sport": "Cricket",
8      "side": "Back",
9      "odds": 1.760,
10     "competitionName": "Lanka Premier League",
11     "eventName": "B-Love Kandy v Galle Titans",
12     "marketName": "Match Odds",
13     "selectionName": "Galle Titans",
14     "outcome": "LOST",
15     "invalid": false,
16     "marketTime": 1691487000000,
17     "line": 0E-30,
18     "betPlacedDate": 1691412831000,
19     "settledDate": 1691499187000,
20     "profitLoss": -10.00,
21     "betPlacedIp": "34.251.14.122",
22     "userName": "fotonmember02",
23     "betStatus": "SETTLED",
24     "marketId": "1.216811201",
25     "providerType": "EXCHANGE",
26     "marketCommission": 0.46
27   }
28 ]

```

Error Response:

▼ Error Responses

```

1  {
2    "errorCode": "G001",
3    "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
4  }
5
6  {
7    "errorCode": "G002",
8    "description": "Can not convert value {0}. Please, check type of value according provided documentation."
9  }
10
11 {
12   "errorCode": "G003",
13   "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
14 }
15
16 {
17   "errorCode": "G004",
18   "description": "Input argument is invalid"
19 }
20
21 {
22   "errorCode": "G005",
23   "description": "Security signature is not valid"
24 }
25
26 {
27   "errorCode": "G006",
28   "description": "Required header {0} is not found"
29 }
30
31 {
32   "errorCode": "G007",
33   "description": "Required header with signature is not found"
34 }
35
36 {
37   "errorCode": "G008",
38   "description": "Required header {0} must be number"
39 }
40
41 {
42   "errorCode": "G009",
43   "description": "Operator id from header is not equal to operator id from request body"
44 }
45
46 {
47   "errorCode": "G010",
48   "description": "Required header {0} must be {1}"
49 }

```

Direct wallet flow endpoints

User Balance Endpoint

Endpoint for getting actual user balance info

URL: https://{SevensHost}/api/integration/operator/user/balance

Http Method: POST

Required Headers:

- Signature (signature of body by operator's (yours) secret key),
- RequestId (Unique request ID for debugging and linking requests and responses),
- OperatorId (uuid, Unique identifier of operator in Sevens)

Example request

```
curl --location --request POST 'https://$ourplatformurl/api/integration/operator/user/balance' \
--header 'X-Signature: gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMoXu7sc0Nb//mkFyBt0BaImULZqHKeegs114hjrLb8d+Df818MSdhMZmlyiTvdovQ+urLJVo8mN+PNDSucUrCF2JA6A55/jLx75m7jeyjv/fXtKLvyGxkASyugwbUX2n0z/kB96zyMgI2nPXESMuYNS1At98n+qXPRSxNGhXpDz7CBX3Fyp847rEdl9WZ/nnj1iK4eqp7eOFz0Jj0XsZidY9iKyUmVXsP0e9yxHJ+mx5SYBb2rbsk8LQsTV1GjNIWvLSKeazzEp4Xfv0G5Hrn/tpmfRJ25FbXCHtUVEcLQ==' \
--header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
--header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
--header 'Content-Type: application/json' \
--data-raw '{
  "operatorId": $YOUR_OPERATOR_ID,
  "userName": "$YOUR_USER_NAME"
}'
```

Request body

```
{
  "operatorId": 123, // Unique identifier of operator in our system
  "userName": "aaa111", // unique identifier of user of operator system
}
```

Response body

```
{
  "risk": 0.00,
  "balance": 94.00
}
```

Error Response:

```
Error Responses
{
  "errorCode": "G001",
  "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
}
{
  "errorCode": "G003",
  "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
}
{
  "errorCode": "G005",
  "description": "Security signature is not valid"
}
{
  "errorCode": "G006",
  "description": "Required header {0} is not found"
}
{
  "errorCode": "G007",
  "description": "Required header with signature is not found"
}
{
  "errorCode": "G008",
  "description": "Required header {0} must be number"
}
```

```

31 {
32   "errorCode": "G009",
33   "description": "Operator id from header is not equal to operator id from request body"
34 }
35
36 {
37   "errorCode": "G010",
38   "description": "Required header {0} must be {1}"
39 }
40
41 {
42   "errorCode": "PW2728",
43   "description": "User does not exist or account details is unavailable"
44 }
45
46 {
47   "errorCode": "OP0009",
48   "description": "User does not exist or account details is unavailable"
49 }

```

User deposit endpoint

Endpoint for add amount to user available balance

URL: [https://{\\$SevensHost}/api/integration/operator/deposit](https://{$SevensHost}/api/integration/operator/deposit)

Http Method: POST

Required Headers:

- Signature (signature of body by operator's (yours) secret key),
- RequestId (Unique request ID for debugging and linking requests and responses),
- OperatorId (uuid, Unique identifier of operator in Sevens)

Example request

▼ curl

```

1 curl --location --request POST 'https://$ourplatformurl/api/integration/operator/deposit' \
2 --header 'X-Signature:
gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMoXu7sc0Nb//mkFyBt0BaImULZqHkeegs114hjrLb8d+Df818MSdhMzmlyiTvdovQ+urLJV08mN+PNDSucUrCF2JA6A55/jLx75m7jeyjv/fXtKLvyG
xKASyugwbUX2n0z/kB96zyMgI2nPXESMuYNS1At98n+qXPRSxNGhXpdz7CBX3Fyp847rEdl9WZ/nnj1ik4eqp7e0Fz0Jj0XsZidY9ikyUmVXsP0e9yxHJ+mx5SYBb2rbsk8LQsTV16jNIWvLSkeazzEp4Xfv0G5
Hrn/tpmFRJ25FbXCHtUVEcLQ==' \
3 --header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
4 --header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
5 --header 'Content-Type: application/json' \
6 --data-raw '{
7   "operatorId": $YOUR_OPERATOR_ID,
8   "userName": "$YOUR_USER_NAME",
9   "amount": 100,
10  "transactionId": "AAAA"
11 }'

```

Request body

▼ Body

```

1 {
2   "operatorId": 123, // Unique identifier of operator in our system
3   "userName": "aaa111", // unique identifier of user of operator system
4   "transactionId": "Generated id of transaction - UUID is preferable"
5   "amount": 100 // unique identifier of user of operator system
6 }

```

Error Response:

▼ Error Responses

```

1 {
2   "errorCode": "G001",
3   "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
4 }
5
6 {
7   "errorCode": "G002",
8   "description": "Can not convert value {0}. Please, check type of value according provided documentation."
9 }
10
11 {
12   "errorCode": "G003",
13   "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
14 }
15
16 {
17   "errorCode": "G004",

```

```

18     "description": "Input argument is invalid"
19 }
20
21 {
22     "errorCode": "G005",
23     "description": "Security signature is not valid"
24 }
25
26 {
27     "errorCode": "G006",
28     "description": "Required header {0} is not found"
29 }
30
31 {
32     "errorCode": "G007",
33     "description": "Required header with signature is not found"
34 }
35
36 {
37     "errorCode": "G008",
38     "description": "Required header {0} must be number"
39 }
40
41 {
42     "errorCode": "G009",
43     "description": "Operator id from header is not equal to operator id from request body"
44 }
45
46 {
47     "errorCode": "G010",
48     "description": "Required header {0} must be {1}"
49 }
50
51 {
52     "errorCode": "PW2728",
53     "description": "User does not exist or account details is unavailable"
54 }
55
56 {
57     "errorCode": "AG2924"
58     "description": "Withdraw Operation is not permitted."
59 }
60
61 {
62     "errorCode": "AG2909",
63     "description": "Message is not found for error code AG2909. Please, ask dev team to explain it"
64 }
65
66 {
67     "errorCode": "AG2458",
68     "description": "Transaction with specified id already exists"
69 }
70
71 {
72     "errorCode": "AG2459",
73     "description": "External operations with user balance are not allowed"
74 }
75
76 {
77     "errorCode": "OP0009",
78     "description": "User does not exist or account details is unavailable"
79 }

```

User withdraw endpoint

Endpoint for decrease user available balance

URL: [https://{\\$SevensHost}/api/integration/operator/withdraw](https://{$SevensHost}/api/integration/operator/withdraw)

Http Method: POST

Required Headers:

- Signature (signature of body by operator's (yours) secret key),
- RequestId (Unique request ID for debugging and linking requests and responses),
- OperatorId (uuid, Unique identifier of operator in Sevens)

Example request

▼ curl

```

1 curl --location --request POST 'https://$SourcePlatformUrl/api/integration/operator/withdraw' \
2 --header 'X-Signature:
  gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMoXu7sc0Nb//mkFyBt0BaImULZqHKeegs114hjrLb8d+Df818MSdhMZmlyiTvdovQ+urLJVo8mN+PNDSucUrCF2JA6A55/jLx75m7jeyjv/fXtKLvyG

```

```
xkASyugwbUX2n0z/kB96zyMgI2nPXESMuyNS1at98n+qXPRsXNGhXpDz7CBX3Fyp847rEd19WZ/nnj1iK4eq7e0Fz0Jj0xsZidY9iKyUmVXsP0e9yxHJ+mx5SYBb2rbsk8LQsTV1GjNIWvLSKeazzEp4Xfv0G5
Hrn/tpmFRJ25FbXCHtUVEcLQ== ' \
3 --header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
4 --header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
5 --header 'Content-Type: application/json' \
6 --data-raw '{
7   "operatorId": $YOUR_OPERATOR_ID,
8   "userName": "$YOUR_USER_NAME",
9   "amount": 100,
10  "transactionId": "AAAA"
11 }'
```

Request body

▼ Body

```
1 {
2   "operatorId": 123, // Unique identifier of operator in our system
3   "userName": "aaa111", // unique identifier of user of operator system
4   "transactionId": "Generated id of transaction - UUID is preferable"
5   "amount": 100 // unique identifier of user of operator system
6 }
```

Error Response:

▼ Error Responses

```
1 {
2   "errorCode": "G001",
3   "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
4 }
5
6 {
7   "errorCode": "G002",
8   "description": "Can not convert value {0}. Please, check type of value according provided documentation."
9 }
10
11 {
12   "errorCode": "G003",
13   "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
14 }
15
16 {
17   "errorCode": "G004",
18   "description": "Input argument is invalid"
19 }
20
21 {
22   "errorCode": "G005",
23   "description": "Security signature is not valid"
24 }
25
26 {
27   "errorCode": "G006",
28   "description": "Required header {0} is not found"
29 }
30
31 {
32   "errorCode": "G007",
33   "description": "Required header with signature is not found"
34 }
35
36 {
37   "errorCode": "G008",
38   "description": "Required header {0} must be number"
39 }
40
41 {
42   "errorCode": "G009",
43   "description": "Operator id from header is not equal to operator id from request body"
44 }
45
46 {
47   "errorCode": "G010",
48   "description": "Required header {0} must be {1}"
49 }
50
51 {
52   "errorCode": "PW2728",
53   "description": "User does not exist or account details is unavailable"
54 }
55
56 {
```

```

57     "errorCode": "AG2924"
58     "description": "Withdraw Operation is not permitted."
59 }
60
61 {
62     "errorCode": "AG2909",
63     "description": "Message is not found for error code AG2909. Please, ask dev team to explain it"
64 }
65
66 {
67     "errorCode": "AG2458",
68     "description": "Transaction with specified id already exists"
69 }
70
71 {
72     "errorCode": "AG2459",
73     "description": "External operations with user balance are not allowed"
74 }
75
76 {
77     "errorCode": "OP0009",
78     "description": "User does not exist or account details is unavailable"
79 }

```

Transaction status endpoint

Endpoint to check the corresponding transaction's status

URL: <https://{{SevensHost}}/api/integration/operator/transactionStatus>

Http Method: POST

Required Headers:

Signature (signature of body by operator's (yours) secret key),

RequestId (Unique request ID for debugging and linking requests and responses),

OperatorId (uuid, Unique identifier of operator in Sevens)

Example request

▼ curl

```

1 curl --location --request POST 'https://$ourplatformurl/api/integration/operator/withdraw' \
2 --header 'X-Signature:
gNJ0m94D0s8cYUf4/YxyDwCtRn4PAJt22w8jd/jpD0uWMOxu7sc0Nb//mkFyBt0BaImULZqHKeegs114hjrLb8d+Df818MSdhMZmlyiTvdovQ+urLJVo8mN+PNDSucUrCF2JA6A55/jLx75m7jeyjv/fXtKLvyGx
kASyugwbUX2n0z/kB96zyMgI2nPXESMuYnS1At98n+qXPR5xNGhXpDz7CBX3Fyp847rEdl9WZ/nnj1iK4eq7e0Fz0Jj0XsZidY9iKyUmVXsP0e9yxHJ+mx5SYBb2rbsk8LQsTV16jNIWvLSKeazzEp4Xfv065Hr
n/tpmfRJ25FbXCHtUVEcLQ==' \
3 --header 'X-Operator-Id: $YOUR_OPERATOR_ID' \
4 --header 'X-Request-Id: $YOUR_PROVIDED_UUID' \
5 --header 'Content-Type: application/json' \
6 --data-raw '{
7     "operatorId": $YOUR_OPERATOR_ID,
8     "transactionId": "AAAA"
9 }'

```

Request body

▼ Body

```

1 {
2     "operatorId": 123, // Unique identifier of operator in our system
3     "transactionId": "Generated id of transaction - UUID is preferable"
4 }

```

Error Response:

▼ Error Responses

```

1 {
2     "errorCode": "G001",
3     "description": "Can not parse input json message. Please, check fields and their values according provided documentation."
4 }
5
6 {
7     "errorCode": "G002",
8     "description": "Can not convert value {0}. Please, check type of value according provided documentation."
9 }
10
11 {
12     "errorCode": "G003",
13     "description": "Message is not found for error code {0}. Please, ask dev team to explain it"
14 }
15
16 {
17     "errorCode": "G005",

```

```

18     "description": "Security signature is not valid"
19   }
20
21   {
22     "errorCode": "G006",
23     "description": "Required header {0} is not found"
24   }
25
26   {
27     "errorCode": "G007",
28     "description": "Required header with signature is not found"
29   }
30
31   {
32     "errorCode": "G008",
33     "description": "Required header {0} must be number"
34   }
35
36   {
37     "errorCode": "G009",
38     "description": "Operator id from header is not equal to operator id from request body"
39   }
40
41   {
42     "errorCode": "G010",
43     "description": "Required header {0} must be {1}"
44   }
45
46   {
47     "errorCode": "AG2464",
48     "description": "External transaction with specified id is not found"
49   }

```

Operator Endpoints (direct wallet flow Sevens initiated transactions)

Deposit callback

Endpoint for money moving from operator to Sevens

URL: <https://{baseUri}/api/provider/callback/deposit>

Http Method: POST

Headers:

Signature (signature of body by secret key),
 RequestId (Unique request ID for debugging and linking requests and responses),
 ProviderId (Unique identifier of Sevens in operator)

Request Body:

▼ Body

```

1  {
2    "userName": "John", // User unique identifier, alphanumeric value without special symbols (only . and _ is allowed), from 4 to 20 characters length
3    "transactionId": "uuid", // unique identifier of transaction
4    "currency": "INR", // user currency
5    "amount": 1.23, // BigDecimal amount for deposit
6    "sessionToken": "token" // session token from frame/url endpoint
7    "providerId": "sevens" // Our (Sevens) identifier in operator system
8  }

```

Response Body:

▼ Body

```

1  {
2    "status": SUCCEED|FAILED,
3    "errorCode": "code", // optional on failed
4    "userId": "John",
5    "currency": "INR",
6    "amount": 1.23
7  }

```

Withdraw callback

URL: <https://{baseUri}/api/provider/callback/withdraw>

Http Method: POST

Headers:

Signature (signature of body by secret key),
 RequestId (Unique request ID for debugging and linking requests and responses),

ProviderId (Unique identifier of Sevens in operator)

Request Body:

▼ Body

```
1 {
2   "userName": "John", // User unique identifier
3   "transactionId": "uuid", // unique identifier of transaction
4   "currency": "INR", // user currency
5   "amount": 1.23, // BigDecimal amount for withdraw
6   "sessionToken": "token" // session token from frame/url endpoint
7   "providerId": "sevens" // Our (Sevens) identifier in operator system
8 }
```

Response Body:

▼ Body

```
1 {
2   "status": SUCCEED|FAILED,
3   "errorCode": "code", // optional on failed
4   "userId": "John",
5   "currency": "INR",
6   "amount": 1.23
7 }
```

Rollback callback

URL: <https://{baseUrl}/api/provider/callback/rollback>

Http Method: POST

Headers:

- Signature (signature of body by secret key),
- RequestId (Unique request ID for debugging and linking requests and responses),
- ProviderId (Unique identifier of Sevens in operator)

Request Body:

▼ Body

```
1 {
2   "transactionId": "uuid", // unique identifier of transaction
3   "sessionToken": "token", // session token from frame/url endpoint
4   "providerId": "sevens" // Our identifier in operator system
5 }
```

Response Body:

▼ Body

```
1 {
2   "status": SUCCEED|FAILED,
3   "errorCode": "code", // optional on failed
4 }
```

Seamless flow endpoints

Operators endpoints

The callback API listing and examples are available on Stoplight - <https://sevens.stoplight.io/docs/seamless-operator-integration>

[API on stoplight.io](#)