


Wrapper Classes

18 July 2026 07:54

```
Integer n1=100;
```

Boxing:

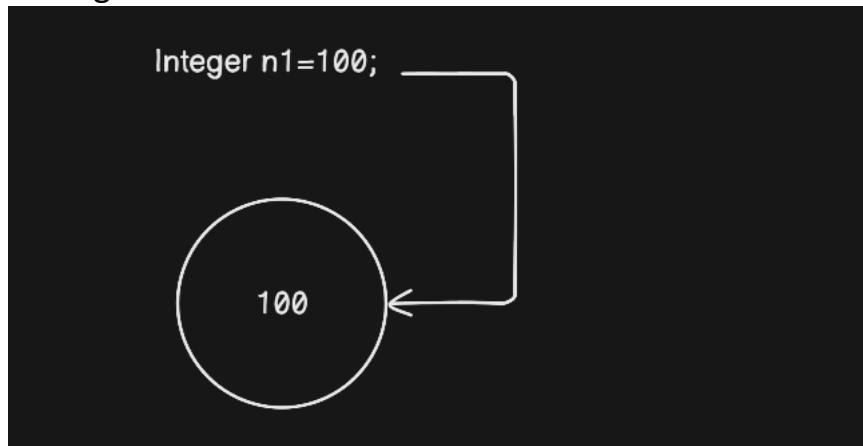

Means converting primitive values into wrapper object.

Manual Boxing:

```
Integer n1=100;  
Integer number=Integer.valueOf(n1);
```

AutoBoxing:

```
-----  
Integer n2=100;
```


Internally:

```
Integer obj=Integer.valueOf(n2);
```


Unboxing

```
-----  
Integer obj=Integer.valueOf(100);  
Int num=obj.intValue();
```

String to Primitive Conversion

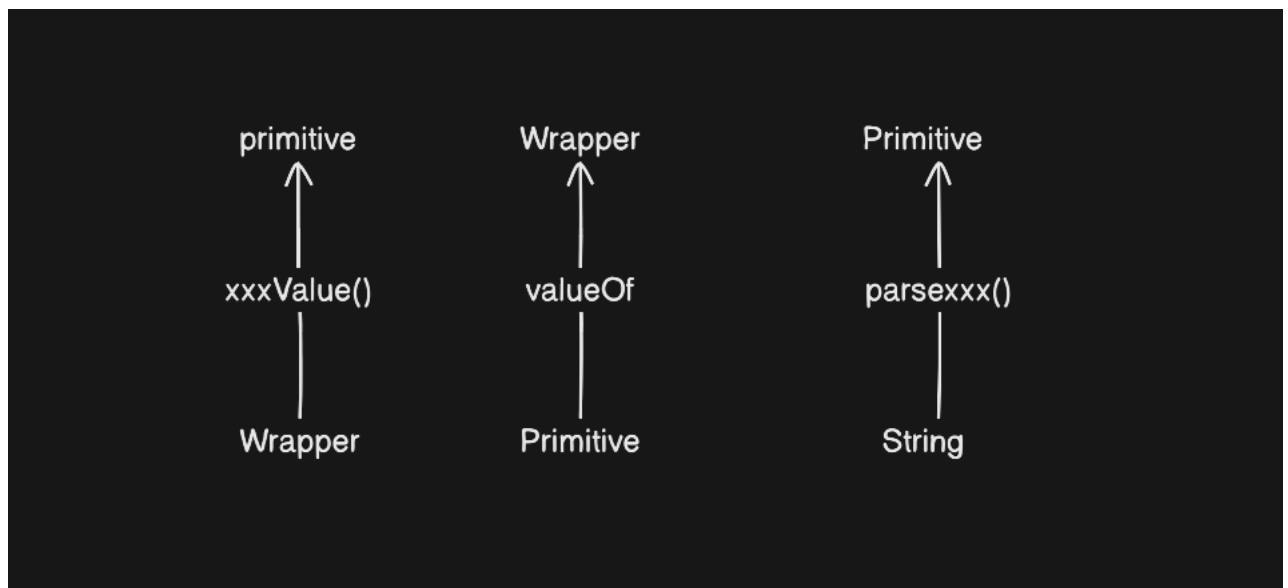

Parsexxx() return primitive
 valueOf() return wrapper object

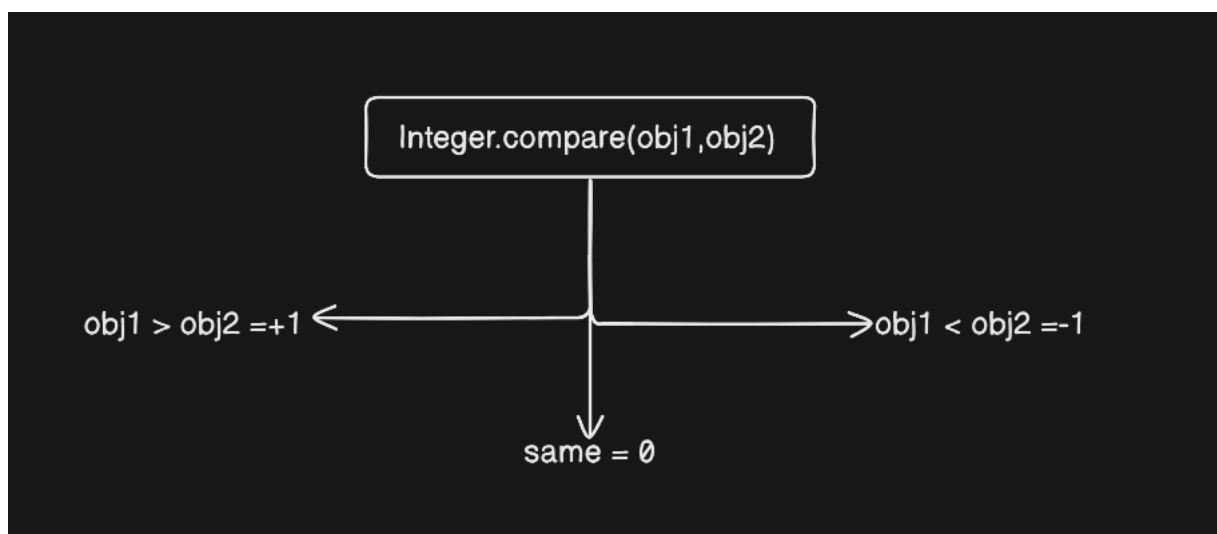


Method	Meaning
Compare(a,b)	Compare two values
Max(a,b)	Return max
Min(a,b)	Return min
toString(value)	Convert value to String

== in Primitive

In primitive == is compare value because we do not have any reference here

== in Classes

In classes == is compare reference and if we want to compare content then use .equals() method

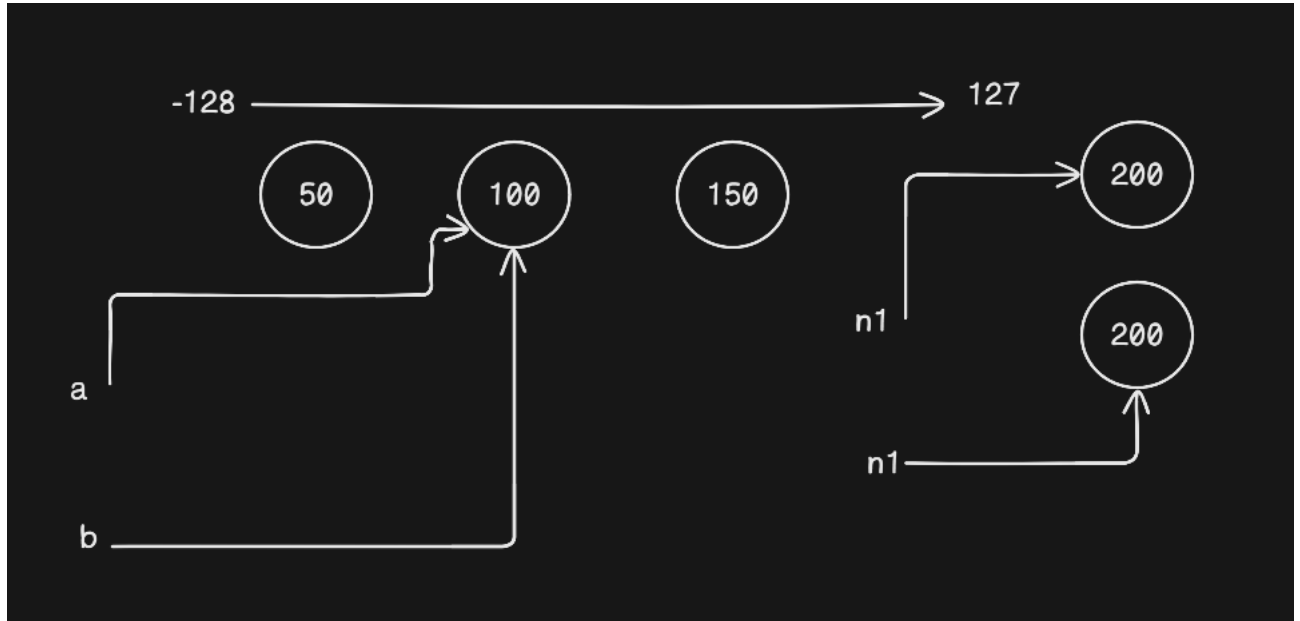

Wrapper classes are immutable

Immutable: if we make changes in current object then new object will be created
it means current object is non changeable.