

7 Provisioning resources exercises

The exercises in this chapter teach the following topics:

- Adding users to a static role
- Creating a provisioning policy
- Verifying account provisioning
- Verifying the password policy
- Verifying that the provisioning policy priorities
- Modifying the default join directive for an attribute
- De-provisioning an account
- Creating a service selection policy
- Creating a provisioning policy using the service selection policy
- Enforcing policy compliance
- Provisioning access on Linux
- Provisioning access on Active Directory

7.1 Exercise 1 – Adding users to a static role

Before you create provisioning policies, you need to add users to roles.

Task 1. Adding users to JKE System Admin role

1. **Log in** to the IBM Security Identity Manager Administrative Console as the system administrator with the user ID **itim manager**.
2. In the **Home** tab, go to **Manage Users**.
3. Edit the **Alice Smyth** entry.
4. In the **Personal Information** tab, add the **JKE System Admin** organizational **role**.
5. Click **Submit Now**. Click **Close**.
6. Repeat steps 1-5 for **Douglas Adams** and **Edwin Abbott**.

Task 2. Adding user to System Accounts Owner role

Note : You can also add users to roles from the Manage Roles task.
7. Add user **Linux System-Accounts** to role **System Accounts Owner**.

7.2 Exercise 2 – Creating a provisioning policy

IBM Security Identity Manager uses the provisioning policy to evaluate which entities are given access to a particular resource governed by a service. In this exercise, you modify the provisioning policy that you created

when you created the Linux Service to provide automatic entitlement for users with the JKE System Admin role.

1. On the **Home** tab, you go to **Manage Policies > Manage Provisioning Policies**.
2. Click **Refresh**. Click the policy named **Default Provisioning Policy for service Linux Service**.
3. Modify the provisioning policy to match the following information:

Note : The greater the priority number, the lower the priority. In a later exercise, you add another provisioning policy with a lower priority number. That policy then takes precedence over this policy.

Field	Value
Policy name	Admin Linux Accounts
Policy Status	Enable
Priority	100
Members (Section)	Select : Roles specified below Add organizational role JKE System Admin
Entitlements (Section)	Select check box for Linux Service and click Change ; Provisioning options: Automatic Target type: Specific Service Service Name: Linux Service Workflow: [Leave blank, click clear button if populated]
Entitlement parameters(Section)	Select check box for Linux Service and click Parameters ; click Create button. Select UNIX shell Enforcement type default Change UNIX shell value to /bin/bash

4. Click **Preview** to see the effects of the new policy, choosing the option to **enforce the entire** policy. Click **Continue**. Wait until the Evaluation Status shows **completed**.
5. Click the **Provision New Accounts** link to see the users who are provisioned new accounts. You should see a total of 4 new accounts. Three for the users (Alice, Douglas, and Edwin) who you added to the JKE System Admin organization role in the previous exercise. The fourth is for Erica, who you added to the JKE System Admin role when you initially created it.
You also see a number of disallowed accounts (the accounts that were adopted by Linux System-Accounts) because there is no provisioning policy in place that allows those accounts. Since the enforcement action is set to **Mark** account, no concrete action is taken by IBM Security Identity Manager regarding these violations. If you set the enforcement action to **Correct**, the system would de-provision the accounts.

Evaluation status: Completed

Accounts evaluated: 34

Error account: 0 accounts

Provision new account: 4 accounts

▼ **Disallowed account: 30 accounts**

Enforcement Action ▲	Number of Accounts ^
Alert account	0
Delete managed account	0
<u>Mark account</u>	30
Orphan managed account	0
Suspend managed account	0

▶ **Noncompliant account: 0 accounts**

▶ **Compliant account: 0 accounts**

6. **Close** the preview screen and **submit** the policy, **enforcing the entire policy**.

7.3 Exercise 3 – Verifying account provisioning

In this exercise, you verify that the accounts on Linux Service are provisioned as you expect.

1. On the **Home** tab, you go to **View Requests > View All Requests by User**.
2. Click **Search Requests** to find the **Modify Provisioning Policy** request.
3. Click the link under the column **Request Type** to open and review the request details. Expand Clicking the plus sign (+) and you can see **4 new accounts** are added.
4. In a terminal window, view **/etc/passwd**. Verify that the accounts are provisioned with the correct shell of **/bin/bash**:

```
cat /etc/passwd
```

7.4 Exercise 4 – Verifying the password policy

You can now verify the password policy that you created for the Linux Service in Exercise 3, "Creating a password policy".

1. On the **Home** tab, you go to **Manage Users**.
2. Click **Refresh** to show all users.
3. Click the small **arrow** to the right of the **Alice Smyth** entry and click **Change Passwords**.

4. Enter a password of **aa** and try to **submit** the change. This action should violate password policy on **Linux Service** because the password is too short.
5. Read the error message on the screen.
6. Click the small triangle to the left of **View password strength rules** to confirm that the minimum length for a password is four characters. Click **Cancel**.

7.5 Exercise 5 – Creating a provisioning policy for the JKE managers role

In this exercise, you create a new provisioning policy to provide Linux accounts to managers at JK Enterprises.

1. On the **Home** tab, you go to **Manage Policies > Manage Provisioning Policies**.
2. Click **Refresh**. Click the **Create**.
3. **Create** the provisioning policy to match the following information:

Note : This provisioning policy takes precedence over Admin Linux Accounts because it has a smaller priority number.

Field	Value
Policy name	Manager Linux Accounts
Policy Status	Enable
Priority	50
Members (Section)	Select : Roles specified below Add organizational role JKE Managers
Entitlements (Section)	Select Create ; Provisioning options: Automatic Target type: Specific Service Service Name: Linux Service Workflow: [Leave blank, click clear button if populated]
Entitlement parameters(Section)	Select check box for Linux Service and click Parameters ; click Create button. Select UNIX shell Enforcement type mandatory Change UNIX shell value to /bin/ksh

4. **Preview** the new provisioning policy. Notice that there are multiple new accounts to provision, and two non-compliant accounts (Douglas and Edwin) with a different shell.

Evaluation status: Completed
 Accounts evaluated: 13
 Error account: 0 accounts
Provision new account: 11 accounts
 ▶ **Disallowed account: 0 accounts**
 ▶ **Noncompliant account: 2 accounts**
 ▶ **Compliant account: 0 accounts**

5. **Close** the Preview Policy windows
6. **Submit** the new provisioning policy.

7.6 Exercise 6 – Verifying that the manager policy takes priority

In this exercise, you verify that the Manager Linux Accounts policy takes priority. User Douglas Adams is entitled by both the Admin Linux Accounts provisioning policy and the Manager Linux Accounts provisioning policy. Manager Linux Accounts has a smaller priority number so the entitlement parameters in that policy take precedence over those in the Admin Linux Accounts policy.

1. On the **Home** tab, you go to **Manage Users**.
2. Click the small triangle to the right of **Douglas Adams** and click **Accounts**.
3. Click **Search** and locate the account on **Linux Service**.

Request...		Change	Delete	Suspend	Restore	Refresh
☐	Sl ^	State ^	User ID ^	Service Name ^	Ownership Type	
☐			dadams	▶ ITIM Service	Individual	
☐			dadams	▶ Linux Service	Individual	
Page 1 of 1		Total: 2 Displayed: 2 Selected: 0				

4. Click the non-compliant warning icon in the **State** column.
5. The warning should indicate that the shell is not compliant.
 Recall that you left the policy enforcement setting on the Linux Service service at the default of **Mark**, not **Correct**. Therefore, Douglas' shell does not automatically change to the value specified by the higher priority policy.
6. Click **close** twice.

7.7 Exercise 7 – Creating a provisioning policy for system accounts

In this exercise, you create a provisioning policy that authorizes the user Linux System-Accounts to own the system accounts that are retrieved during reconciliation. The provisioning policy will stipulate that the accounts use ownership type **system** instead of individual.

Task 1. Creating the provisioning policy

1. On the **Home** tab, you go to **Manage Policies > Manage Provisioning Policies**.
2. **Create** a new provisioning policy with the following information:

Field	Value
Policy name	System Linux Accounts
Policy Status	Enable
Priority	10000
Business unit	JK Enterprises
Members (Section)	Select : Roles specified below Add organizational role System Account Owner
Entitlements (Section)	Select Create ; Provisioning options: Manual Ownership type: System Target type: Specific Service Service Name: Linux Service Workflow: [Leave blank, click clear button if populated]
Entitlement parameters(Section)	<i>[none set]</i>

3. Click **Submit**.
4. On the **Home** tab, go to **Manage Services**.
5. Click the small arrow to the right of **Linux Service** and click **Accounts**. Click **Refresh** to show all the accounts.
Notice that the accounts owned by Linux System-Accounts are still marked as Disallowed. That is because the accounts have the ownership type Individual but the provisioning policy only allows ownership type System.

Task 2. Changing account ownership type on system accounts

Now you change the account ownership for all the accounts that **Linux System-Accounts** owns. You use the **assign** to user function to change the ownership type.

- Filter the list of accounts to show only the accounts that Linux System-Accounts owns by completing the search box as shown.

Account information

Search by ☐ User ID ☒ Owner

Ownership Type

- Click **Search**.
- Choose the check box at the top of the select column to **select all** the rows. Click **Assign to User**. The Assign to User wizard opens.
- Find and choose user **Linux System-Accounts** and click **Continue**.
- On the confirmation screen, click **Assign to User**.
- Click **close** to return to the **Manage Accounts** task and click **Refresh** to update the accounts list.
- The accounts show ownership type **System**.

Request... Change Delete Suspend Restore Assign to User Refresh						
☐ S ^	State ▾	User ID ^	Owner ^	Ownership Type ^	Status ^	
☐		abrt	Linux System-Accounts	System	Inactive	
☐		adm	Linux System-Accounts	System	Active	
☐		avahi	Linux System-Accounts	System	Inactive	
☐		bin	Linux System-Accounts	System	Active	
☐		daemon	Linux System-Accounts	System	Active	

Hint : If you don't see any accounts, ensure that your Search settings specify ownership type **All**.

7.8 Exercise 8 – Modifying the default join directive for an attribute

In this exercise, you modify the default join directive for the attribute that governs a user's secondary group setting in Linux.

Before you can see how the join directives work, you need to perform additional configuration of the existing provisioning policies in order to set up an attribute conflict.

Modifying existing provisioning policies

- On the **Home** tab, you go to **Manage Policies > Manage Provisioning Policies**.
- Click the **Admin Linux Accounts** policy and click **Entitlements**.
- Select **Linux Service** and click **Parameters**.

4. **Create** a new parameter for **Secondary group**. Select **Mandatory** for **Enforcement type** and add the **adm** and **printadmin** groups to Secondary group.
5. **Create** another new parameter for **Secondary group**. Select **Allowed** for Enforcement type and add the **dialout**, **games**, and **video** groups to Secondary group. Click **Continue**.

Create Change Delete				
Select ^	Name ^	Template value ^	Enforcement... ^	Value Type ^
☐	UNIX shell	/bin/bash	Default	Constant Value
☐	Secondary group	printadmin	Mandatory	Constant Value
☐	Secondary group	adm	Mandatory	Constant Value
☐	Secondary group	video	Allowed	Constant Value
☐	Secondary group	games	Allowed	Constant Value
☐	Secondary group	dialout	Allowed	Constant Value
Page 1 of 1 Total: 6 Displayed: 6 Selected: 0				

Note : You add the dialout and video groups because those groups are assigned to new users by default by the operating system. The provisioning policy should allow those groups on accounts that already have them. You add the games group because you use that group in a later exercise to configure an access.

6. **Submit** the changes to the provisioning policy, enforcing the entire policy.
7. Repeat steps 1 through 6 for the **Manager Linux Accounts** provisioning policy, but this time add only **printadmin** as a **Mandatory** secondary group. Be sure to add **dialout** and **video** as Allowed secondary groups. **Do not add games**. Click **Continue**.

Create Change Delete				
Select ^	Name ^	Template value ^	Enforcement... ^	Value Type ^
☐	UNIX shell	/bin/ksh	Mandatory	Constant Value
☐	Secondary group	printadmin	Mandatory	Constant Value
☐	Secondary group	video	Allowed	Constant Value
☐	Secondary group	dialout	Allowed	Constant Value
Page 1 of 1 Total: 4 Displayed: 4 Selected: 0				

8. **Submit** the changes to the provisioning policy, enforcing the entire policy.
9. On the **Home** tab, go to **View Requests > View All Requests by User**. Wait until both provisioning policy changes are completed before continuing this exercise.

Adding a new person to provision an account

You now add a new user that is entitled to both provisioning policies and observe how the Secondary group attribute conflict is resolved. The default join directive for Secondary group is Union.

10. On the **Home** tab, navigate to **Manage Users**.

11. Click **Create** and add the following **Person** entry to the **JK Enterprises Business** unit:

User	Data
Uma Join	Last Name: Join Full Name: Uma Join Preferred user ID: ujoin First Name: Uma Organizational Role: JKE System Admin Title: Manager E-mail address: ujoin@jke.test Password: P@ssw0rd

Note : Be sure to specify Uma's first name, even though the information is optional. You create another person with the same last name later in this exercise.

12. **Submit** the new person.

Verifying the groups that are assigned to Uma Join

13. As **root** on the **isim.test** host, run the following command in a **terminal** window to see which groups Uma is assigned:

```
groups ujoin
```

With the default join directive (Union), Uma is assigned to the following groups:

- **printadmin**
- **adm**

Changing the join directive for erposixsecondgroup

14. On the Home tab, go to **Configure System > Configure Policy Join Behaviors**. Select **Open** it using Java Webstart(default). Click **OK**. Click **Continue**. **Accept terms and conditions**. Click **Run**. Click **Run** again. It might take a minute for the Java applet to load for the first time.

15. Select the **PosixLinuxProfile** service type. When the window populates with the attribute list, click the attribute **erposixsecondgroup**.

16. Select Intersection as the join type

The screenshot shows a dialog box with the following fields and options:

- Attribute Name:** erposixsecondgroup
- Description:** (empty text box)
- Join Type:** Three radio buttons are present: **Union** (unselected), **Intersection** (selected), and **Priority** (unselected).

17. Click **Save**. Click **OK**. Close the Webstart window from the top right corner(x) symbol. Click **close**.
18. **Restart** IBM Security Identity Manager for changes to take effect. From the **Terminal** run below command:
`/ISIMScripts/restartWAS.sh`

Note : There is an option in **enrolepolicies.properties** called **provisioning.policy.join.overridingCacheTimeout** that controls how often the join directives are refreshed in IBM Security Identity Manager. The default is 300 seconds.

Adding another new person

19. On the **Home** tab, go to **Manage Users**.
20. Click **Create** and add the following **Person** entry to the **JK Enterprises Business** unit:

User	Data
Ima Join	Last Name: Join Full Name: Ima Join Preferred user ID: ijoin First Name: Ima Organizational Role: JKE System Admin Title: Manager E-mail address: ijoin@jke.test Password: P@ssw0rd

21. **Submit** the person. Click **Close**.

Verifying the groups that are assigned to Ima Join


22. As **root** on the **isim.test** host, use the following command in a **terminal** window to see to which groups **Ima** is assigned:
`groups ijoin`
 With the new join directive of Intersection, Ima is assigned only to the following groups:
 - **printadmin**

Setting the join directive for erposixsecondgroup back to Union

Now that you have seen the effect of the join directive, you will reset the join directive for erposixsecondgroup to **union**.

23. On the Home tab, you go to **Configure System > Configure Policy Join Behaviors**. Select **Open** it using Java Webstart(default). Click **OK**. Click **Continue**. **Accept terms and conditions**. Click **Run**. Click **Run** again. It might take a minute for the Java applet to load for the first time.
24. Select the **PosixLinuxProfile** service type. When the window populates with the attribute list, click the attribute **erposixsecondgroup**.

25. Select **Union** as the join type.

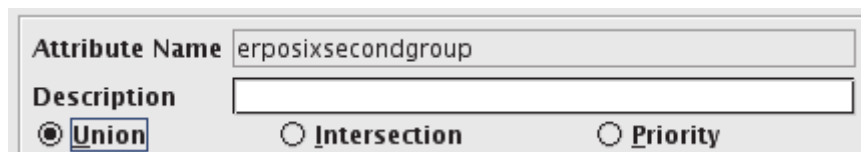

26. Click **Save** and click **Close**.

27. Click **Logout**.

28. **Restart** IBM Security Identity Manager for changes to take effect. From the **Terminal** run below command:

```
/ISIMScripts/restartWAS.sh
```

7.9 Exercise 9 – De-provisioning an account

In this exercise, you de-provision the Linux account for Ima Join.

1. On the **Home** tab, go to **Manage Users**.
2. Click **Refresh** to display all users
3. Click the small **arrow** to the right of **Ima Join** and click **Accounts**. Click **Refresh**.
4. Click the small **arrow** to the right of Ima's Linux Service account and click **Delete**. Click **Close**.

Explain why the operation was **successful** or **not successful**.

7.10 Exercise 10 – Creating a service selection policy

In this exercise, you create a service selection policy to provision a Linux account to users whose **last name** begins with the **letters M through Z**.

1. On the Home tab, go to **Manage Policies > Manage Service Selection Policies**.
2. **Create** a new service selection policy with the following information:

Field	Value
Name	Linux Service based on last name
Business unit	JK Enterprises
Make policy available to services in	This business unit and its subunits

Field	Value
Service Type (Section)	POSIX Linux Profile
Service Selection Script (Section)	<pre> var service = null; var serviceArray = ServiceSearch.searchByFilter("(erServiceName=Linux*)",1); if (serviceArray != null && serviceArray.length > 0) service = serviceArray[0]; var sn = subject.getProperty("sn")[0]; if (sn>="M") return service; else return null; </pre>

- Click **Submit Now** to submit the new service selection policy.

7.11 Exercise 11 – Creating a provisioning policy using the service selection policy

In this exercise, you create a provisioning policy that will use the service selection policy to provide Linux accounts to users whose last name begins with the letters M through Z..

- On the Home tab, go to **Manage Policies > Manage Provisioning Policies**.
- Create** a new provisioning policy with the following information:

Field	Value
Policy Name	M-Z Linux Accounts
Make policy available to services in	This business unit and its subunits
Priority	1000
Business unit	JK Enterprises
Members	All users in the organization
Entitlements	Click Create Provisioning options: Automatic Target type: Service Selection Policy Service type: POSIX Linux profile Governing service selection policy name: Linux Service based on last name Workflow: [Leave blank]
Entitlement Parameters	[none set]

3. **Preview** the provisioning policy to confirm that new accounts are provisioned for users with last names starting with M through Z. Click **Close**.
4. **Submit** the new provisioning policy.
5. Click **View My Request**. Click **Refresh** till the request is completed. Review the completed request detail to see which users are provisioned Linux accounts.

7.12 Exercise 12 – Enforcing policy compliance

In the last few exercises, you may have noticed that there are accounts on Linux Service that are non-compliant. In this exercise, you configure the Linux Service to correct non-compliant accounts.

Task 1. Finding and examining non-compliant accounts

1. On the **Home** tab, you go to **Manage Services**. Click **Refresh**.
2. Click the small **arrow** to the right of **Linux Service** and click **Accounts**. Click **Refresh** to show all the accounts.
3. Click the **State** column header **arrow** twice to sort the list by state - descending. All marked accounts are at the top of the list.

Request...ChangeDeleteSuspendRestoreAssign to UserRefresh						
☐ s ^	State ▾	User ID ^	Owner ^	Ownership Type ^	Status ^	
☐		iibn-s	Ibrahim Ibn-Saud	Individual	Active	
☐		iayom	Ivan Ayom	Individual	Active	
☐		tbraha	Tycho Braha	Individual	Active	
☐		rsanch	Raphael Sanchez	Individual	Active	
☐		ddrive	Dianne Driver	Individual	Active	
☐		bcarlt	Brad Carlton	Individual	Active	
☐		jwrih	John Wright	Individual	Active	
☐		vyoung	Vince Young	Individual	Active	

4. Click the small yellow warning icon to see the non-compliant attributes.
The non-compliance is due to the secondary group attribute not matching the mandatory groups that you specified in the provisioning policies.

Task 2. Correcting non-compliance

5. On the **Home** tab, go to **Manage Services**.
6. Click the small **arrow** to the right of **Linux Service** and click **Configure Policy Enforcement**.
7. Set the enforcement action to **Correct**. Click **Continue**.
8. **Submit** the request.

Important : Be careful when setting enforcement to Correct because disallowed accounts will be **deleted!** The system might also automatically make other unwanted changes. Review all non-compliant accounts on a service before setting enforcement to Correct.

9. Click **View My Request**. Click **Refresh** till the request is completed. Review the completed request detail to see which user's Linux accounts are modified. **Refresh** the account list on **Manage Accounts** Tab to confirm all accounts are now compliant.

Task 3. Set policy enforcement back to Mark

In order to prevent unintended account changes or deletions, you set the policy enforcement back to **Mark**.

10. Return to **Manage Services**
11. Click the small **arrow** to the right of **Linux Service** and click **Configure Policy Enforcement**.
12. Set the enforcement action to **Mark**. Click **Continue**.
13. Click **Submit**.

7.13 Exercise 13 – Provisioning access on Linux

In this exercise, you create an application access. You then request the access through the IBM Security Identity Manager Identity Service Center(ISC).

Task 1. Defining the access

1. On the **Home** tab, you go to **Manage Services**.
2. Click the small arrow to the right of **Linux Service** and click **Manage Groups**. Search for the **games** group.
3. Click the group name **games**.
4. On the **Access Information** tab, select the check box for **Define an Access**.
5. Select **Enable Common Access**. Type the access name of **Tetris**. Select the access type **Application**. Select a workflow of **No Approval Required**. Select **both notification** options.
6. Click **OK** to save the form.
7. Click **Log Out**. Close **Firefox**.

Task 2. Requesting access

Accesses are usually request based. In this task, you log in to the IBM Security Identity Manager Identity Service Center(ISC) and request an access.

8. Open Firefox. Enter the URL - **https://isim.test:9443/itim/ui/Login.jsp** for the Identity Service Center (ISC) console or click the bookmark  ISIM ISC
9. Log in as user **asmyth**, with password **P@ssw0rd**
10. Click **Request Access**. **Request access** to the **Tetris** application. (Scroll down and find the Tetris application)

Note : If you do not see the choice to request the access, ensure that the Admin Linux Accounts provisioning policy specifies the secondary group entitlement parameters of games. You set this up in [6.8.Exercise 8 – Modifying the default join directive for an attribute](#)

11. Click **Next**. Enter justification – required and Click **Submit**.
12. To confirm successful provisioning, open a **terminal** and issue:

```
groups asmyth
```

 Confirm games is in the list of groups.
13. **Log out** and **log back** in to the ISC console as **John Davis**, with user id **jdavis** and password **P@ssw0rd**
14. Click **Request Access**. Notice that the Tetris access is **not available**.
 John is **not a member** of any provisioning policies that entitle him to a Linux Account that allows the games secondary group. Consequently, John is not permitted the Tetris access, which is based on the games group. Users need entitlement to request an access.
15. **Logout** of the Identity Service center(ISC). Close **Firefox**.

7.14 Exercise 14 – Provisioning shared folder access on TechSupport LDAP

In this exercise, you work with an access on IBM SDS LDAP.

Task 1. Updating provisioning policy

In this task, you modify the TechSupport LDAP provisioning policy to permit the TechSupport Help Desk employees access to the TechSupport LDAP Service.

1. Log in to the IBM Security Identity Manager Administrative Console as the system administrator with the user ID **itim manager**.
2. On the **Home** tab, you go to **Manage Policies > Manage Provisioning Policies**.
3. Click the policy named **Default Provisioning Policy for service TechSupport LDAP** to edit it.

4. Modify the provisioning policy to match the following information.

Field	Value
Policy name	Help Desk LDAP Accounts
Policy Status	Enable
Priority	1000
Members(Section)	Add organizational role Help Desk
Entitlements(Section)	Click on TechSupport LDAP Provisioning options: Manual Target type: Specific Service Service Name: TechSupport LDAP

Field	Value
	Workflow: [Leave blank, click Clear button if populated]
Entitlement Parameters(Section)	Select check box for TechSupport LDAP and click Parameters; click Create button. Select Group Name, click continue Enforcement type Allowed Group value JKENetworkShare click Create button. Select Full Name Parameter type Javascript Enforcement type Mandatory Value return subject.getProperty("cn"); click Create button. Select Last Name Parameter type Javascript Enforcement type Mandatory Value return subject.getProperty("sn"); click Create button. Select UserID Parameter type Javascript Enforcement type Mandatory Value return subject.getProperty("uid");

Create	Change	Delete			
☐ Select ^	Name ^	Template value ^	Enforcement... ^	Value Type ^	
☐	<u>Group Name</u>	cn=JKENetworkShare,ou=TechSuppEmployees,dc=contractors	Allowed	Constant Value	
☐	<u>User ID</u>	return subject.getProperty("uid");	Mandatory	JavaScript	
☐	<u>Last name</u>	return subject.getProperty("sn");	Mandatory	JavaScript	
☐	<u>Full name</u>	return subject.getProperty("cn");	Mandatory	JavaScript	
Page 1 of 1		Total: 4 Displayed: 4 Selected: 0			

The parameter section should look like above.

- Click **Preview** to see the effects of the new policy, selecting the option to **enforce the entire policy**. Click **Continue**. Wait until the Evaluation Status shows completed. You see three accounts to be marked compliant.

Evaluation status: Completed

Accounts evaluated: 3

Error account: 0 accounts

Provision new account: 0 accounts

▶ **Disallowed account: 0 accounts**

▶ **Noncompliant account: 0 accounts**

▶ **Compliant account: 3 accounts**

[Stop Evaluation](#)

[Close](#)

6. **Close** the preview screen and **submit** the policy, **enforcing the entire policy**. Click View My Request and **refresh** if the request is still pending.

Task 2. Creating the access

7. On the **Home** tab, go to **Manage Services**. Click the small **arrow** to the right of **TechSupport LDAP** Service and click **Manage Groups**. Search for the **JKENetworkShare** group.
8. Click the group name **JKENetworkShare**
9. On the **Access Information** tab, select the check box for **Define an Access**.
10. Select **Enable Common Access**. Type the access name **TechSupport Shared Directory**. Select the access type **Shared folder**.
In access description put **Shared Directory Access for TechSupport Employees only** and the workflow of **No Approval Required**. Select **both notification** options.
11. Click **OK** to save the form. Click **Close**.
12. Click **Log Out**.
13. **Close** Firefox

Task 3. Requesting access

In this task, you request access to the **TechSupport Shared Directory** from a user that does not have an TechSupport LDAP account. In order to grant the access, IBM Security Identity Manager will first automatically provision an TechSupport LDAP account and then add the access to the new account.

14. Enter the URL for the Self Service console in New Firefox Window:
or click the bookmark 
15. Log in as John Davis, with user ID **jdavis** and password **P@ssw0rd**.
16. Click **Request Access** and request access for the **TechSupport Shared Directory**.
17. Enter the justification – **required**. You can see a new account is to be provisioned for John on **TechSupport LDAP** Service. Click **Submit**.
18. Return to the home page using the **Home** symbol at top.
19. Confirm that John receives the access by reviewing **View Access**.
You can open the **LDAP Browser** from desktop and Double Click **TechSupportEmployees** and expand **ou=TechSuppEmployees**. You can see **uid=jdavis** is new account created on LDAP and also if you click **cn=JKENetworkShare** you can check **uid=jdavis** is added as member of the LDAP Group.