
NEXASTORE

Technical Support Knowledge

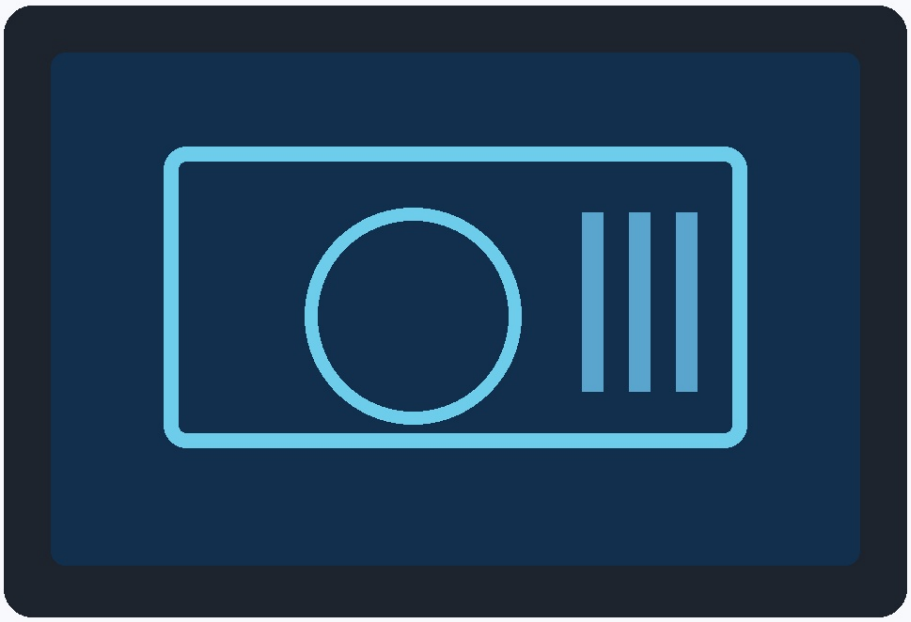

GPU SUPPORT

NexaGPU Troubleshooting Guide

Drivers, detection, display, performance and AI workload issues

NexaStore Support Library • 2026 Edition

1. Applies to NexaGPU A2000, A4000 and A6000

Use this guide for detection, driver, display, performance and AI-runtime issues. Exact power connectors, board dimensions and supported features should be confirmed in the NexaGPU Series Technical Guide.

Symptom	First checks
GPU not detected	Power down; reseat card if qualified; verify power connectors; check firmware/OS device list
Driver installation fails	Confirm supported OS/driver package; remove conflicting old driver; reboot
No display output	Check monitor input/cable; test another port; verify GPU power; avoid unsupported adapters
Application uses integrated GPU	Select high-performance GPU in OS/application settings
System shuts down under load	Check PSU capacity, connectors, temperatures and overclock settings
Artifacts / corruption	Return to stock settings; test temperatures/driver; run hardware diagnostics

2. AI Runtime Problems

Issue	Checks
Local LLM runs on CPU	Verify runtime GPU support, driver, GPU visibility and compatible build
Out of VRAM	Reduce model/context/batch size; use quantization/offload; close competing GPU apps
Embedding job is slow	Check batch size, GPU utilization, model support and CPU data pipeline
CUDA/runtime-style error	Check driver/runtime compatibility and framework requirements
Performance drops over time	Inspect temperature, power limit, memory pressure and throttling

3. Power and Thermals

GPU	Illustrative board power	Planning note
NexaGPU A2000	~150 W	Entry AI/embedding workloads; verify PSU headroom
NexaGPU A4000	~250 W	Local inference and creator workloads
NexaGPU A6000	~350 W	High-end local AI; requires strong PSU/cooling

4. Troubleshooting Order

• Return GPU and system settings to supported defaults.

• Confirm physical power/cabling and system detection.

• Confirm supported driver and runtime versions.

• Reproduce with one application/workload where possible.

• Observe temperature, power, VRAM and GPU utilization.

• Escalate persistent artifacts, repeated crashes or diagnostic failures as possible hardware issues.

5. Agent Knowledge Boundaries

Need	Source
Exact GPU VRAM/specification	Product catalog / NexaGPU Technical Guide
Troubleshooting procedure	This guide via RAG
Customer warranty entitlement	Warranty service
Current driver package	Approved support/download source, not stale RAG assumptions
Create RMA/service case	Authorized support tool
Approve replacement	Business workflow, not LLM judgment alone

Educational notice

This is a fictional support document. Power work inside a PC should be performed only by qualified users or service personnel.