


Ways to Add JS

1. By Using Console (Browser Developer Tools):

- a. You can directly write and execute JavaScript code in the browser's developer console.
- b. Steps:
 - i. Open your browser (e.g., Chrome, Firefox).
 - ii. Right-click on the webpage and select Inspect (or press **Ctrl + Shift + I / Cmd + Option + I**).
 - iii. Navigate to the Console tab.
 - iv. Write JavaScript code directly and execute it.
 - v. For Example:

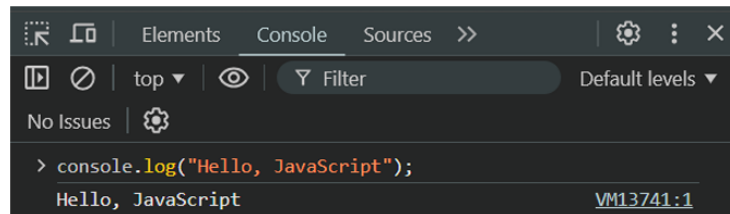

2. Javascript Inside the **<head>** tag:

- a. You can also include JavaScript inside the **<head>** tag of the HTML file.
- b. This is useful for scripts that need to be initialized before the page content is rendered.
- c. For Example:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>JavaScript in Head</title>
7   <script>
8     console.log("Javascript inside the <head> tag.")
9   </script>
10 </head>
11 <body>
12
13 </body>
14 </html>
```

3. Inline JavaScript (Event Handlers):

- a. JavaScript code can be directly written within HTML tags using event attributes like *onclick* , *onmouseover* , etc.
- b. For Example →

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Inline JavaScript</title>
5 </head>
6 <body>
7   <button onclick="alert('Hello from Inline JS!')">Click Me</button>
8 </body>
9 </html>
```

4. Javascript Inside the *<body>* tag (Internal JS):

- a. You can embed JavaScript code directly inside the *<script>* tag within the HTML document, usually inside the *<body>* tag.
- b. Typically, scripts placed at the *end of the <body>* load after the content, which can be useful if your script depends on the DOM being fully loaded.
- c. For Example →

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <title>Internal JavaScript</title>
5 </head>
6 <body>
7   <h1>JavaScript Inside Body Tag</h1>
8   <script>
9     alert("Hello from Internal JS!");
10  </script>
11 </body>
12 </html>
```

5. External Javascript:

- a. You can write JavaScript code in a separate file (e.g., script.js) and link it to the HTML file using the `<script>` tag with a `src` attribute.
- b. For Example →
- c. HTML File (index.html)

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>External Javascript</title>
7 </head>
8 <body>
9   <h1>External JavaScript Example</h1>
10  <script src="./script.js"></script>
11 </body>
12 </html>
```

- d. External JavaScript File (script.js)

```
1 alert("Hello from External JS!");
```

6. defer Attribute in Script Tag:

- a. The `defer` attribute in the `<script>` tag is used to specify that the script should be executed only after the entire HTML document has been parsed.
- b. It ensures that the script does not block the rendering of the webpage, improving the page load performance.

c. For Example →



```
1 <script src="script.js" defer></script>
```

d. It works only for external scripts (i.e., scripts with the *src* attribute)