Program Optimization

Instructors:

R. Shathanaa

Superscalar Processor

- **Definition: A superscalar processor can issue and execute *multiple instructions in one cycle*. The instructions are retrieved from a sequential instruction stream and are usually scheduled dynamically.**

- **Benefit: without programming effort, superscalar processor can take advantage of the *instruction level parallelism* that most programs have**

- **Most modern CPUs are superscalar.**
- **Intel: since Pentium (1993)**

Pipelined Functional Units

```
long mult_eg(long a, long b, long c) {
    long p1 = a*b;
    long p2 = a*c;
    long p3 = p1 * p2;
    return p3;
}
```

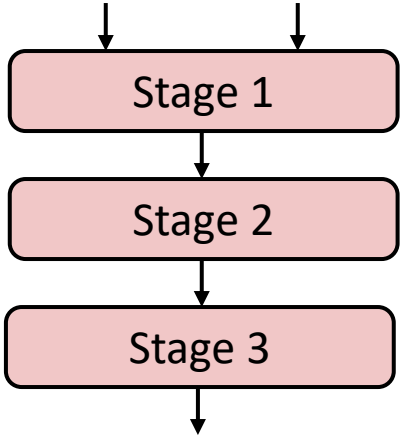

	Time						
	1	2	3	4	5	6	7
Stage 1	a*b	a*c			p1*p2		
Stage 2		a*b	a*c			p1*p2	
Stage 3			a*b	a*c			p1*p2

- Divide computation into stages
- Pass partial computations from stage to stage
- Stage i can start on new computation once values passed to i+1
- E.g., complete 3 multiplications in 7 cycles, even though each requires 3 cycles

Haswell CPU

- 8 Total Functional Units

- **Multiple instructions can execute in parallel**

  2 load, with address computation

  1 store, with address computation

  4 integer

  2 FP multiply

  1 FP add

  1 FP divide

- **Some instructions take > 1 cycle, but can be pipelined**

Instruction	*Latency*	*Cycles/Issue*
Load / Store	4	1
Integer Multiply	3	1
Integer/Long Divide	**3-30**	**3-30**
Single/Double FP Multiply	5	1
Single/Double FP Add	3	1
Single/Double FP Divide	**3-15**	**3-15**

x86-64 Compilation of Combine4

- Inner Loop (Case: Integer Multiply)

```
void combine4(vec_ptr v, data_t *dest)
{
  long i;
  long length = vec_length(v);
  data_t *d = get_vec_start(v);
  data_t t = IDENT;
  for (i = 0; i < length; i++)
    t = t OP d[i];
  *dest = t;
}
```

Method	Integer		Double FP	
Operation	Add	Mult	Add	Mult
Combine4	1.27	3.01	3.01	5.01
Latency Bound	1.00	3.00	3.00	5.00

Combine4 = Serial Computation (OP = *)

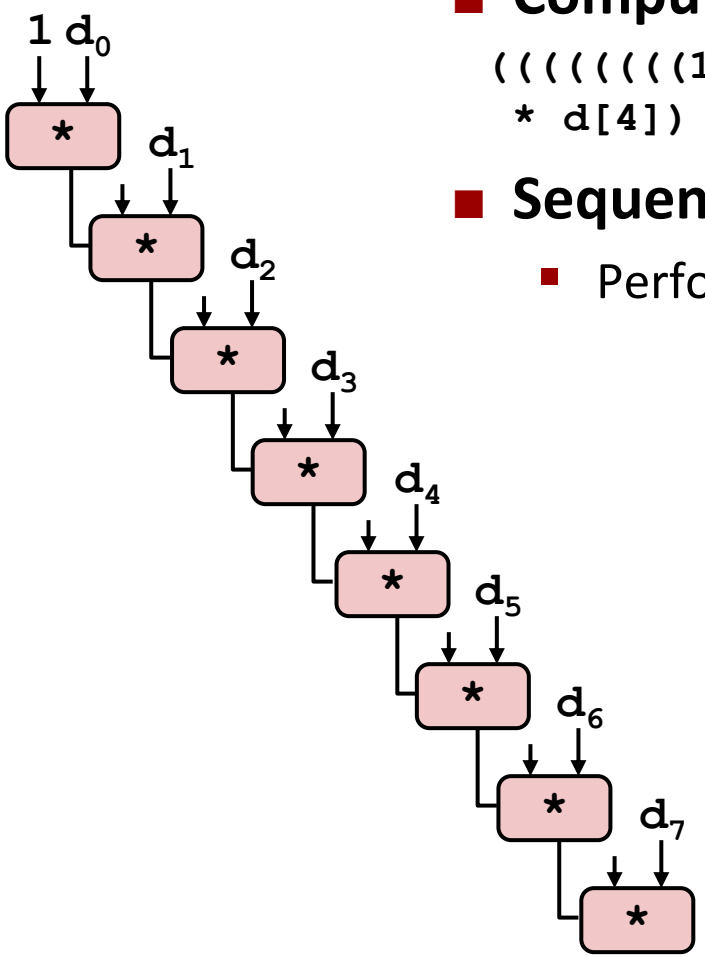

- **Computation (length=8)**

```
((((((((1 * d[0]) * d[1]) * d[2]) * d[3])
 * d[4]) * d[5]) * d[6]) * d[7])
```

- **Sequential dependence**
  - Performance: determined by latency of OP

Data-Flow Graphs

- A way to visualize how the data dependencies in a program dictate its performance.

```
    Inner loop of combine4.  data_t = double, OP = *
    acc in %xmm0, data+i in %rdx, data+length in %rax
1   .L25:                                   loop:
2     vmulsd   (%rdx), %xmm0, %xmm0          Multiply acc by data[i]
3     addq     $8, %rdx                      Increment data+i
4     cmpq     %rax, %rdx                    Compare to data+length
5     jne      .L25                          If !=, goto loop
```

Data-Flow Graph

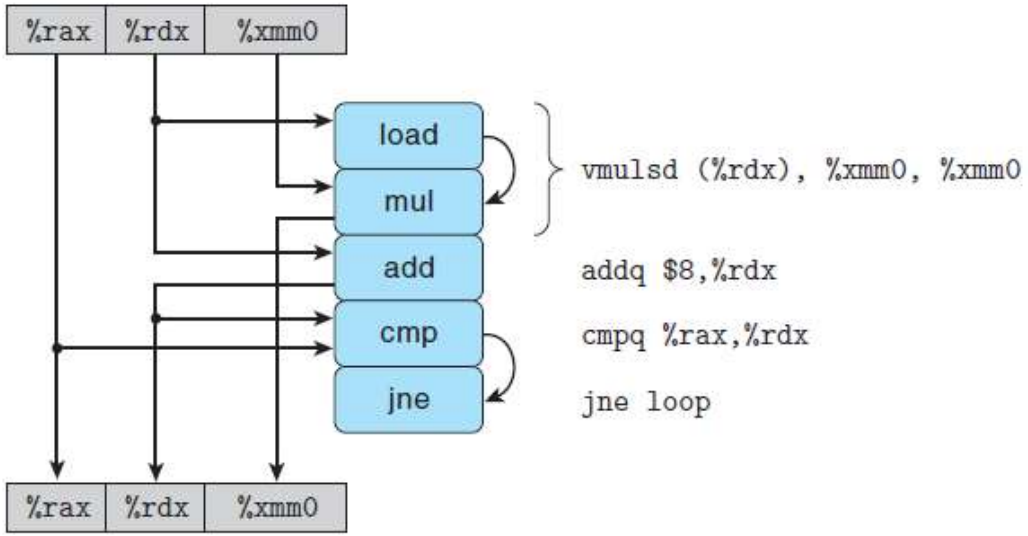

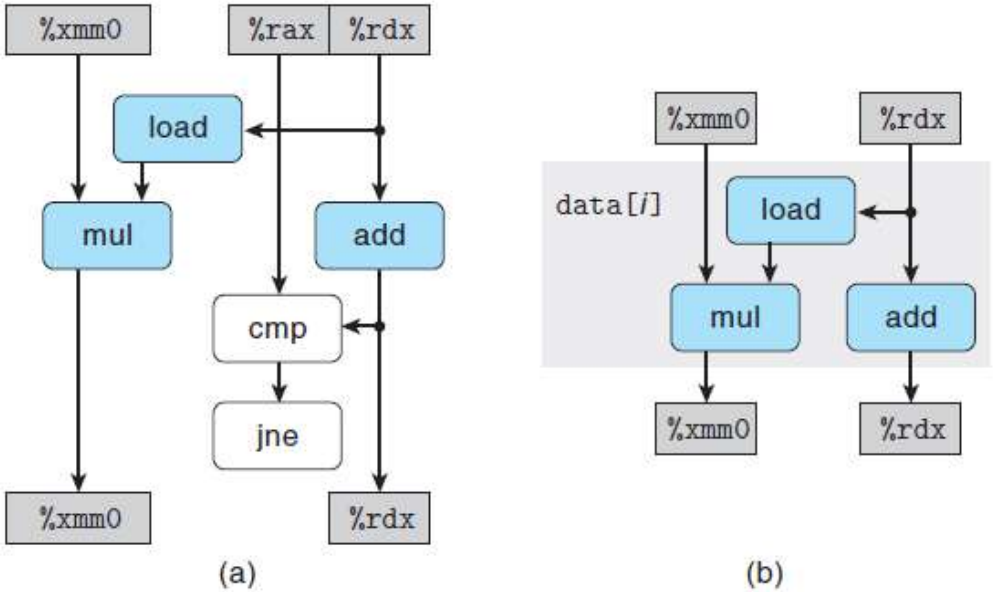

Data-Flow Graphs

- For a code segment forming a loop, we can classify the registers that are accessed into four categories:
  - *Read-only*. used as source values, not modified within the loop. **rax**
  - *Write-only*. used as the destinations of data-movement operations. **none**
  - *Local*. These are updated and used within the loop, but there is no dependency from one iteration to another. **condition flags**
  - *Loop*. These are used both as source values and as destinations for the loop, with the value generated in one iteration being used in another. **rdx, xmm0**
  - **Assume mul – 5 clk and add - 1 clk**

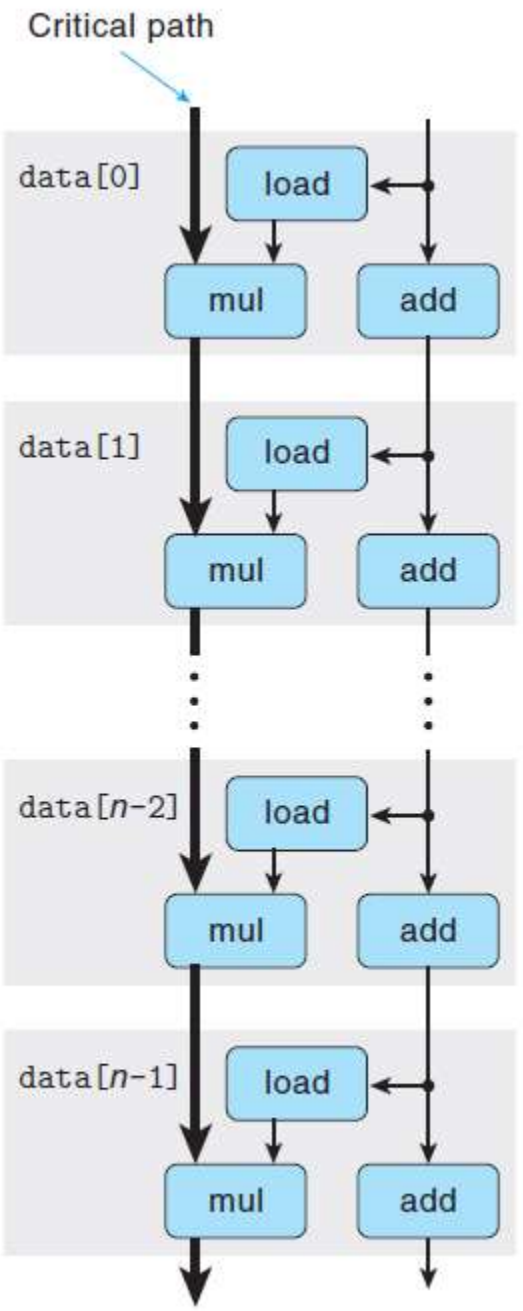

Loop Unrolling (2x1)

```
void unroll2a_combine(vec_ptr v, data_t *dest)
{
    long length = vec_length(v);
    long limit = length-1;
    data_t *d = get_vec_start(v);
    data_t x = IDENT;
    long i;
    /* Combine 2 elements at a time */
    for (i = 0; i < limit; i+=2) {
        x = (x OP d[i]) OP d[i+1];
    }
    /* Finish any remaining elements */
    for (; i < length; i++) {
        x = x OP d[i];
    }
    *dest = x;
}
```

- Perform 2x more useful work per iteration

Effect of Loop Unrolling

Method	Integer		Double FP	
Operation	Add	Mult	Add	Mult
Combine4	1.27	3.01	3.01	5.01
Unroll 2x1	1.01	3.01	3.01	5.01
Latency Bound	1.00	3.00	3.00	5.00

- **Helps integer add**
  - Achieves latency bound
- **Others don't improve.** ***Why?***
  - Still sequential dependency

```
x = (x OP d[i]) OP d[i+1];
```

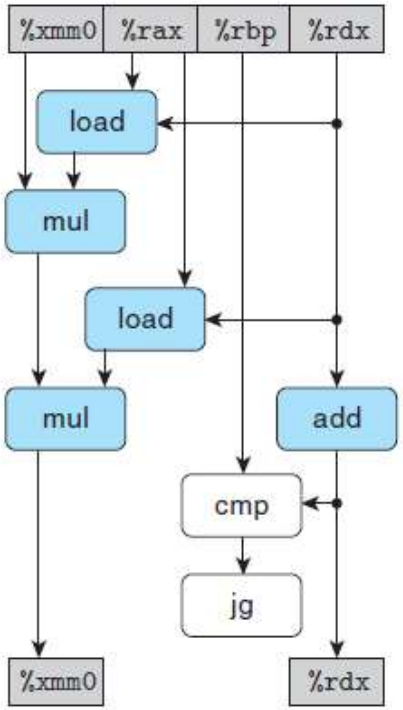
%xmm0
%rax
%rbp
%rdx
load
mul
load
mul
add
cmp
jg
%xmm0
%rdx

(a)

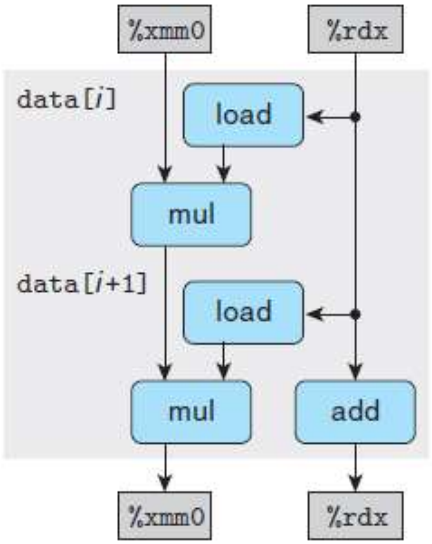
%xmm0
%rdx
data[i]
load
mul
data[i+1]
load
mul
add
%xmm0
%rdx

(b)

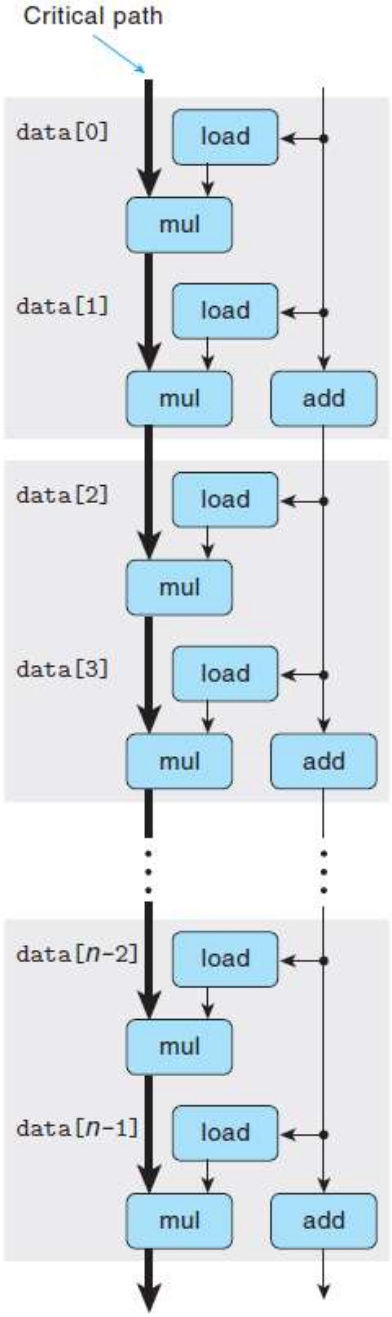
Critical path
data[0]
load
mul
data[1]
load
mul
add
data[2]
load
mul
data[3]
load
mul
add
data[n-2]
load
mul
data[n-1]
load
mul
add

Loop Unrolling with Reassociation (2x1a)

```
void unroll2aa_combine(vec_ptr v, data_t *dest)
{
    long length = vec_length(v);
    long limit = length-1;
    data_t *d = get_vec_start(v);
    data_t x = IDENT;
    long i;
    /* Combine 2 elements at a time */
    for (i = 0; i < limit; i+=2) {
        x = x OP (d[i] OP d[i+1]);
    }
    /* Finish any remaining elements */
    for (; i < length; i++) {
        x = x OP d[i];
    }
    *dest = x;
}
```

Compare to before

```
x = (x OP d[i]) OP d[i+1];
```

- Can this change the result of the computation?
- Yes, for FP. *Why?*

Effect of Reassociation

Method	Integer		Double FP	
Operation	Add	Mult	Add	Mult
Combine4	1.27	3.01	3.01	5.01
Unroll 2x1	1.01	3.01	3.01	5.01
Unroll 2x1a	1.01	1.51	1.51	2.51
Latency Bound	1.00	3.00	3.00	5.00
Throughput Bound	0.50	1.00	1.00	0.50

- **Nearly 2x speedup for Int *, FP +, FP ***
  - Reason: Breaks sequential dependency

```
x = x OP (d[i] OP d[i+1]);
```

  - Why is that? (next slide)

4 func. units for int +
2 func. units for load

2 func. units for FP *
2 func. units for load

Reassociated Computation

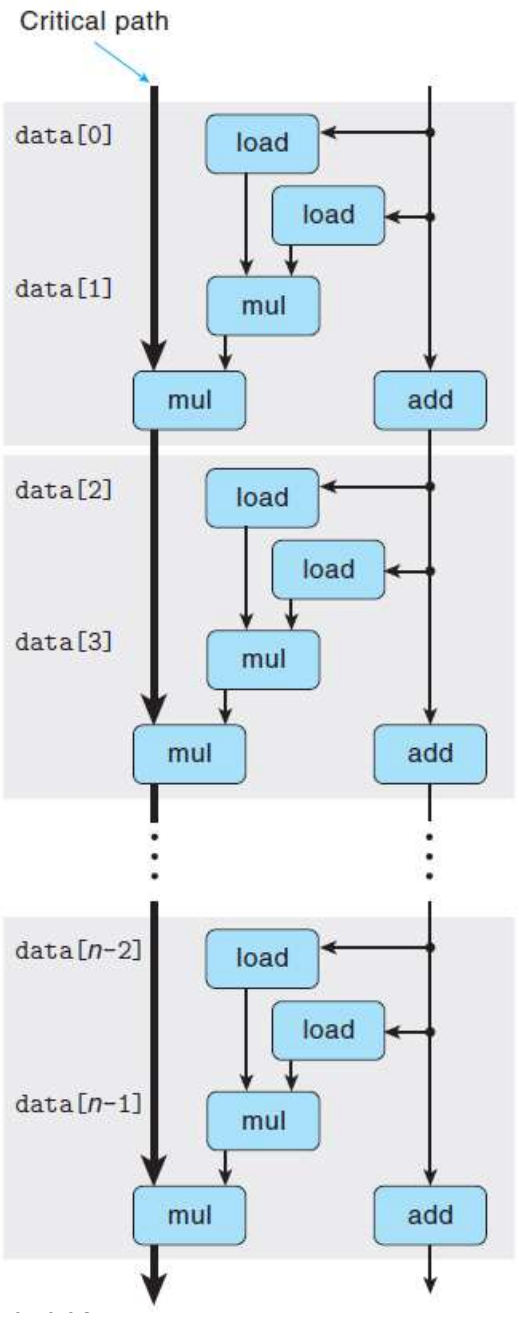

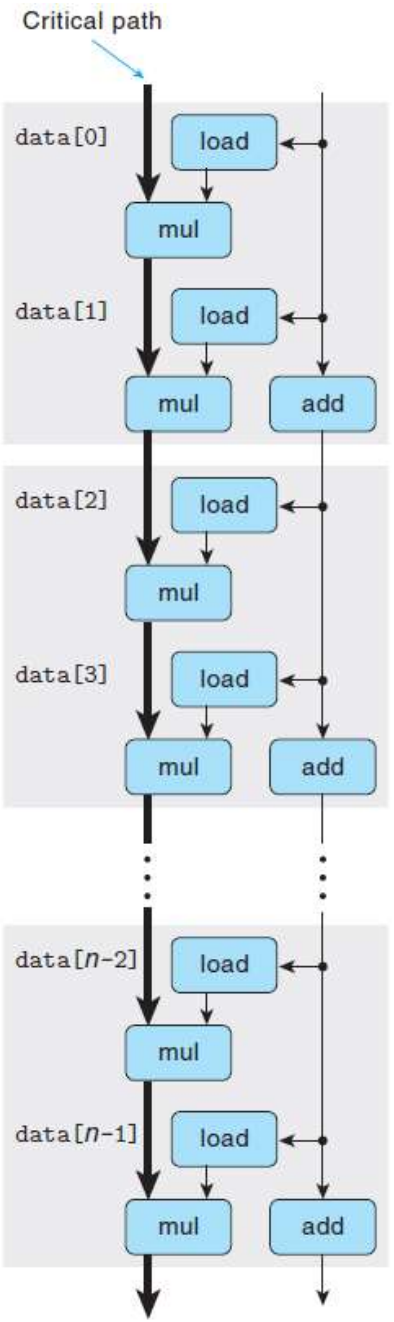

- **What changed:**
  - Ops in the next iteration can be started early (no dependency)
- **Overall Performance**
  - N elements, D cycles latency/op
  - (N/2+1)*D cycles:
    CPE = D/2

Loop Unrolling with Separate Accumulators (2x2)

```
void unroll2a_combine(vec_ptr v, data_t *dest)
{
    long length = vec_length(v);
    long limit = length-1;
    data_t *d = get_vec_start(v);
    data_t x0 = IDENT;
    data_t x1 = IDENT;
    long i;
    /* Combine 2 elements at a time */
    for (i = 0; i < limit; i+=2) {
       x0 = x0 OP d[i];
       x1 = x1 OP d[i+1];
    }
    /* Finish any remaining elements */
    for (; i < length; i++) {
       x0 = x0 OP d[i];
    }
    *dest = x0 OP x1;
}
```

- Different form of reassociation

Effect of Separate Accumulators

Method	Integer		Double FP	
Operation	Add	Mult	Add	Mult
Combine4	1.27	3.01	3.01	5.01
Unroll 2x1	1.01	3.01	3.01	5.01
Unroll 2x1a	1.01	1.51	1.51	2.51
Unroll 2x2	0.81	1.51	1.51	2.51
Latency Bound	1.00	3.00	3.00	5.00
Throughput Bound	0.50	1.00	1.00	0.50

- Int + makes use of two load units

```
x0 = x0 OP d[i];
x1 = x1 OP d[i+1];
```

- 2x speedup (over unroll2) for Int *, FP +, FP *

Separate Accumulators

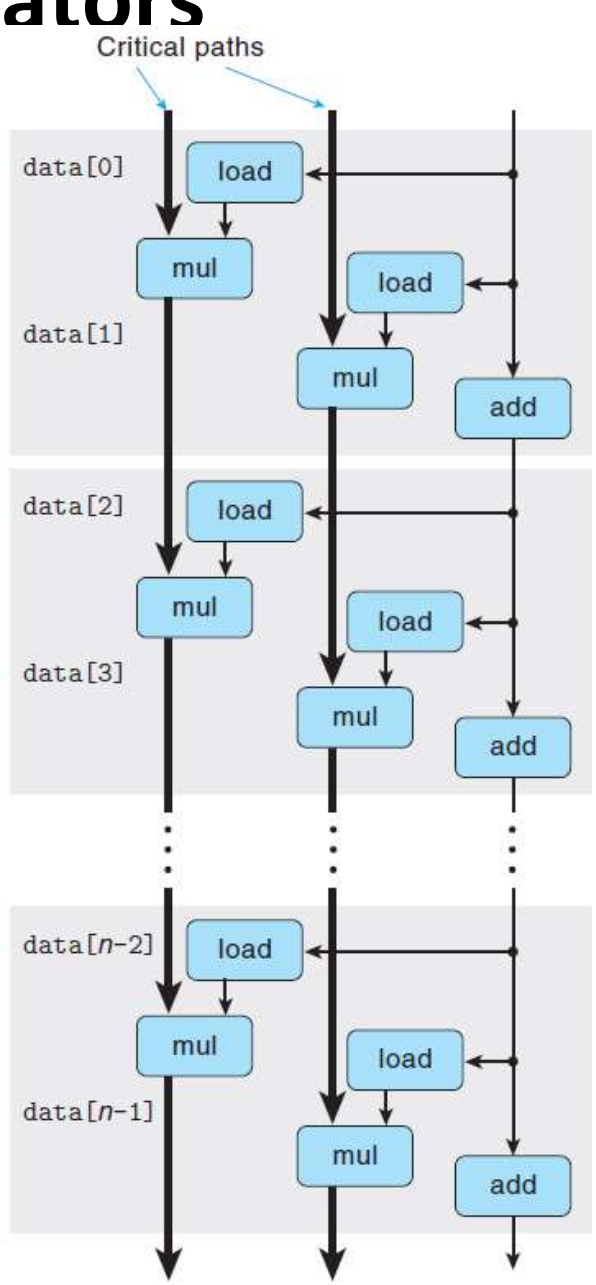

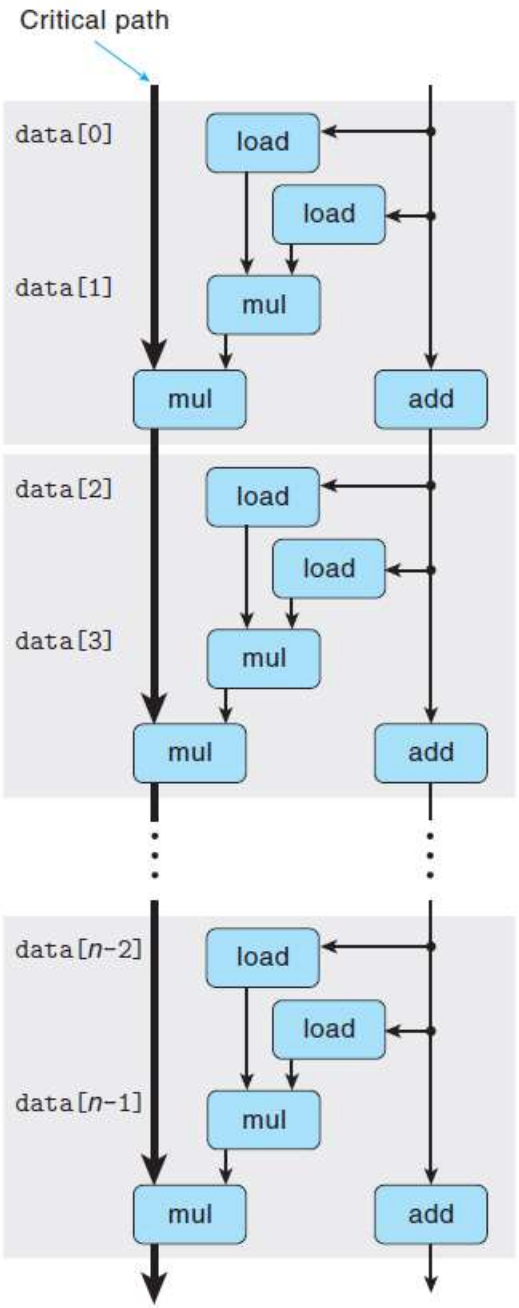

What Now?

- **What changed:**
  - Two independent "streams" of operations
- **Overall Performance**
  - N elements, D cycles latency/op
  - Should be (N/2+1)*D cycles: **CPE = D/2**
  - CPE matches prediction!

Unrolling & Accumulating

- **Idea**
  - Can unroll to any degree L
  - Can accumulate K results in parallel
  - L must be multiple of K

- **Limitations**
  - Diminishing returns
    - Cannot go beyond throughput limitations of execution units
  - Large overhead for short lengths
    - Finish off iterations sequentially

Achievable Performance

Method	Integer		Double FP	
Operation	Add	Mult	Add	Mult
Best	0.54	1.01	1.01	0.52
Latency Bound	1.00	3.00	3.00	5.00
Throughput Bound	0.50	1.00	1.00	0.50

- Limited only by throughput of functional units
- Up to 42X improvement over original, unoptimized code

What About Branches?

- **Challenge**
  - Instruction Control Unit must work well ahead of Execution Unit to generate enough operations to keep EU busy

```
404663:   mov    $0x0,%eax
404668:   cmp    (%rdi),%rsi
40466b:   jge    404685
40466d:   mov    0x8(%rdi),%rax

  . . .

404685:   repz retq
```

Executing

How to continue?

  - When encounters conditional branch, cannot reliably determine where to continue fetching

Branch Outcomes

- **When encounter conditional branch, cannot determine where to continue fetching**
  - Branch Taken: Transfer control to branch target
  - Branch Not-Taken: Continue with next instruction in sequence
- **Cannot resolve until outcome determined by branch/integer unit**

```
404663:   mov     $0x0,%eax
404668:   cmp     (%rdi),%rsi
40466b:   jge     404685
40466d:   mov     0x8(%rdi),%rax

  . . .

404685:   repz retq
```

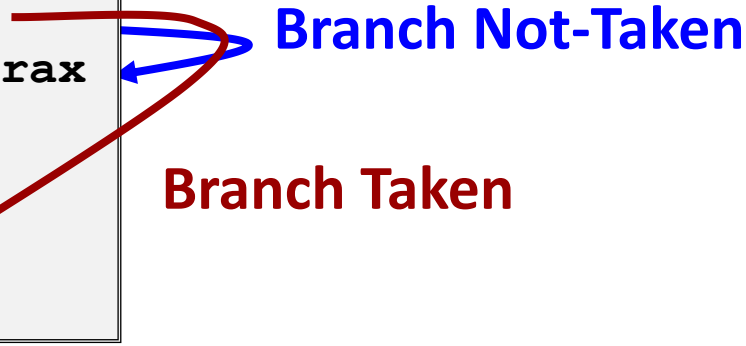

Branch Prediction

- **Idea**
  - Guess which way branch will go
  - Begin executing instructions at predicted position
    - But don't actually modify register or memory data

```
404663:   mov     $0x0,%eax
404668:   cmp     (%rdi),%rsi
40466b:   jge     404685
40466d:   mov     0x8(%rdi),%rax

  . . .

404685:   repz retq
```

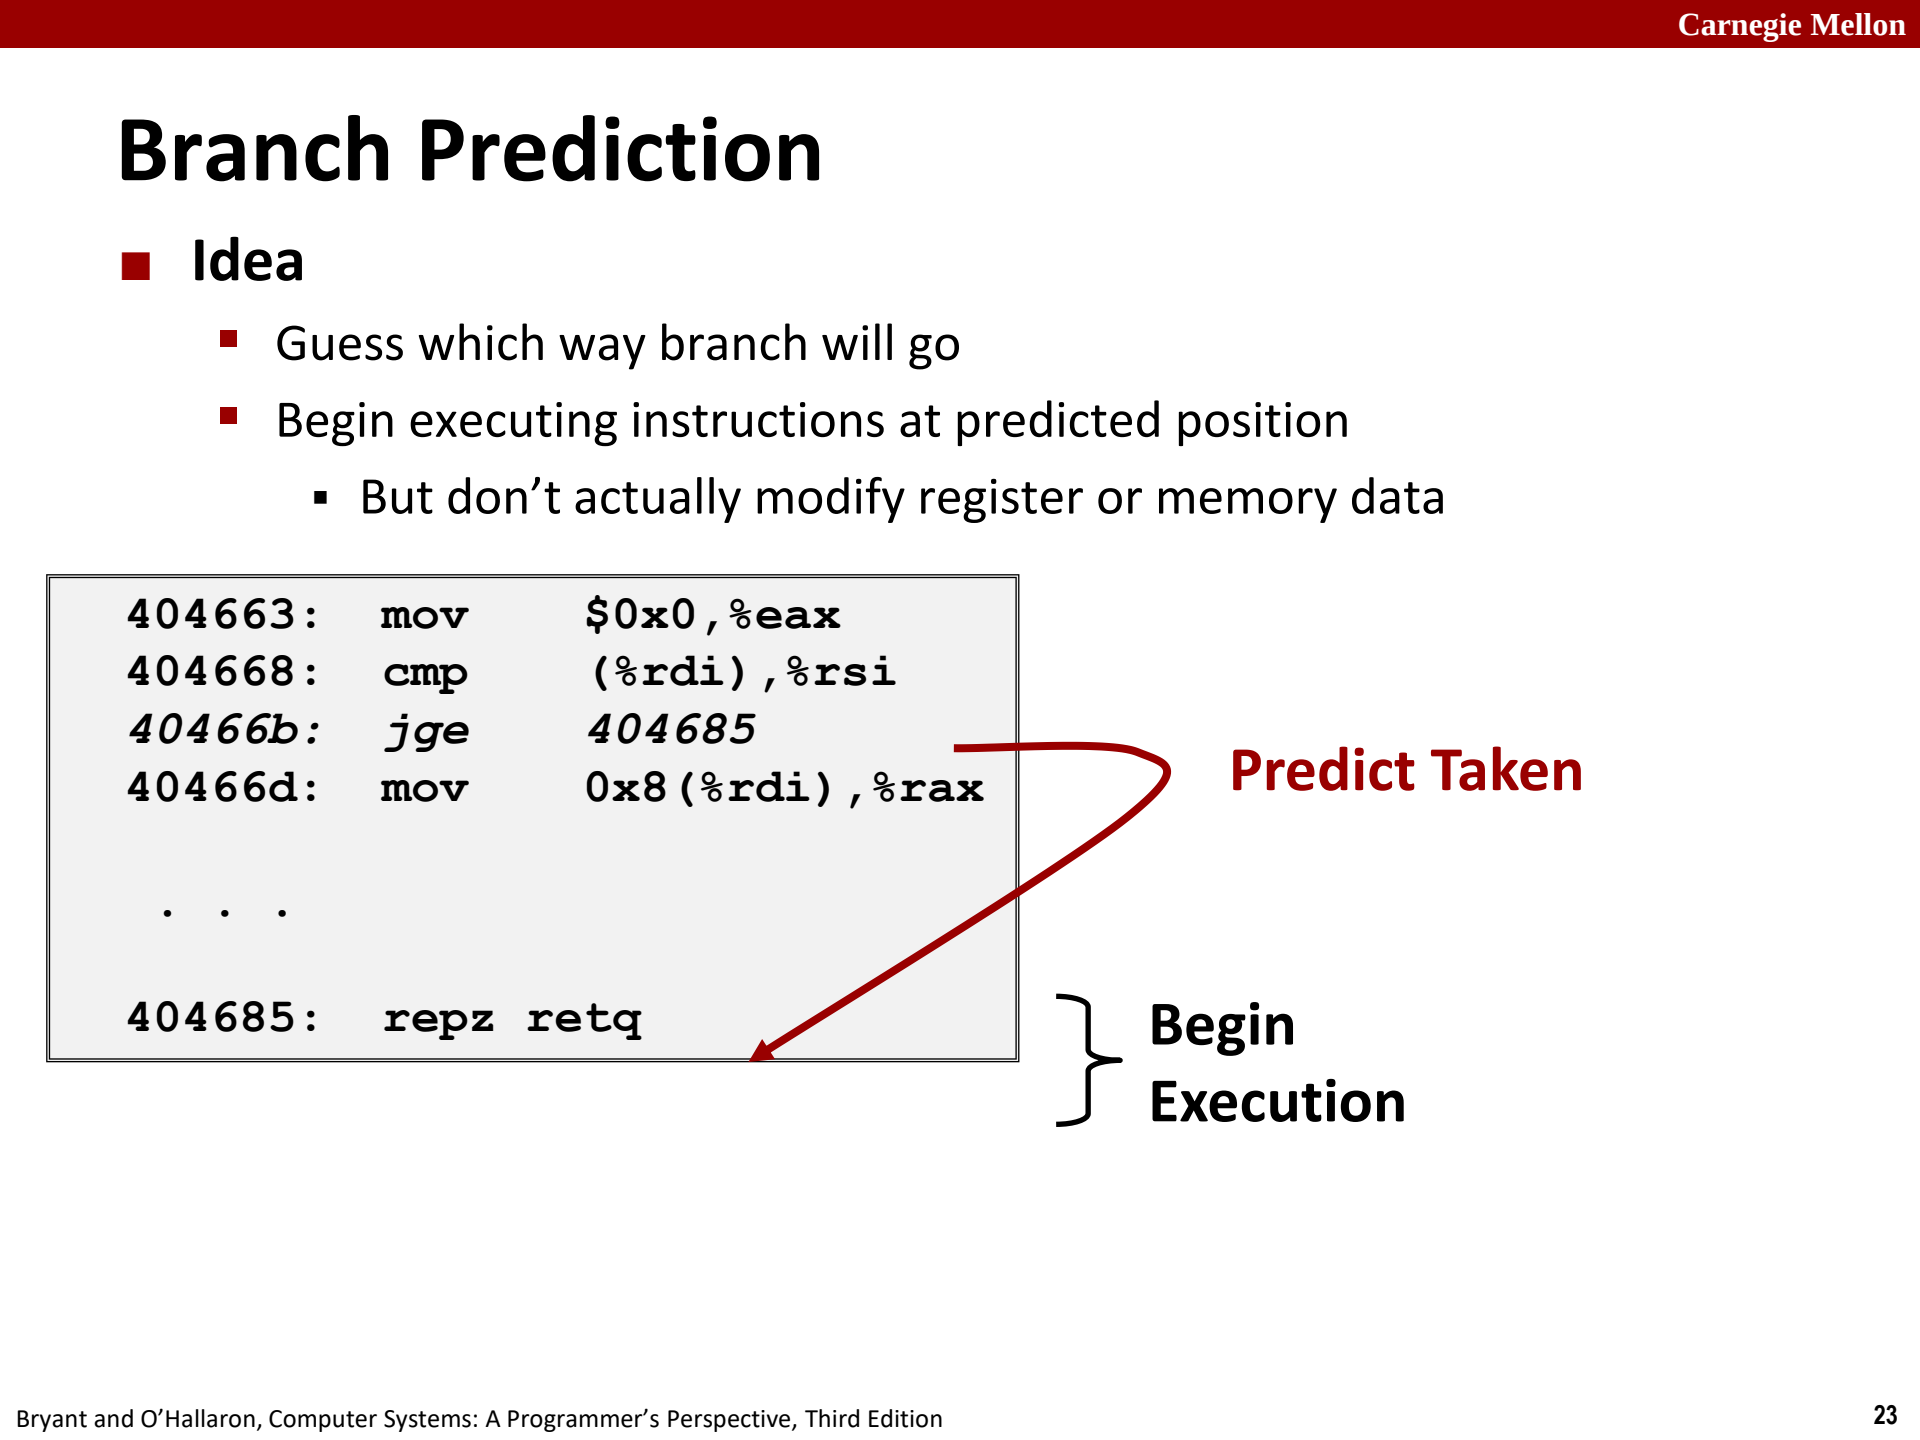

Branch Prediction Through Loop

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 98

Predict Taken (OK)

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 99

Predict Taken (Oops)

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 100

Read invalid location

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 101

Assume
vector length = 100

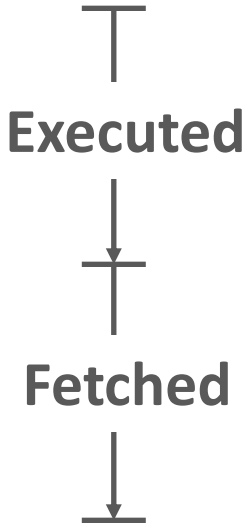

Branch Misprediction Invalidation

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 98

Assume
vector length = 100

Predict Taken (OK)

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 99

Predict Taken (Oops)

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 100

```
401029:  vmulsd (%rdx),%xmm0,%xmm0
40102d:  add    $0x8,%rdx
401031:  cmp    %rax,%rdx
401034:  jne    401029
```

i = 101

Invalidate

Branch Misprediction Recovery

```
401029:   vmulsd (%rdx),%xmm0,%xmm0
40102d:   add    $0x8,%rdx
401031:   cmp    %rax,%rdx
401034:   jne    401029
401036:   jmp    401040
 . . .
401040:   vmovsd %xmm0,(%r12)
```

i = 99

Definitely not taken

Reload Pipeline

- **Performance Cost**
  - Multiple clock cycles on modern processor
  - Can be a major performance limiter

Getting High Performance

- **Good compiler and flags**
- **Don't do anything stupid**
  - Watch out for hidden algorithmic inefficiencies
  - Write compiler-friendly code
    - Watch out for optimization blockers: procedure calls & memory references
  - Look carefully at innermost loops (where most work is done)
- **Tune code for machine**
  - Exploit instruction-level parallelism
  - Avoid unpredictable branches
  - Make code cache friendly