

# **PUBLIC REACTION ANALYSIS ON TWITTER: A SEGMENTATION & HYPOTHESIS STUDY OF THE SHINZO ABE ASSASSINATION**



# BACKGROUND STORY



# BACKGROUND

On July 8, 2022, former Japanese Prime Minister Shinzo Abe was shot during a campaign speech in Nara, Japan. He later died from his injuries, marking one of the most shocking acts of political violence in modern Japanese history.

The suspect, Tetsuya Yamagami, reportedly targeted Abe due to resentment toward the Unification Church, which he believed had financially harmed his family. The attack was driven by personal grievance and perceived institutional connections rather than direct political rivalry.

## Why This Project Matters

- The incident triggered massive global reactions on Twitter.
- Social media became a real-time platform for news, emotion, and political framing.
- Analyzing sentiment and engagement helps us understand:
  - How digital audiences react to political crises
  - How emotion influences information spread
  - How viral amplification differs across sentiment groups

This project examines how public discourse evolves during a high-impact political event and how engagement dynamics reflect collective digital behavior.

# ABOUT THE DATASET



# ABOUT DATASET

The dataset contains 132,094 raw Twitter posts collected immediately after the assassination of Shinzo Abe, From 8 July to 9 July 2022.

⚠ Important:

This dataset represents raw, unfiltered data before preprocessing and refinement.

Each row corresponds to one tweet captured during the data extraction period.

## 📌 Dataset Characteristics (Raw Data)

- Total Records: 132,094 tweets
- Total Variables: 21 columns
- Memory Usage: ~19.4 MB
- Includes:
  - Original tweets
  - Retweets
  - Replies
  - Quoted tweets
  - Multiple languages

This dataset reflects the initial public reaction stream, not yet cleaned or filtered.

## What the Raw Dataset Contains

### Tweet-Level Data

- Tweet ID
- Timestamp
- Full text
- Hashtags
- Language
- Retweet & favorite counts

### User-Level Metadata

- Anonymized user ID
- Follower & following count
- Total tweets by user
- Account creation date
- Self-reported location (partially missing)

### Why This Matters

Because this is raw data:

- It may contain duplicates
- It includes retweets and bot-like activity
- It includes missing location values
- It includes multilingual noise
- It contains non-relevant tweets using similar hashtags

Therefore, data cleaning and filtering are critical before analysis.

# **DATA CLEANING & PREPROCESSING**



# DATA CLEANING

Because the dataset was collected in raw format, several preprocessing steps were required before analysis.

Social media data is inherently noisy and unstructured, making cleaning a critical step to ensure reliable insights.

## 📌 Step 1 — Datetime Standardization

Converted time-related columns into proper datetime format:

- tweetcreatedts
- usercreateddt
- extractedts

This enables:

- Time-series analysis
- Pre vs post event segmentation
- Accurate temporal aggregation

# DATA CLEANING

## Step 2 — Location to Country Extraction

The original dataset only contained free-text location.

To make geographic analysis possible:

- Built automatic country keyword mapping using pycountry
- Cleaned emojis & special symbols from location
- Applied rule-based matching
- Used GeoText for city-to-country inference
- Created new column: country
- Missing or unmatched locations labeled as "Unknown"
- Dropped original location column

This step transformed unstructured text into structured geographic data.

# DATA CLEANING

## 🔍 Step 3 — Missing Value Check

- Most analytical columns contain no missing values
- Location-based missing values were handled via "Unknown" labeling
- No major data loss during preprocessing

## 🔄 Step 4 — Duplicate Inspection

- Checked for duplicated rows
- No aggressive duplicate removal applied
- Dataset preserved as close as possible to original reaction stream

This maintains authenticity of public reaction volume.

# DATA CLEANING

## 🧠 Step 5 — Filter based on Shinzo Abe

- Filter based on Shinzo / Abe
- From 132.094 to 31.977
- The most retweeted before filtering is from BJP Activist at India that Anti-Islam and spread their agenda.
- Many of them are not related with shinzo abe, Include Crypto news.
- After filtering, all tweet about Shinzo Abe

# DATA CLEANING

## Example of tweet from netizen

- Before filtering, the most retweeted is:

*Please India as a friend I tell you: stop being tolerant to the intolerant. Defend Hinduism against the extremists, terrorists and jihadists. Don't appease Islam, for it will cost you dearly. Hindus deserve leaders that protect them for the full 100%!\n\n#HinduLivesMatters #India*

- My speculation that is from BJP Activist at India that Anti-Islam and spread their agenda.



# DATA CLEANING

Example of tweet from netizen

- After filtering, the most retweeted is:

*[Breaking News] Officials say former Japanese Prime Minister #Abe Shinzo has been confirmed #dead. He was reportedly #shot during a speech on Friday in the city of #Nara, near Kyoto*



# FEATURE ENGINEERING



# FEATURE ENGINEERING

After cleaning and structuring the dataset, additional analytical features were created to enable segmentation and statistical testing. This step transforms raw Twitter data into structured analytical variables.



## Sentiment Scoring (VADER)

Sentiment analysis was performed using:

VADER (Valence Aware Dictionary and sEntiment Reasoner)

Why VADER?

- Designed for social media text
- Handles capitalization & punctuation emphasis
- Works well with short informal sentences

For each tweet, a compound sentiment score was generated

# FEATURE ENGINEERING



## Sentiment Labeling

The compound score was converted into categorical labels:

- $\geq 0.05 \rightarrow$  Positive
- $\leq -0.05 \rightarrow$  Negative
- Otherwise  $\rightarrow$  Neutral

New column created:

`sentiment`

This enables:

- Sentiment distribution analysis
- Engagement comparison
- Group-based segmentation

# FEATURE ENGINEERING



## Time-Based Segmentation

To analyze event impact, tweets were divided into:

- Pre-event
- Post-event

This allows:

- Sentiment shift analysis
- Engagement change comparison
- Behavioral difference testing



## Geographic Feature Creation

From raw location text:

- Extracted structured country
- Standardized country naming
- Labeled unmatched entries as "Unknown"

This enables regional sentiment comparison.

# FEATURE ENGINEERING



## Engagement Indicators

Existing metrics were preserved:

- `retweetcount`
- `favorite_count`

These serve as:

- Engagement proxies
- Dependent variables for hypothesis testing

## Result of Feature Engineering

The dataset now contains:

- ✓ Structured geographic data
- ✓ Quantitative sentiment score
- ✓ Sentiment labels
- ✓ Time segmentation
- ✓ Engagement metrics ready for comparison

This makes the dataset fully ready for:

- Exploratory Data Analysis
- Segmentation Analysis
- Hypothesis Testing

# EDA




## Exploratory Data Analysis: Outlier Inspection

A qualitative examination of the top viral tweets (outliers) reveals a distinct divergence in the nature of content driving Positive versus Negative sentiment.



# EDA-BOXPLOT

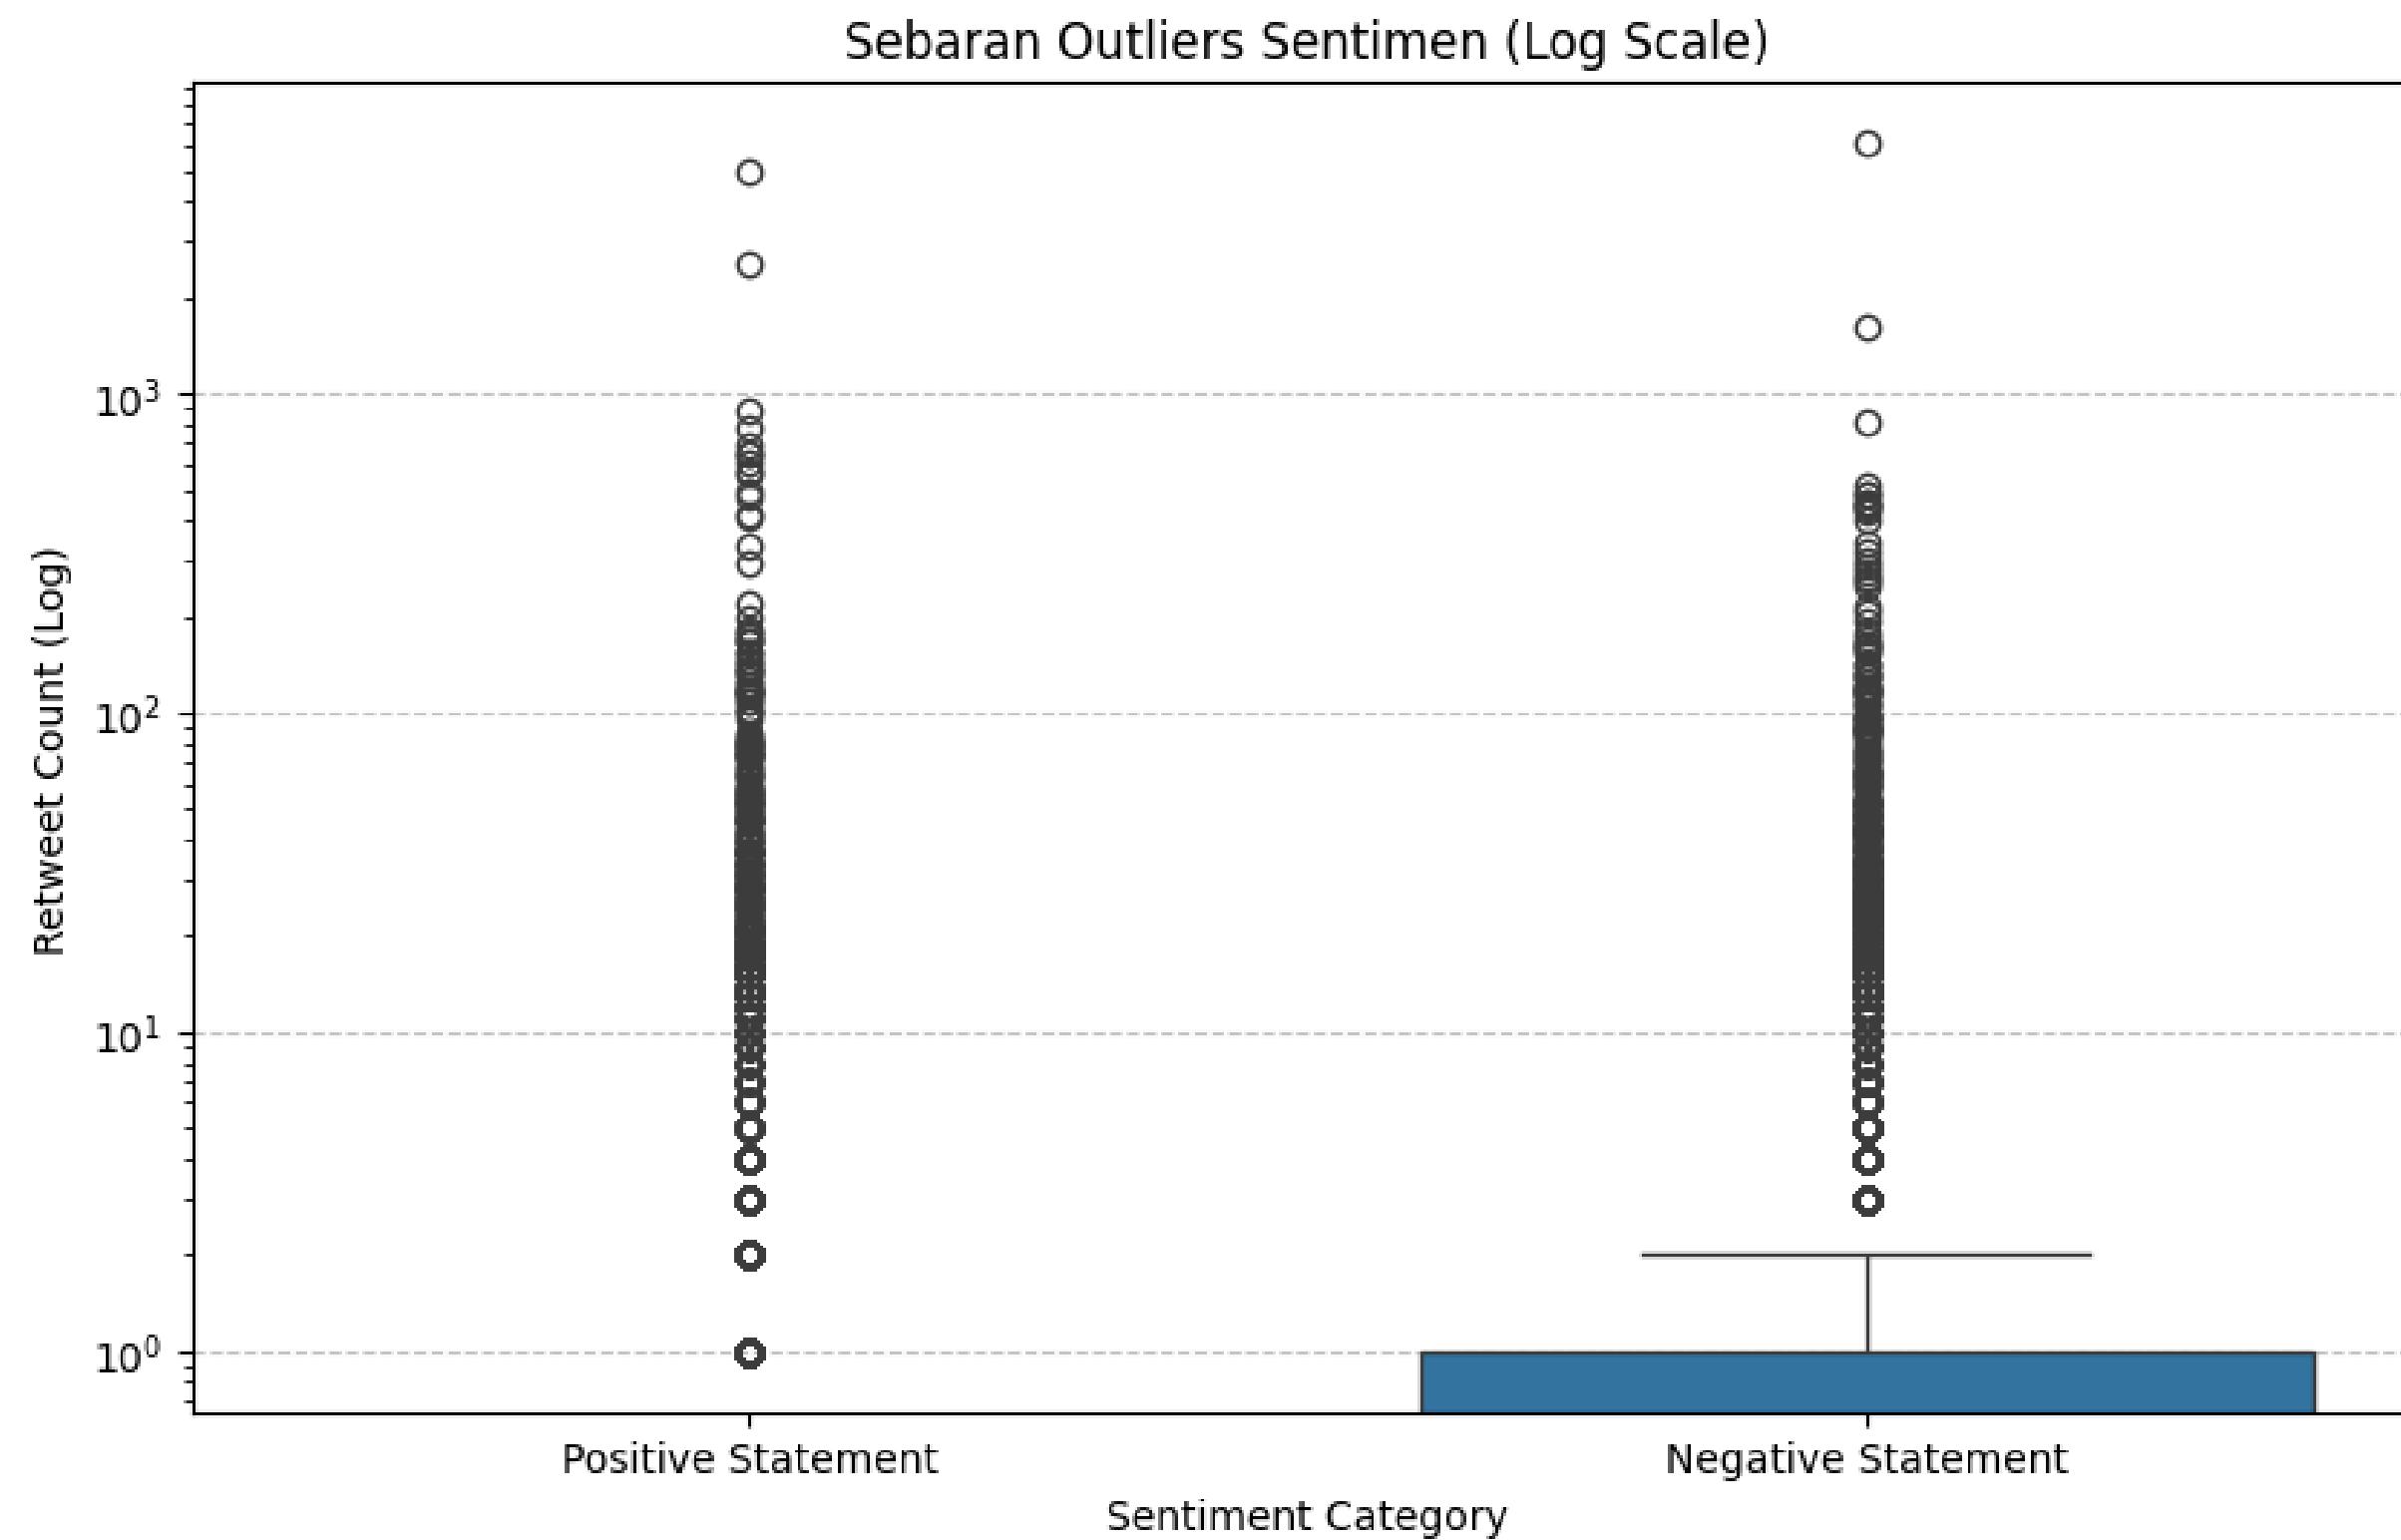

# EDA—EXPLANATION

## Explanation of Retweet Distribution by Sentiment (Log Scale)

### 🔍 Key Observations

- Retweet counts display a heavy upper-tail distribution, with numerous extreme outliers.
- Most tweets receive low engagement, while a small number achieve extremely high retweet counts.
- Both positive and negative sentiments contain viral outliers.
- Negative tweets exhibit slightly stronger upper-tail amplification compared to positive tweets.

### 💡 Initial Insight

Engagement is driven by a small number of highly viral tweets, suggesting amplification dynamics during crisis events.

The visible difference in upper-range retweets between sentiment groups motivates further statistical testing.

# NEXT COMING SOON :)



Thank you for reading this  
little project hehe~

